

Estimation of monopolar signals from spincter muscles and removal of common mode interference

*Original*

Estimation of monopolar signals from spincter muscles and removal of common mode interference / Mesin, Luca. - ELETTRONICO. - (2008), pp. 1-2. ( Congresso della International Society of Electrophysiology & Kinesiology (ISEK) Niagara Falls, Ontario, Canada 18-21 GIUGNO 2008.).

*Availability:*

This version is available at: 11583/1919721 since:

*Publisher:*

*Published*

DOI:

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# ESTIMATION OF MONOPOLAR EMG SIGNALS FROM SPHINCTER MUSCLES

Luca Mesin

LISiN, Dept. of Electronics, Politecnico di Torino, Torino, Italy

## 1. INTRODUCTION

Surface electromyogram (EMG) is usually recorded by means of spatial filters with vanishing sum of weights. More information could be extracted from monopolar signals measured with respect to a reference electrode away from the muscle. Under some assumptions, surface EMG detected along a line parallel to the fiber path has zero mean value in space at any time. This property is a constraint which can be used to estimate monopolar signals from single differential (SD) EMG signals and is satisfied in the case of a circumferential electrode array surrounded by a circular muscle.

## 2. METHODS


The problem of estimating monopolar signals  $\vec{m}(t)$  from SD  $\vec{s}(t)$  is not well posed. Indeed, there are infinite solutions, as an arbitrary function of time  $f(t)$  can be added to the monopolar signals without affecting the SD signals  $s_i(t) = m_i(t) + f(t) - (m_{i+1}(t) + f(t)) = m_i(t) - m_{i+1}(t)$

SD signals from an array of  $N$  electrodes can be expressed in terms of monopolar signals as follows


Matrix  $\underline{A}$  cannot be inverted as it has a vanishing eigenvalue, associated to an eigenvector with constant entries.

Nevertheless, the pseudoinverse of matrix  $\underline{A}$  can be evaluated and monopolar signals can be estimated as  $\vec{m}_{est}(t) = \underline{A}^\# \vec{s}(t)$

$$\vec{s}(t) = \underline{A} \vec{m}(t) \quad \underline{A} = \begin{pmatrix} 1 & -1 & 0 & \dots & 0 \\ 0 & 1 & -1 & \dots & \vdots \\ \vdots & \dots & \ddots & \ddots & 0 \\ 0 & \dots & 0 & 1 & -1 \end{pmatrix} \quad \begin{matrix} N-1 \text{ rows} \\ N \text{ columns} \end{matrix}$$

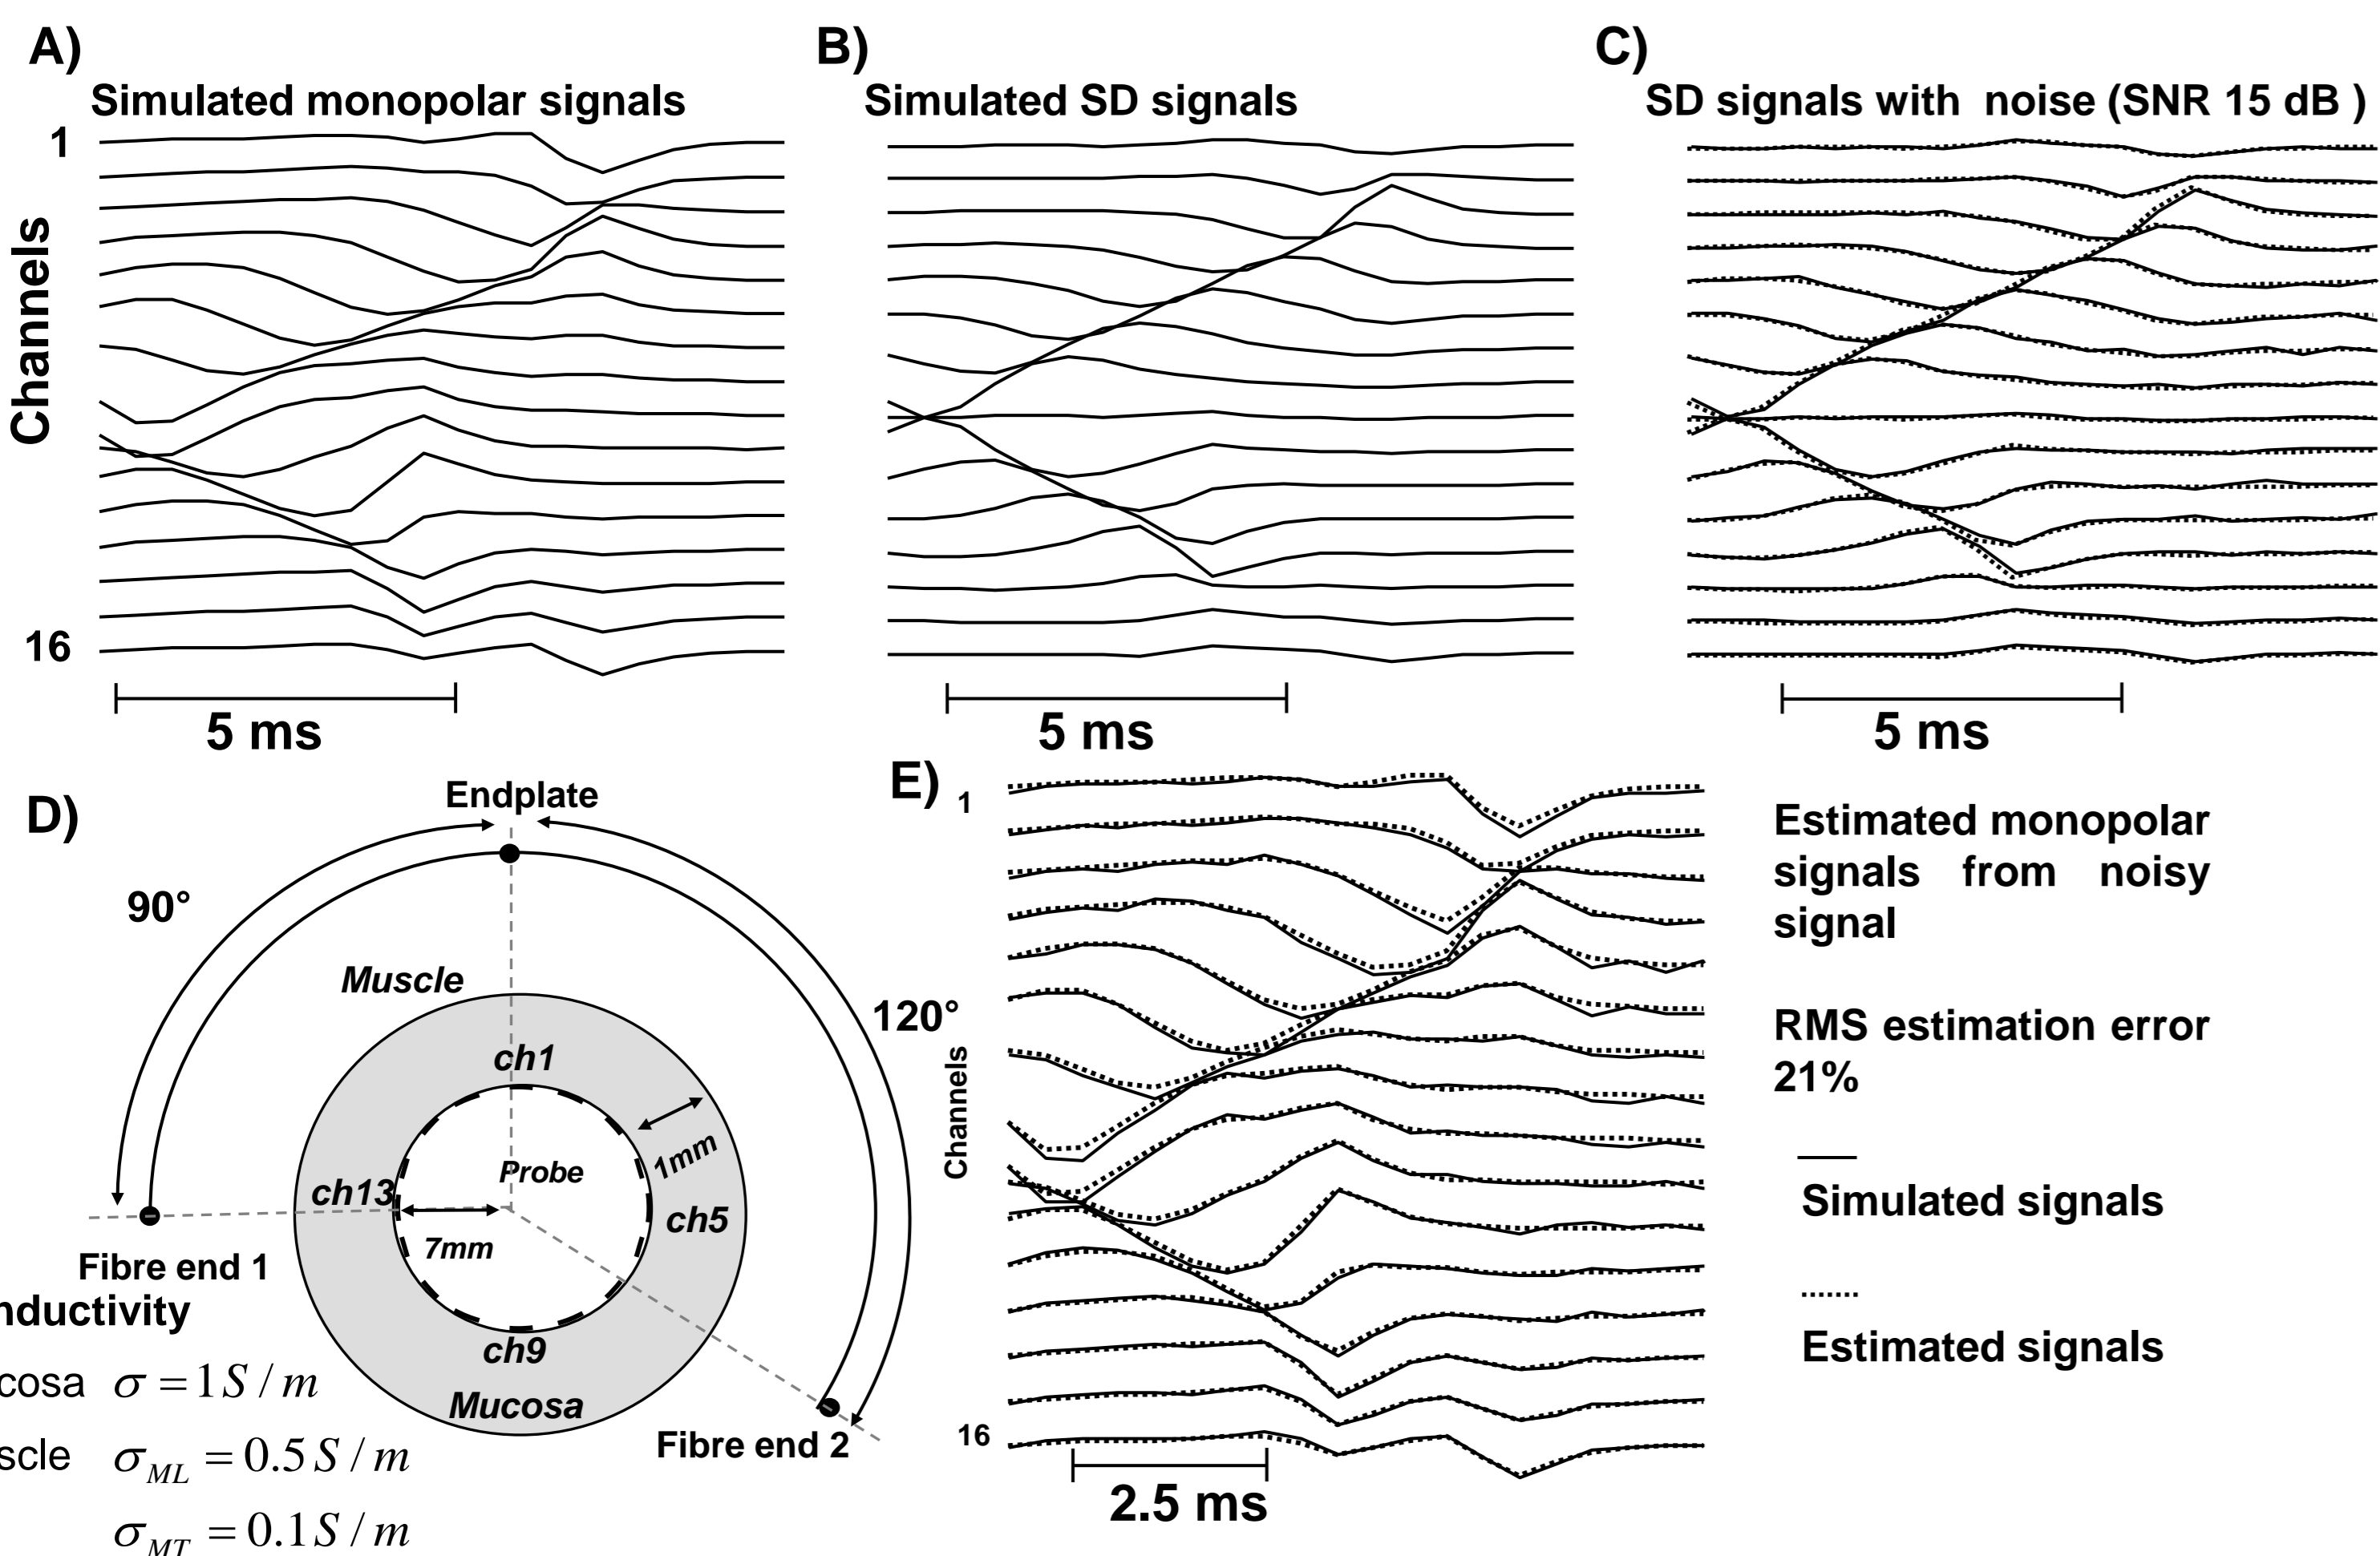

Under the assumption that the volume conductor is space invariant, the monopolar surface EMG detected along a curve parallel to the fiber path has zero mean value in space at any time.

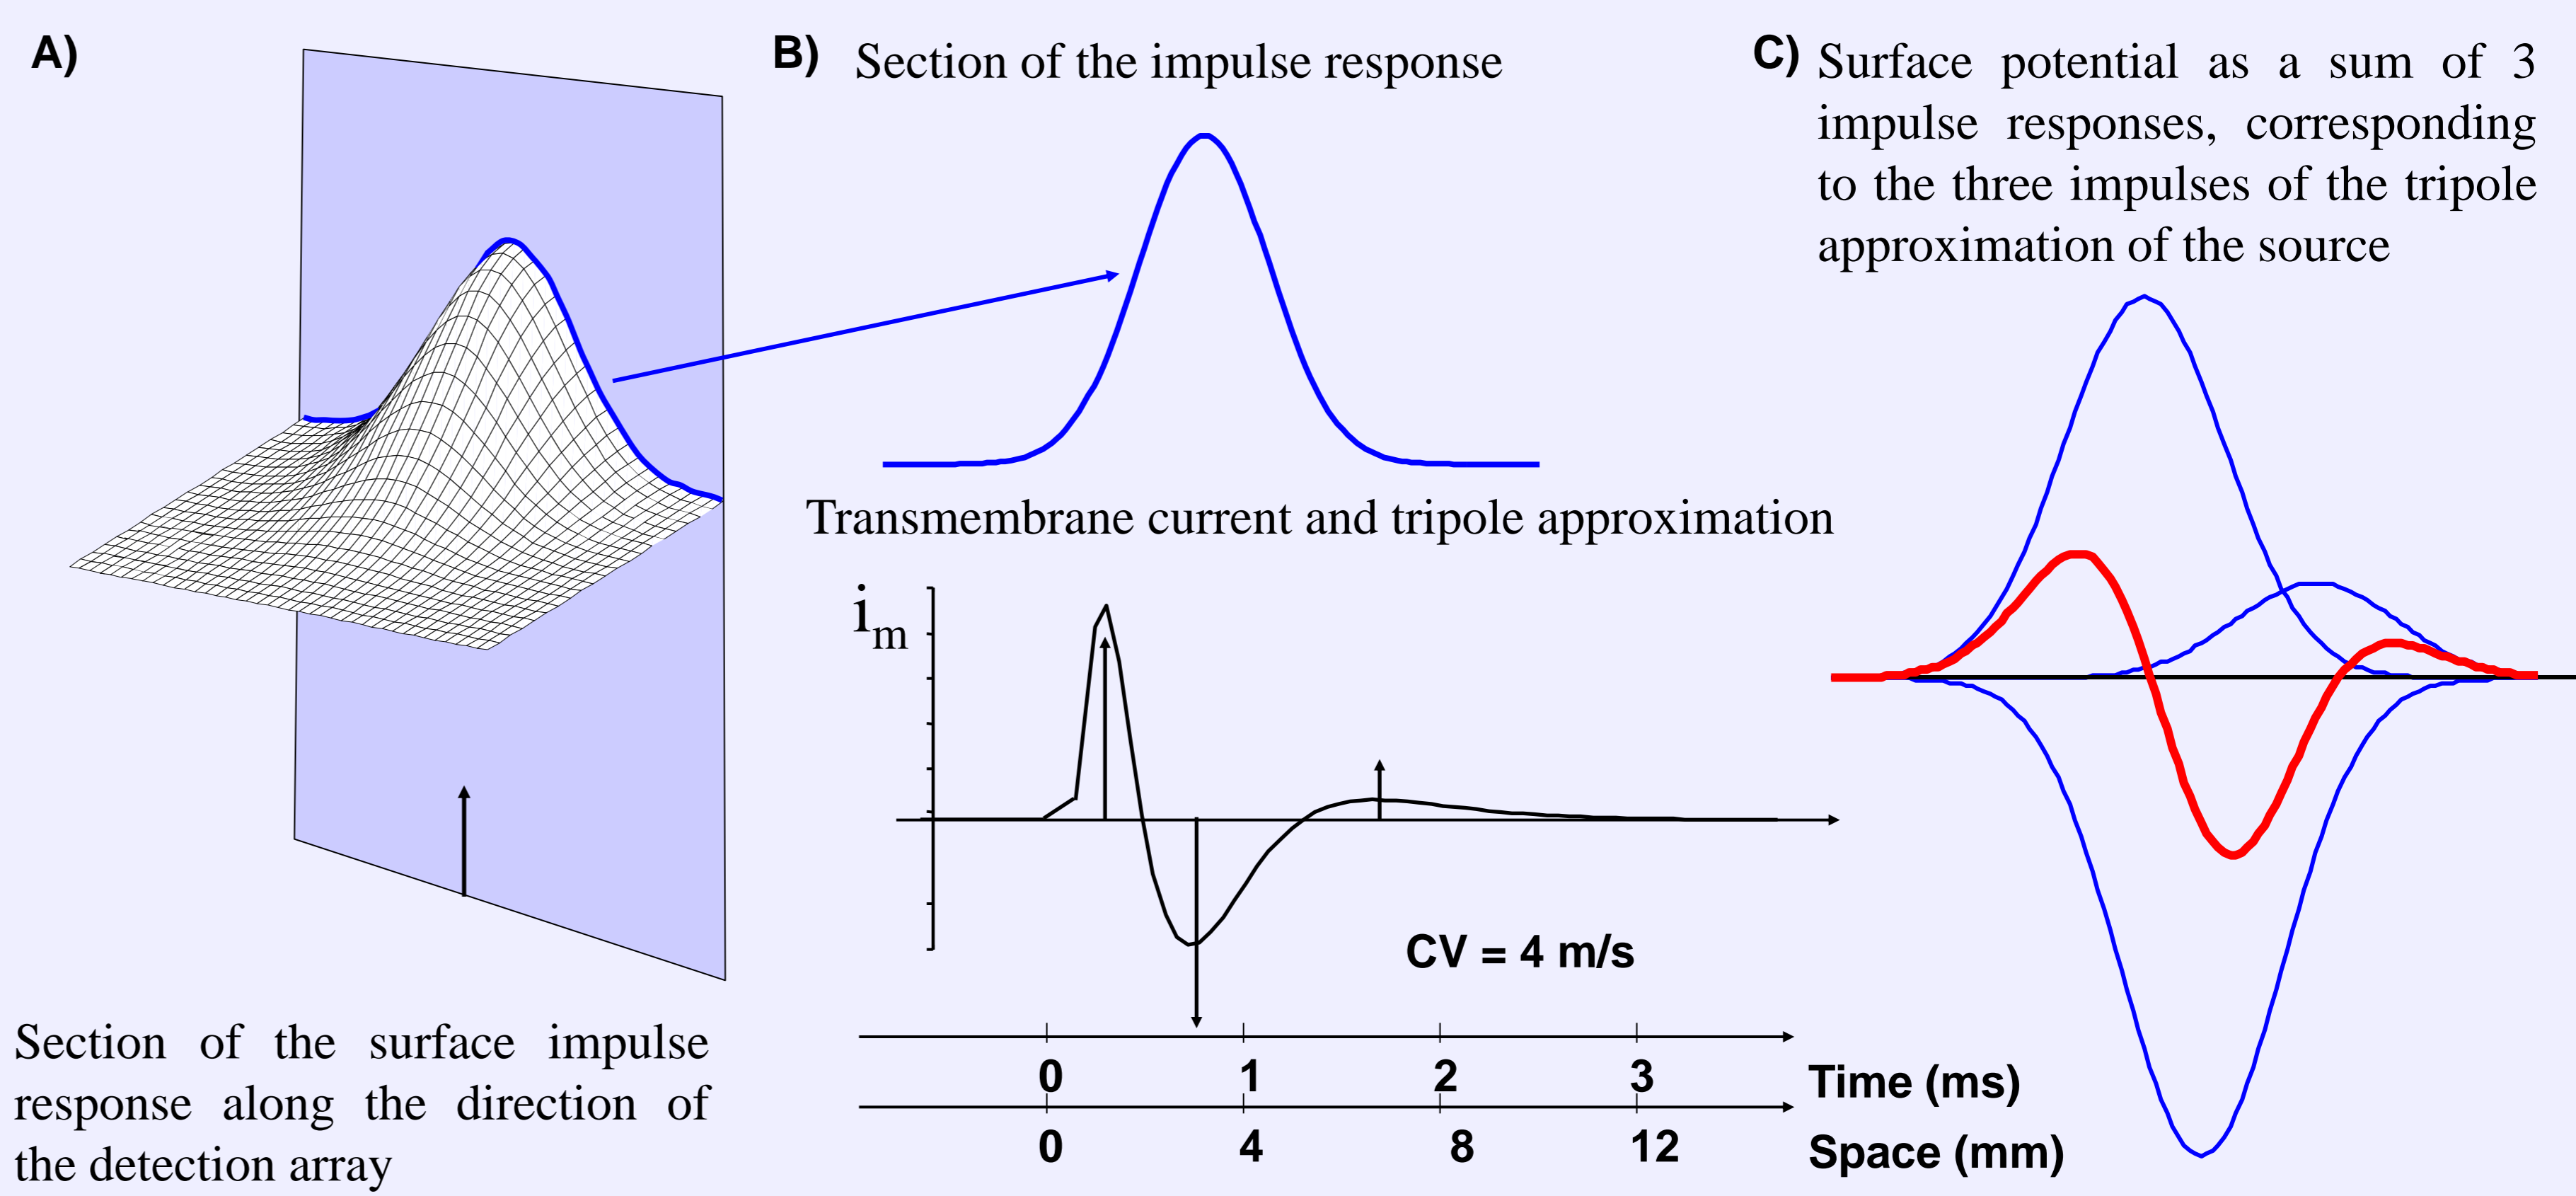


**Figure 1** A) Example of simulation of monopolar SFAP, using a model of sphincter. B) SD signals obtained from the monopolar signals. C) SD signals with 15 dB white noise. D) Estimate of monopolar signals from perturbed SD signals.


**Figure 2** A) Sketchy representation of an impulse response. B) Section of the impulse response at the location of the detection system in the direction of muscle fibres and transmembrane current (source of the volume conductor problem). C) Surface potential along the direction of the muscle fibres expressed as a convolution of the source (tripole approximation) with the impulse response.

## 3. RESULTS

### Application to simulated SFAPs

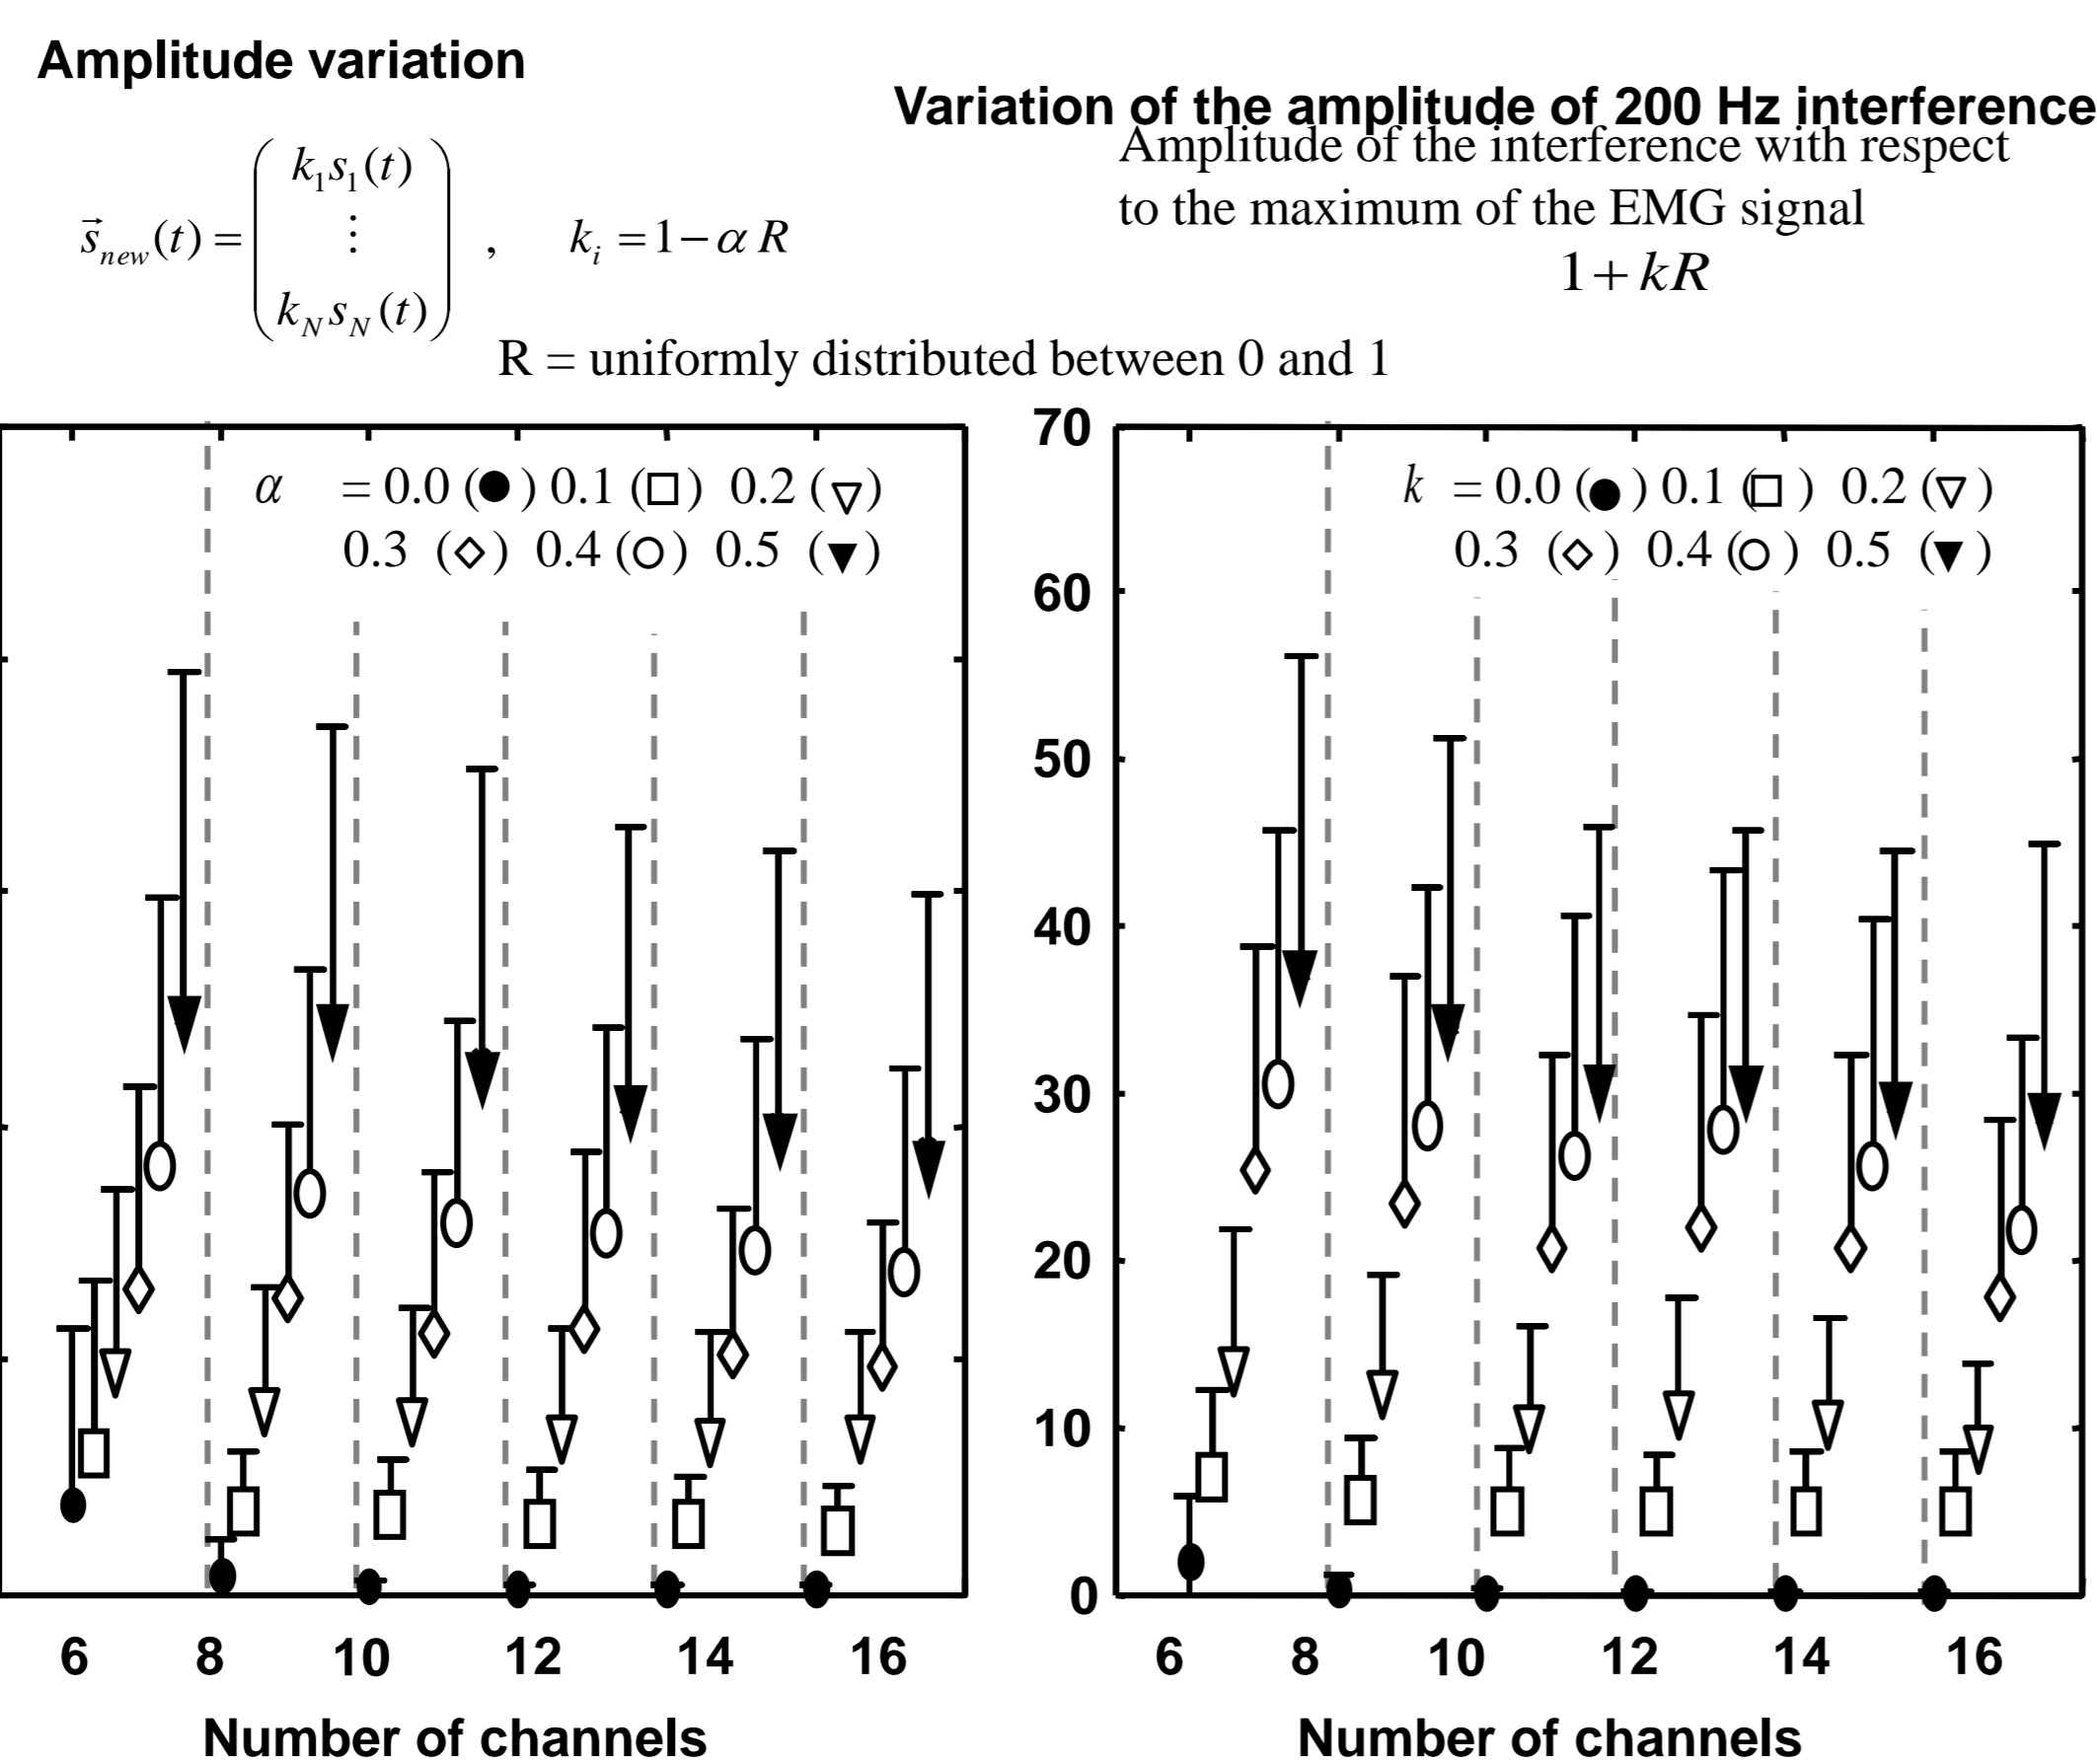

### Application to simulated noise free MUAPs and interference signals

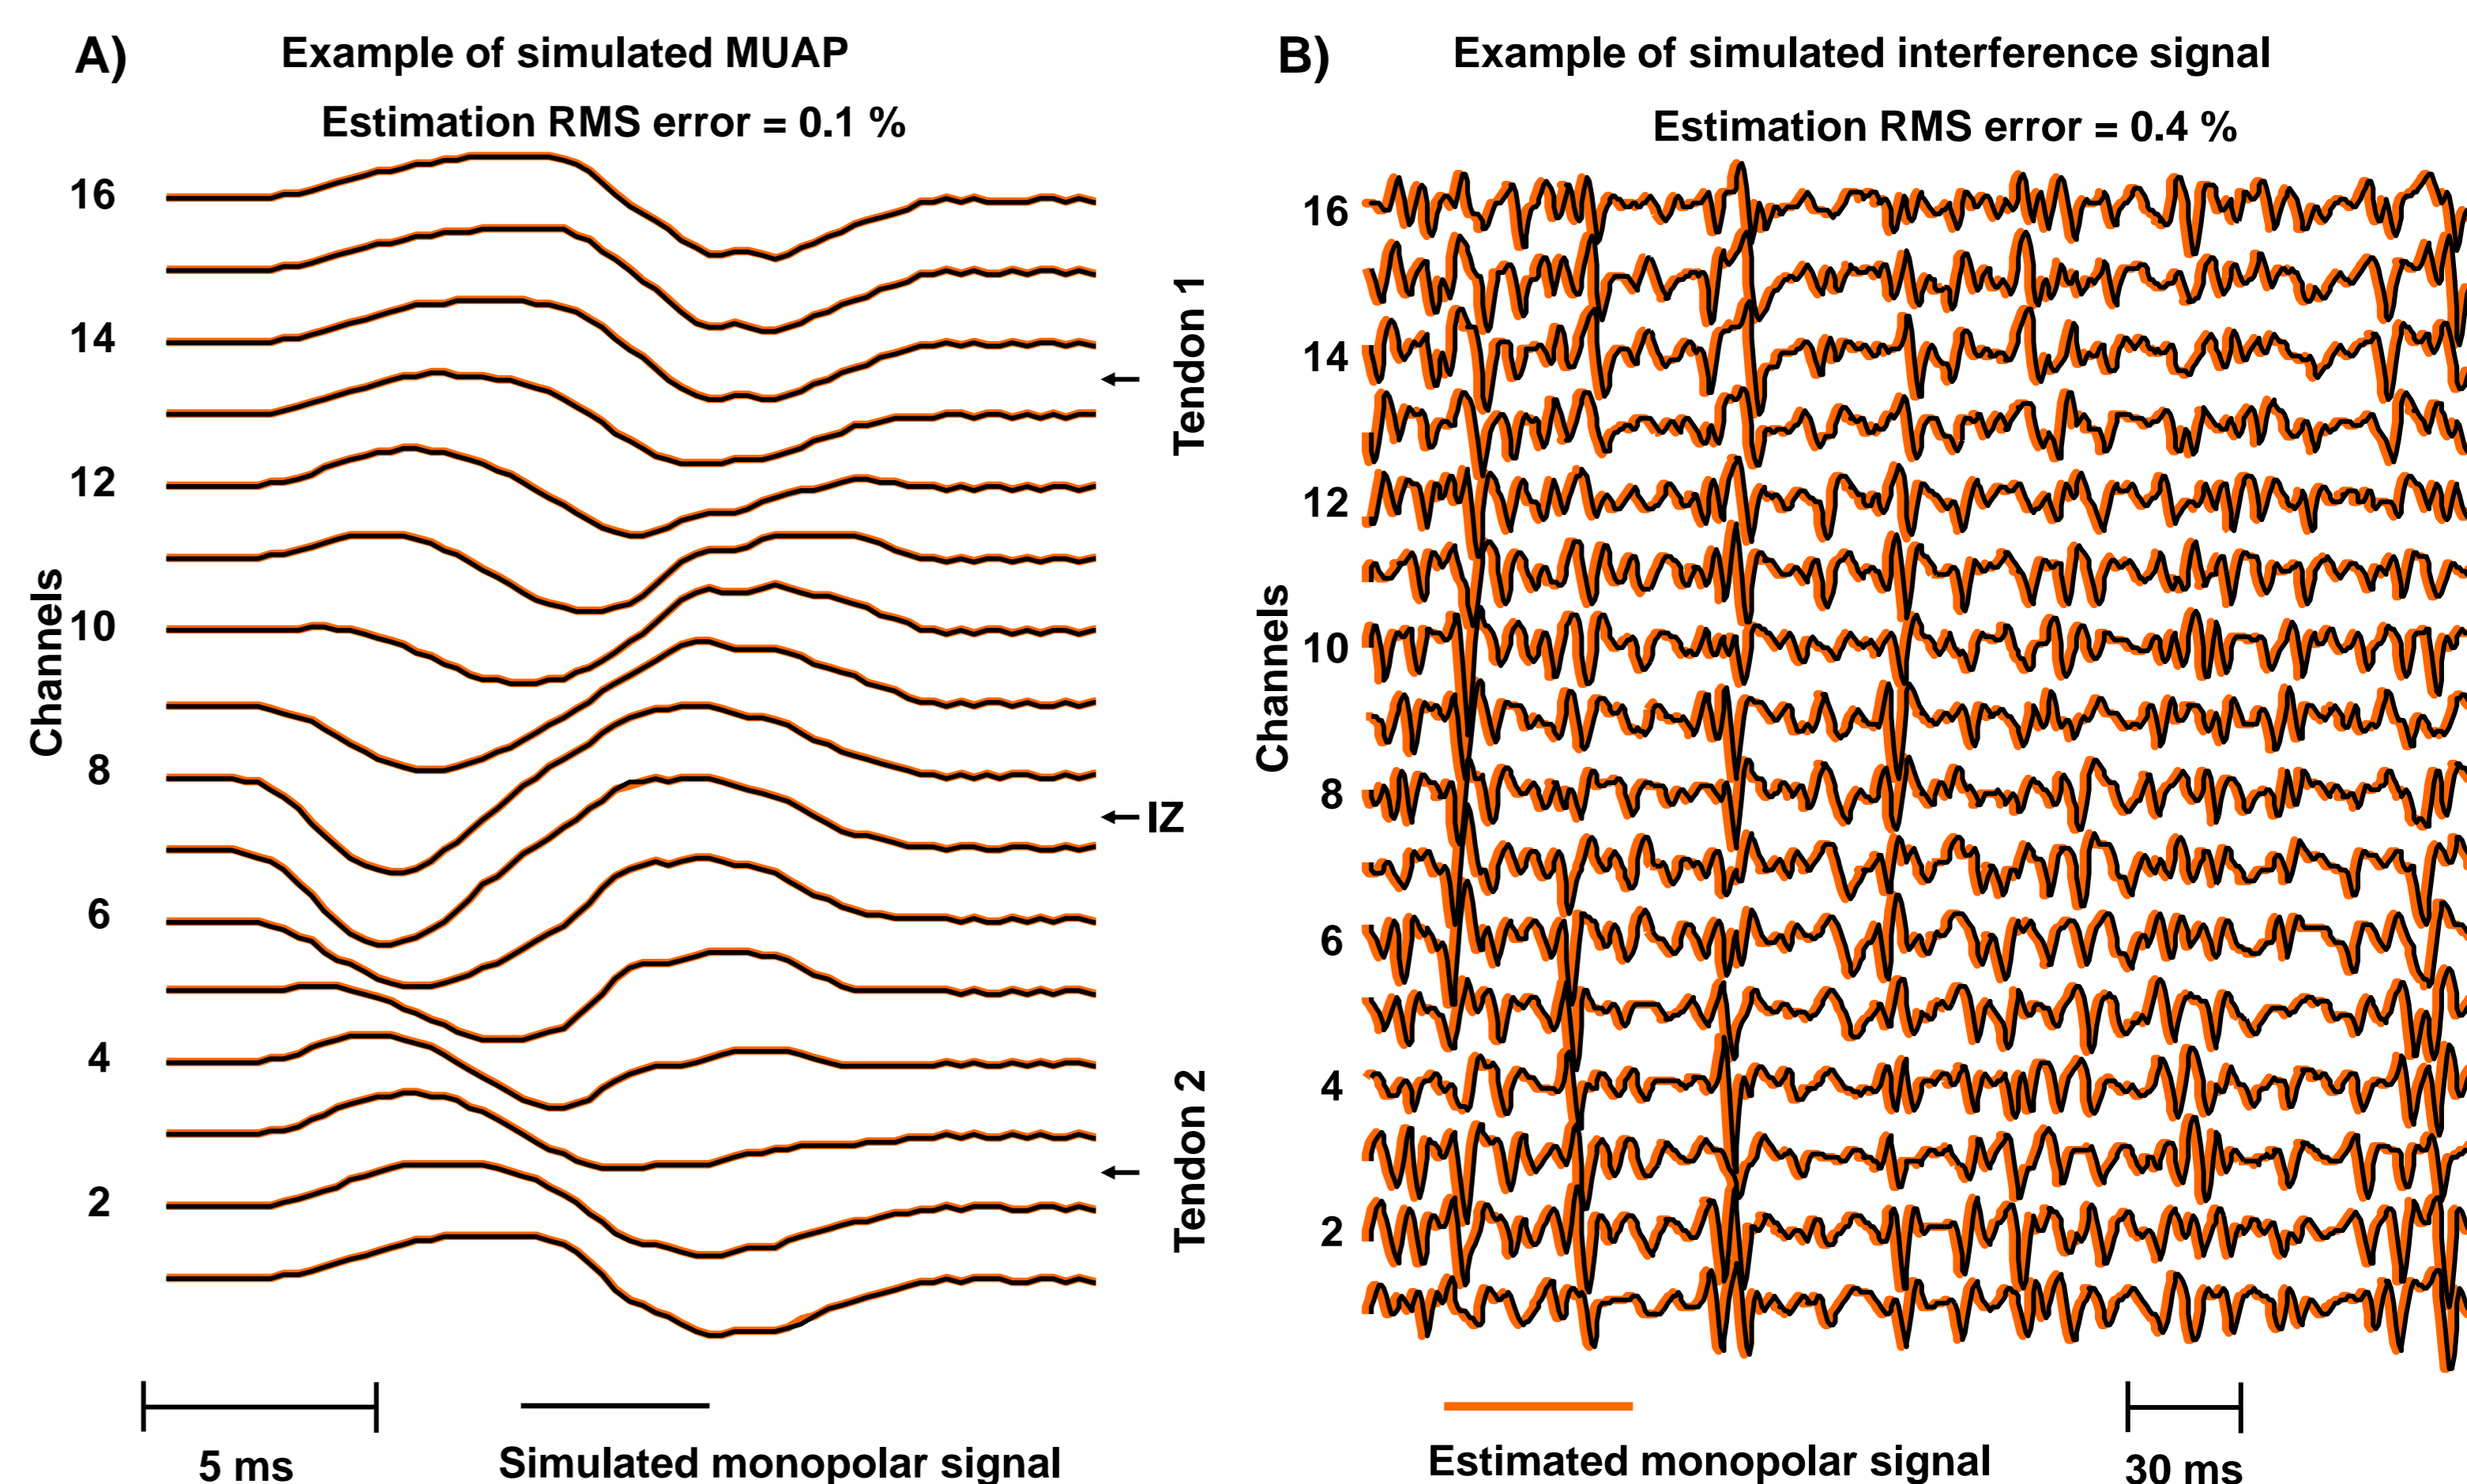



**Figure 3** Performance of the method. Mean and STD of the RMS error in estimating monopolar from SD SFAP corresponding to 88 positions of simulated fibers (depth between 2 and 8 mm within the muscle with 1 mm step, distance of the fibres from the detection electrodes in the axial direction between 0 and 10 mm with 1 mm step)

**Figure 4** A) Application of the method to a MUAP (MU constituted by 154 fibers) and B) to an interference signal (60 MUs, force level 40% MVC). SD signals were obtained from the simulated monopolar signals, and then monopolar signals were reconstructed.

### Application to signals simulated by a planar model

Importance of covering the entire potential distribution


Different angles between the detection array and the fibre direction

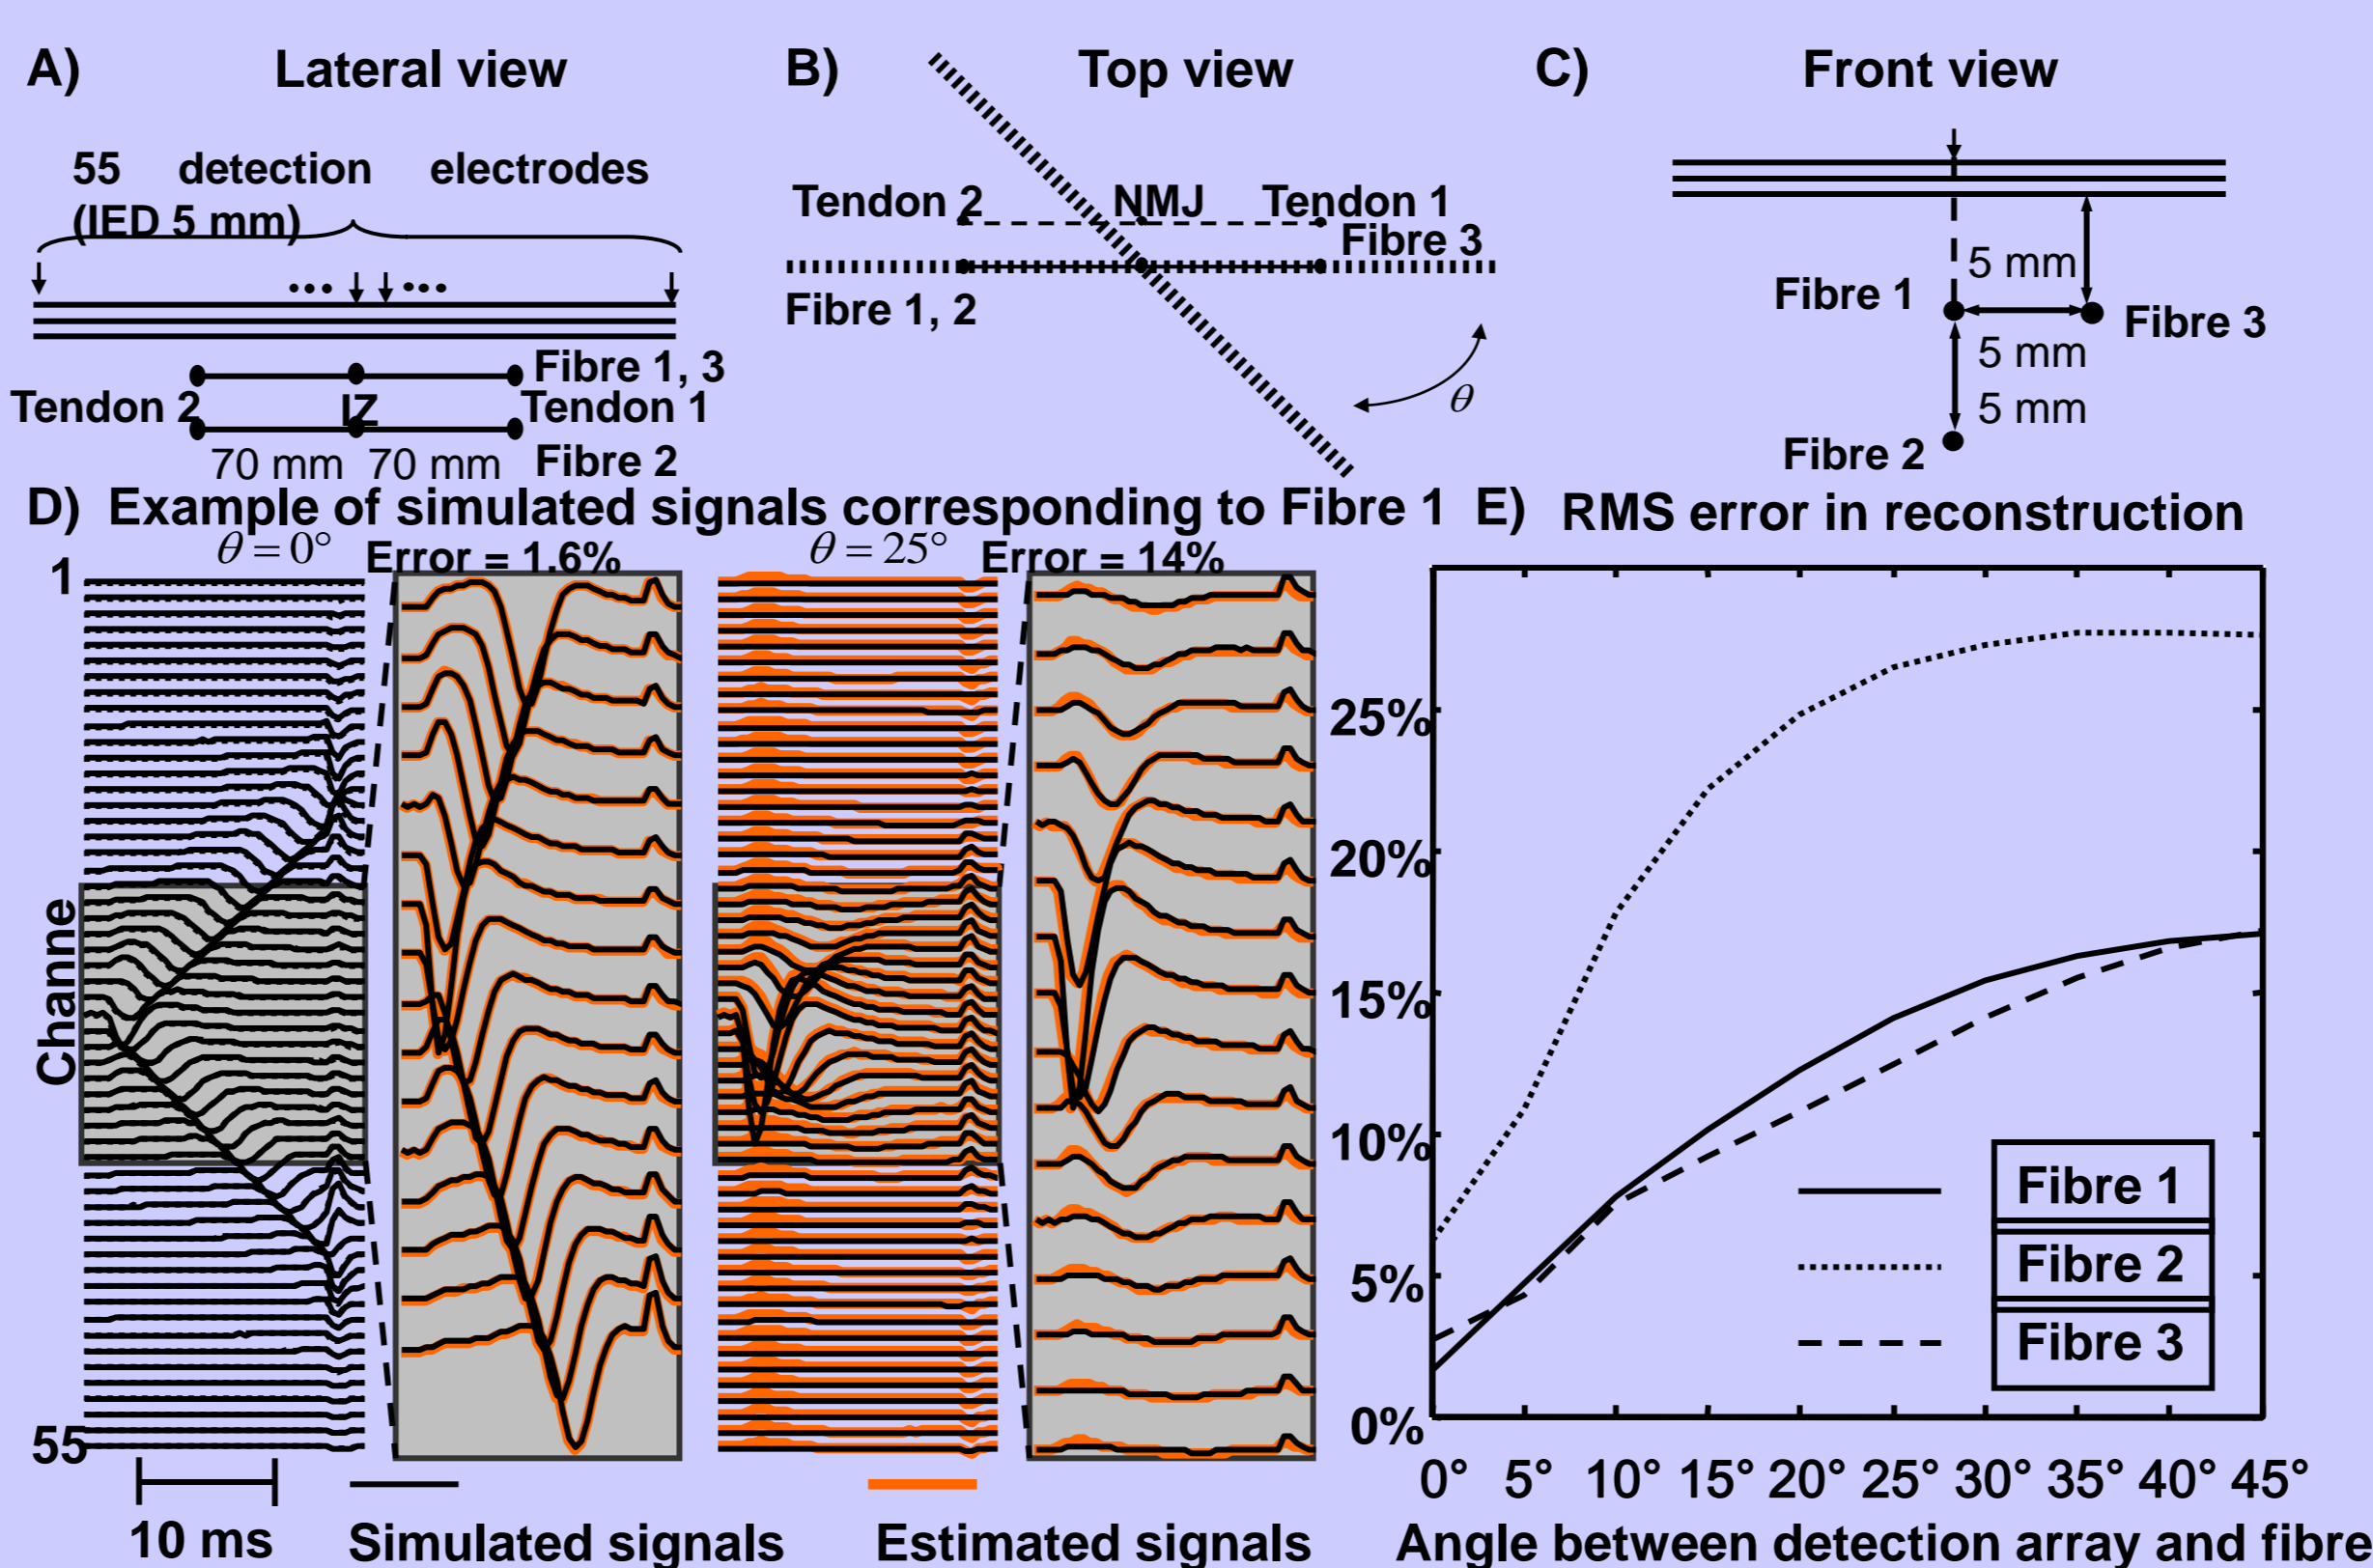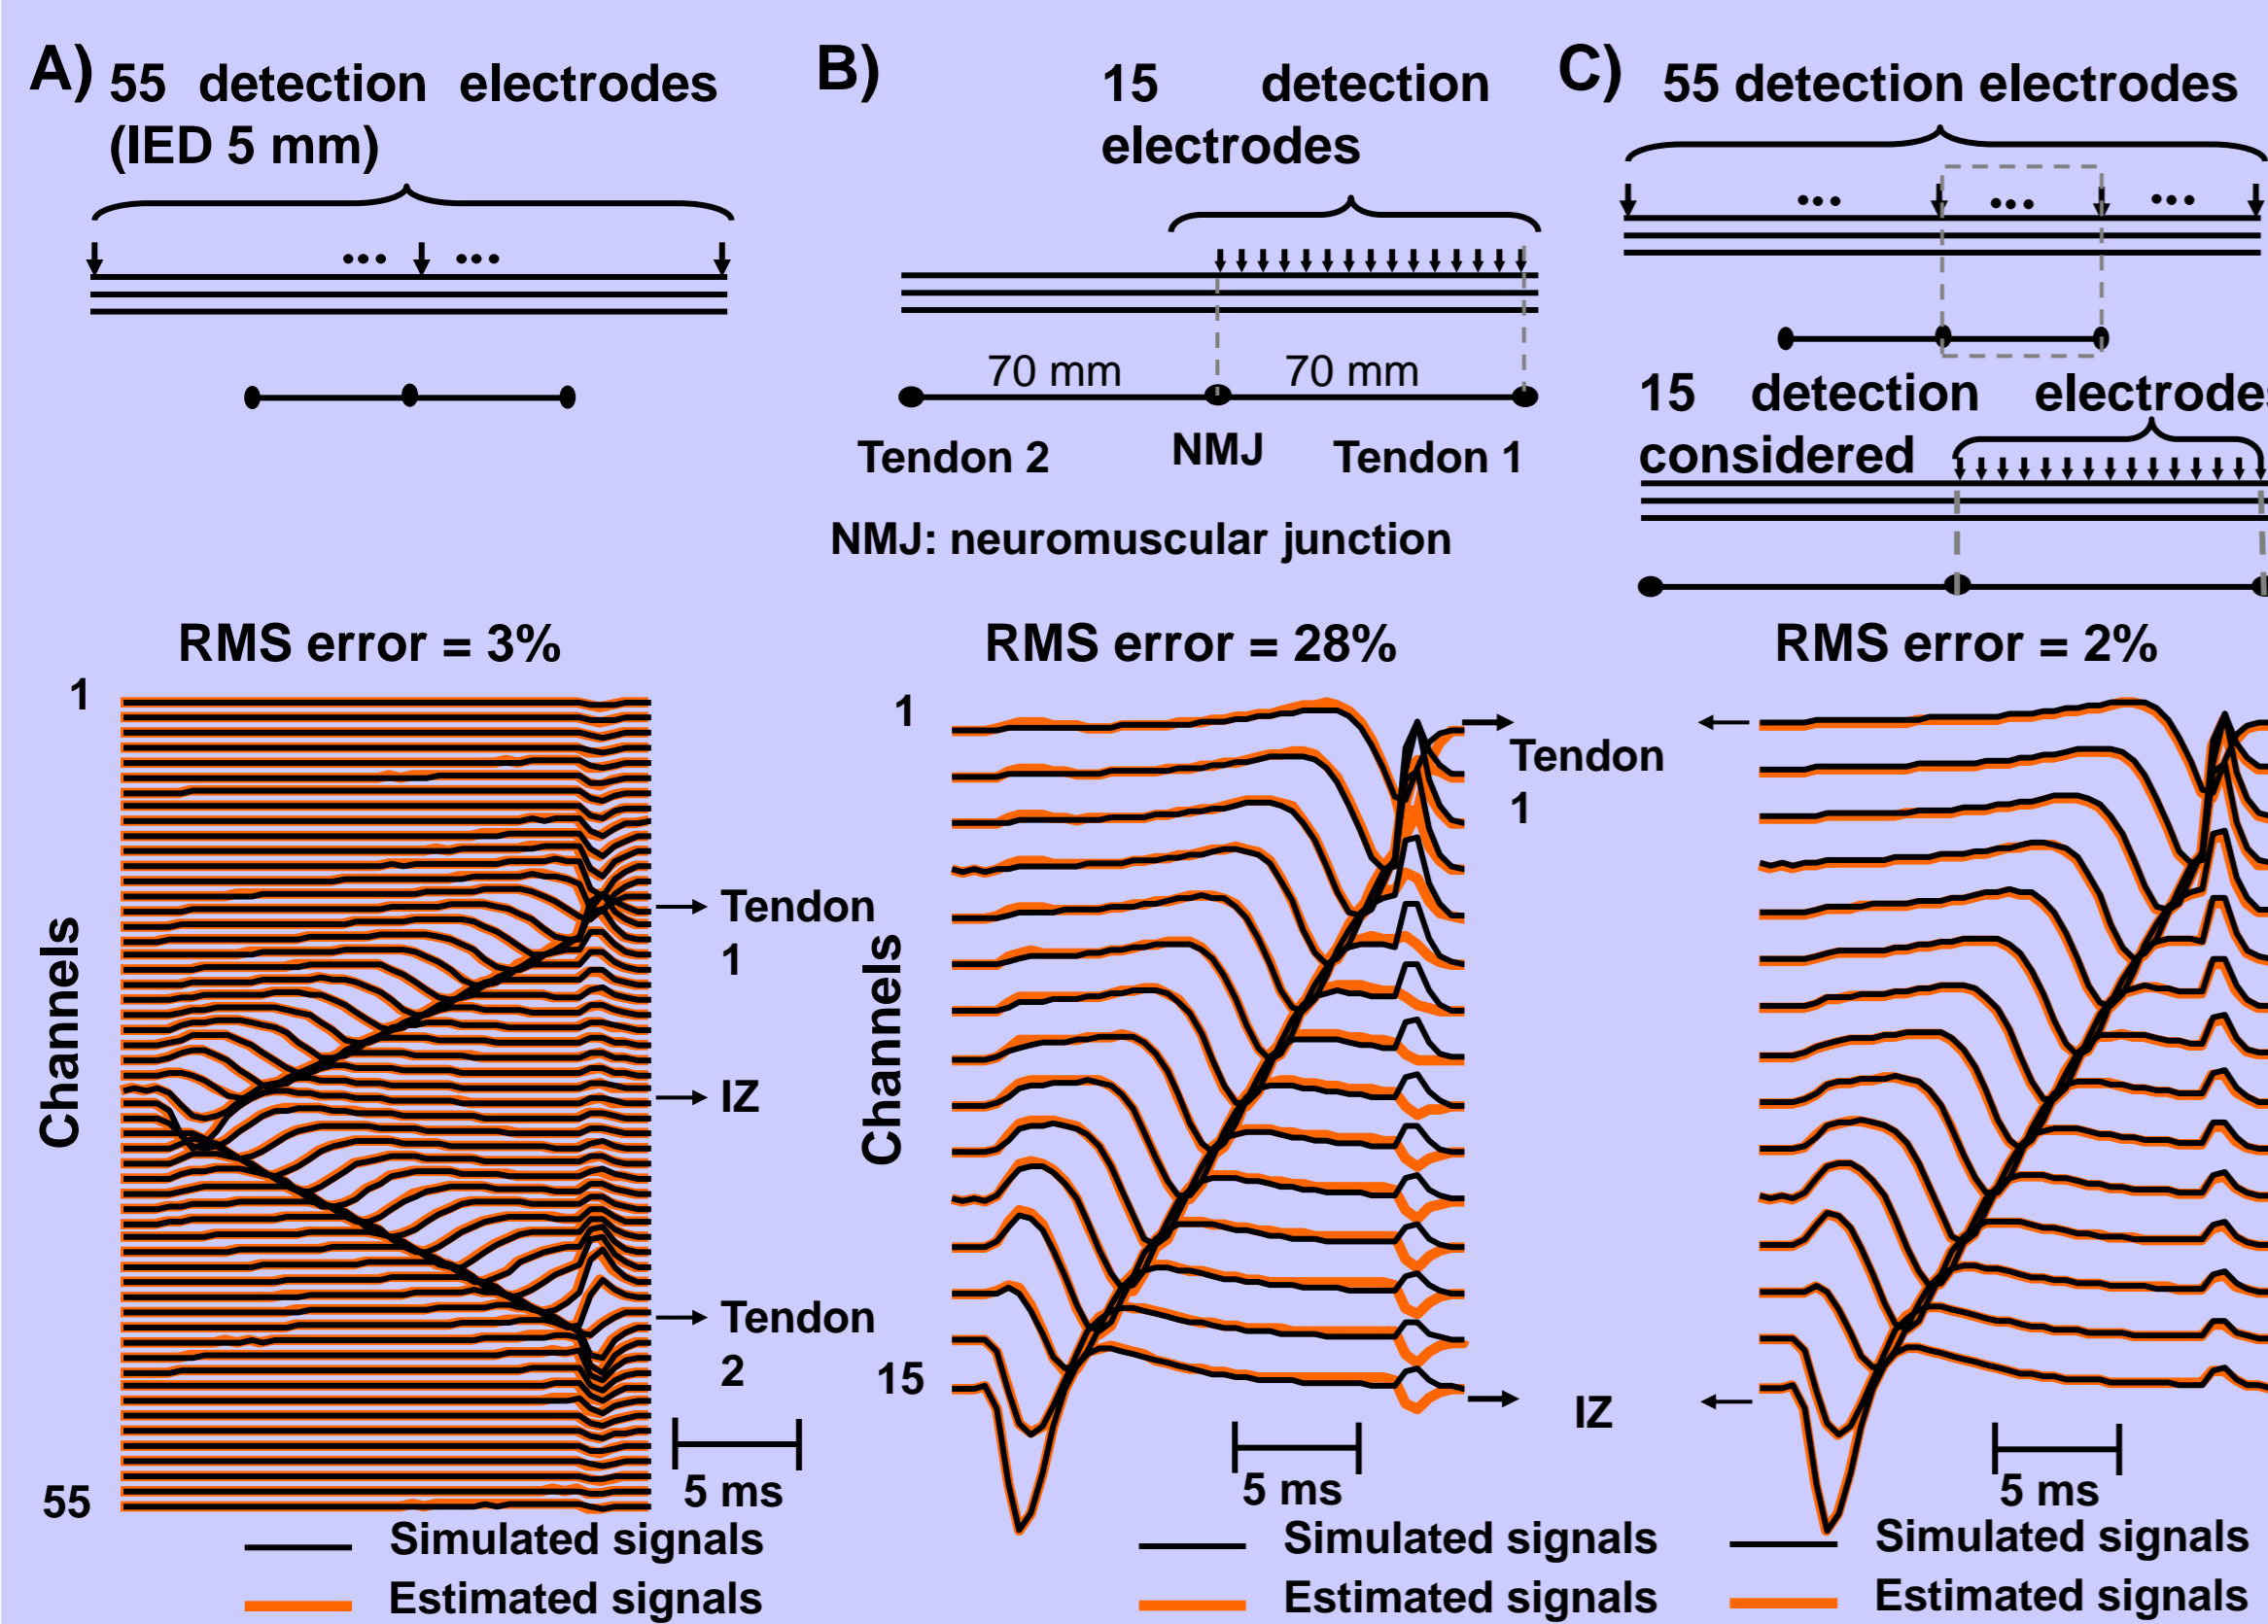

### Considerations on the estimation error

The estimation error is the sum of the "approximation error" due to sampling and the "noise error" due to additive noise (supposed to be Gaussian with zero mean and standard deviation  $\sigma$ ). The "approximation error" is the common mode present in the vector of sampled monopolar signal and reduces with increasing number of channels  $N$ .

$$\text{Mean noise error: } \sum_{j=1}^N A_{ij}^2 \sigma^2 \cong \frac{N}{12} \sigma^2$$

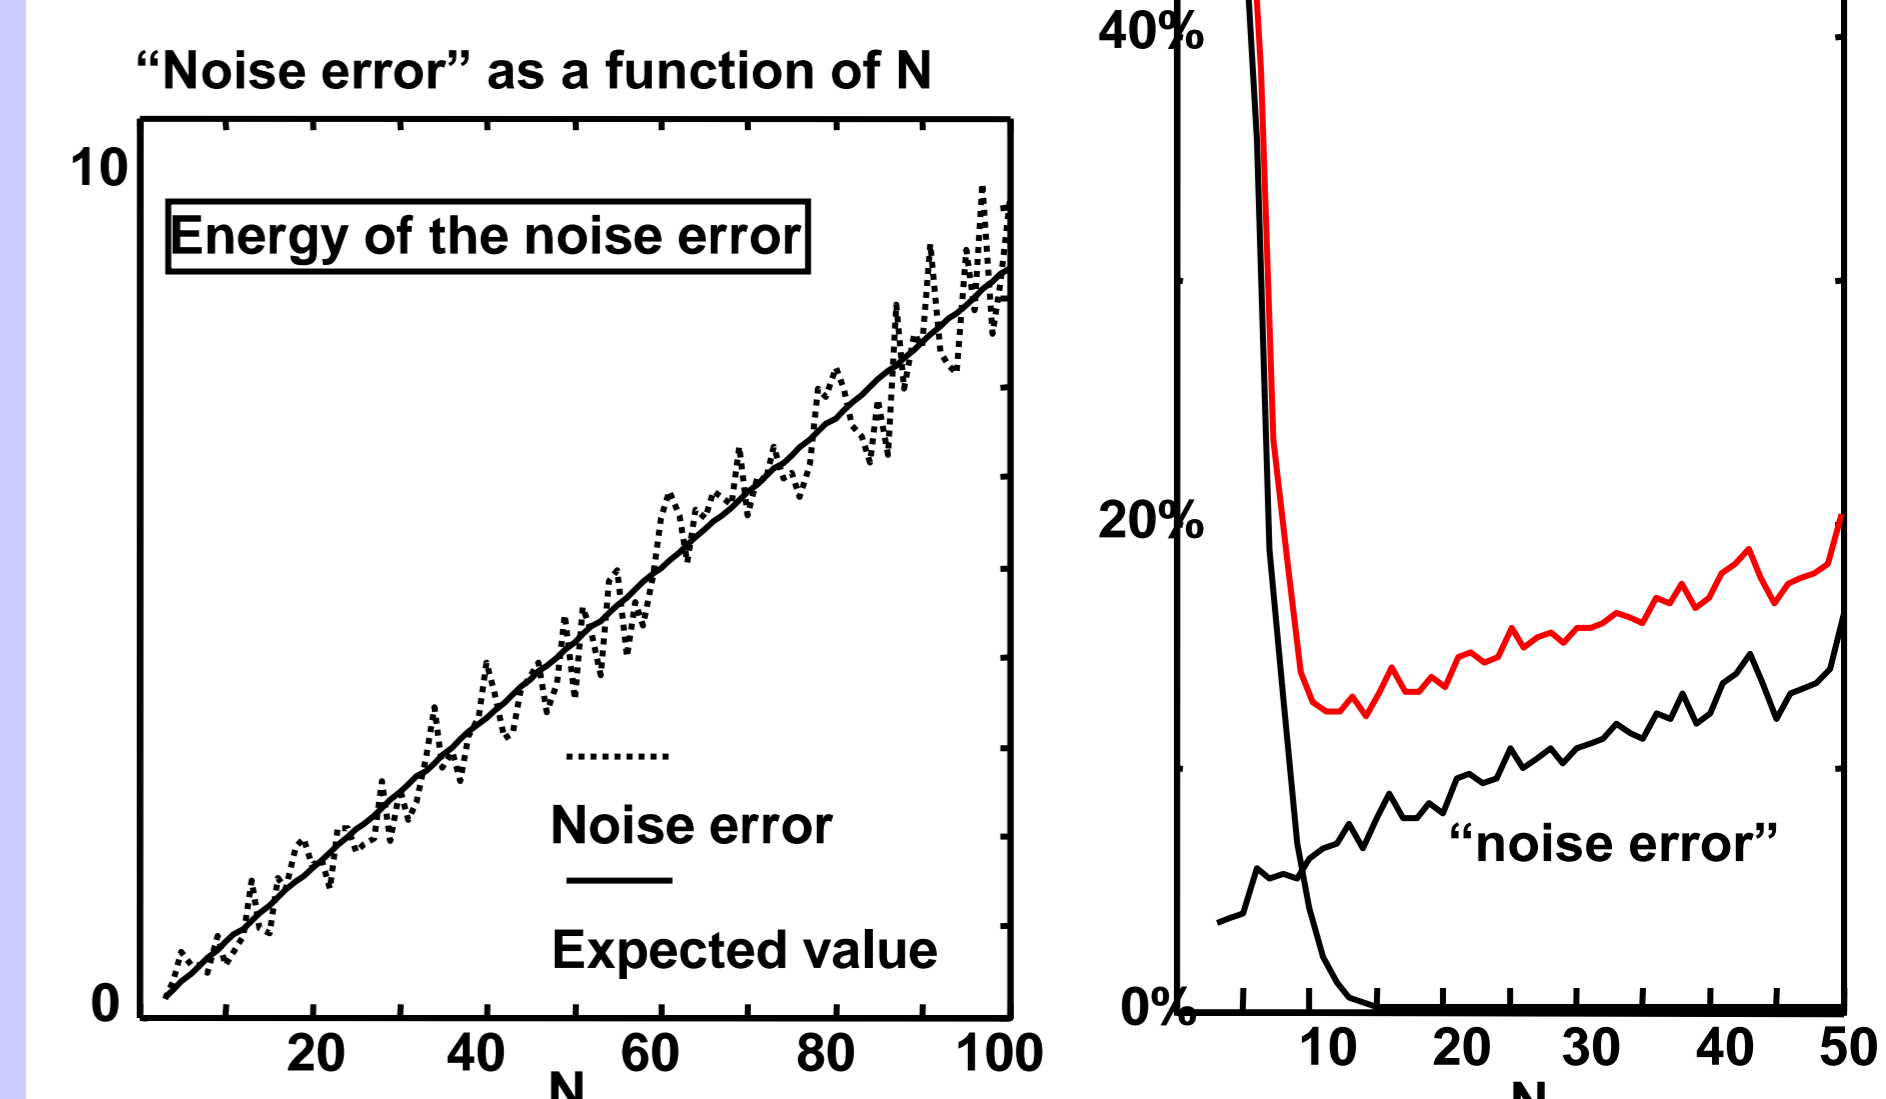

**Figure 7** A) Square "noise error" for realisations of Gaussian noise (mean 0, STD 1) compared to the theoretical expected value as a function of the number of channels  $N$ . B) RMS "approximation error", "noise error" and estimation error normalised with respect to the square root of the energy of the monopolar signals of a representative SFAP (fibre located under the detection array, 1 mm deep in the muscle).

## 4. CONCLUSIONS

Under the hypothesis of space invariance of the volume conductor, monopolar signals detected along the direction of the muscle fibres with an array covering the entire spatial support of the potential distribution have vanishing spatial mean at any time. This provides a constraint for estimating monopolar from SD signals from sphincter muscles.

## Acknowledgements

Sponsored by Projects TASI and TIFNI (Else Kroner-Fresenius-Stiftung, Compagnia di San Paolo, Regione Piemonte)