

MIMO Antenna Optimization: From Configuring Structure to Sizing with the aid of Neural Network

*Original*

MIMO Antenna Optimization: From Configuring Structure to Sizing with the aid of Neural Network / Mir, F; Kouhalvandi, L; Ebrahimi, F; Matekovits, L. - ELETTRONICO. - (2023), pp. 1-4. (Intervento presentato al convegno 2023 IEEE 16th Dallas Circuits and Systems Conference (DCAS) tenutosi a Denton, TX, USA nel 14-16 April 2023) [10.1109/DCAS57389.2023.10130253].

*Availability:*

This version is available at: 11583/2984403 since: 2023-12-07T12:14:47Z

*Publisher:*

IEEE

*Published*

DOI:10.1109/DCAS57389.2023.10130253

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

IEEE postprint/Author's Accepted Manuscript

©2023 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

# MIMO Antenna Optimization: From Configuring Structure to Sizing with the aid of Neural Network

Farzad Mir<sup>1+</sup>, Lida Kouhalvandi<sup>2\*</sup>, Farshad Ebrahimi<sup>3+</sup>, Ladislau Matekovits<sup>4#◇</sup>

<sup>+</sup> Department of Electrical and Computer Engineering, University of Houston, Houston 77204, USA

<sup>\*</sup> Department of Electrical and Electronics Engineering, Dogus University, Istanbul, Turkey

<sup>-</sup> Department of Electronics and Telecommunications, Politecnico di Torino, Turin, Italy

<sup>#</sup> Department of Measurements and Optical Electronics, Politehnica University Timisoara, Timisoara, Romania

<sup>◇</sup> Istituto di Elettronica e di Ingegneria dell'Informazione e delle Telecomunicazioni, National Research Council, Turin, Italy  
fmir@cougarnet.uh.edu<sup>1</sup>, lida.kouhalvandi@ieee.org<sup>2</sup>, febrahi3@cougarnet.uh.edu<sup>3</sup>, ladislau.matekovits@polito.it<sup>4</sup>

**Abstract**—In the last decades, massive multiple-input multi-output (MIMO) designs play important role and this trend will continue in next-generation mobile technologies. Designing high-performance MIMOs is significant since these types of antennas include multiple radiating elements. For these complex configurations, intelligent-based optimization methods can tackle the problem of designing. This paper devotes to designing and optimizing the configuration and design parameters of a MIMO antenna, respectively. Firstly bottom-up optimization (BUO) approach is executed successfully for constructing the general configuration of the MIMO antenna and afterwards, artificial neural network (ANN) is utilized for obtaining the design parameters with the optimal values. The proposed method leads to generate the optimal topology with size values in a reduced effort by designers. The presented approach is operated leading to design and optimize a MIMO antenna with 15.3 GHz bandwidth (13.7 - 29 GHz).

**Index Terms**—Multiple-Input Multi-Output (MIMO), Bottom-Up Optimization (BUO), Artificial Neural Network (ANN)

## I. INTRODUCTION

In communication systems, massive multiple-input multi-output (MIMO) antennas are widely and executed successfully for increasing the capacity of exchanged data [1]. The massive MIMO antennas lead to overcoming the losses in fifth-generation (5G) mobile applications [2] and provide the opportunity for lower latency with energy efficiency [3], [4]. Typically, the configuration of MIMO antennas are complex where they are used more in massive radio-frequency (RF) chains and wireless technologies [5].

Developing the massive radio-frequency (RF) chains through MIMO antennas seems complex due to the configuration and structure of MIMO antennas [5] to fulfill advanced constrains.

In the recently published papers, various solutions are presented for designing antennas and making use of optimizer algorithms. Some methods as generic algorithm [6] swarm optimization [7] are known optimization methods for this purpose. Designing antennas with these types of algorithms lasts long and requires significant computational effort.

In this paper, a two-step optimization method is executed for firstly configuring the general structure of the MIMO antenna,

and then sizing all the presented design parameters in the structure of MIMO antenna. In the first step, the bottom-up optimization (BUO) algorithm is employed for configuring the structure of presented antenna. In a second step, artificial neural network (ANN) is used for predicting the optimal values for the determining variables describing the antenna geometry. The presented optimization process is performed through two tools: electronic design automation (EDA) tool, here CST, and also numerical analyzer, here MATLAB. The reason of combining these tools is to reduce the overall effort of RF designs.

The paper is organized as follows: Section II presents the proposed optimization approach. Section III explains the simulation results of optimized MIMO antenna. Section IV presents the overall conclusions around the presented work.

## II. A GENERAL VIEW AROUND THE PROPOSED OPTIMIZATION METHOD

MIMO antennas are complex substructures in a wireless communication system. Hence, an advanced approach is required for designing these systems. This section devotes to presenting the proposed method that leads to reducing the design efforts by engineers. Firstly, the BUO method is executed successfully for building the structure of MIMO antenna. Afterwards, the ANN is trained for achieving the optimal design parameters straightforwardly. For easily access to the main idea of the proposed method, a flowchart depicted in Fig. 1 is provided.

### A. Bottom-up optimization (BUO) method

The BUO algorithm devotes to start with an initial antenna design as shown in Fig. 2 and then increasing the number of radiators, sequentially [8] [9]. In our specific application, sequentially increase up to four antennas is followed, started from two initial radiators. Figure 3 presents the configured MIMO antenna.

### B. Artificial neural network (ANN) method

The learning-based method is one of the sub-division of the optimization approaches that is getting benefits from the machine learning concept. The ANN is introducing this

content and determines the relationship between the input and output data. Recently, ANN is employed in various RF designs and has proved its effectiveness for example in [10]–[13] due to its modeling accuracy. Obtaining the large bandwidth of RF designs is not straightforward and requires additional computational effort with respect to narrow band

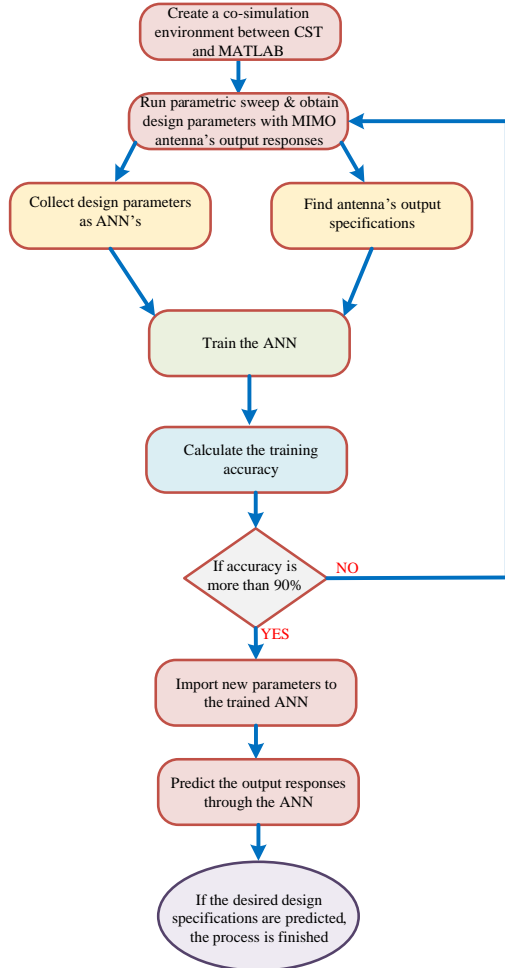


Fig. 1. The general flowchart of the proposed method.

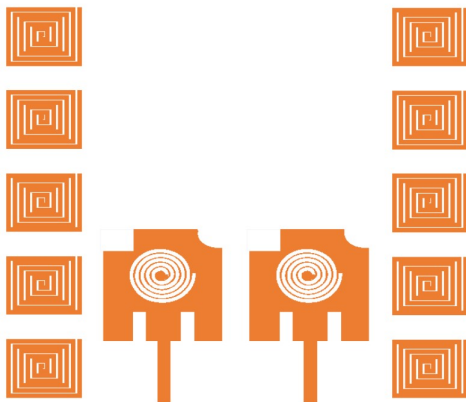


Fig. 2. Initial antenna design.

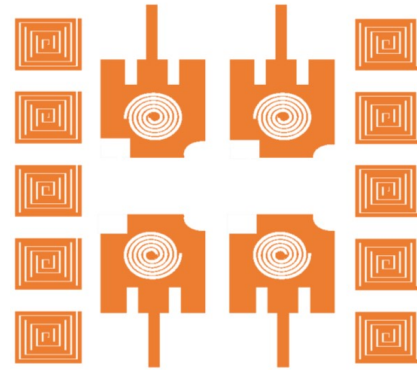


Fig. 3. The configured MIMO antenna through the BUO method.

systems. For reducing this effort, the ANN is trained and constructed with the aim of estimating all included variables in the configured MIMO antenna. This ANN would be useful enough for antenna modeling in the large frequency band. For this case, all variables presented in Fig. 3 are used as the input layer specifications; the the output layer predicts the output specifications of the MIMO antenna in terms of  $S_{11}$  and gain. All variables that are used in configuring antenna are iterated randomly and this suitable amount of data is used as the input/output data for constructing the ANN. Figure 4 presents the constructed ANN for estimating the optimal values for the various variables leading to achieve desire simulation results.

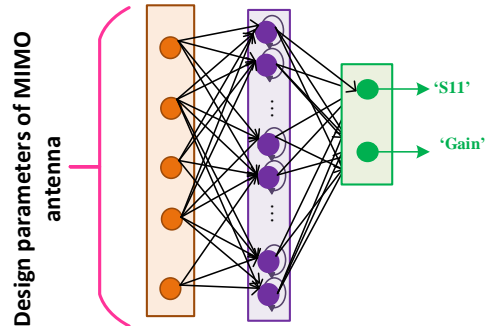


Fig. 4. A general structure of proposed ANN.

### III. SIMULATION RESULTS

The BUO method is employed and results in the optimal four single antennas. After obtaining the topology, the ANN is trained using 1000 data. The rule of thumb is used for determining the number of neurons where 550 neurons are used in the single hidden layer. Below, the achieved simulation results after employing our proposed approach are presented and discussed.

The MIMO antenna design shown in Fig. 5 is built on the copper grounded  $84 \times 70mm^2$  and dielectric FR-4 substrate with 1.6 mm thickness and  $\tan \delta = 0.025$  and  $\epsilon = 4.3$ . The main structure is a microstrip patch antenna with a circular spiral located in the center with a number of 6 turns. The single patch is made of copper; two columns of copper rectangular

spirals with 6 turns each are placed on the right and left side of the patch. Each radiator is excited by a coaxial cable as it is illustrated in Fig. 5 with designed parameters defined as reported in Tab. I.

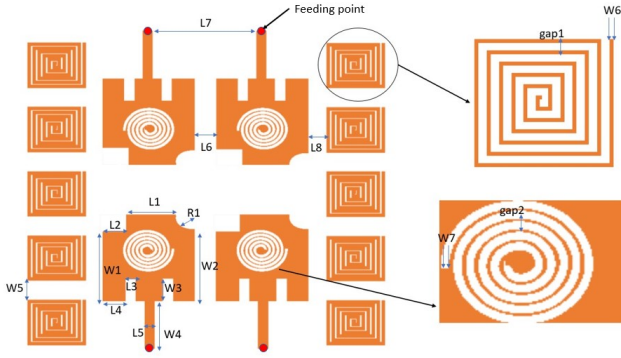


Fig. 5. Parameter description of optimized MIMO antenna.

TABLE I  
VALUES OF CONFIGURED MIMO ANTENNA IN FIG.5

width	value (mm)	length	value (mm)
$W_1$	19	$L_1$	10
$W_2$	19	$L_2$	5
$W_3$	6	$L_3$	1
$W_4$	9	$L_4$	6
$W_5$	4.8	$L_5$	2
$W_6$	0.3	$L_6$	2
$W_7$	0.5	$L_7$	18
gap1	0.5	gap2	0.5
-	-	$L_8$	3

The simulation is conducted through CST software and the outcomes are explained in Fig. 6 and Fig.7 for  $S_{11}$  and  $S_{21}$ , respectively. The obtained bandwidth for the optimized structure in Fig. 6 is from 13.7 GHz to 29 GHz (15.3 GHz) which can be considered an ultra-wide band. The E-plane radiation patterns for three different frequencies as 13.7, 16.23, and 29 GHz are represented in Fig. 8 and Fig. 9 that are demonstrating two incidence angles such as  $\phi = 0$  and  $90^\circ$ , respectively.

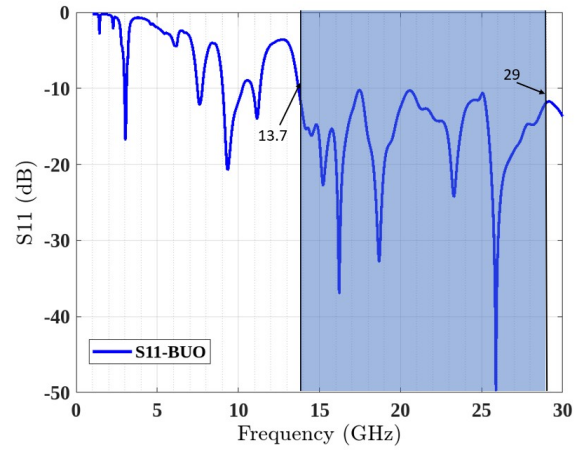


Fig. 6.  $S_{11}$  for MIMO through BUO

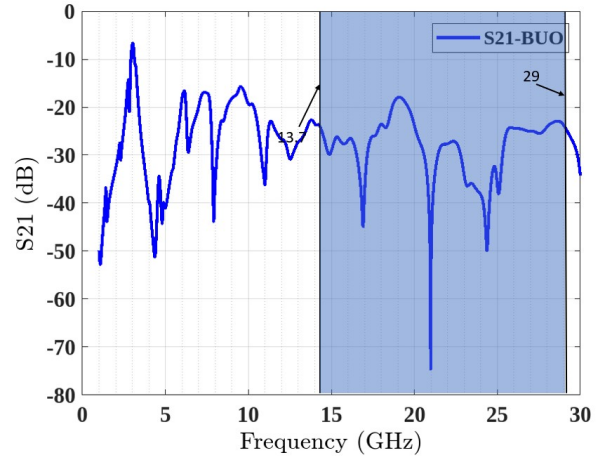


Fig. 7.  $S_{21}$  for MIMO through BUO

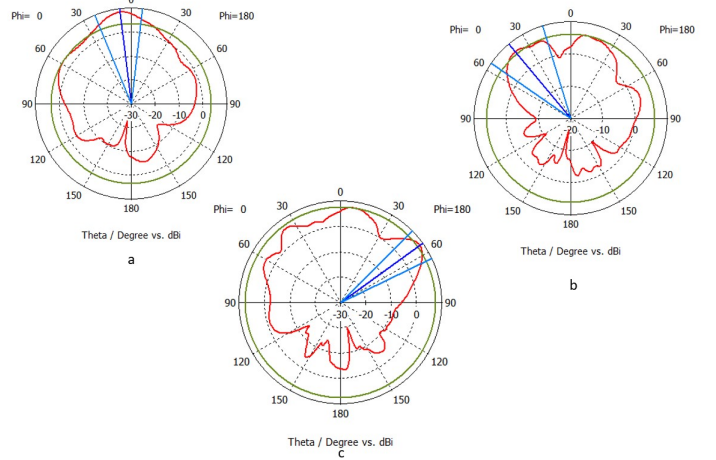


Fig. 8. Radiation pattern for E plane at  $\phi = 0$  for a= 13.7 GHz, b=16.23 GHz, and c=29 GHz

#### IV. CONCLUSION

In this work, we develop a new methodology for designing and optimizing MIMO antenna where configuration develop-

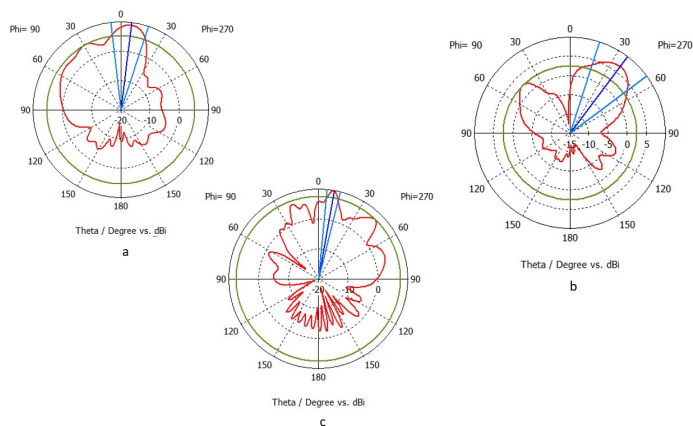


Fig. 9. Radiation pattern for E plane at  $\phi = 90$  for a= 13.7 GHz, b=16.23 GHz, and c=29 GHz

ment and sizing of antenna are executed successfully. In the first phase, the algorithm namely as BUO is performed for building the initial structure of MIMO antenna. Afterwards, an intelligent-based method (i.e., ANN) is constructed for sizing the design parameters generated from the BUO approach. The proposed approach is able to reduce time-to-market in designing high-dimensional designs and provides an automated optimization environment. This method is validated by designing a MIMO antenna at a frequency band from 13.7 GHz to 29 GHz.

## REFERENCES

- [1] S. Nej, A. Ghosh, S. Ahmad, J. Kumar, A. Ghaffar, and M. I. Hussein, "Design and characterization of 10-elements mimo antenna with improved isolation and radiation characteristics for mm-wave 5g applications," *IEEE Access*, vol. 10, pp. 125 086–125 101, 2022.
- [2] F. A. Pereira de Figueiredo, "An overview of massive mimo for 5g and 6g," *IEEE Latin America Transactions*, vol. 20, no. 6, pp. 931–940, 2022.
- [3] T. A. Khan, A. Yazdan, and R. W. Heath, "Optimization of power transfer efficiency and energy efficiency for wireless-powered systems with massive mimo," *IEEE Transactions on Wireless Communications*, vol. 17, no. 11, pp. 7159–7172, 2018.
- [4] T. T. Vu, H. Q. Ngo, M. N. Dao, D. T. Ngo, E. G. Larsson, and T. Le-Ngoc, "Energy-efficient massive mimo for federated learning: Transmission designs and resource allocations," *IEEE Open Journal of the Communications Society*, vol. 3, pp. 2329–2346, 2022.
- [5] L. Kouhalvandi, "Directly matching an mmic amplifier integrated with mimo antenna through dnns for future networks," *Sensors*, vol. 22, no. 18, 2022. [Online]. Available: <https://www.mdpi.com/1424-8220/22/18/7068>
- [6] N. Telzhensky and Y. Leviatan, "Novel method of uwb antenna optimization for specified input signal forms by means of genetic algorithm," *IEEE Transactions on Antennas and Propagation*, vol. 54, no. 8, pp. 2216–2225, 2006.
- [7] J. Robinson and Y. Rahmat-Samii, "Particle swarm optimization in electromagnetics," *IEEE Transactions on Antennas and Propagation*, vol. 52, no. 2, pp. 397–407, 2004.
- [8] F. Mir, L. Kouhalvandi, L. Matekovits, and E. O. Gunes, "Electromagnetic bottom-up optimization for automated antenna designs," in *2020 IEEE Asia-Pacific Microwave Conference (APMC)*, 2020, pp. 792–794.
- [9] —, "Automated optimization for broadband flat-gain antenna designs with artificial neural network," *IET Microwaves, Antennas Propagation*, vol. 15, pp. 1537–1544(7), October 2021. [Online]. Available: <https://digital-library.theiet.org/content/journals/10.1049/mia2.12137>

- [10] T. Kobal, Y. Li, X. Wang, and A. Zhu, "Digital predistortion of rf power amplifiers with phase-gated recurrent neural networks," *IEEE Transactions on Microwave Theory and Techniques*, vol. 70, no. 6, pp. 3291–3299, 2022.
- [11] Z. Chen, C. Cai, T. Zheng, J. Luo, J. Xiong, and X. Wang, "Rf-based human activity recognition using signal adapted convolutional neural network," *IEEE Transactions on Mobile Computing*, vol. 22, no. 1, pp. 487–499, 2023.
- [12] H. Wu, W. Chen, X. Liu, Z. Feng, and F. M. Ghannouchi, "A uniform neural network digital predistortion model of rf power amplifiers for scalable applications," *IEEE Transactions on Microwave Theory and Techniques*, vol. 70, no. 11, pp. 4885–4899, 2022.
- [13] F. Mir, L. Kouhalvandi, and L. Matekovits, "Deep neural learning based optimization for automated high performance antenna designs," *Scientific Reports*, vol. 12, no. 16801, 2022.