

A Low Cost ALS and VLC Circuit for Solid State Lighting

Original

A Low Cost ALS and VLC Circuit for Solid State Lighting / Ruo Roch, M.; Martina, M.. - ELETTRONICO. - 550:(2019), pp. 461-467. (Intervento presentato al convegno Applications in Electronics Pervading Industry, Environment and Society tenutosi a Pisa nel 26-27 Settembre 2018) [10.1007/978-3-030-11973-7_55].

Availability:

This version is available at: 11583/2735213 since: 2019-06-19T23:14:45Z

Publisher:

Springer

Published

DOI:10.1007/978-3-030-11973-7_55

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

Springer postprint/Author's Accepted Manuscript

This version of the article has been accepted for publication, after peer review (when applicable) and is subject to Springer Nature's AM terms of use, but is not the Version of Record and does not reflect post-acceptance improvements, or any corrections. The Version of Record is available online at: http://dx.doi.org/10.1007/978-3-030-11973-7_55

(Article begins on next page)

A low cost ALS and VLC circuit for solid state lighting

Massimo Ruo Roch and Maurizio Martina

Politecnico di Torino, Dipartimento di Elettronica e Telecomunicazioni

Abstract. Solid state lighting is nowadays widely diffused both in residential and office or industrial environment. Ambient light sensing to modulate lamp power is typical, too, but sensors inside a lamp are a challenge, due to the high flux of these sources, which easily saturates nearby light detectors. Usually, separate sensing devices must be introduced in the system, thus increasing complexity and cost. In this work, a methodology will be presented, to allow integration of a light sensing device inside a lamp, using low cost circuitry to mitigate interactions between high power LED sources and sensing photodiodes. Moreover, the same circuit allows visual light communication among sources.

Keywords: LED, ALS, VLC, IoT, sensing

1 Introduction

Usage of white LEDs as light sources is rapidly pervading the market, with large scale marketing starting around 2010. However, the initial approach was to use these kind of devices just as a plug-in replacement for traditional lamps, i.e. incandescent and fluorescent sources. The driving force is mainly energy savings, around 50% with respect to fluorescent lamps, and up to 80% if compared to incandescent bulbs [1] [2].

Specific characteristics of LEDs, seen as electronic devices, opened new usage perspectives, as they are dramatically different from their predecessors. Main differences are as follows:

- Quasi linear dependence of light flux from current passing through the LED. This relationship allows to easily modulate the total emitted power, leading to light dimming in the environment, to save energy, or to improve user experience.
- Reduced dimensions. White LEDs have small dimensions (1mm × 1mm for a 1W source). Design of very small lamps is nowadays typical.
- High modulation speed. White LEDs can change their flux on the nanosecond timescale, allowing to use them both to illuminate, and to carry information, given a proper modulation scheme.
- Complex driving electronics required. The light source, typically built from several parallel strings of series connected LEDs, is typically driven by a current generator, with voltages in the range of 10V-100V, and currents

ranging from 100mA up to several Ampere. Moreover, regulations requires high power factor designs of the power supply unit.

Introducing light sensors in the environment to collect data about illumination levels, and to send them to a control unit able to change the flux emitted by solid state lamps, is again a typical situation in the age of Internet of Things (IoT) [3].

The overall system is usually realized with physically separated objects. Specifically, the following devices must be introduced:

- Solid state lamps, with a control input to dim them.
- Light sensors, with a data output to send collected data.
- A central control unit, which, according to sensed information, modulates lamps power.
- A communication network, to join together these building blocks. Several solutions exist, both wired (e.g. DALI), and wireless (e.g. ZigBee)

Having separated sensors and lamps leads to a cost increase, as deployment costs are related to the number of different objects to be installed. On the other hand, integrating a light sensor inside a LED lamp is a challenge, as the high flux level of LED can easily saturate nearby photo sensors. Several topology have been suggested to overcome this problem [4] [5] [6], but anyway they still require to optically shield the sensor from the LEDs, and this is not practical in compact lamps.

Visual Light Communication (VLC) is rapidly gaining interest, too, both in indoor and outdoor environments [7] [8] [9], but main interest is in achieving high bandwidth efficiency, and LED lamps are mainly used as transmitters [10].

In this work, instead, simplicity and cost is the driving force, to allow large scale deployment of ALS and VLC distributed systems fully integrated inside low cost LED lamps. In this context, high bandwidth is not a premium, as IoT system do not need to transmit too much information (ambient light levels, temperature, people presence, etc.)

2 Proposed solution

In a typical solid state lamp, represented in figure 1, a Power Supply Unit (PSU) convert the AC line voltage to a DC constant current. Usually this current is not perfectly constant, and is slightly modulated at two times the AC line frequency, to satisfy High Power Factor (HPF) requirements. LEDs are directly fed by the PSU. Last, the PSU, if dimmable, has a control input (DIM), used to change the amount of light emitted by the lamp.

In the proposed solution (figure 2), a control and sensing unit is interposed between the PSU and the LEDs. This block has the task to allow accurate Ambient Light Sensing (ALS), and, at the same time, to modulate emitted light in such a way to allow Visual Light Communication (VLC). The light sensor is a photodiode, which act both as a sensor for ambient light and as a receiver for optical signals coming from other lamps.

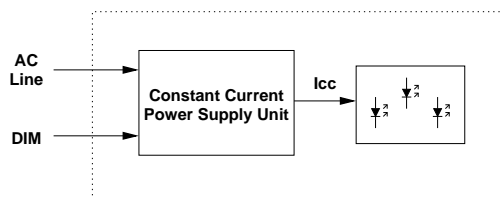


Fig. 1. Standard LED lamp

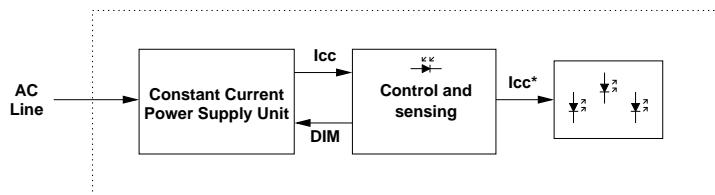


Fig. 2. Modified LED lamp

To accomplish these functions, at each cycle of the AC line input the LEDs are turned off for a short interval (a negligible fraction of the cycle time). This interval is centered around the zero crossing of the sinusoidal input waveform. The usage of the AC line as a time reference gives best results, as it allows automatic synchronization of every lamp connected to the same power connection. Moreover, performing measurement and communication activities at a time in which the power line is crossing zero, minimizes errors due to interference's, both originated by the internal PSU, and injected from the outside.

Following LEDs turn off, a short amount of time must elapse, to accomplish photo detector and amplifier settling time. Now, a sequence of samples is gathered and stored, for further calculations. If no communication is needed, the average value of these samples represents the sensed ambient light level.



Fig. 3. Modulation patterns

If communication is needed, instead, a modulation scheme must be introduced. The chosen approach is based on the emission of few pulses by the LEDs, injecting a controlled current. Zeros and ones are represented by different number of pulses at different frequencies. A key point is that the total energy must not change, to avoid visible luminance changes of the lamp as a function of the transmitted pattern. As an example, the two different modulations can be 4

pulses at 100kHz to represent '0', and 8 pulses at 200kHz to represent '1' (figure 3)

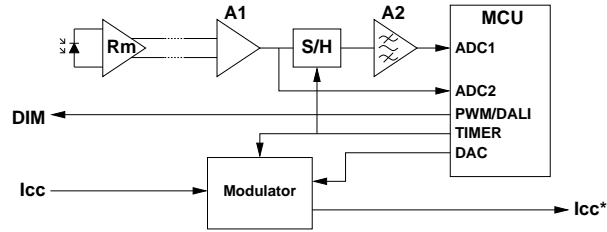


Fig. 4. Control and sensing block

The internal structure of the circuit designed to implement the above functionalities is depicted in figure 4.

A standard photodiode, with spectral response resembling the human eye one, feeds a transresistance amplifier. It has a differential output, as it must be mounted on the front of the lamp, near the LEDs, and the noise level along the cables can be quite high. The lamp PSU itself has nodes swinging from 0 to 700V at 20kHz-200kHz, generating significant EMI. Besides, the gain of the transresistance amplifier is limited, as it must not saturate even when the LEDs are turned on. It means the signal measured when LEDs are turned off has limited amplitude, and a single ended approach would degrade precision and reliability.

The differential signal is fed to an instrumentation amplifier (A1), used to eliminate common mode noise, and then sent to a sample-and-hold. This one is in hold mode when LEDs are turned on, and in sample mode when they are turned off. Its task is to minimize transients at the input of the successive stages, allowing an easier design (and higher gain) of the following band-pass filter A2. In fact, an abrupt change at the input of the filter (fall down of the LED power - see figure 3) would be anyway amplified, and must be avoided. A2 is introduced to further improve SNR, and to increase sensitivity.

The output of A1 and A2 are sent to a microcontroller (MCU), which samples the signals while LEDs are off, and store them for further computations. Signal processing algorithms are executed while LEDs are on, in the remaining portion of the AC line cycle.

Two different calculations must be performed:

- ALS. The actual value of measured luminance is obtained simply averaging the samples acquired while LEDs are off, but outside the communication interval.
- VLC. To detect the received bit, a differential approach is used, comparing the amplitude of the frequencies corresponding to '0' and '1' respectively. To obtain a boost in sensitivity, the samples are pre-processed through two Goertzel filters, centered on the desired frequencies.

Light modulation is implemented by the modulator block of figure 4. A simplified schematic is visible in figure 5. It is basically a switch, used to interrupt the current flow from the lamp PSU, and a current generator, driven by the DAC output of the MCU. The current generator is implemented through a current mirror with gain. The gain is needed as LEDs driving current is typically two order of magnitude greater than the output current capabilities of the DAC. The switch is implemented through a pair of source coupled NMOS transistors. This topology neglects the presence of the body diodes, allowing to block current flow in both directions (right side of the figure).

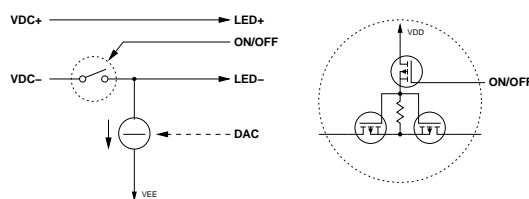


Fig. 5. Details of the modulator block

3 Implementation and results

A physical implementation has been designed, using off-the-shelf discrete components, and simulated, taking in account parasitics. The circuit has been designed in the hypothesis to insert it inside a T8 form factor LED tube. Special care has been taken to reduce overall cost, obtaining a module which requires less than 10 US\$.

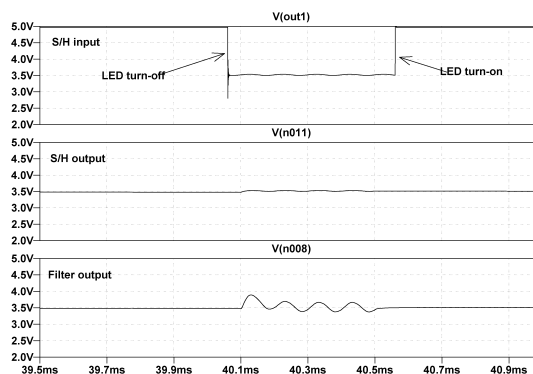


Fig. 6. Simulation output

In figure 6 relevant waveforms of the ALS and VLC blocks are shown. The upper waveform is the signal at the input of the S/H, and the center one is the output of the S/H, showing almost complete cancellation of LEDs turn-on/turn-off transients. Last, bottom waveform is the modulated signal at the output of the band-pass filter, sent to the input of the A/D converter into the MCU, to be processed by the two Goertzel digital filters.

References

1. S. Nakamura, "Energy savings by LED lighting," 2015 Conference on Lasers and Electro-Optics (CLEO), San Jose, CA, 2015, pp. 1-1.
2. D. Garcia-Llera et al., "Optimizing LED lamps design for street lighting with staggered arrangement allowing energy saving strategies in a Lighting Smart Grid context," 2015 IEEE Industry Applications Society Annual Meeting, Addison, TX, 2015, pp. 1-8.
3. P. P. F. Dheena, G. S. Raj, G. Dutt and S. V. Jinny, "IOT based smart street light management system," 2017 IEEE International Conference on Circuits and Systems (ICCS), Thiruvananthapuram, 2017, pp. 368-371.
4. P. N. A. Belmonte, L. M. Chaves, F. S. Torres and D. W. de Lima Monteiro, "On overcoming photodetector saturation due to background illumination while maintaining high sensitivity by means of a tailored CMOS pixel," 2018 Global LIFI Congress (GLC), Paris, 2018, pp. 1-5.
5. P. N. Belmonte, P. J. French, D. D. L. Monteiro, F. S. Torres, "Linear high-dynamic-range bouncing pixel with single sample", Proceedings of 2013 International Image Sensor Workshop ISSW, pp. 12-16, 2013.
6. A. Spivak, A. Belenky, A. Fish, O. Yadid-Pecht, "Wide-Dynamic-Range CMOS Image Sensors a Comparative Performance Analysis", IEEE Transactions on Electron Devices, vol. 56, no. 11, pp. 2446-2461, Nov. 2009.
7. S. Ayub, S. Kariyawasam, M. Honary, B. Honary, "A practical approach of VLC architecture for smart city", 2013 Loughborough Antennas Propagation Conference (LAPC), pp. 106-111, Nov 2013.
8. W. Boubakri, W. Abdallah, N. Boudriga, "A light-based communication architecture for smart city applications", 2015 17th International Conference on Transparent Optical Networks (ICTON), pp. 1-6, July 2015.
9. P. H. Pathak, X. Feng, P. Hu, P. Mohapatra, "Visible light communication networking and sensing: A survey potential and challenges", IEEE communications surveys & tutorials, vol. 17, no. 4, pp. 2047-2077, 2015.
10. S. Hranilovic, "On the design of bandwidth efficient signalling for indoor wireless optical channels", International Journal of Communication Systems, vol. 18, no. 3, pp. 205-228, 2005.
11. A. V. Oppenheim, R. W. Schaffer, J. R. Buck, "Discrete-time signal processing". 2nd ed. Upper Saddle River, NJ: Prentice Hall, 1999, 870p. ISBN 01-375-4920-2.
12. F. Zplata and M. Kasal, "Using the Goertzel algorithm as a filter," 2014 24th International Conference Radioelektronika, Bratislava, 2014, pp. 1-3.