

Towards real-time S-parameter qualification and macromodeling

*Original*

Towards real-time S-parameter qualification and macromodeling / GRIVET TALOCIA, S.. - ELETTRONICO. - (2012).

*Availability:*

This version is available at: 11583/2497968 since:

*Publisher:*

*Published*

DOI:

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# Towards real-time S-parameter qualification and macromodeling


**Stefano Grivet Talocia**

*Politecnico di Torino, Italy*  
***stefano.grivet@polito.it***

16<sup>th</sup> IEEE Workshop on Signal and Power Integrity  
IBIS Summit, 16 May 2012, Sorrento, Italy

## The objective


### S-parameter block

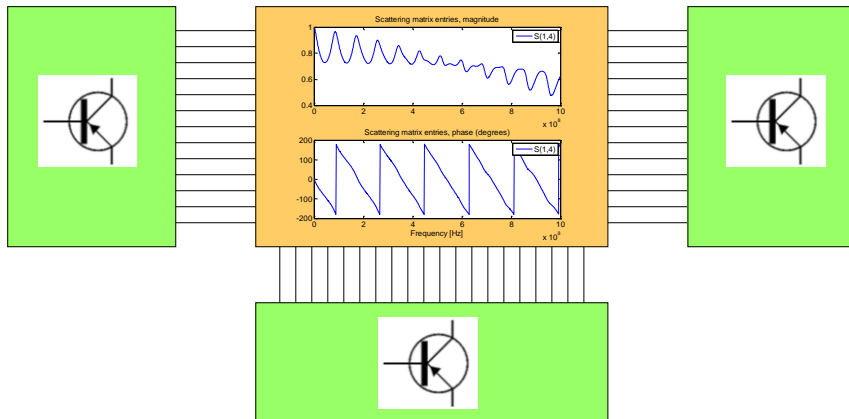


## Why S-parameters

- S-parameters are always defined
  - Impedance or admittance may not
- S-parameters are normalized
  - Good numerical properties in simulation
- S-parameters are easily measured
  - Even at very high frequency, good reliability
- Standard format for S-parameters
  - Touchstone files from measurement hardware
  - All field solvers provide S-parameters on output
- Tabulated frequency data
  - Intrinsic IP protection for vendors
  - Do not disclose design details, but only I/O electrical properties
- Best way to represent broadband EM/circuit interactions
  - The essence of Signal and Power Integrity


## Scattering network functions

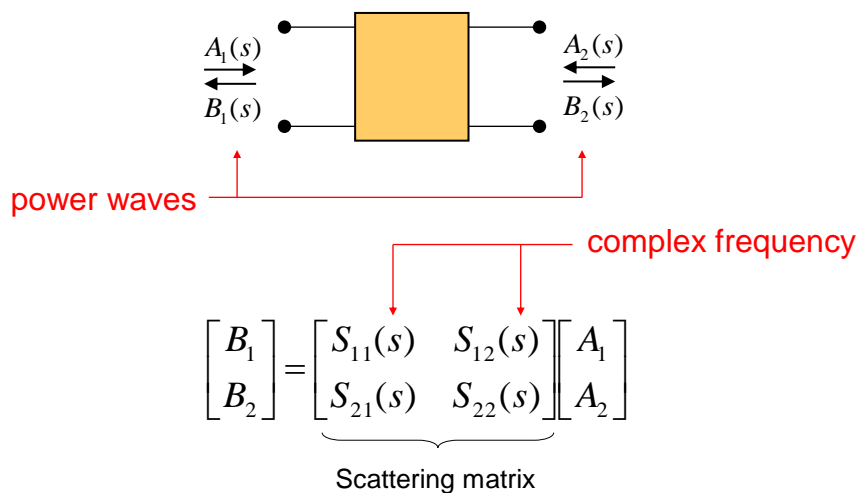


## Examples of S-parameter data




Wiring harness  
8 ports










Via array  
12 ports




High-speed channel  
18 ports

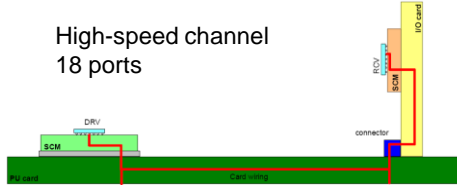

## Examples of S-parameter data





## S-parameter modeling flow

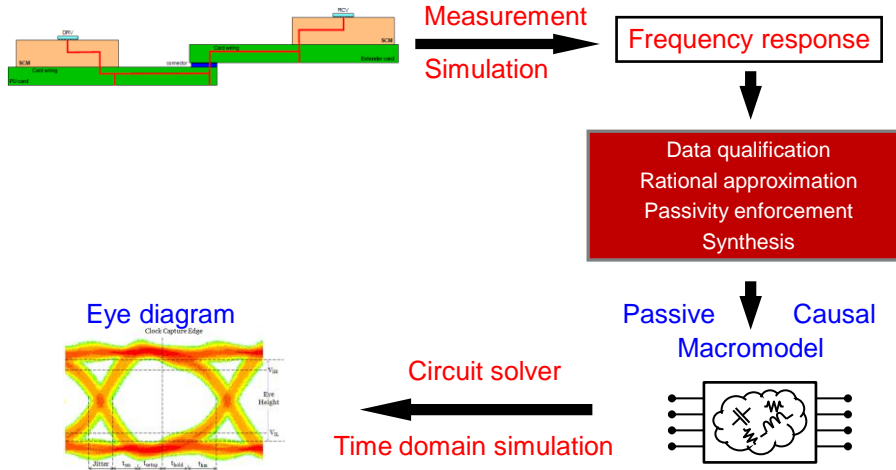

## Part I: qualification

A quick overview

## Passivity: why?

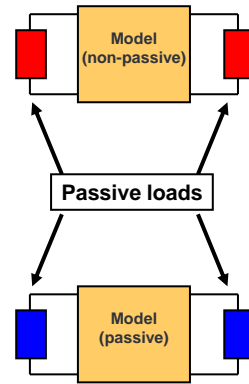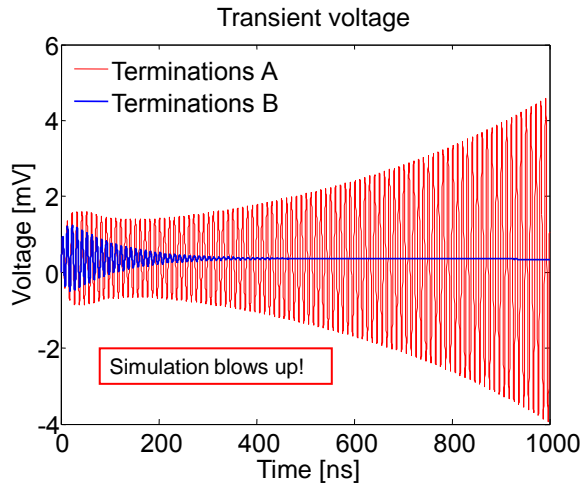

## Passivity

$$\mathbf{S}(-j\omega) = \mathbf{S}^*(j\omega)$$


Guarantees real-valued impulse response.  
Always assumed by construction

$$\|\mathbf{S}(j\omega)\| \leq 1 \quad \text{or} \quad \max_i \sigma_i \{\mathbf{S}(j\omega)\} \leq 1$$

Energy condition: structure must not amplify signals.  
Sometimes called simply "passivity" condition


$\mathbf{S}(j\omega)$  is causal

No anticipatory behavior in time-domain.  
Note: causality is a prerequisite for passivity!

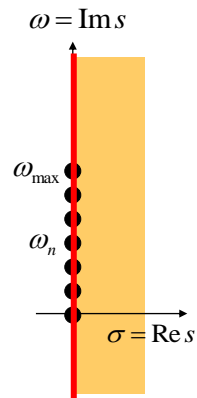


## Passivity

$S(s)$  is passive  $\Rightarrow$  { singular values of  $S(j\omega)$  }  $\leq 1, \forall \omega$

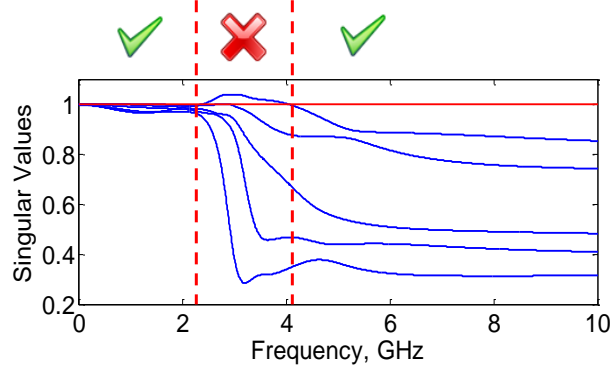

## Causality

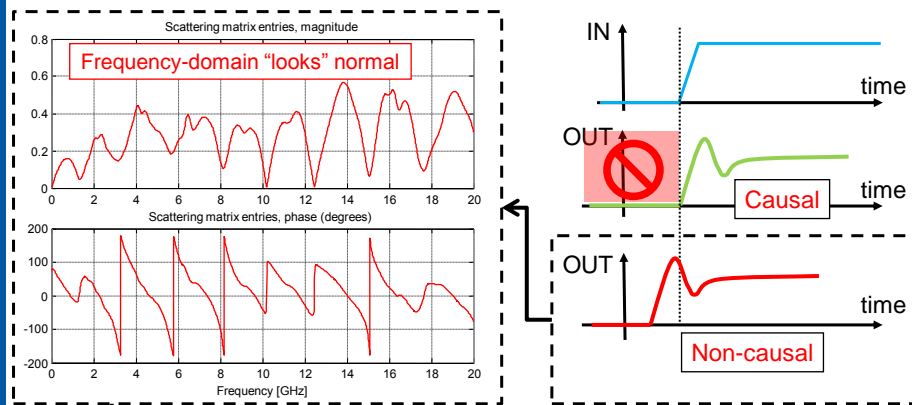



**Circuit solver**

**Unpredictable**



## Causality: definitions

### Time-domain



Note: no delay extraction here

### Frequency-domain

Hilbert transform


Kramers-Krönig dispersion relations

$$H(j\omega) = \frac{1}{j\pi} \text{pv} \int_{-\infty}^{+\infty} H(j\omega') \frac{d\omega'}{\omega - \omega'}$$

Self-consistency

All samples are strongly related

## Causality check

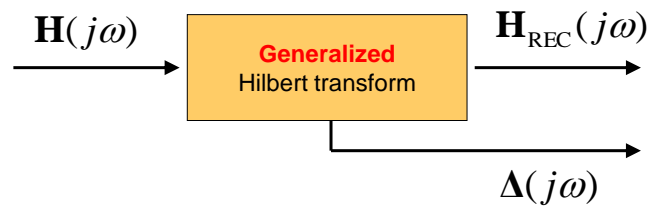

"Error bar"


Causal  $|\mathbf{H}_{\text{REC}}(j\omega) - \mathbf{H}(j\omega)| < \Delta(j\omega)$

Non-causal  $|\mathbf{H}_{\text{REC}}(j\omega) - \mathbf{H}(j\omega)| > \Delta(j\omega)$

## Causality check error

$$E_{dB}(j\omega) = 20 \log_{10} \frac{|H_{REC}(j\omega) - H(j\omega)|}{\Delta(j\omega)}$$

Computed (parallel) for each scattering response

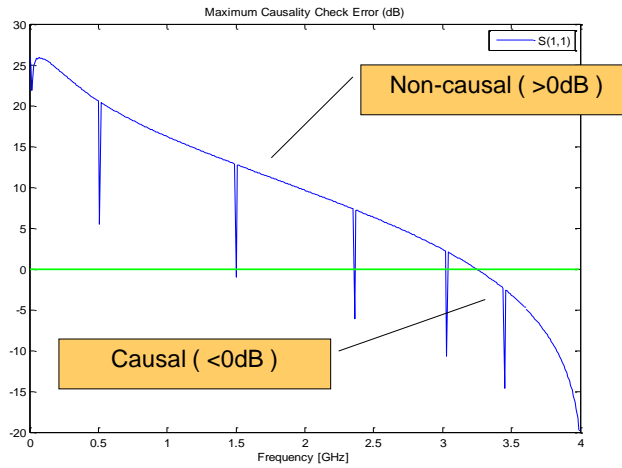

## Part II: macromodeling

An update on recent developments

## Rational function fitting: why?



Circuit solvers understand circuits

Any lumped circuit has rational frequency responses (poles-residues, poles-zeros, ratio of polynomials)

$$\mathbf{S}(s) \approx \sum_{n=1}^N \frac{\mathbf{R}_n}{s - p_n} + \mathbf{S}_\infty$$

Impedance, admittance, scattering

## Rational function fitting: why?




Circuit solvers understand circuits

Any lumped circuit has rational frequency responses (poles-residues, poles-zeros, ratio of polynomials)

$$\mathbf{S}(s) \approx \sum_{n=1}^N \frac{\mathbf{R}_n}{s - p_n} + \mathbf{S}_\infty$$


Impedance, admittance, scattering

Extraction of an equivalent circuit is an inverse problem (two-step)




## Stripline + launches

Data: measured S-parameters

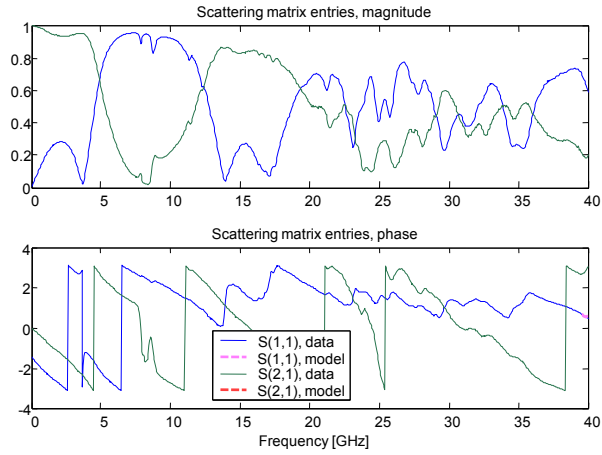


## Stripline + launches

Macromodel: 60 poles

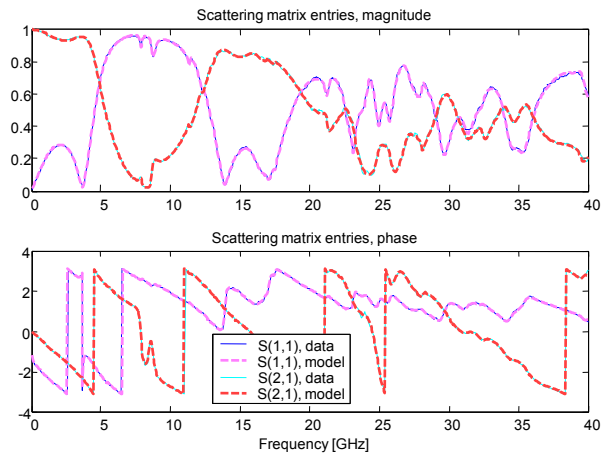


## Handling many ports




$$\hat{S}_{i,j}(s) \approx \sum_{n=1}^N \frac{R_n^{i,j}}{s - p_n} + S_\infty^{i,j}$$

Processing **all** responses may lead to a **large** system!

## Parallel Vector Fitting




$$\begin{bmatrix} I_K & \varphi & 0 & 0 & \dots & 0 & 0 & -S_1\varphi \\ 0 & 0 & I_K & \varphi & \dots & 0 & 0 & -S_2\varphi \\ \vdots & \vdots & \vdots & \vdots & \ddots & \vdots & \vdots & \vdots \\ 0 & 0 & 0 & 0 & \dots & I_K & \varphi & -S_{p^2}\varphi \end{bmatrix} \begin{bmatrix} R_1 \\ R_2 \\ \vdots \\ R_{p^2} \\ C \end{bmatrix} = \begin{bmatrix} S_1 I_K \\ S_2 I_K \\ \vdots \\ S_{p^2} I_K \end{bmatrix}$$

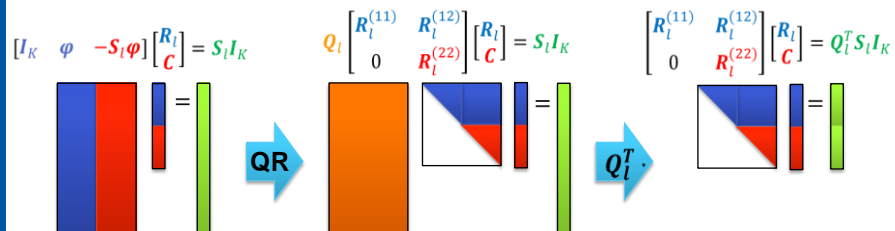


## Parallel Vector Fitting

Original LSP

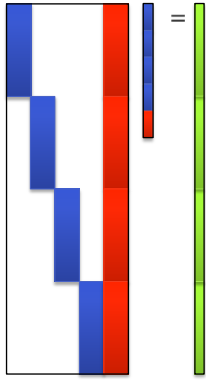

1 GB

QR decompositions

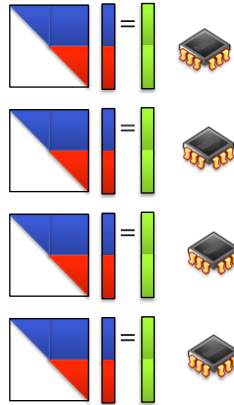

$P = 83$   $K = 1228$   $N = 30$

New LSP




12 MB


## Parallel Vector Fitting

$P = 83$   $K = 1228$   $N = 30$

Parallel efficiency

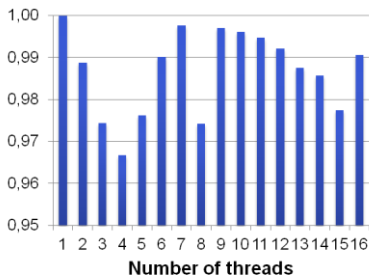


Speed up

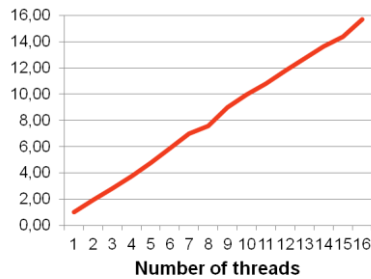

From 193.33 to 12.23 seconds

## State-space macromodel realization

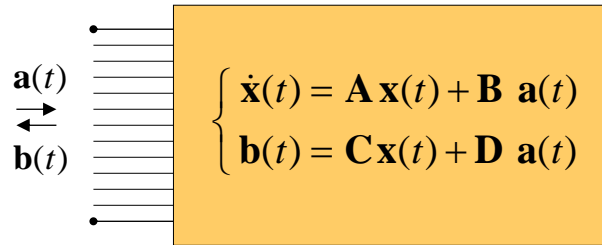

$$\mathbf{S}(s) \approx \sum_{n=1}^N \frac{\mathbf{R}_n}{s - p_n} + \mathbf{S}_\infty = \mathbf{D} + \mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B}$$

## Checking macromodel passivity


$$\{\text{singular values of } \mathbf{S}(j\omega)\} \leq \mathbf{1}, \quad \forall \omega$$

### Eigenvalues of Hamiltonian matrix

$$\mathbf{M} = \begin{pmatrix} \mathbf{A} - \mathbf{B}(\mathbf{D}^T\mathbf{D} - \mathbf{I})^{-1}\mathbf{D}^T\mathbf{C} & -\mathbf{B}(\mathbf{D}^T\mathbf{D} - \mathbf{I})^{-1}\mathbf{B}^T \\ \mathbf{C}^T(\mathbf{D}\mathbf{D}^T - \mathbf{I})^{-1}\mathbf{C} & -\mathbf{A}^T + \mathbf{C}^T\mathbf{D}(\mathbf{D}^T\mathbf{D} - \mathbf{I})^{-1}\mathbf{B}^T \end{pmatrix}$$

Real matrix  $\mathbf{M}$  must have no imaginary eigenvalues

## Checking macromodel passivity

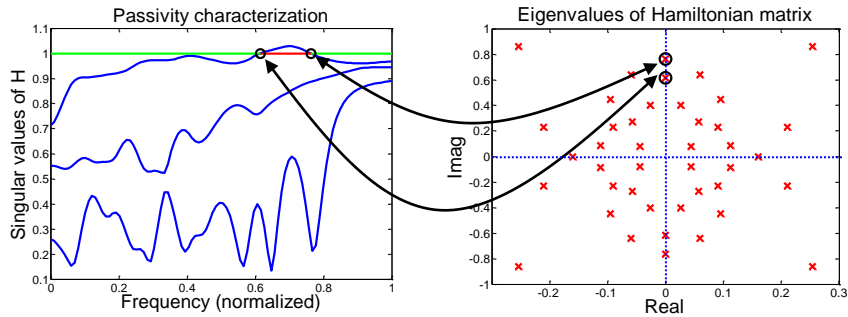

### Theorem

$j\omega_0$  is an eigenvalue of  $\mathbf{M} \Leftrightarrow \sigma = 1$  is a singular value of  $\mathbf{S}(j\omega_0)$

## Passivity enforcement

- Generate a **new passive macromodel**
- Apply **small correction** to **preserve accuracy** through
  - iterative passivity check
  - solution of small-size optimization problems


$$\begin{cases} \dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{a} \\ \mathbf{b} = \mathbf{C}\mathbf{x} + \mathbf{D}\mathbf{a} \end{cases} \quad \longrightarrow \quad \begin{cases} \dot{\mathbf{x}} = \mathbf{A}\mathbf{x} + \mathbf{B}\mathbf{a} \\ \mathbf{b} = (\mathbf{C} + \Delta\mathbf{C})\mathbf{x} + \mathbf{D}\mathbf{a} \end{cases}$$

$$\Delta\mathbf{S} = \Delta\mathbf{C}(s\mathbf{I} - \mathbf{A})^{-1}\mathbf{B}$$

## Passivity check: computing few eigenvalues

We need only all purely imaginary eigenvalues of  $\mathbf{M}$   
Iterative single-shift Arnoldi iterations to find few eigenvalues "close" to imaginary "shift points".


Pick initial shifts at ends of spectrum



## Passivity check: computing few eigenvalues

We need only all purely imaginary eigenvalues of  $\mathbf{M}$   
Iterative single-shift Arnoldi iterations to find few eigenvalues "close" to imaginary "shift points".

Pick initial shifts at ends of spectrum




Bisection on imaginary axis

## Passivity check: computing few eigenvalues

We need only all purely imaginary eigenvalues of  $\mathbf{M}$   
 Iterative single-shift Arnoldi iterations to find few eigenvalues "close" to imaginary "shift points".

Pick initial shifts at ends of spectrum




Bisection on imaginary axis

The union of all disks must have no "gaps"!


## Basic idea: single-shift $\leftrightarrow$ single-thread



Split bandwidth into N subbands  
 $N = F(T)$   
 $T = \text{threads}$

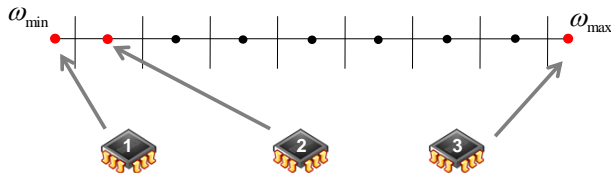


Startup phase

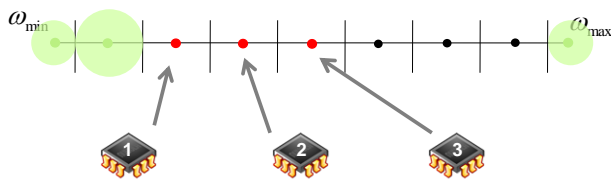

● Ready  
 ● In execution  
 ● Completed

## Speedup (high-speed connector model)

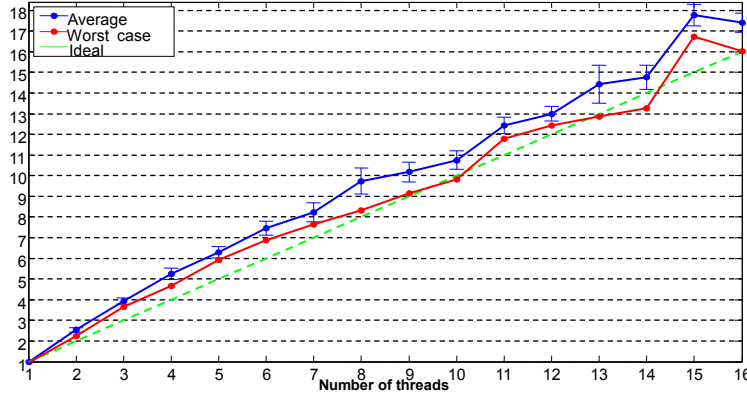

Order	2240
Ports	56
$f_{min}$	0 GHz
$f_{max}$	21 GHz
$\alpha$	5
$N \lambda_{imag}$	22

Number of threads	1	2	8	16
Number of $\lambda$	90	110	86	84
Analysis time [s]	33.778	13.259	3.369	1.830
Refine time[s]	0.096	0.039	0.021	0.019
Total time [s]	33.972	13.398	3.487	1.950
Speedup		2.5 X	9.7 X	17.4 X

## S-parameter modeling flow: a summary



### Input


- Tabulated frequency responses ("numbers", "S-parameters")
  - From EM simulations (in-house or external tools)
  - From measurements
  - From vendors (connectors, filters, etc...)
- Standardized (Touchstone format)
- Small-size, compact files
- Hides IP (behavioral data)




### Output

- System-level simulation model ("equation", "netlist")
- Qualification certificate (WHY?)
  - Physical self-consistency (stability, causality, passivity)
  - Guaranteed performance in system-level analysis



## The HPM Service


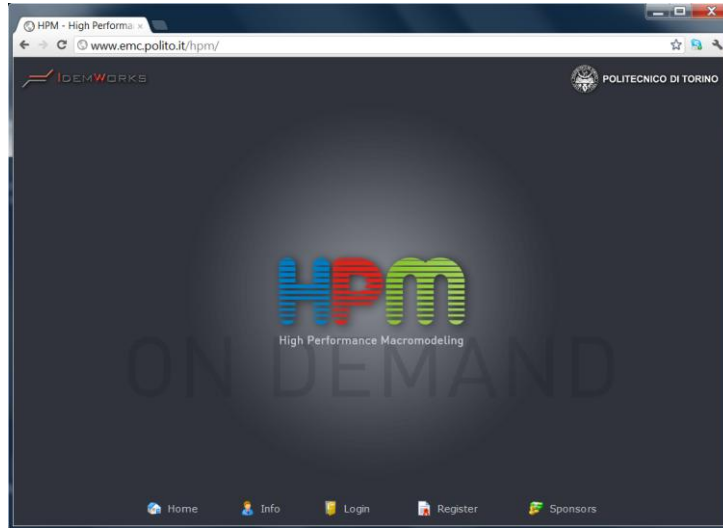



## The HPM Service


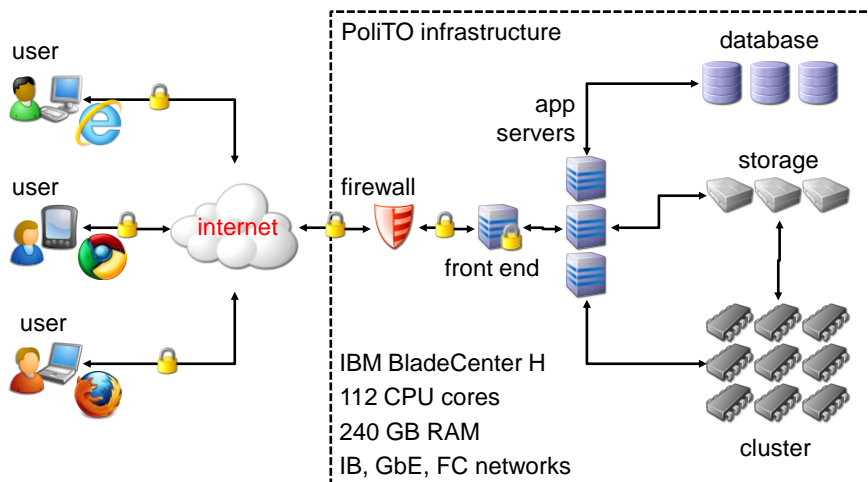




## Sponsors

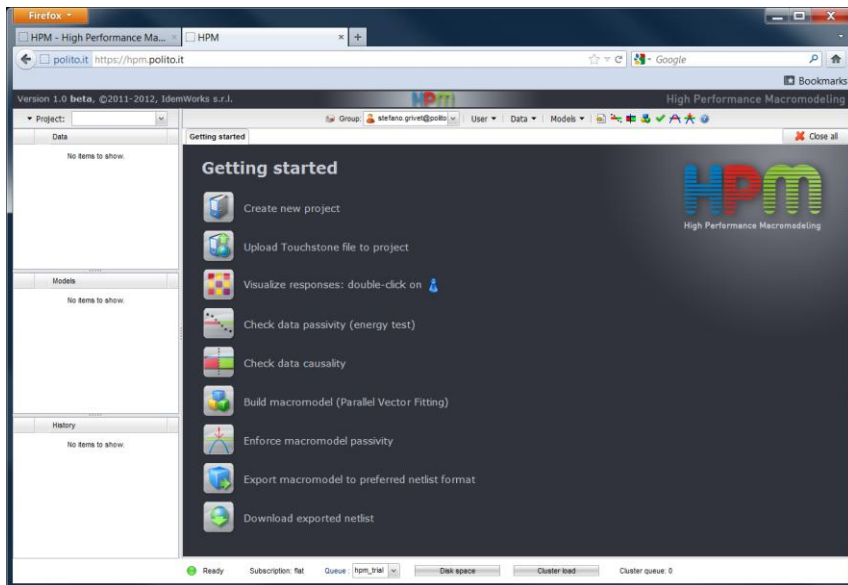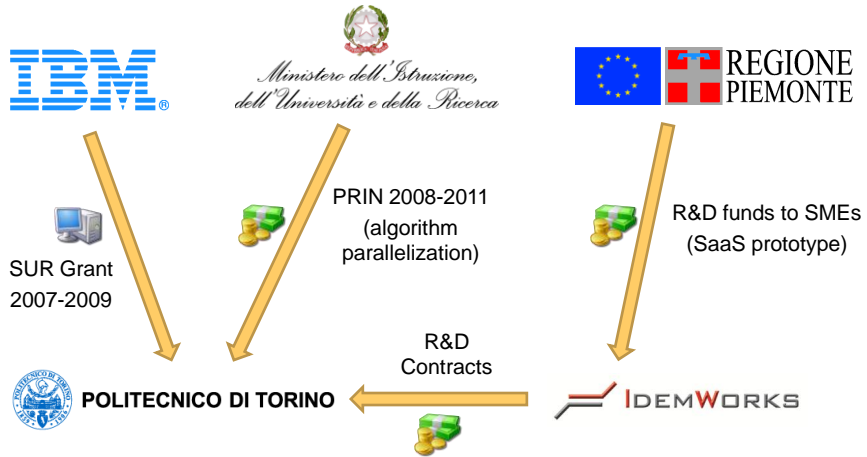

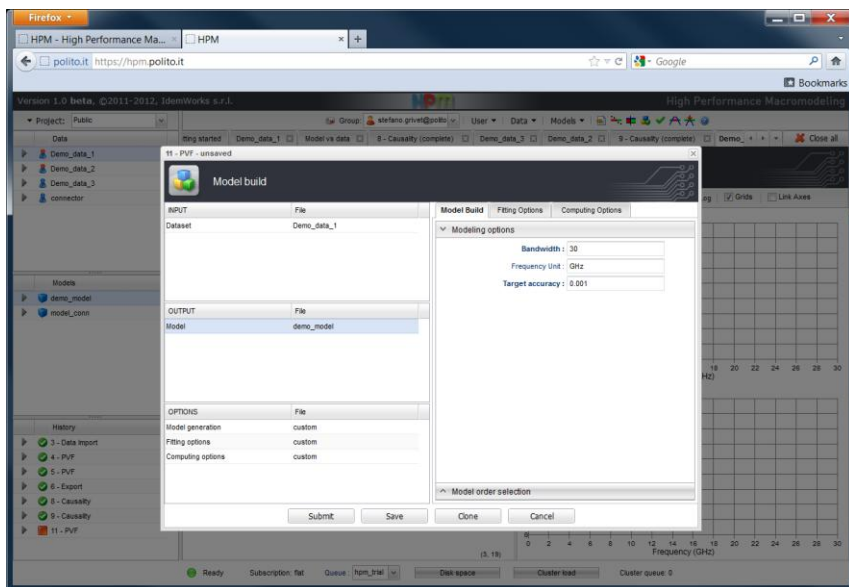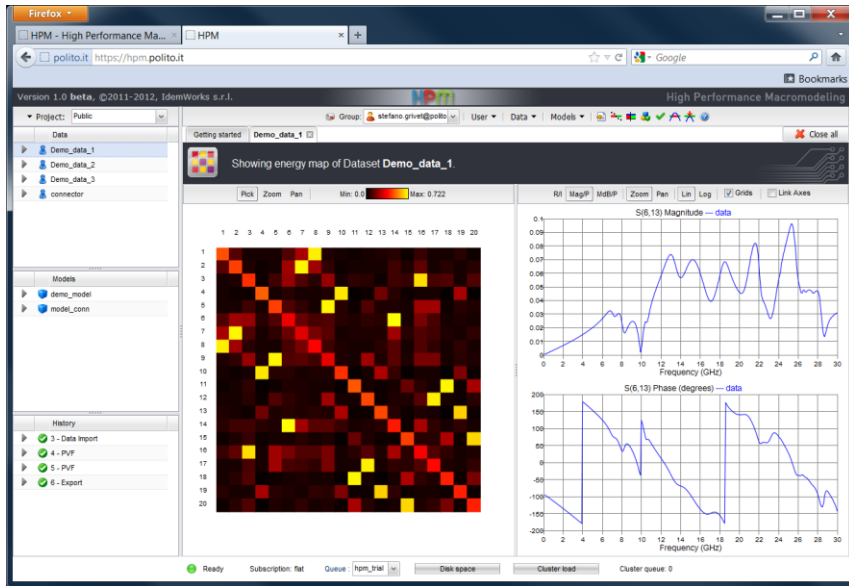

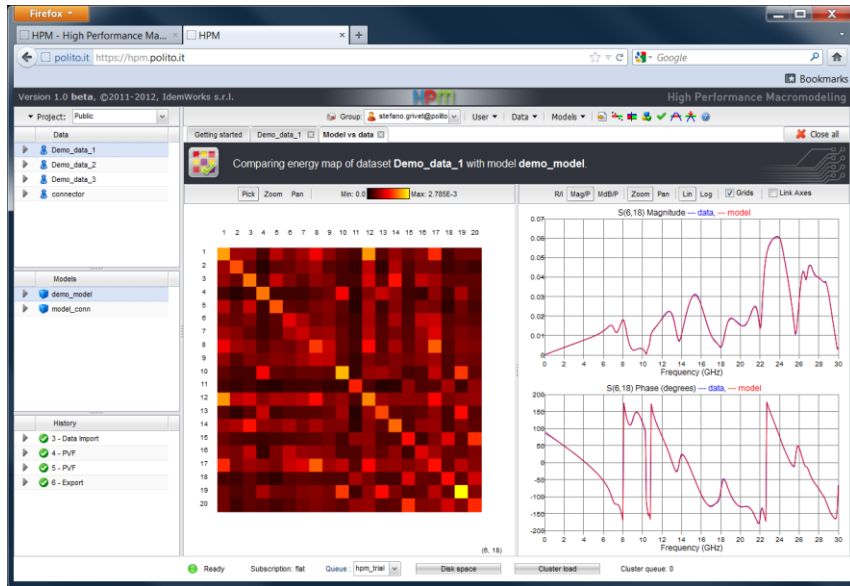

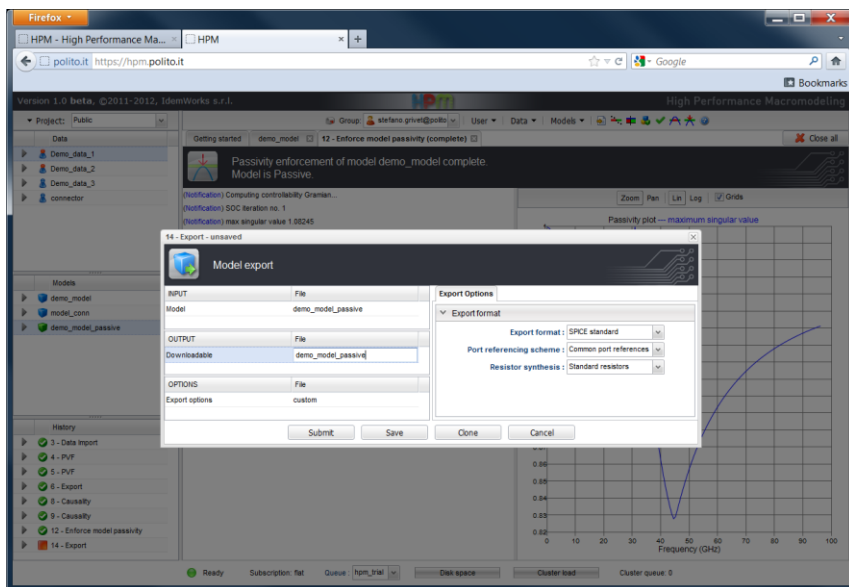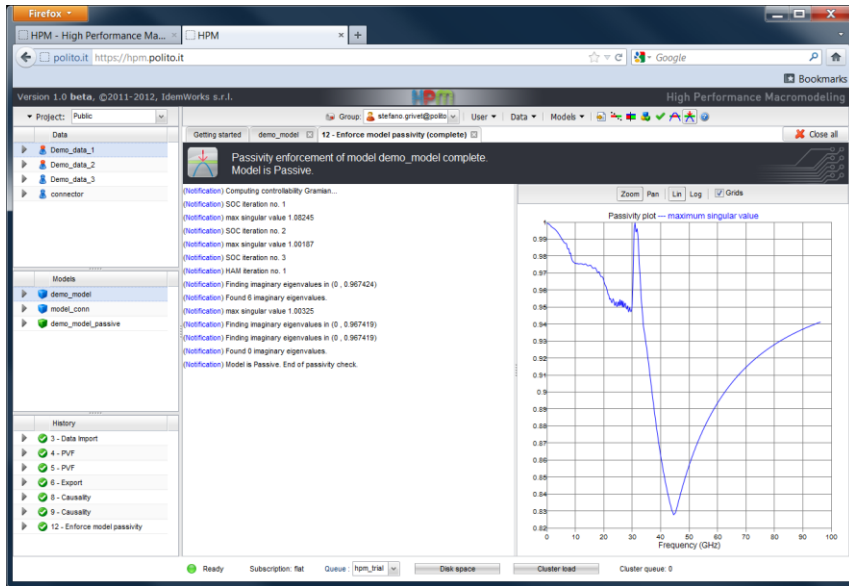

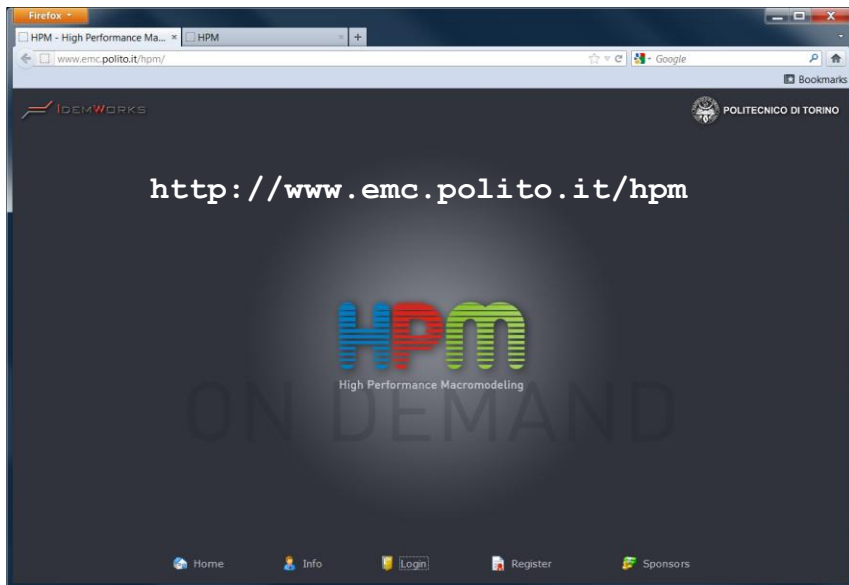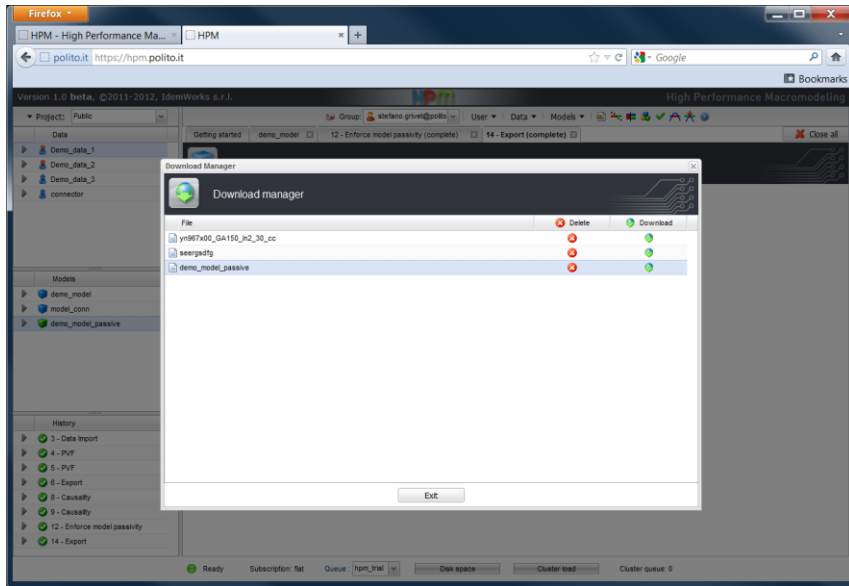

Thank you



<http://www.emc.polito.it>



<http://www.idemworks.com>

## References

1. S. Grivet-Talocia, HPM: an interactive web service for high-performance macromodeling of passive interconnects in system-level verification flows, *University Booth, Design Automation and Test in Europe Conference (DATE12), Dresden (Germany)*, March 12-16, 2012.
2. HPM service. Available online: <http://www.emc.polito.it/hpm>
3. P. Triverio, S. Grivet-Talocia, M.S. Nakhla, F. Canavero, R. Achar, "Stability, Causality, and Passivity in Electrical Interconnect Models" , *IEEE Transactions on Advanced Packaging*, vol. 30, n. 4, pp. 795-808, November, 2007
4. A. Chinae, S. Grivet-Talocia, "On the Parallelization of Vector Fitting Algorithms" , *IEEE Transactions on Components, Packaging, and Manufacturing Technology*, Vol. 1, n. 11, pp. 1761-1773, November 2011, 2011
5. L. Gobbato, A. Chinae, S. Grivet-Talocia, "A Parallel Hamiltonian Eigensolver for Passivity Characterization and Enforcement of Large Interconnect Macromodels" , *Design, Automation and Test in Europe Conference (DATE11), Grenoble (France)*, pp. 26-31, March 14-18, 2011