

Interplanetary CubeSats system for space weather evaluations and technology demonstration

*Original*

Interplanetary CubeSats system for space weather evaluations and technology demonstration / Viscio, MARIA ANTONIETTA; Viola, Nicole; Corpino, Sabrina; Stesina, Fabrizio; S., Fineschi; F., Fument; C., Circi. - In: ACTA ASTRONAUTICA. - ISSN 0094-5765. - 104:2(2014), pp. 516-525. [10.1016/j.actaastro.2014.06.005]

*Availability:*

This version is available at: 11583/2556138 since:

*Publisher:*

ELSEVIER

*Published*

DOI:10.1016/j.actaastro.2014.06.005

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# Interplanetary CubeSats system for space weather evaluations and technology demonstration.

Maria Antonietta Viscio <sup>a</sup>, Nicole Viola <sup>a</sup>, Sabrina Corpino <sup>a</sup>, Fabrizio Stesina <sup>a</sup>, Silvano Fineschi <sup>b</sup>,  
Federico Fumenti <sup>c</sup>, Christian Circi <sup>d</sup>,

<sup>a</sup> Politecnico di Torino, Corso Duca degli Abruzzi 24, Torino 10129, Italy

<sup>b</sup> National Institute for Astrophysics, Strada Osservatorio 20, 10025, Pino Torinese (To), Italy

<sup>c</sup> DLR Institute of Space Systems, Robert-Hooke-Str. 7, 28359 Bremen, Germany

<sup>d</sup> Sapienza University of Rome, Via Salaria, 851, 00138 Roma, Italy

*E-mail addresses:* [maria.viscio@polito.it](mailto:maria.viscio@polito.it) (M.A. Viscio), [nicole.viola@polito.it](mailto:nicole.viola@polito.it) (N. Viola),  
[sabrina.corpino@polito.it](mailto:sabrina.corpino@polito.it) (S. Corpino), [fabrizio.stesina@polito.it](mailto:fabrizio.stesina@polito.it) (F. Stesina), [fineschi@oato.inaf.it](mailto:fineschi@oato.inaf.it) (S. Fineschi),  
[federico.fumenti@gmail.com](mailto:federico.fumenti@gmail.com) (F. Fumenti), [christian.circi@uniroma1.it](mailto:christian.circi@uniroma1.it) (C. Circi)

The paper deals with the mission analysis and conceptual design of an interplanetary 6U CubeSats system to be implemented in the L<sub>1</sub> Earth-Sun Lagrangian Point mission for solar observation and in-situ space weather measurements.

Interplanetary CubeSats could be an interesting alternative to big missions, to fulfill both scientific and technological tasks in deep space, as proved by the growing interest in this kind of application in the scientific community and most of all at NASA. Such systems allow less costly missions, due to their reduced sizes and volumes, and consequently less demanding launches requirements.

The CubeSats mission presented in this paper is aimed at supporting measurements of space weather. The mission envisages the deployment of a 6U CubeSats system in the L<sub>1</sub> Earth-Sun Lagrangian Point, where solar observations for in situ measurements of space weather to provide additional warning time to Earth can be carried out.

The proposed mission is also intended as a technology validation mission, giving the chance to test advanced technologies, such as telecommunications and solar sails, envisaged as propulsion system. Furthermore, travelling outside the Van Allen belts, the 6U CubeSats system gives the opportunity to further investigate the space radiation environment: radiation dosimeters and advanced materials are envisaged to be implemented, in order to test their response to the harsh space environment, even in view of future implementation on other spacecrafts (e.g. manned spacecrafts).

The main issue related to CubeSats is how to fit big science within a small package - namely power, mass, volume, and data limitations. One of the objectives of the work is therefore to identify and size the required subsystems and equipment, needed to accomplish specific mission objectives, and to investigate the most suitable configuration, in order to be compatible with the typical CubeSats (multi units) standards.

The work has been developed as collaboration between Politecnico di Torino, Sapienza University of Rome, "Osservatorio Astrofisico di Torino - INAF" (Astrophysical Observatory of Torino) and DLR (Deutsches Zentrum für Luft- und Raumfahrt) in Bremen.

Keywords: CubeSats, interplanetary mission, solar sail, space weather, solar observation

## 1. Introduction

A large number of CubeSats have already been developed and launched into Earth orbit; however none have accomplished an interplanetary mission. Since big missions are usually very costly, relying on CubeSats could be an interesting alternative to accomplish both scientific and technological tasks in deep space, as proved by the growing interest in this kind of application in the scientific community and most of all at NASA.

Even after decades of study and spacecraft visits, many planetary science goals remain, and among them one of the most exciting is the search for signs of past or present life on the surface or subsurface of a handful of solar system planets and moons. Of equal interest is asteroid characterization for future resource extraction. The newest field of planetary science is the discovery and characterization of exoplanets, planets orbiting stars other than the sun.

Besides the high value scientific return, interplanetary CubeSats can be also exploited as support for future human exploration of the solar systems as well as test-bed for advanced technologies (e.g. solar sails). In this regard

they can be used to provide solar storm advance warning, radio-quiet zone Mapping of Earth-Moon L2 region, Lunar surface mapping, asteroids mapping, etc.

The CubeSats mission presented in this paper is aimed at supporting measurements of space weather that represents quite a critical issue especially for what concerns the human exploration of space beyond Earth orbit where the protection of the Earth magnetic field is not available anymore. The mission envisages the deployment of a 6U CubeSats system in the  $L_1$  Earth-Sun Lagrangian point, where solar observations for in situ measurements of space weather to provide additional warning time to Earth can be carried out. The proposed mission is also intended as a technology validation mission, giving the chance to test advanced technologies, such as telecommunications and solar sails, envisaged as propulsion system. Furthermore, the potentialities of this kind of system as support to future exploration missions are considered. In this regard, travelling outside the Van Allen belts, the 6U CubeSats system gives the opportunity to further investigate the space radiation environment: radiation dosimeters and advanced materials are envisaged to be implemented, in order to test their response to the harsh space environment, even in view of future implementation on other spacecrafts (e.g. manned spacecraft).

The aspect related to the test of innovative technologies is quite an important issue, in view of future human missions. Indeed advanced technologies need to be demonstrated in relevant environment prior to be implemented in actual missions [1, 2], and in this regard a CubeSats mission represent an interesting low-cost opportunity for in-space technology validation.

The work has been developed as collaboration between Politecnico di Torino, Sapienza University of Rome, “Osservatorio Astrofisico di Torino – INAF” (Astrophysical Observatory of Torino) and DLR (Deutsches Zentrum für Luft- und Raumfahrt) in Bremen. The AeroSpace Systems Engineering Team, ASSET, at the Department of Mechanical and Aerospace Engineering of Politecnico di Torino has been working for almost a decade at small satellites programs. In February 2012 e-st@r was successfully injected into Low Earth Orbit (LEO) by Vega Launch Vehicle. E-st@r is a cubesat, developed by undergraduate and most of all by graduate and PhD students under the supervision of researchers and professors, with educational and technological/engineering objectives [3]. The e-st@r program followed the PiCPoT program, which was developed at Politecnico di Torino in the 2000s and ended with the unfortunate launch of PiCPoT nano-satellite in 2006, which never reached LEO because of a failure of the launcher [4]. Both PiCPoT and e-st@r programs represent a valuable heritage for the current small satellites activities at Politecnico di Torino [5].

The paper starts from the definition of the mission (see section 2), in terms of mission statement, mission objectives, requirements and mission analysis. Then it focuses on the 6U CubeSats system (see section 3), describing its configuration and analyzing the subsystems and main equipment composing it, and on its technological challenges (see section 4). Eventually main conclusions are drawn.

## 2. CubeSats mission

### 2.1. Mission Objectives

According to the typical conceptual design process in Systems Engineering, the mission statement, which is reported hereafter, has been firstly established:

*To perform solar observation and in-situ space weather measurements from the  $L_1$  Earth-Sun Lagrangian point region, pursuing a low-cost approach relying on interplanetary CubeSats and providing a platform for advanced technologies test.*

Starting from the mission statement, the mission objectives have been derived. Mission objectives can be split into two different groups:

1. Scientific objectives:
  - *to observe the Sun*
  - *to perform plasma measurements*
  - *to perform radiation measurements*
2. Technological objectives:
  - *to develop a low-cost CubeSats platform*
  - *to implement solar sail propulsion*
  - *to communicate to Earth from very distant region (Earth-Sun  $L_1$ )*
  - *to collect, store, manage and send to Earth large quantity of scientific data.*

## 2.2. Mission Requirements

Once the broad goals of the system, represented by the mission objectives, had been identified, the system requirements have been defined. On the basis of the system requirements, the conceptual design process of the 6U CubeSats system has evolved through the mission analysis and the system architecture, which consists of two main tasks: Functional Analysis and System Sizing, which is currently under way.

In order to proceed with the sizing of the system the top-level requirements had to be assessed. Hereafter, a summary of the most significant ones is reported.

- Functional requirements
  - The system shall perform an interplanetary mission to the first Earth Sun Lagrangian point.
  - The system shall be provided with interfaces with the launcher.
  - The system shall withstand the launch loads.
  - The system shall withstand the deep space environment.
  - The system shall perform plasma measurement.
  - The system shall take pictures of the Sun.
  - The system shall perform radiations measurements (total ionizing dose).
  - The system shall allow communications with Earth.
    - command data (uplink)
    - telemetry data (downlink)
    - scientific data (downlink)
- Performance requirements
  - The system shall be compliant with 6U CubeSats standards\*
    - maximum envelope: 20cm x 30cm x 10cm
    - maximum total mass: 8kg
  - The total required electrical power shall not exceed 20W.
  - The required data rate shall not exceed 500kbps.

## 2.3. Mission Analysis

The 6U CubeSats system motion is modeled as a circular restricted three-body problem (CR3BP), in which Sun and Earth are the massive bodies moving in circular orbits around their center of mass. The CubeSats system has instead negligible mass, thus it is supposed to move in the resulting force field without affecting the motion of the primaries. The solution of the CR3BP is characterized by the presence of 5 points in which the acting forces are balanced canceling each other and allowing the third body to keep the position without requiring any corrective maneuver. Unfortunately only 2 of these 5 equilibrium points are stable (for the mass ratio  $\mu \leq 0.038$ ) thus, given a small body occupying an unstable point or orbiting around it, even a small perturbation can cause its departure making the motion unbounded. To bound the motion in the vicinity of an unstable point, corrective maneuvers are required [7-15]. In this paper the motion around the L1 unstable point is considered envisaging the third body, i.e. the 6U CubeSats system, equipped with an ideal solar sail. An ideal solar sail reflects all the incoming radiation and is not interested by deformation that influences the thrust vector and consequently the sailcraft trajectory [16, 17].

The motion can be described in a Cartesian reference frame Oxyz with the origin fixed in the system barycenter, with the xy-plane coinciding with the plane of primaries motion and with the x-axis oriented along the Sun-Earth direction. Assuming as unity the distance between the primaries, the mean angular rate of the system and the sum of the primaries masses, the motion of the CubeSats can be described in non-dimensional units through the following system of differential equations:

---

\* The standard for 1U cubesat envisages a maximum envelope of 10cm x 10cm x 10cm and maximum mass of 1.33kg [6].

$$\begin{pmatrix} \dot{\mathbf{r}} \\ \dot{\mathbf{v}} \end{pmatrix} = \begin{pmatrix} \mathbf{v} \\ -2\boldsymbol{\Omega} \wedge \mathbf{v} + \nabla^T U(\mathbf{r}) + a_c \left( \frac{\mathbf{r}_1 \cdot \mathbf{n}}{\|\mathbf{r}_1\|} \right)^2 \mathbf{n} \end{pmatrix}$$

where:

- $\mathbf{r} = (x, y, z)$  denotes the position
- $\mathbf{v} = (v_x, v_y, v_z)$  denotes the velocity
- $\boldsymbol{\Omega}$  denotes the system angular rate
- $U = \frac{1-\mu}{\|\mathbf{r}_1\|} + \frac{\mu}{\|\mathbf{r}_2\|} + \frac{1}{2}(x^2 + y^2)$  denotes the potential function
- $\mu = \frac{M_{Earth}}{M_{Sun} + M_{Earth}}$  denotes the mass ratio
- $\mathbf{r}_1 = (x + \mu, y, z)$  denotes the position wrt the Sun
- $\mathbf{r}_2 = (x - (1-\mu), y, z)$  denotes the position wrt the Earth
- $a_c$  denotes the sail characteristic acceleration
- $\mathbf{n} = (n_x, n_y, n_z)$  denotes the unit-vector which is normal to the sail surface.

The attitude of the sail is described through two angles  $\alpha$  and  $\beta$  and an orthonormal rotating reference frame  $x_v, y_v, z_v$ , as shown in figure 1.

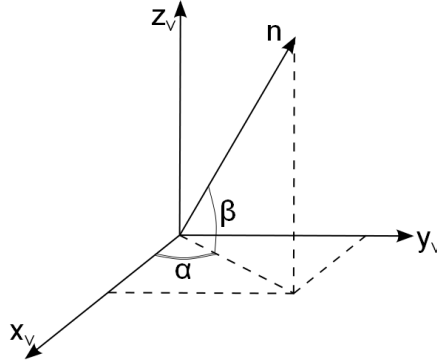


Fig. 1: Solar Sail Attitude in the  $x_v, y_v, z_v$  reference frame

The  $Cx_v, y_v, z_v$  frame has the origin in the center of the sail surface, while the three axes are defined as follows

$$\mathbf{x}_v = \frac{\mathbf{r}_1}{\|\mathbf{r}_1\|} \quad \mathbf{y}_v = \frac{\mathbf{z}_v \wedge \mathbf{x}_v}{\|\mathbf{z}_v \wedge \mathbf{x}_v\|} \quad \mathbf{z}_v = \frac{\mathbf{r} \wedge \mathbf{x}_v}{\|\mathbf{r} \wedge \mathbf{x}_v\|}$$

The sail attitude and the satellite path have been obtained solving an optimal control problem with the Direct Collocation with Non Linear Programming (DCNLP) approach [18, 19, 20].

In defining the optimization process, a Halo orbit is used as initial guess for the trajectory. A Halo orbit is an approximated solution of the CR3BP characterized by the equality of the in-plane and out-of-plane motion frequencies and can be computed using the approach shown by Richardson [21]. For the L1 point of the Sun-Earth system, Halo orbits have a period T of approximately 177 days, which is roughly half a year, hence to simulate a one-year CubeSats trajectory tests for 2T have been conducted.

In order to obtain a trajectory as close as possible to a periodic orbit, the optimal control problem has been solved minimizing the following performance index

$$J = \Delta \mathbf{r} + \Delta \mathbf{v}$$

which represents the difference between the initial and the final state, evaluated considering both the difference between the positions and between the velocities.

In addition constraints on the control vector have been imposed to limit the sail attitude rates to 5 degrees per day.

It is finally worth pointing out that no Halo station-keeping has been performed; Halo orbits have only been used as initial guess for the final optimal trajectory.

### **3. CubeSats system configuration**

#### *3.1 Functional Analysis*

The Functional Analysis is a fundamental tool of the design process to explore new concepts and define their architectures. When systems engineers design new products, they perform Functional Analysis to refine the new product's functional requirements, to map its functions to physical components, to guarantee that all necessary components are listed and that no unnecessary components are requested and to understand the relationships among the new product's components [22].

Primary results of Functional Analysis are the functional tree and the product tree: the former identifies the basic functions, which the system has to be able to perform, while the latter individuates all system physical components, which are able to carry out the basic functions. In other words, these components may be the equipment or the subsystems, which make up the whole system.

According to the Functional Analysis, once the basic functions had been identified, the components to perform those functions have been selected by means of the so-called functions/components (or functions/devices) matrix. The functions/components matrix has therefore been used to map functions to physical components. Figure 2 illustrates the functions/components matrix for the complete 6U CubeSats system.

DEVICES FUNCTIONS	Structure S/S			Electrical Power S/S				Thermal Control S/S			Command and Data Handling S/S			Communications S/S		Attitude & Orbit Det & Control S/S		Mission Observation S/S											
	Radiation shielding	MDPS panels	Primary structure	Secondary structure	Solar arrays	Batteries	Power distribution unit	Regulators	Converters	Radiators	Heat pipes	MU	Surface finishes	Acquisition unit	On-board computer	Memories	Watchdog timer	Antenna/optical photoreceptor	Data Bus	Receiver/transmitter	Auto-tracking equipment	Orbit sensors	Thrusters/Solar sails	Attitude sensors	Attitude Actuators	Camera	Spectrometer	Magnetometer	Dosimeter
Radiation protection	X																												
Micro meteoroids and debris protection		X																											
Ground handling loads withstanding			X																										
Flight accerlerations withstanding			X																										
Operational loads withstanding			X	X																									
Power generation					X																								
Energy storage						X																							
Power distribution							X																						
Power regulation and control								X	X										X										
Heat rejection										X																			
Local heat sink											X																		
Thermal insulation												X	X																
Commands processing														X	X	X			X										
Telemetry and mission data processing														X	X	X			X										
Attitude control functions														X	X	X			X										
Computer health monitoring provision															X		X												
Command reception																		X	X	X									
Telemetry transmission																		X	X	X									
Orbit determination (navigation)														X								X							
Orbit control (guidance)														X									X						
Attitude determination														X										X					
Attitude control														X											X				
Sun/Deep Space observation																											X		
Plasma measurements																											X	X	
Radiation measurements																													X

Fig. 2: Functions/Components Matrix

As result of the Functional Analysis the assessment of the subsystems and components needed to accomplish the mission has been derived. In summary, the following subsystems compose the 6U CubeSats system [23]:

- structure, which supports all other spacecraft subsystems, and includes the mechanical interfaces with the launcher and the ground support equipment interfaces (to be defined);
- electrical power subsystem, which is in charge of providing, storing, distributing and controlling the spacecraft electrical power; it mainly consists of solar cells mounted on the external surfaces of the system as power source, Li-ion batteries for the energy storage and power distribution unit;
- thermal control subsystem, designed to maintain all spacecraft and payload components and subsystems within their required temperature limits for each mission phase;
- command and data handling subsystem, which receives, validates, decodes, and distributes commands to other spacecraft systems and gathers, processes, and formats spacecraft housekeeping and mission data for downlink, maintains mission time and synchronization, manages operative modes and failures;
- attitude and orbit determination and control subsystem, needed to determine attitude, trajectories, angular and linear velocities, handling the measurements of inertial and not inertial sensors, to stabilize the vehicle and orient it in desired directions during the mission despite the external disturbance torques acting on it using magnetic actuators and small reaction wheels; solar sails are exploited for orbit control;
- communications, which provides the interface between the spacecraft and the ground systems, transmitting both payloads mission data and spacecraft housekeeping data; for an interplanetary CubeSats mission optical communication is likely to be implemented, in order to be compliant with mission requirements and constraints (see section “4.2. Communications” for more details);
- mission observation subsystem, which includes the scientific instruments for Sun observation and plasma measurements (see section “3.2. Mission Payloads”).

Besides the allocation of the subsystems, one of the main issues related to CubeSats is how to fit big science within a small package - namely power, mass, volume, and data limitations. One of the objectives of the work is

therefore to identify and size the required subsystems and equipment, needed to accomplish specific mission objectives, and to investigate the most suitable configuration, in order to be compatible with the typical CubeSats (multi units) standards.

A reference system able to fulfill the scientific objectives of the proposed mission may consist of:

- 2U occupied by the scientific payloads;
- 2U for the solar sails;
- 2U devoted to telecommunications and other bus subsystems (power subsystem, attitude control system and command and data handling).

The following section focuses on the description of the scientific payloads, which occupy up to two of the CubeSats system units.

### 3.2 Mission Payloads

In this section a brief overview of the scientific instruments to be included in the system, according to the mission objectives, is reported.

Specifically, the types of instruments to be considered are:

- Plasma Instruments, for plasma measurements;
- Radiation Dosimeters and Advanced Materials, to investigate the space environment and validate technologies in view of future implementation in human missions;
- Imagers/Cameras, to take pictures of the Sun.

For each instruments class, several options have been considered and among them only the most significant ones have been selected, also according to constraints deriving from the CubeSats standards. In particular, all the scientific payloads shall fit 2U CubeSat sizes (10cm x 10cm x 20cm, 2.66kg).

Hereafter, the main features of the instruments are discussed and the justification for the selection of specific ones is reported.

Two instruments are envisaged to perform measurement of the plasma environment, a magnetometer and a plasma spectrometer.

The reference magnetometer considered for this mission is a super low power flux-gate magnetometer LEMI-031 [24]. It is intended for measuring the three components of the magnetic field vector. Due to its low mass and small size it is suitable for implementation in CubeSats systems. Moreover, the obtainable sensitivity (which is less than 1nT) makes this sensor interesting for measurement of magnetic fields associated to significant coronal mass ejection events. Its main features are listed in table I.

Mass	Volume	Power	Data
Sensor: <75g	Sensor: 70.5mm (L), 32mm (D)	Power consumpt.: <10mW	Measurement range: $\pm 53,000$ nT
Electronics: <100g	Electronics: 84mm (D), 22mm (H)	Power supply: 3.33-3.7V	Sensitivity: 0.6mV/nT Data Rate: 150bps

Table I: Magnetometer features

The reference spectrometer is an Ion and Neutral Mass Spectrometer (INMS) [25, 26], that is a miniaturized analyzer designed for sampling of low mass ionized and neutral particles in the spacecraft ram direction. The key sensor components consist of a collimator/ion filter, an ionizer and a charged particle spectrometer. Particles enter the aperture into the ion filter region where charged particles can be rejected. This is followed by a series of baffles for collimation and further charged particle suppression. Collimated neutral particles are subsequently ionized in the ionizer by a 50 eV electron beam followed by mass selection in the analyzer. The spectrometer can be operated in different modes, optimized for ions or neutral particle analysis. The INMS main features are listed in table II.

Mass	Volume	Power	Data
Mass: 350g	Envelope: 100x100x50mm ( $\frac{1}{2}$ U)	Power consumption: 500mW	Data Rate: ~23bps

Table II: INMS features

As introduced before, the CubeSats mission represents an opportunity to study the deep space environment, and in particular to test the response of specific materials, which can be used to shield the spacecraft.

Radiation micro dosimeters are envisioned [27], which are compact hybrid microcircuits which directly measure the total ionizing dose absorbed by an internal silicon test mass. The test mass simulates silicon die of integrated circuits on-board a host spacecraft in critical mission payloads and subsystems. By accurately measuring the energy absorbed from electrons, protons, and gamma rays, an estimate of the dose absorbed by other electronic devices on the same vehicle can be made. The dosimeters' main features are listed in table III.

The dose of radiation accumulated on a system will depend on the shielding capability of the material used to shield.

The shielding effectiveness depends on the chemical composition of the material (for example hydrogen is very efficient shielding and therefore materials with high hydrogen concentration shall be preferred), and according to this, very different masses of shielding could be needed, to meet the requirements on the maximum absorbed dose, while considering different materials.

<b>Mass</b>	<b>Volume</b>	<b>Power</b>	<b>Data (type/quantity)</b>
Mass: 20 g	Envelope: 35x25x10 mm	Power consumption: 280mW Electric I/F: 10 mA at 13-40 VDC	Measures up to 40 krads Data Rate: 1 Byte/s

Table III: Radiation Micro Dosimeter features

In the CubeSats mission here discussed, two different materials are envisaged to be implemented and tested, through dosimeters' measurements: Kevlar [28] and High Density Polyethylene (HDPE) [29], which indeed have good shielding performances.

As final configuration, three dosimeters are envisioned, positioned in three different spots. Two of them are coupled with Kevlar and HDPE covers, in order to measure the shielding capabilities of the two materials.

In particular, it is assumed to have two equal tiles having a thickness of 20mm for both materials (each tile is 50x50x20mm, which corresponds to 72g for Kevlar and 48g for polyethylene).

A NanoCam C1U [30] is finally envisaged to take pictures of the Sun. It is a high performing camera system fitting a single unit cubesat, based on a CMOS technology. Its main features are listed in table IV.

<b>Mass</b>	<b>Volume</b>	<b>Power</b>	<b>Data (type/quantity)</b>
Mass: 170 g	Envelope: 96x90x58 mm	Power consumption: Idle: 360mW Image acquisition: 634mW Image processing 660mW Supply voltage: 3.3V	CMOS camera Data Rate: 400kbps

Table IV: NanoCam C1U features

## 4. Technological challenges

The enabling technologies for this kind of mission mainly regard the solar sail control and navigation, deep space tracking and telecommunications

### 4.1 Solar Sails

In the last decade the possibility to execute maneuvers without requiring propellant, but exploiting an unlimited source like the solar radiation pressure, aroused more and more interest in the field of solar sails. A solar sail cancels the dependency of the mission duration from the amount of propellant stored on board and has the further advantage of providing a continuous thrust [31-39]. Unfortunately solar radiation pressure represents at the same time the advantage and the drawback of this propulsion system, since it limits the available thrust to very small ranges.

The real challenge for the CubeSats mission is not just using a solar sail, but a small solar sail, since the provided thrust depends on the sail surface area and the mission restrictions on sizes and volumes limit considerably the sail dimension. In this work solar sails with characteristic acceleration  $a_c = 0.01 \text{ mm/s}^2$  and  $a_c = 0.05 \text{ mm/s}^2$  have been taken into consideration. For each value the corresponding sail mass and size have been investigated and the results are briefly discussed hereafter.

The area  $A$  of the sail can be evaluated through

$$a_c = \frac{2\eta PA}{m}$$

where  $m$  is the total CubeSats mass,  $\eta$  is the sail efficiency and  $P$  is the solar radiation pressure [40, 41]. Making use of the ideal solar sail assumption and of the CubeSats mass requirement, it results to be  $\eta = 1$  and  $m = 8 \text{ kg}$ . Table V resumes the required sail areas and the corresponding side lengths when a squared sail is supposed to be used.

$a_c \text{ [mm/s}^2\text{]}$	Area $\text{[m}^2\text{]}$	Side $\text{[m]}$
0.01	8.59	2.93
0.05	42.95	6.55

Table V: Sail dimensions

Once the area is known, the total sail mass  $m_s$  (i.e. the mass of the sail film plus the mass of the sail structure) can be evaluated from the definition of the sail loading

$$\sigma_s = \frac{m_s}{A}$$

The sail loading is the primary hardware performance metric of a solar sail. It quantifies the structural design's performances and represents an open field of research. For this reason a wide range of values has been considered to evaluate the total sail mass, and figure 3 shows the results, i.e. the trend of the mass of the solar sail as a function of the sail loading.

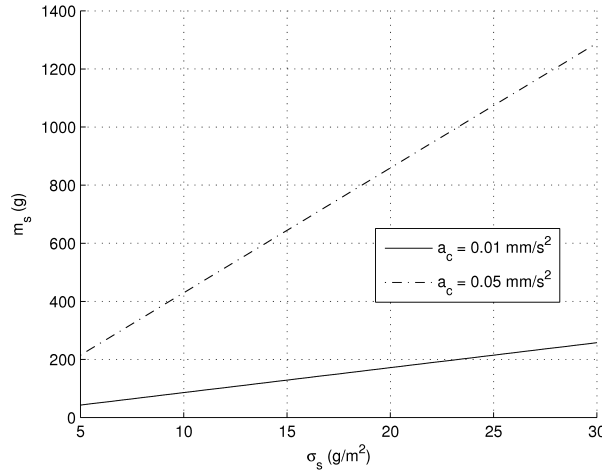


Fig. 3: Sail mass.

In the present work a cautious value of  $20 \text{ g/m}^2$  has been considered for the sail loading, leading to the masses shown in Table VI.

$a_c \text{ [mm/s}^2\text{]}$	Mass $\text{[g]}$
0.01	172
0.05	859

Table VI: Sail mass

Using the values introduced above for the characteristic acceleration, the optimal trajectory has been found for a timeframe of  $2T$ , where  $T$  denotes the period of the Halo orbit used as initial guess.

For each value of the characteristic acceleration, tests have been conducted using Halos with z-axis amplitude  $A_z = 250000$  km and  $A_z = 350000$  km as initial guess. An optimal trajectory obtained with  $a_c = 0.01$  mm/s<sup>2</sup> and  $A_z = 250000$  km is shown in Figure 4. The reference frame  $Oxyz$  is used, but for easy viewing the origin  $O$  and the Sun are not included in the figure.

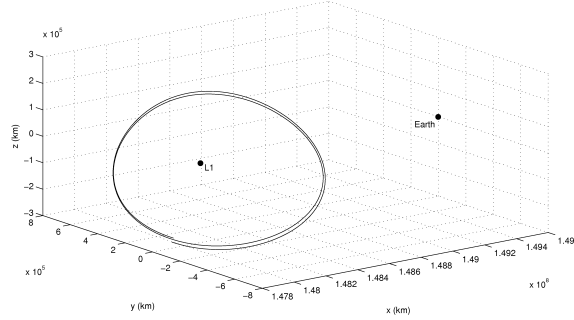


Fig. 4: Optimal trajectory obtained with  $a_c = 0.01$  mm/s<sup>2</sup> and with a  $A_z = 250000$  km Halo

#### 4.2 Communications

As demands on space communication systems become greater, both in terms of data to be transmitted and distance from Earth, it becomes more and more important to pay close attention to the selection of the best communication technology.

There are significant differences between RF and laser communication systems, and much of it results directly from the several orders of magnitude difference in wavelength, which actually results in very different antenna sizes.

RF communications systems provide wide-area coverage, multicasting service, and easy point-to-point wireless communications. Optical communications systems have no regulatory restrictions on the use of frequencies and bandwidths and are immune to jamming and interception by adverse parties.

In order to select the most suitable configuration for the CubeSats mission, a trade-off has been performed to compare the RF solution and the optical one.

The first step of the analysis consisted on the evaluation of the link budget in downlink (worst case): a summary of the obtained results is shown in tables VII and VIII for RF and optical system, respectively.

The computations have been performed considering a required data rate of 400kbps and a link range of  $1.5 \times 10^6$  km (distance between Earth and the first Earth-Sun Lagrangian point).

From the comparison between the two link budgets it results that the laser communications system needs a much smaller antenna, which will correspond to lower mass and easier integration requirements. Moreover, the required power is less for optical system.

RF system – Ka band	
Transmit power	1.8 W 2.55 dBW
Frequency	32 GHz
Atmosphere loss	-4 dB
Antenna pointing loss	-2 dB
Free space loss	-246 dB
BER	$10^{-6}$
RX antenna diameter	34 m
RX antenna gain	78 dB
System noise temperature	196 K
Link margin	10 dB
TX antenna gain	42 dB
TX antenna diameter	<b>52 cm</b>

Table VII: RF system link budget (downlink)

#### Optical System

Transmit power	500mW
	27dBm
Wavelength	1.55μm
Frequency	193THz
Pointing loss	-6dB
Free space loss	-322dB
RX antenna diameter	5m
RX antenna gain	139 dB
RX loss	-3dB
Sensitivity	90 photons/bit
Link margin	10 dB
TX antenna gain	94 dB
TX loss	-3 dB
TX antenna diameter	<b>3 cm</b>

Table VIII: Optical system link budget (downlink)

Besides the link budget considerations, to conduct a realistic trade study of RF versus laser communications, other important characteristics or factors must be identified and included in the trade [42].

In the present work the following parameters have been considered for the trade-off (Please note that, some of them are only qualitatively evaluated):

- mass
- power
- cost: the lifecycle cost includes two contributions, that are development, or non recurrent cost, and recurring costs; the development cost would be higher for laser communications, but recurring costs would be lower (overall RF are preferable).
- integration impact: it includes several factors that denote the overall effect of integrating a communications system.
  - volume needed to allocate the system (related to size)
  - field of view: the requirement to provide a clear view throughout a range of angle is more stringent for RF systems due to larger antennas;
  - need to stow and deploy the antenna
  - dynamic reaction effect (related to deployment operations)
- technical risk: it includes parts availability and level of space qualification, development and testing.

The results of the comparison are shown in table IX.

As overall result of the trade-off, the optical communications turned out to be the best solution. Moreover, optical communication could be critical for the required antenna pointing, but it is not too much more challenging than the RF case.

	<b>Mass</b>	<b>Power</b>	<b>Cost</b>	<b>Integration impact</b>	<b>Technical Risk</b>	<b>TOT.</b>
Weight [%]	23	10	25	20	22	100
<b>RF</b>	-1	-1	1	-1	1	-0,06
<b>Optical</b>	1	1	-1	1	-1	0,06

Table IX: RF vs Optical communications trade off

It is also worth underlining that one of the main objectives of the proposed CubeSats mission is to provide a platform for test and validation of advanced technologies. According to this the choice of implementing laser communications is even more significant.

## 5. System budgets

In this section a preliminary mass and power budget for the CubeSats system is reported. Starting from the results of the functional analysis, an assessment of the mass and the power required for all the subsystems composing the

CubeSats system has been done, also relying on some references as [3, 4, 43]. The main results are summarized in table X.

S/S	Mass [g]	Power [W]
Structure	1500	0
EPS	500	1
TCS	300	0
CDHS	150	0.5
AODCS	500	3
Comms	250	3
P/L	1000	3
Solar sail	860	0
TOTAL	5060	10.5

Table X: CubeSats system budgets

## 6. Conclusions

The paper describes a 6U CubeSats system interplanetary mission to the  $L_1$  Earth-Sun Lagrangian point.

The problem of cost reduction is a significant driving factor in advancing space technologies, and it mainly involves two main points, that are the miniaturization or mass and power reduction of platform and instruments, and the implementation of new launch strategies, mission planning and use of ground network to reduce the cost. These issues are important not only for extremely small satellites, but are significant for any bigger spacecraft, as a reduction of the mission cost is always desirable.

According to this, the interest in small satellites, and in particular CubeSats, is growing up, as they can represent valuable platforms both for scientific and technological scopes, with lower costs than big satellites.

In particular a mission like that discussed in the paper would represent a good opportunity to improve the national interest and capabilities in the exploration of the solar systems, pursuing both scientific and technological objectives, foreseeing sun observation and plasma measurements, as well as advanced technologies demonstration (e.g. optical communications, solar sails), in view of their future implementation on larger spacecraft. Moreover, it would give the chance to expand the academic presence in developing systems needed for future missions, including human expeditions.

It is worth underlining that no real-time monitoring is envisioned in this mission, as it is conceived as demonstration mission of new technologies, and no dedicated analyses have been performed to address ground stations' issues. Thus the objective is to collect and send back to Earth data, which can then be analyzed on ground. The possibility to exploit an analogous platform for real-time monitoring to support and take corrective actions, for instance, on other spacecraft can be further investigated in future work, by relying on additional analyses about ground stations availability and responsiveness.

## 6. Acronyms

AMR – Anisotropic Magneto-Resistance  
AODCS – Attitude and Orbit Determination and Control Subsystem  
AU – Astronomical Unit  
BER – Bit Error Rate  
CDHS – Command and Data Handling Subsystem  
EPS – Electrical Power Subsystem  
HDPE – High Density Polyethylene  
INMS – Ion and Neutral Mass Spectrometer

LEO – Low Earth Orbit  
MDPS – Micrometeoroids and orbital Debris Protection System  
MLI – Multi Layer Insulation  
RF – Radio Frequency  
RX – Receiver  
S/S – Subsystem  
TCS – Thermal Control Subsystem  
TX – Transmitter

## 7. References

Ref. 1: Cardile D., Chiesa S., Viola N., Viscio M.A., General methodology for demonstration mission design. In: 22nd AIDAA Conference, Napoli, September 2013

Ref. 2: Viscio M.A., Cardile D., Viola N., Basso V., Gargioli E., Scenario assessment for the demonstration of enabling technologies for space exploration. In: 64th International Astronautical Congress, Beijing (China), September 2013

Ref. 3: Corpino S., Chiesa S., Stesina F., Viola N. Cubesat development at Politecnico di Torino: the e-st@r program. In: 61<sup>st</sup> International Astronautical Congress, Prague (CZ), 27 Sep - 1 Oct 2010.

Ref. 4: Chiesa S., Corpino S., Viola N. PiCPoT program: lessons learned. In: 58th International Astronautical Congress. Hyderabad, India, September 24-28, 2007, ISSN: 1995-6258.

Ref. 5: Obiols-Rabasa G., Corpino S., Nichele F., Ridolfi G., Stesina F., Viola N., 3-STAR program at Politecnico di Torino. In: Small satellites, services and systems - the 4S symposium. Portoroz, Slovenia, 4-8 June 2012.

Ref. 6: CubeSat Design Specification Rev. 12, The CubeSat Program, Cal Poly SLO

Ref. 7: Breakwell J.V., Kamel A.A., Ratner M.J., Station-keeping for a translunar communications station. *Celestial Mechanics* 10(3), 357-373 (1974).

Ref. 8: Farquhar, R.W., Kamel, A.A.: Quasi-periodic orbits about the translunar libration point. *Celestial Mechanics* 7(4), 458-473 (1973).

Ref. 9: Gómez G., Howell K.C., Masdemont J.J., Simò C., Station-keeping strategies for translunar libration point orbits. *Proceedings of the AAS/AIAA Space Mechanics Meeting, Monterey, Calif, USA, 1998.*

Ref. 10: Simo J., McInnes C.R.. Solar sail orbits at the Earth-Moon libration points. *Communications in Nonlinear Science and Numerical Simulation* 14(12), 4191-4196 (2009).

Ref. 11: Romagnoli D., Circi C., Lissajous trajectories for lunar global positioning and communication systems. *Celestial Mechanics* 107(4), 409-425 (2010).

Ref. 12: Circi C., “Properties of transit trajectory in the restricted three and four-body problem”, *Advances in Space Research*, Vol. 49, No. 10, May 2012, pp. 1506-1519

Ref. 13: Mingotti G., Topputo F., Bernelli-Zazzera F., Efficient invariant-manifold, low-thrust planar trajectories to the Moon, in: *Communication in nonlinear science and numerical simulation*, Volume 17, Issue 2, Pages: 817-83, 2012

Ref. 14: Mingotti G., Topputo F., Bernelli-Zazzera F., “Optimal Low-Thrust Invariant Manifold Trajectories via Attainable Sets”, *Journal of guidance control and dynamics*, Vol. 34, Issue 6, Pages: 1644-1655, 2011

Ref. 15: Topputo F., “On optimal two-impulse Earth-Moon transfers in a four-body model”, *Celestial mechanics & dynamical astronomy*, Vol. 117, Issue 3, Pages: 279-313, 2013.

Ref. 16: Vulpetti G., “Fast Solar Sailing: Astrodynamics of Special Sailcraft Trajectories”, Springer, 2013.

Ref. 17: Ingrassia T., Faccin V., Bolle A., Circi C., Sgubini S., “Solar sail elastic displacement effects on interplanetary trajectories”, *Acta Astronautica*, Vol. 82, Issue 2, February 2013

Ref. 18: Hargraves C.R., Paris S.W., Direct trajectory optimization using nonlinear programming and collocation. *Journal of Guidance, Control and Dynamics* 10(4), 338–42 (1987).

Ref. 19: Ozimek M.T., Grebow D.J., Howell K.C., A Collocation Approach for Computing Solar Sail Lunar Pole-Sitter Orbits. *The Open Aerospace Engineering Journal* 3 (1), 65-75 (2010).

Ref. 20: Fumenti F., Circi C., Romagnoli D.. Collocation points distributions for optimal spacecraft trajectories. *Communications in Nonlinear Science and Numerical Simulation* 18 (3), 710-727 (2013).

Ref. 21: Richardson D.L.. Analytic Construction of Periodic Orbits about the Collinear Points. *Celestial Mechanics* 22, 241-253 (1980).

Ref. 22: Viola N., Corpino S., Fioriti M., Stesina F. (2012). Functional Analysis in Systems Engineering: methodology and applications. In: Prof. Dr. Boris Cogan . *Systems Engineering - Practice and Theory*. p. 71-96, RIJEKA:InTech, ISBN: 9789535103226, doi: 10.5772/34556

Ref. 23: Viscio M.A., Viola N., Corpino S., Stesina F., Circi C., Fumenti F., Fineschi S.. Interplanetary CubeSats mission to earth-sun libration point for space weather evaluations. In: 64th International Astronautical Congress, Beijing (China), September 2013

Ref. 24: <http://lemisensors.com/?q=LEMI-031> (accessed on May 21<sup>st</sup>, 2014)

Ref. 25: Call for CubeSat Proposals for QB50, Issued on 15 February 2012 by the von Karman Institute for Fluid Dynamics (VKI) Brussels, Belgium

Ref. 26: QB50 System Requirements and Recommendations, Interface Control Document, Issue 3, 5 February 2013

Ref. 27: Teledyne Microelectronic Technologies,  $\mu$ DOS001 Micro Dosimeter datasheet. (<http://www.teledynemicro.com/space/pdf/microDosimeter.pdf>, accessed on May 21<sup>st</sup>, 2014)

Ref. 28: Technical Guide Kevlar Aramid Fiber

Ref. 29: INEOS Olefins & Polymers, Typical Engineering Properties of High Density Polyethylene, USA

Ref. 30: GOMSpace, NanoCam C1U Datasheet (<http://gomspace.com/index.php?p=products-c1u>, accessed on May 21<sup>st</sup>, 2014)

Ref. 31: Vulpetti, G. “The sailcraft splitting concept”. *Journal British Interplanetary Society*, Volume 59, Issue 2, February 2006, Pages 48-53, 2006.

Ref. 32: Vulpetti, G. “Total solar irradiance fluctuation effects on sailcraft-Mars rendezvous”, *Acta Astronautica*, Volume 68, Issue 5-6, Pages 644-650, 2011.

Ref. 33: Vulpetti, G. “Reaching extra-solar-system targets via large post-perihelion lightness-jumping sailcraft”, *Acta Astronautica*, Volume 68, Issue 5-6, Pages 636-643, 2011.

Ref. 34: Mengali, G., Quarta A.A., "Optimal heliostationary missions of high-performance sailcraft", *Acta astronautica*, Vol. 60, Issue: 8-9, Pages: 676-683, 2007

Ref. 35: Mengali G., Quarta A.A., "Optimal control laws for axially symmetric solar sails", *Journal of spacecraft and rockets*, Vol. 42, Issue: 6, Pages:1130-1133,2005.

Ref. 36: Mengali G., Quarta A.A., "Near-optimal solar-sail orbit-raising from low earth orbit", *Journal of spacecraft and rockets*, Vol. 42, Issue: 5, Pages: 954-958, 2005.

Ref. 37: Macdonald, M. and McInnes, C. R., "Solar Sail Science Mission Applications and Advancement", *Advances in Space Research*, Vol. 48, No. 11, 2011, pp. 1702-1716.

Ref. 38: Lappas, V., Adeli, N., Visagie, L., Fernandez, J., Theodorou, T., Steyn, W. and Perren, M., "Cubesail: A Low Cost Cubesat Based Solar Sail Demonstration Mission", *Advances in Space Research*, Vol. 48, No. 11, 2011, pp. 1890-1901.

Ref. 39: Dachwald B. and Seboldt W., "Multiple near-Earth Asteroid Rendezvous and Sample Return Using First Generation Solar Sailcraft", *Acta Astronautica*, Vol. 57, No. 11, 2005, pp. 864-875.

Ref. 40: Wright J.L.. *Space Sailing*. Gordon and Breach Science Publishers, 1992.

Ref. 41: McInnes C.R.. *Solar sailing: technology, dynamics and mission applications*. Springer, 1999

Ref. 42: Lambert S.G., Casey W.L., "Laser Communications in Space", Artech House, Boston London

Ref. 43: <http://www.cubesatshop.com>