



POLITECNICO DI TORINO
Repository ISTITUZIONALE

Multi-band optical systems to enable ultra-high speed transmissions

Original

Multi-band optical systems to enable ultra-high speed transmissions / Ferrari, A.; Napoli, A.; Costa, N.; Fischer, J. K.; Pedro, J.; Forsyia, W.; Richter, A.; Pincemin, E.; Curri, V.. - ELETTRONICO. - 1(2019), pp. 1-1. ((Intervento presentato al convegno 2019 Conference on Lasers and Electro-Optics Europe and European Quantum Electronics Conference, CLEO/Europe-EQEC 2019 tenutosi a Munich (DE) nel 2019 [10.1109/CLEOE-EQEC.2019.8872247].

Availability:

This version is available at: 11583/2826934 since: 2020-05-19T14:13:42Z

Publisher:

Institute of Electrical and Electronics Engineers Inc.

Published

DOI:10.1109/CLEOE-EQEC.2019.8872247

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2019 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Multi-Band Optical Systems to Enable Ultra-High Speed Transmissions

Alessio Ferrari^{1*}, Antonio Napoli², Nelson Costa³, Johannes K. Fischer⁴, Joao Pedro³, Wladek Forysiak⁵,
Andre Richter⁶, Erwan Pincemin⁷, Vittorio Curri¹

1. Politecnico di Torino, Torino, Italy; 2. Infinera Germany, Munich, Germany; 3. Infinera Portugal, Carnaxide, Portugal;
4. Fraunhofer Institute for Telecommunications HHI, Berlin, Germany; 5. AIPT, Aston University, Birmingham, UK;
6. VPI Photonics, Berlin, Germany; 7. Orange Labs, Lannion, France; *alessio.ferrari@polito.it

Current forecasts indicate that the fastest growing IP-traffic is in metro and data center interconnect (DCI) [1]. The exploitation of the entire low-loss spectrum of single-mode fibers (SMF) (from 1260 nm up to 1620 nm) was proposed to avoid the predictable capacity crunch and the eventual need for a new fibre infrastructure roll-out. First analytic result considering multi-band (MB) transmission (from O- to L-band) hint an achievable traffic load exceeding 200 Tb/s for a 500 km link in a single SMF [2].

The maximum transmittable capacity over ITU-T G.652D SMF, which is the mainly deployed fiber type [3], is evaluated in this work. Three different fiber span lengths are considered: 40 km, 60 km and 80 km. A high level overview of the MB setup is depicted in Fig. 1 (left). The system is composed of a MB transmission bench composed of {L, C, S, E, O}-band transmitters. 50 GHz spaced polarization multiplexed (PM)-MQAM signals with root raised cosine shaping (roll-off = 0.15) and a symbol rate of 32 Gbaud are multiplexed and launched into the fiber link. A 2 nm guard-band between adjacent bands is assumed. At the receiver side, the bands are de-multiplexed, amplified and then demodulated. We assume lumped amplifiers: Praseodymium doped fibre amplifier(DFA) in O-band [4], Bismuth DFA in E-band [5], Thulium DFA in S-band [6] and Erbium DFA in C- and L-bands. A noise figure of 6, 5.5, 7, 6 and 7 dB are assumed for {L, C, S, E, O}-band amplifiers, respectively. The wavelength ranges and number of channels in each band are reported in Table 1. The local-optimization global-optimization (LOGO) approach [7] is employed to optimize the launched power. The overall signal-to-noise-ratio (SNR) is estimated considering the impact of non-linear interference (NLI) which is evaluated using the generalized Gaussian noise (GGN) model [8]. The GGN model takes into account the frequency dependence of the fiber loss, the chromatic dispersion and the stimulated Raman scattering (SRS). Finally, the achievable capacity assuming a flexible transceiver capable to completely exploit the available SNR is computed.

Table 1: Per-band system parameters.

Band/Wavelength Range (nm)	L (1565-1625)	C (1530-1565)	S (1460-1530)	E (1360-1460)	O (1260-1360)
Number of channels	136	82	182	295	237

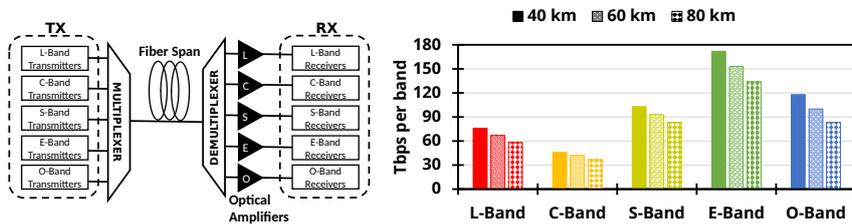


Figure 1: System setup (left) and per band (right) capacity after transmission along 40 km, 60 km and 80 km of SMF.

The per band capacity illustrated in Fig. 1 (right) shows that C-band provides a low capacity when compared with the remaining bands as a consequence of its narrow bandwidth (see Table 1). On the other hand, the E-band shows the highest capacity mainly due to high channel count (~300 channels). By observing the evolution of the per band capacity over distance, a higher negative slope is observed for S-, E- and O-bands when compared with the L- and C-bands. This behavior can be explained by analyzing the dominant transmission impairments. Indeed, the worse performance is observed in O-band which is severely degraded by signal depletion. Consequently, amplified spontaneous emission (ASE) noise is the main transmission impairment. On the other hand, L- and C-band transmission is mainly dominated by NLI due to the strong SRS pump from the neighbour bands.

In case of short-reach links (≤ 40 km), the total capacity is > 500 Tb/s/fiber which is an enormous increase with respect to current commercial C+L-band systems. Moreover, even for distances around 80 km, the total fiber capacity is still in the order of 400 Tb/s/fiber. C-band represents just a small part of the capacity available in the fiber. Exploiting the remaining low-loss bands increases the potentialities the already deployed optical fiber infrastructure. However, sophisticated techniques are needed to efficiently plan the line system.

This work was funded by the German "Bundesministerium für Bildung und Forschung" under contract no. 16KIS0487K (Celtic project SENDATE-FICUS) and by the European Unions Horizon 2020 research and innovation program under the Marie Skłodowska-Curie ETN WON, grant agreements 814276.

- [1] Cisco Visual Networking Index: Forecast and Methodology, June 2017.
- [2] J. K. Fischer et al. Maximizing the capacity of installed optical fiber... In *ICTON*, page Tu.B3.3, 2018.
- [3] E. Pincemin. Capacity growth through multi-band amplified WDM system. In *ECOC Workshop WS01*, 2018.
- [4] Praseodymium fluoride fiber glass doped amplifier, product data sheet. <https://www.fiberlabs.com>.
- [5] E. Dianov. Bismuth-doped optical fibers: ... *Light: Science & Applications*, 1, 2012.
- [6] S. Aozasa et al. Tm-doped fiber amplifiers for 1470-nm-band WDM signals. *PTL*, 12(10):1331–1333, 2000.
- [7] P. Poggiolini et al. The LOGON strategy for low-complexity control plane... In *OFC*, page OW1H.3, 2013.
- [8] M. Cantono et al. On the interplay of nonlinear interference generation with... *IEEE / OSA JLT*, 2018.