

Wiener-Hopf Solution of E-Polarized Plane Wave Diffraction by a Dielectric Slit in a Thick Screen

*Original*

Wiener-Hopf Solution of E-Polarized Plane Wave Diffraction by a Dielectric Slit in a Thick Screen / Daniele, Vito; Lombardi, Guido. - ELETTRONICO. - 1:(2021), pp. 895-896. (Intervento presentato al convegno 2021 IEEE International Symposium on Antennas and Propagation and USNC-URSI Radio Science Meeting (APS/URSI) tenutosi a Singapore, Singapore nel 4-10 December 2021) [10.1109/APS/URSI47566.2021.9704648].

*Availability:*

This version is available at: 11583/2958984 since: 2022-04-04T12:49:13Z

*Publisher:*

The Institute of Electrical and Electronics Engineers

*Published*

DOI:10.1109/APS/URSI47566.2021.9704648

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

IEEE postprint/Author's Accepted Manuscript

©2021 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

# Wiener-Hopf Solution of E-Polarized Plane Wave Diffraction by a Dielectric Slit in a Thick Screen

Vito Daniele

Department of Electronics and Telecommunications  
Politecnico di Torino  
Torino, Italy  
vito.daniele@polito.it

Guido Lombardi

Department of Electronics and Telecommunications  
Politecnico di Torino  
Torino, Italy  
guido.lombardi@polito.it

**Abstract**— The study of the scattering and the radiation problems constituted of a dielectric slit in a thick conducting screen is of great importance in antenna systems, periodic structure, screens and propagation problems. In this paper, we formulate the problem and illustrate the solution's procedure through the Wiener-Hopf method.

**Keywords**— *dielectric-loaded slit, slot, thick metallic shield, screen, Wiener-Hopf method.*

## I. INTRODUCTION

Antenna systems, periodic structures, screens and propagation obstacles can be constituted by dielectric slits in a thick conducting screens, see Fig. 1. The problem may be classified as canonical; however, it receives a continuous wide attention for practical applications.

Usually, the scattering and the radiation properties of such structures are often studied using the fundamental waveguide mode in the slit.

The literature reports approaches that are based on Green's function formulations [1], integral equations [2], and modal series [3]-[4] together with ray problem outside the slit [5].

As demonstrated in [4] the problem presents special physical properties at narrow band known as extraordinary transmission.

The Wiener-Hopf (WH) technique [6] allows to approach the problem using a comprehensive mathematical-physical model which can be extended to more complex structures involving stratification in the slit region and it is independent from the size of the slit.

The Wiener-Hopf equations obtained by the application of the method are defined in the spectral domain and their solution in terms of spectral transformation of the field components contains all the physical properties of the problem.

In particular in the slit problem we need to apply the Green function's procedure [7]-[9] to make complete the WH equations.

In general, the WH equations cannot be solved exactly. To overcome this limitation we resort to the Fredholm Factorization [10]-[11]. The Fredholm factorization allows to obtain semi-analytical solutions of a given problem with high accuracy and

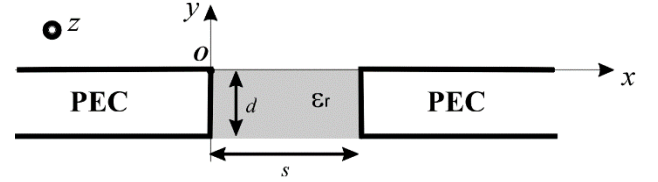


Fig. 1. Dielectric slit in a thick conducting screen.

efficiency. The complete solution procedure consists of the following steps: 1) deduction of WH equations, 2) Fredholm factorization, 3) evaluation of field components via inverse spectral transformation and asymptotics.

## II. FORMULATION

With reference to Fig. 1, the dielectric slit in a thick perfect electrical conducting (PEC) screen has width  $s$ , thickness  $d$  and relative dielectric constant  $\epsilon_r$ . In the problem, we consider time-harmonic fields with time dependence  $e^{j\omega t}$ , which is omitted.

The source considered in this work is an  $Ez$ -polarized plane wave with incidence angle  $\varphi_o$ :

$$E_z^i(x, y) = E_o e^{jk\rho \cos(\varphi - \varphi_o)} = E_o e^{jk(x \cos \varphi_o + y \sin \varphi_o)} \quad (1)$$

where  $k$  is the propagation constant of the free space (the region outside the slit).

The W-H equations of the problem can be accomplished by a generalization of the procedure done for the hole problem and proposed in [6], p. 304.

The procedure starts from subdividing the geometry of the problem into sub-regions, which are homogeneous in geometry and material: the top and the bottom sub-regions are homogeneous isotropic half-spaces (free space) and the central sub-region is a rectangular region of dimensions  $d \times s$  made by dielectric.

The WH equations are written in terms of Laplace transforms along  $x$  direction of field components at  $y=0, d$  respectively labelled 1 and 2. The non-null transforms, due to the PEC boundary conditions, are

$$V_{1o}(\eta) = \int_0^s E_z(x, 0) e^{j\eta x} dx, \quad (2)$$

$$V_{2o}(\eta) = \int_0^s E_z(x, -d) e^{j\eta x} dx,$$

$$\begin{aligned} I_{1o}(\eta) &= \int_0^s H_x(x, 0) e^{j\eta x} dx, \\ I_{1+}(\eta) &= e^{-j\eta s} \int_s^\infty H_x(x, -d) e^{j\eta x} dx, \\ I_{1\pi+}(\eta) &= -\int_{-\infty}^0 H_x(x, 0) e^{-j\eta x} dx, \\ I_{2o}(\eta) &= \int_0^s H_x(x, -d) e^{-j\eta x} dx, \\ I_{2+}(\eta) &= e^{-j\eta s} \int_0^\infty H_x(x, -d) e^{j\eta x} dx, \\ I_{2\pi+}(\eta) &= -e^{j\eta s} \int_{-\infty}^s H_x(x, -d) e^{-j\eta x} dx. \end{aligned} \quad (3)$$

All this quantities are interpreted as WH unknowns.

Using circuital considerations as in multilayered regions, the deduction of the WH equations in the top and bottom sub-regions is systematic and it yields:

$$-I_{1\pi+}(-\eta) + I_{1o}(\eta) + e^{j\eta s} I_{1+}(\eta) = Y_c(\eta) [V_{1o}(\eta)] \quad (4)$$

$$I_{2\pi+}(-\eta) - I_{2o}(\eta) - e^{j\eta s} I_{2+}(\eta) = Y_c(\eta) [V_{2o}(\eta)] \quad (5)$$

with  $Y_c(\eta) = \xi(\eta) / k Z_o$ ,  $\xi(\eta) = \sqrt{k^2 - \eta^2}$ .

By using the alterative unknowns

$$\begin{aligned} V_{1\pi o}(\eta) &= e^{j\eta s} V_{1o}(-\eta), \quad V_{2\pi o}(\eta) = e^{j\eta s} V_{2o}(-\eta), \\ I_{1\pi o}(\eta) &= e^{j\eta s} I_{1o}(-\eta), \quad I_{2\pi o}(\eta) = e^{j\eta s} I_{2o}(-\eta) \end{aligned} \quad (6)$$

in (4)-(5) we get two further equations and substituting  $\eta$  with  $-\eta$  we obtain a system of 8 equations with the unknowns (2),(3),(6) evaluated in  $\eta$  and  $-\eta$ .

To complete the WH formulation of the slit problem we need to apply the Green function's function procedure [7]-[9] in the central dielectric rectangular region. Starting from the wave equations and applying the Fourier transform

$$\tilde{E}_{zo}(\alpha, y) = \int_0^s E_z(x, y) e^{j\alpha x} dx \quad (7)$$

we apply the Green's function procedure to get the solution of the second order equation constituted of the particular integral plus the homogenous solution. The imposition of boundary conditions at  $y=0, d$  and the derivation of the Fourier transform of  $H_x$  in  $0 < x < s$  at  $y=0, d$  yields two incomplete equations that relates  $I_{1o}(\eta)$ ,  $I_{2o}(\eta)$  to  $V_{1o}(\eta)$ ,  $V_{2o}(\eta)$  plus particular integrals. The incompleteness is due to the presence of the particular integrands that are represented in explicit form using

Mittag-Leffler's theorem and Cauchy representation formula [8]-[9]. These two equations of the central regions are doubled substituting  $\eta$  with  $-\eta$  and using the unknowns (6). The resulting system of equations allows to compute all the unknowns reported in (2),(3),(6).

The completed WH representation can be semi-analytically solved using the Fredholm Factorization [6], [10]-[11].

### III. SOLUTION OF THE PROBLEMS

The adopted procedure reduces the WH equations to a system of Fredholm integral equations of second kind where, after mathematical manipulations, the four unknowns are the spectral "voltage" quantities (2), first line of (6).

Once solved the problem in terms of voltage spectra, via asymptotics we get diffraction coefficients and total fields of the problem for plane wave illumination. The procedure is going to be checked by comparing the numerical results with the current literature reported in the references.

Further details on the formulation, numerical validations and results will be shown during the presentation.

### ACKNOWLEDGMENT

This work was supported by the Italian Ministry of University and Research under PRIN Grant 2017NT5W7Z GREEN TAGS.

### REFERENCES

- [1] F. L. Neerhoff and G. Mur, "Diffraction of a plane electromagnetic wave by a slit in a thick screen placed between two different media," *Appl. Sci. Res.*, vol. 28, no. 1, pp. 73-88, Jul. 1973.
- [2] D. T. Auckland and R. F. Harrington, "A nonmodal formulation for electromagnetic transmission through a filled slot of arbitrary cross section in a thick conducting screen," *IEEE Trans. Microw. Theory Techn.*, vol. MTT-28, no. 6, pp. 548-555, Jun. 1980.
- [3] H. J. Eom, *Wave Scattering Theory: A Series Approach Based on the Fourier Transformation*. Berlin, Germany: Springer-Verlag, 2001.
- [4] A. H. Haddab and E. F. Kuester, "Extraordinary Transmission Through a Single Dielectric-Loaded Slot in a Thick Metallic Shield," in *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 4, pp. 1846-1853, April 2018.
- [5] H. Shirai, M. Shimizu and R. Sato, "Hybrid Ray-Mode Analysis of E-Polarized Plane Wave Diffraction by a Thick Slit," in *IEEE Transactions on Antennas and Propagation*, vol. 64, no. 11, pp. 4828-4835, Nov. 2016.
- [6] V.G. Daniele, R.S. Zich, *The Wiener Hopf method in Electromagnetics*, Scitech Publishing, 2014
- [7] B. Friedman, *Principles and Techniques of Applied Mathematics*, New York, NY: John Wiley & Sons, 1956, Ch. 3
- [8] V. Daniele, G. Lombardi and R. S. Zich, "Radiation and Scattering of an Arbitrarily Flanged Dielectric-Loaded Waveguide," in *IEEE Transactions on Antennas and Propagation*, vol. 67, no. 12, pp. 7569-7584, Dec. 2019.
- [9] V.G. Daniele, G. Lombardi, R.S. Zich, "The Semi-infinite Grounded Slab Illuminated by an Electromagnetic Plane Wave: The Wiener-Hopf Solution," *IEEE Access*, to be submitted, 2021
- [10] V.G. Daniele, G. Lombardi, "Fredholm factorization of Wiener-Hopf scalar and matrix kernels," *Radio Sci.*, 42: RS6S01, pp. 1-19, 2007
- [11] V.G. Daniele, G. Lombardi, R.S. Zich, "The scattering of electromagnetic waves by two opposite staggered perfectly electrically conducting half-planes," *Wave Motion*, 83, pp. 241-263, 2018