

Exploring Algebraic Preconditioning of EFIE Matrices Arising from Higher Order Additive Singular Bases

Original

Exploring Algebraic Preconditioning of EFIE Matrices Arising from Higher Order Additive Singular Bases / Carpentieri, B., Graglia, R.D., Petri, P., Tavelli, M.. - In: IEEE ANTENNAS AND WIRELESS PROPAGATION LETTERS. - ISSN 1536-1225. - 24:6(2025), pp. 1507-1511. [10.1109/lawp.2025.3541449]

Availability:

This version is available at: 11583/2997557 since: 2025-02-17T13:27:31Z

Publisher:

IEEE

Published

DOI:10.1109/lawp.2025.3541449

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2025 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Exploring Algebraic Preconditioning of EFIE Matrices Arising from Higher Order Additive Singular Bases

Bruno Carpentieri, Roberto D. Graglia, *IEEE, Life Fellow*, Paolo Petrini, and Maurizio Tavelli

Abstract—Currently there are no operator-dependent preconditioners (for example of the Calderón type) to handle matrices obtained using high-order singular vector bases. So this letter has a dual purpose. The first is to show that the electric field integral equation (EFIE) discretized by high-order singular bases can be quickly solved iteratively using special general-purpose algebraic preconditioners. The second is to demonstrate that the results obtained with the fast solver have the same accuracy as those obtained using classical direct solution methods. The algebraic preconditioner specifically considered here has been used elsewhere to efficiently solve problems with several million unknowns. Thus, in light of the dual purpose and without loss of generality, we use as benchmarks medium-sized test problems involving singular induced currents because, for these problems, the preconditioned solutions can be compared with those obtained by direct methods, which are notoriously unsuitable for solving very large, ill-conditioned problems. In particular, to demonstrate that our approach correctly models the singular behavior of fields in the near-field region, we report several numerical results for current components induced by plane waves on infinitely thin flat plates. On the edges of these plates the current component parallel to the edges can be unlimited (i.e. going to infinity), while the component normal to the edges must vanish. This behavior is correctly modeled by our singular bases when necessary and is not corrupted by the fast solver, which demonstrates the effectiveness and robustness of the singular bases and the preconditioner used.

Index Terms—Integral equations, method of moments, higher order vector elements, preconditioners, fast solvers.

I. INTRODUCTION

High-order additive singular bases for the electromagnetic (EM) analysis of three-dimensional metallic structures with the method of moments (MoM) improve the precision and convergence of the numerical solution, in particular when the induced current is unbounded near edges or corners [1]– [7].

Received January 13, 2025; accepted February 6, 2025.

B. Carpentieri and M. Tavelli are with the GNCS INdAM group, Free University of Bozen-Bolzano, 39100 Bolzano, Italy (e-mail: bruno.carpentieri@unibz.it; maurizio.tavelli@unibz.it).

R.D. Graglia and P. Petrini are with the Dipartimento di Elettronica e Telecomunicazioni (DET), Politecnico di Torino, 10129 Turin, Italy (e-mail: roberto.graglia@polito.it; paolo.petrini@polito.it).

The work of B. Carpentieri was supported by the Free University of Bozen-Bolzano (IN200Z SmartPrint) and partially funded by the INdAM-GNCS project CUP_E53C22001930001.

The work of R.D. Graglia and P. Petrini was supported by the European Union - Next Generation EU under the Italian National Recovery and Resilience Plan (NRRP), Mission 4, Component 2, Investment 1.3, CUP E13C22001870001, partnership on “Telecommunications of the Future” (PE00000001 – program “RESTART”), and CUP E13C22000990001, partnership on “Multiscale modeling and Engineering Applications” (program “HPC”).

In addition to reducing the number of unknowns needed to achieve a given accuracy, high-order singular basis functions eliminate the need for mesh refinement to estimate error, since this can be done by increasing the order of the used base; more importantly, they allow the use of p -adaptive techniques that increase the base’s order locally, where suggested by the error estimation code. Nevertheless, when studying large structures, the computation time needed to solve the system of equations in the traditional way is usually greater than the computation time needed to fill the system matrix, even if parallel computers are used (let’s say it is sufficient to have more than about 10,000 unknowns). In these cases, whatever the base used, it is necessary to resort to rapid iterative solution techniques, which require appropriate preconditioners. There are quite well-established operator-dependent preconditioning techniques suitable for using *polynomial* bases, such as the Calderón preconditioner for RWG bases [8]– [14]; however, these do not seem to be usable for bases involving singular functions or polynomial (i.e., non-singular) bases of locally varying order. In this regard, when studying structures with sharp edges and corners, the only alternative to using much denser meshes near the edges and basis functions of the lowest possible order, such as rooftop and RWG functions, is to introduce singular additive basis functions along the edges, which does not require the use of dense meshes and not even mesh refinement [1]. The lack of results on preconditioners for EFIE systems obtained with singular basis functions is also due to the available EM fast-solvers that typically use low-order basis functions (e.g. RWG basis functions) despite requiring a very large number of cells and extensive use of parallel computers to study non-smooth large bodies.

For these reasons this paper considers *purely algebraic* preconditioners such as the one summarized in Section II below, to show that the quality of the results obtained using singular basis functions does not deteriorate due to the preconditioner and/or the iterative solution methods adopted. This study is logically preparatory to the parallelization (still in progress) of the code that calculates the coefficients of the system matrix, which are very complicated MoM integrals with singular kernel, singular basis functions and singular testing functions (as we use Galerkin’s testing method) [5]– [7]. Also, this paper does not present a “*new*” preconditioner, because the algebraic preconditioner specifically considered in Section II has been shown elsewhere to be able to efficiently handle problems with several million unknowns [15]–[18]. We could as well consider other algebraic preconditioners [19]–

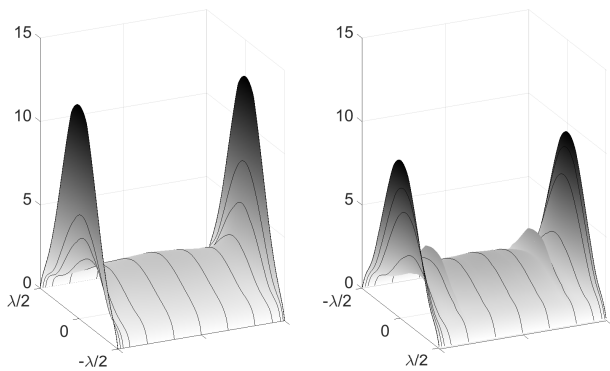


Fig. 1. $1\lambda \times 1\lambda$ square plate on the $z = 0$ plane. Magnitude of the (copolar) current component J_x induced by a normally incident plane wave with $H_y = 1$ A/m. The quality of the results at left obtained with the singular base of order $p = 2, s = 1, m = 0$ is definitely superior to that obtained with the regular base of order $p = 2$ (at right). Note that the higher quality of the results is achieved with a relatively small increase in the number of unknowns [5]. In fact, the number of degrees of freedom is 1,740 and 1,816 for the regular and singular base, respectively.

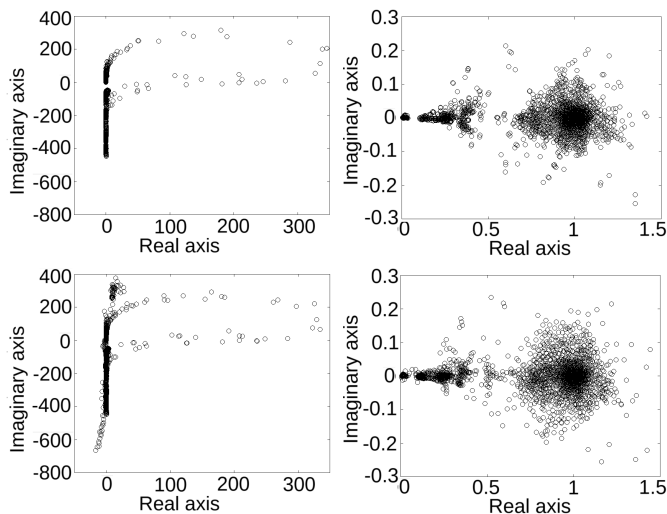


Fig. 2. Spectra of the MoM matrix before (at left) and after preconditioning (at right) for the case illustrated in Fig. 1. The top figures are obtained using a purely polynomial base, the bottom ones with a singular base. Note that the scales used in the right column are dramatically different from the left.

[22], which we do not do here for brevity. That said, Section III presents some results for test problems involving sharp-edged structures, focusing on medium-sized problems because direct solution methods, whose results we take as benchmarks, are unsuitable for solving very large and ill-conditioned problems. Preliminary results of this work have been presented in [23].

II. MATRIX FAST-SOLVER

We solve the dense linear system arising from MoM discretization of the pertinent integral equation using the generalized minimum residual (GMRES) iterative Krylov subspace solver [24], [25]. A Krylov method solves an $n \times n$ matrix problem in $N_{\text{iter}} \mathcal{O}(\text{M-V})$ flops per right-hand side, where M-V indicates the matrix-vector product operation, $\mathcal{O}(\text{M-V})$ represents the computational cost of the M-V product operation,

and N_{iter} is the number of iterations required to achieve a certain solution accuracy, depending on the characteristics of the integral formulation and on the problem geometry. Combined with fast algorithms for the M-V multiplication, such as MLFMA [26]–[28], panel clustering [29] and \mathcal{H} -matrices [30]–[32], iterative solvers can overcome the memory constraints of direct methods for solving dense linear systems.

The number of iterations N_{iter} can be significantly reduced by *preconditioning*, which transforms the initial linear system

$$Ax = b \quad (1)$$

into an equivalent one with a well clustered spectrum around point one of the complex plane and guarantees rapid convergence [33], [34]. The preconditioned system has the form

$$MAx = Mb \quad (2)$$

or

$$AMy = b, \text{ with } x = My \quad (3)$$

depending on whether preconditioning from the left or the right. (We usually do preconditioning using (3)). Preconditioning plays a crucial role in the iterative solution process, particularly for certain integral formulations like EFIE, in which the number of iterations required by Krylov solvers can scale as $\mathcal{O}(n^{0.5})$. The development of efficient, inherently parallel and scalable preconditioners for boundary integral equations is an important research topic; see, e.g., [35] and references therein.

We consider purely algebraic preconditioning methods that compute matrix M only using the coefficient matrix of system (1). Algebraic preconditioners can be applied to various integral operators and complex geometries by changing a few parameters, although they may not be the optimal method for every case. We compute the preconditioner as the sparse matrix M that minimizes the Frobenius-norm of the error matrix

$$\|I - \hat{A}M\|_F^2 = \sum_{j=1}^n \|e_j - \hat{A}m_{\bullet j}\|_2^2, \quad (4)$$

where \hat{A} is a sparse approximation of A which incorporates the most relevant contribution to the singular integrals, e_j is the j th vector of the standard basis of \mathbb{C}^n and $m_{\bullet j}$ is the column vector representing the j th column of M . A similar relation can be established when left preconditioning is used [15]. In this study, the sparsity pattern of \hat{A} is predetermined by selecting the k largest entries in each column of A [36]. The results in the next section were obtained with a system equipped with an Intel i9 12900ks and an NVIDIA RTX A4000.

III. NUMERICAL EXPERIMENTS

First, let us consider the results for the square plate of size $(1\lambda \times 1\lambda)$ already studied in [5]. By solving this problem with singular and regular bases (this time with 10×10 square cells) we obtain the results of Fig. 1. Observing the spectra of the MoM matrices, we notice that eigenvalues with a negative real part appear when singular additive basis functions are used (Fig. 2 at bottom left), while these are not

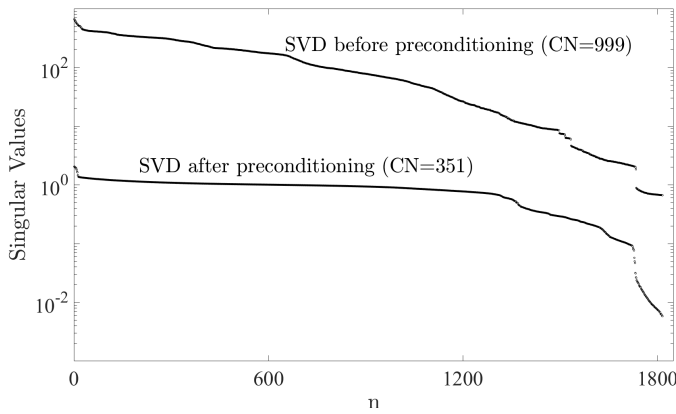


Fig. 3. SVD values before and after preconditioning for the square plate of Fig. 1 obtained using the singular base [2,1,0] and 1.816 DOFs. The condition number CN is the ratio of the maximum to minimum singular value.

there when purely polynomial bases are used (Fig. 2 at top left). Since the preconditioners try to cluster the eigenvalues near the (1,0) point of the complex plane, it is possible that some get trapped near the origin. This is more likely to happen if there are eigenvalues with a large negative real part and, as said, the EFIE system matrix has eigenvalues with a negative real part when using singular basis functions. Furthermore, eigenvalues close to 0, or scattered, require a large number of iterations. These problems are solved by using the preconditioner proposed above in Section II, as shown in Fig. 2 at right.

Fig. 3 shows the SVD values before and after preconditioning obtained by studying the test case of Fig. 1. In this experiment, the preconditioner M exhibits a degree of sparsity that is below 3% in comparison to A . Using the GMRES method, the initial residual norm is reduced by six orders of magnitude after 74 iterations when using the regular base, while 108 are needed when using the singular base. Convergence worsens when using the singular base because it leads to a more scattered spectrum than that obtained using the regular base, as can be seen in Fig. 2.

Having clarified once again the greater accuracy obtainable using additive singular bases (*cfr.* [1]- [6]), we now consider in Fig. 4 three other test cases relating to rectangular plates of larger dimensions, solved with the bases of order $[p, s, m]$ discussed in [5]. For these and other cases, Table I reports the size in wavelengths of the plate, the base's order, the size of the system matrix A , and the percentage of singular basis functions over the total number of basis functions. All matrices are represented using double precision complex values. In simulations involving dense coefficient matrices, constructing a preconditioner directly from the full matrix A is computationally expensive, especially as the problem size increases. To mitigate this, as suggested in [36], a sparse approximation \hat{A} of the A matrix can be used, significantly reducing memory usage and execution time. While this approach may degrade the preconditioner's quality in general cases, in boundary element method (BEM) problems, even sparse approximations often preserve the most relevant contributions

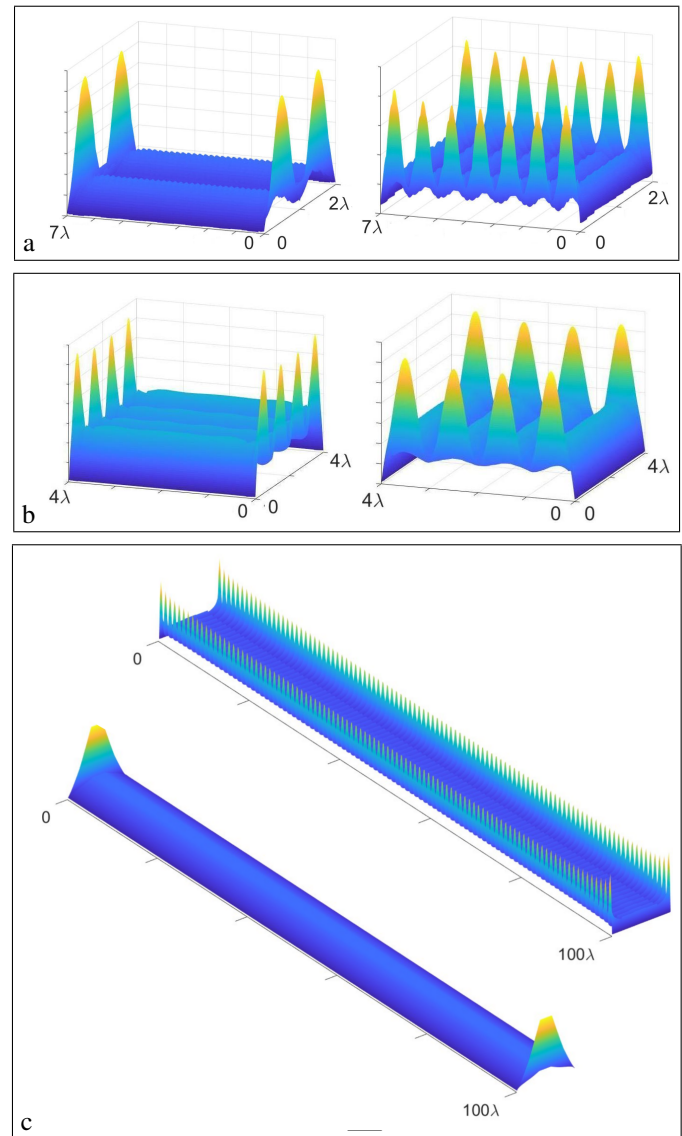


Fig. 4. Magnitude of the copolar current component induced on rectangular plates of different dimensions by a plane wave normally incident on the plate with magnetic field $H = 1$ A/m. The results for a plate of size $(7\lambda \times 2\lambda)$, $(4\lambda \times 4\lambda)$, and $(100\lambda \times 1\lambda)$ are shown in subfigures (a), (b) and (c), respectively. The results on the left of these subfigures are for the incident magnetic field H parallel to the long side of the plate, those on the right for H parallel to the short side. Figure a, b and c, were obtained with bases of order [2,1,0], [0,1,0] and [0,1,0], respectively (see also Table I).

to singular integrals, ensuring effectiveness. The performance of the preconditioner depends on balancing the sparsity of both \hat{A} and M . Increasing the density of M improves convergence but incurs a nearly cubic increase in computational cost. A more efficient strategy is to allow the sparse approximation \hat{A} to have more non-zero entries than the preconditioner, which enhances the preconditioner's effectiveness without significantly increasing construction time. This is supported by the quadratic complexity of the QR factorization required to solve the least-squares problems involved in constructing M . Table I shows the sparsity ratios used for \hat{A} and M . Our experiments demonstrate that increasing the density of \hat{A} for a fixed preconditioner density accelerates convergence,

TABLE I
BENCHMARK PROBLEMS SOLVED USING A GPU-PARALLEL IMPLEMENTATION OF THE BLOCK VERSION OF GMRES (BGMRES) [39]

Cells' size	Base order $[p, s, m]$	Plate size	Matrix size	Singular DOFs	Blocks	Streams	Density of \hat{A} 10%		Density of \hat{A} 15%	
							M 2.5%	M 5%	M 5%	M 10%
$\lambda/5$	[0, 0, 0]	$8\lambda \times 8\lambda$	3,120	0%	5	5	85 (0.8s)	78 (0.8s)	75 (1.0s)	66 (0.7s)
		$10\lambda \times 10\lambda$	4,900	0%	5	5	84 (1.9s)	73 (1.6s)	71 (1.8s)	69 (1.6s)
		$100\lambda \times 1\lambda$	4,495	0%	5	5	118 (2.3s)	82 (1.5s)	82 (1.6s)	58 (1.1s)
	[0, 1, 0]	$8\lambda \times 8\lambda$	3,436	9.20%	4	4	88 (1.0s)	79 (0.9s)	76 (1.1s)	72 (0.9s)
		$10\lambda \times 10\lambda$	5,296	7.48%	4	4	88 (2.3s)	79 (2.1s)	77 (2.3s)	78 (2.4s)
		$100\lambda \times 1\lambda$	6,511	30.96%	17	17	142 (5.5s)	102 (3.8s)	102 (4.0s)	79 (3.0s)
[2, 1, 0]	$7\lambda \times 2\lambda$	6,341	2.8%	17	17	366 (14.3s)	312 (12.6s)	113 (4.0)	109 (4.1s)	
$\lambda/20$	[0, 1, 0]	$4\lambda \times 4\lambda$	13,276	4.8%	4	4	91 (14.3s)	77 (11.9s)	75 (12.0s)	66 (10.6s)

The columns on the right report the number of iterations and, in brackets, the GPU time spent to solve the linear system (1) using the CUDA version of the BGMRES solver to reduce the initial residual norm by six orders of magnitude, with restart parameter equal to 200, $maxiter = 2000$ and final tolerance $\epsilon = 10^{-10}$. The number of blocks and streams is set as in the Table. The data are obtained with matrices \hat{A} and M of different densities. (The density is the fraction of non-zero elements in percentage value.) The number of unknowns and the size of the linear system (i.e., the size of A , \hat{A} , and M) is given row by row in the 4th column of the Table. It depends on the size in wavelengths of the square cells used to mesh the plates (shown in the 1st column on the left), the order $[p, s, m]$ of the base used (2nd column), and the size in wavelengths of the plate (3rd column). The 5th column reports the percentage of singular basis functions used; i.e., the percentage of singular DOFs. The latter value increases as the perimeter in wavelengths of the flat plate increases and in fact, for the data in the Table, the maximum number of singular DOFs is reached for the rectangular plate $100\lambda \times 1\lambda$ studied with the base of order $[p, s, m] = [0, 1, 0]$ (recall that the bases with $s = 0$ do not contain singular basis functions). Despite the tests involve relatively small-sized problems, it is clear that the solution times obtained using the preconditioner are shorter than those required by the direct solution method. For example, five times shorter for the case with 13,276 unknowns, for which the direct solution takes 74.98 seconds (matrix filling time excluded). The values obtained with the base of order [0,0,0] are given only for comparison; in fact, with such a loose mesh, the error on the induced current obtained with the base of order [0,0,0] is too high.

while maintaining a sparse preconditioner significantly reduces overall CPU time. In these numerical experiments, the linear systems are solved with a parallel implementation of the block GMRES (BGMRES) algorithm [37] such as presented in [38], [39]. For the GPU algorithm, the number of streams and blocks is set as indicated in Table I. In all these experiments we solve simultaneously the problem for the x and the y component of (3) using the multi-RHS strategy, i.e. $N_b = 2$, we set the restart of the BGMRES solver to 200 and a final tolerance of $\epsilon = 10^{-10}$.

Finally, it is interesting to note from Table I how the solution time when using the preconditioner is five times less than that required by the direct solution method, despite using only 13,276 unknowns. Furthermore, as can be seen for example from Fig. 5 relative to the $4\lambda \times 4\lambda$ plate, without preconditioning the iterative method does not achieve the required precision (i.e. it does not converge).

IV. CONCLUSION

Calderón-type preconditioners are not able to handle problems using singular bases. This letter shows that the electric field integral equation discretized by high-order singular bases can be quickly solved iteratively using a special general-purpose algebraic preconditioner. The results thus obtained have the same accuracy as those obtained using classical direct solution methods, which are unsuitable for solving large problems. To demonstrate that our numerical approach does not influence the correct behavior in the near-field region, the letter reports numerical results for the current induced by plane waves on infinitely thin flat plates. In fact, the current density induced on infinitely thin plates can be unbounded (tend to infinity) at the edges of the plates and should be modeled with singular basis functions. It has been seen that in regions where the current is unbounded the relative distance (i.e. the relative

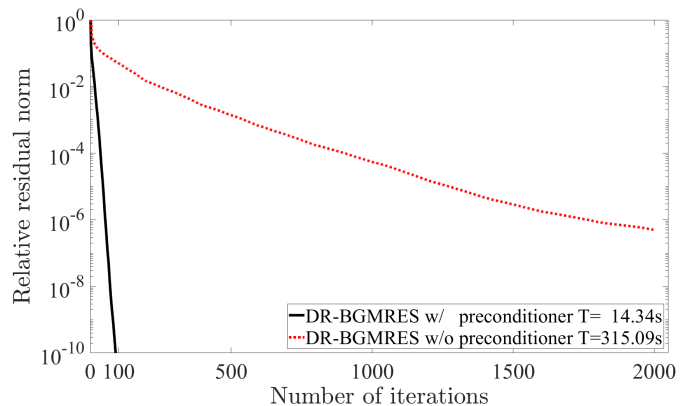


Fig. 5. Convergence history for solving the $(4\lambda \times 4\lambda)$ plate problem of Fig. 4b with 13,276 DOFs, and densities of \hat{A} and M of 10% and 2.5%, respectively.

difference) between the numerical solutions obtained with the fast solver and those obtained with the traditional solvers is always less than 10^{-8} . Similarly, in the regions of bounded currents, the difference between the solutions is always less than 10^{-8} in absolute value. The code used here for computing MoM matrices is being parallelized. Once that is done, we will use higher-order singular bases to tackle larger problems, explore other preconditioners, and combine everything into fast integral solvers.

REFERENCES

- [1] R. D. Graglia, and A. F. Peterson, *Higher-order Techniques in Computational Electromagnetics*, SciTech Publishing/IET, Edison, NJ, 2016.
- [2] G. Lombardi and R. D. Graglia, "Modeling Junctions in Sharp Edge Conducting Structures With Higher Order Method of Moments," in IEEE

- Transactions on Antennas and Propagation, vol. 62, no. 11, pp. 5723-5731, Nov. 2014, doi: 10.1109/TAP.2014.2355855.
- [3] A. F. Peterson and R. D. Graglia, "Basis Functions for Vertex, Edge, and Corner Singularities: A Review," in *IEEE Journal on Multiscale and Multiphysics Computational Techniques*, vol. 1, pp. 161-175, 2016, doi: 10.1109/JMMCT.2017.2650962.
 - [4] R. D. Graglia, A. F. Peterson and P. Petrini, "Computation of EFIE Matrix Entries With Singular Basis Functions," in *IEEE Transactions on Antennas and Propagation*, vol. 66, no. 11, pp. 6217-6224, Nov. 2018, doi: 10.1109/TAP.2018.2868979.
 - [5] R. D. Graglia, A. F. Peterson, and P. Petrini, "Hierarchical divergence conforming bases for edge singularities in quadrilateral cells," *IEEE Trans. Antennas Propagat.*, vol. 66, no. 11, Nov. 2018, pp. 6191-6201, doi: 10.1109/TAP.2018.2854298
 - [6] R. D. Graglia, A. F. Peterson and P. Petrini, "Hierarchical Divergence Conforming Bases for Tip Singularities in Quadrilateral Cells," in *IEEE Transactions on Antennas and Propagation*, vol. 68, no. 12, pp. 7986-7994, Dec. 2020, doi: 10.1109/TAP.2020.3026900.
 - [7] R. D. Graglia, A. F. Peterson, and P. Petrini, "Integral transformations to handle corner function singularities," *IEEE Trans. Antennas Propagat.*, vol. 68, no. 12, Dec. 2020, pp. 7995-8008, DOI: 10.1109/TAP.2020.3026914
 - [8] S. H. Christiansen, and J.-C. Nédélec, "A preconditioner for the electric field integral equation based on Calderón formulas," *SIAM J. Numer. Anal.*, vol. 40, n. 3, pp. 1100-1135, 2002. doi: 10.1137/S0036142901388731
 - [9] F. P. Andriulli *et al.*, "A Multiplicative Calderon Preconditioner for the Electric Field Integral Equation," *IEEE Transactions on Antennas and Propagation*, vol. 56, no. 8, pp. 2398-2412, Aug. 2008, doi: 10.1109/TAP.2008.926788.
 - [10] F. Valdés, F.P. Andriulli, K. Cools and E. Michielssen, "High-order Div- and Quasi Curl-Conforming Basis Functions for Calderón Multiplicative Preconditioning of the EFIE," *IEEE Transactions on Antennas and Propagation*, vol. 59, no. 4, pp. 1321-1337, April 2011, doi: 10.1109/TAP.2011.2109692
 - [11] Y. Boubendir, O. Bruno, D. Levadoux, and C. Turc, "Integral equations requiring small numbers of Krylov-subspace iterations for two-dimensional smooth penetrable scattering problems," *Appl. Numer. Math.*, Vol. 95, pp. 82-98, 2015. doi: 10.1016/j.apnum.2015.01.005.
 - [12] A. Merlini, S. Adrian, A. Dély, and F. P. Andriulli, "Calderón preconditioners for electromagnetic integral equations," in *Integral Equations for Real-Life Multiscale Electromagnetic Problems*. Institution of Engineering and Technology, December 2023, pp. 277-306. [Online]. Available: <https://hal.science/hal-04405436>
 - [13] B. Hofmann, M. Mirmohammadsadeghi, T.F. Eibert, F.P. Andriulli and S.B. Adrian, "Low-Frequency Stabilization for the B-Spline-Based Isogeometric Discretization of the Electric Field Integral Equation," *IEEE Transactions on Antennas and Propagation*, vol. 72, no. 4, pp. 3558-3571, April 2024, doi: 10.1109/TAP.2024.3369393.
 - [14] J. Bourhis, D. Franzò, A. Merlini and F.P. Andriulli, "On a Novel Calderón Preconditioning Strategy Based on High-Order Quasi-Helmholtz Projectors," *2024 International Conference on Electromagnetics in Advanced Applications (ICEAA)*, Lisbon, Portugal, 2024, pp. 700-703, doi: 10.1109/ICEAA61917.2024.10701907.
 - [15] B. Carpentieri, I. Duff, L. Giraud, and G. Sylvand, "Combining fast multipole techniques and an approximate inverse preconditioner for large electromagnetism calculations," *SIAM J. Scientific Computing*, vol. 27, no. 3, pp. 774-792, 2005.
 - [16] X.-M. Sun, B. Li, X.-M. Pan, and X.-Q. Sheng, "Numerical calculation of extremely large reflector antenna using high-performance parallel MLFMA," in *2013 IEEE International Workshop on Electromagnetics, Applications and Student Innovation Competition*. IEEE, 2013, pp. 46-48.
 - [17] X.-M. Pan and X.-Q. Sheng, "An efficient parallel SAI preconditioner for multilevel fast multipole algorithm for scattering by extremely large complex targets," vol. 2009, no. 557 CP, 2009, p. 407 - 410.
 - [18] T. Malas and L. Gürel, "Accelerating the multilevel fast multipole algorithm with the sparse-approximate-inverse (SAI) preconditioning," *SIAM Journal on Scientific Computing*, vol. 31, no. 3, pp. 1968-1984, 2009.
 - [19] J. Lee, J. Zhang, and C.-C. Lu, "Incomplete LU preconditioning for large scale dense complex linear systems from electromagnetic wave scattering problems," *Journal of Computational Physics*, vol. 185, no. 1, pp. 158-175, 2003.
 - [20] B. Carpentieri and M. Bollhöfer, "Symmetric inverse-based multilevel ILU preconditioning for solving dense complex non-hermitian systems in electromagnetics," *Progress In Electromagnetics Research*, vol. 128, pp. 55-74, 2012.
 - [21] P. Coulier, H. Pouransari, and E. Darve, "The inverse fast multipole method: using a fast approximate direct solver as a preconditioner for dense linear systems," *SIAM Journal on Scientific Computing*, vol. 39, no. 3, pp. A761-A796, 2017.
 - [22] J. L. Yin Wang and J. Zhang, "A short survey on preconditioning techniques for large-scale dense complex linear systems in electromagnetics," *International Journal of Computer Mathematics*, vol. 84, no. 8, pp. 1211-1223, 2007.
 - [23] B. Carpentieri, R. D. Graglia, P. Petrini, and M. Tavelli, "Preconditioning of EFIE matrices when Using additive high-order singular bases," *Proc. of the 2024 IEEE Int. Symp. on Antennas and Propagation and ITNC-USNC-URSI Radio Science Meeting*, Firenze, Italy, 14-19 July, 2024.
 - [24] Y. Saad and M. H. Schultz, "GMRES: A generalized minimal residual algorithm for solving nonsymmetric linear systems," *SIAM Journal on scientific and statistical computing*, vol. 7, no. 3, pp. 856-869, 1986.
 - [25] Y. Saad, *Iterative methods for sparse linear systems*, 2nd ed. Philadelphia: SIAM, 2003.
 - [26] J. Song, C.-C. Lu, and W. C. Chew, "Multilevel fast multipole algorithm for electromagnetic scattering by large complex objects," *IEEE transactions on antennas and propagation*, vol. 45, no. 10, pp. 1488-1493, 1997.
 - [27] E. Darve and P. Havé, "Efficient fast multipole method for low-frequency scattering," *Journal of Computational Physics*, vol. 197, no. 1, pp. 341-363, 2004.
 - [28] O. Ergul and L. Gürel, *The multilevel fast multipole algorithm (MLFMA) for solving large-scale computational electromagnetics problems*. John Wiley & Sons, 2014.
 - [29] W. Hackbusch and Z. P. Nowak, "On the fast matrix multiplication in the boundary element method by panel clustering," *Numerische Mathematik*, vol. 54, no. 4, pp. 463-491, 1989.
 - [30] S. Börm, L. Grasedyck, and W. Hackbusch, "Introduction to hierarchical matrices with applications," *Engineering analysis with boundary elements*, vol. 27, no. 5, pp. 405-422, 2003.
 - [31] L. Grasedyck and W. Hackbusch, "Construction and arithmetics of H -matrices," *Computing*, vol. 70, pp. 295-334, 2003.
 - [32] M. Bebendorf, *Hierarchical matrices*. Springer, 2008.
 - [33] M. Benzi, "Preconditioning techniques for large linear systems: a survey," *Journal of computational Physics*, vol. 182, no. 2, pp. 418-477, 2002.
 - [34] K. Chen, *Matrix preconditioning techniques and applications*. Cambridge University Press, 2005, no. 19.
 - [35] B. Carpentieri, "Algebraic preconditioners for the Fast Multipole Method in electromagnetic scattering analysis from large structures: trends and problems," *Electronic Journal of Boundary Element*, vol. 7, no. 1, pp. 13-49, 2009.
 - [36] B. Carpentieri, I. Duff, and L. Giraud, "Sparse pattern selection strategies for robust Frobenius-norm minimization preconditioners in electromagnetism," *Numer. Linear Algebra Appl.*, vol. 7, no. 7-8, pp. 667-685, 2000.
 - [37] M. H. Gutknecht, "Block Krylov space methods for linear systems with multiple right-hand sides: an introduction," in *Modern mathematical models, methods and algorithms for real world systems*. Anshan, 2007, pp. 420-447.
 - [38] D.-L. Sun, B. Carpentieri, T.-Z. Huang, and Y.-F. Jing, "A spectrally preconditioned and initially deflated variant of the restarted block GMRES method for solving multiple right-hand sides linear systems," *International Journal of Mechanical Sciences*, vol. 144, pp. 775-787, 2018.
 - [39] B. Carpentieri, M. Tavelli, D.-L. Sun, T.-Z. Huang, and Y.-F. Jing, "Fast Iterative Solution of Multiple Right-Hand Sided MoM Linear Systems on CPUs and GPUs Computers," *IEEE Transactions on Microwave theory and techniques*, pp. 1-14, 2023.