

DMT vs PAM: an Experimental Comparison over VCSEL-MMF Links for Intra-Datacenter Connections

Original

DMT vs PAM: an Experimental Comparison over VCSEL-MMF Links for Intra-Datacenter Connections / Rosa Brusin, A. M.; Aquilino, F.; Pileri, D.; Nespola, A.; Forghieri, F.; Carena, A.. - ELETTRONICO. - (2025), pp. 1-4. (2025 European Conference on Optical Communications (ECOC) Copenhagen (Den) 28 September 2025 - 02 October 2025) [10.1109/ECOC66593.2025.11263289].

Availability:

This version is available at: 11583/3004743 since: 2025-12-22T14:10:49Z

Publisher:

IEEE

Published

DOI:10.1109/ECOC66593.2025.11263289

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2025 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

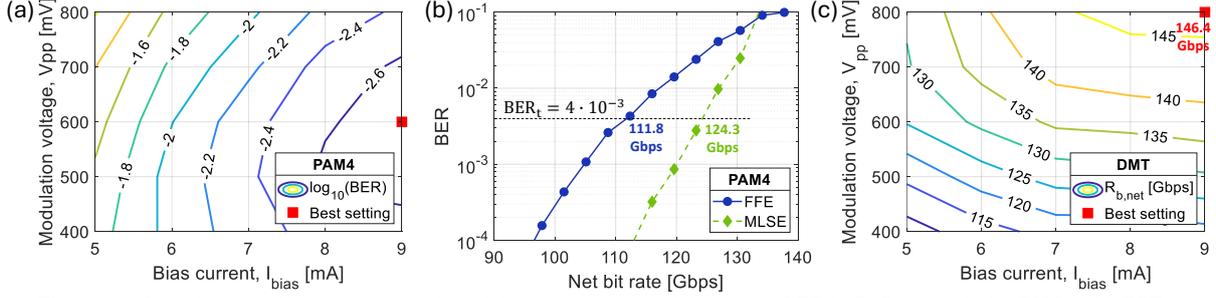


Fig. 2: (a) Optimization of bias current and modulation voltage to minimize the BER in B2B scenario for PAM4 with FFE at 120 Gbps, (b) determination of the maximum net bit rate at FEC threshold in B2B scenario for PAM4, and (c) optimization of bias current and modulation voltage to maximize the transmission rate in B2B scenario for DMT with 9 dB clipping ratio.

lows to fully exploit the already deployed datacenter infrastructures without substituting the legacy MMF links.

Experimental setup

The scheme of the experimental setup is illustrated in Fig. 1. Two configurations are possible: back-to-back (B2B) and transmission over a 90-m OM3 fiber. A fast Digital to Analog Converter (DAC) (AWG Keysight 92 GS/s, 32 GHz), connected to a 850 nm VCSEL with 26 GHz bandwidth via a bias-tee (Bias-T) and a 40 GHz RF probe, generates the PAM4 or DMT signal used to directly drive the VCSEL. A lens-mirror-lens system focuses the modulated light into the tested fiber or directly to the receiver (RX) chain if the B2B scenario is considered. The receiver section consists of an optical isolator, a photodiode (Thorlabs DX30BF) with 30 GHz bandwidth followed by a low noise transimpedance amplifier (TIA) with 50 GHz bandwidth. The received signals were sampled using a fast real-time oscilloscope (RTO) (Tektronix, 70 GHz -200 GS/s) and processed offline.

The digital signal processing (DSP) for the PAM4 signal includes adaptive equalization to mitigate bandwidth limitation effects and inter-symbol interference. Two different adaptive equalizer strategies are tested: a $T/2$ -spaced Feed Forward Equalizer (FFE) with 20 taps, optionally followed by a Maximum Likelihood Sequence Estimation Equalizer (MLSE) with 16 states. Then, error counting is performed to compute the bit error rate (BER). Hard-Decision Forward Error Correction (HD-FEC) is considered, in particular the Enhanced-FEC (E-FEC)^[11] with 10.35% FEC overhead and target bit error rate (BER_t) equal to $4 \cdot 10^{-3}$.

Regarding the DMT, the frequency spectrum is divided into 1024 orthogonal subcarriers; only 511 of them are modulated to create a real-valued time-domain signal. The cyclic prefix is fixed to 16 samples, while the clipping ratio has been optimized. In this analysis, we implement both rate-adaptive (RA) and margin-adaptive (MA) DMT based on the Levin-Campello (LC)^{[12],[13]} algorithm, optimized to operate at $\text{BER}_t = 4 \cdot 10^{-3}$. Initially, a training

quadrature phase shift keying (QPSK) sequence is transmitted to estimate the per-subcarrier signal-to-noise ratio (SNR). Then, bit and power loading are performed to optimize the bit allocation and the relative power on each subcarrier, according to the evaluated SNR and the allocation strategy. For the RA strategy, the bit rate is maximized, up to the point where the worst-performing subcarrier reaches the BER_t . For the MA strategy, instead, the bit rate is fixed. A per-subcarrier SNR margin is defined, which represents the SNR difference (in dB) from the FEC threshold. In particular, the strategy maximizes the SNR margin on the worst performing subcarrier (SNR_{ma}). If $\text{SNR}_{ma} \geq 0$, then the BER_t (at the fixed data rate) is guaranteed.

Experimental results

As a first step, for both PAM4 and DMT, the optimal working condition that maximizes the rate is determined in B2B scenario, sweeping the bias current (I_{bias}) and the modulation voltage (V_{pp}) in the ranges 5-9 mA and 400-800 mV, respectively. The values for the upper bounds have been selected to prevent the device from damage.

For PAM4, the optimization is done in two stages considering the FFE equalizer. Initially, the different configurations of (I_{bias}, V_{pp}) are tested transmitting at a fixed rate of 120 Gbps (108.8 Gbps net rate) to select the configuration that minimizes the BER. This is shown in Fig. 2(a), where the best setting, represented by the red square, is found for $I_{bias}=9$ mA and $V_{pp}=600$ mV. Although the optimal bias current coincides with the upper bound, meaning that a higher value could potentially improve the performance, we imposed limits in order to have the VCSEL working in a safer region. After that, for this best configuration of I_{bias} and V_{pp} , the system performance is analyzed at different bit rates. Fig. 2(b) reports the BER as a function of the net bit rate for the two equalizer strategies. The resulting maximum bit rates at the BER_t are 111.8 Gbps and 124.3 Gbps, respectively for FFE and MLSE. As expected, a higher bit rate is achieved with MLSE, as it is a more sophisticated equalizer than FFE.

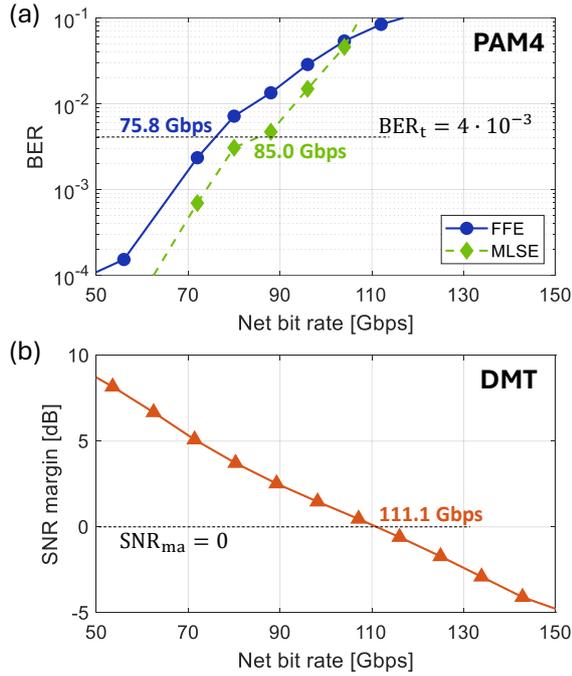


Fig. 3: Maximum net bit rate for transmission over a 90 m OM3 fiber in case of (a) PAM4 and (b) DMT.

Rate adaptive DMT is performed to define the best configuration of $(I_{\text{bias}}, V_{\text{pp}})$ in B2B. Jointly, the clipping ratio is optimized as well. Fig. 2(c), obtained for the optimal CR=9 dB, illustrates the bit rate achieved by the different configurations of bias current and modulation voltage, showing that a maximum net bit rate of 146.4 Gbps can be reached setting $I_{\text{bias}}=9$ mA and $V_{\text{pp}}=800$ mV. Also here, the upper bounds of I_{bias} and V_{pp} have been selected to avoid damaging the VCSEL.

Compared to PAM4, the best value of V_{pp} is higher for DMT. This is explained by the Gaussian shape of the time-domain DMT signal and the implementation of clipping, which allow to better exploit the swing of the device and have a higher OMA, improving the performance. Following this optimization, already in B2B, with DMT it is possible to transmit at a bit rate which is 17.8% higher than PAM4 with MLSE, as DMT is able to better counteract the limited bandwidth of the VCSEL.

A reduction of the maximum bit rates is expected when the OM3 fiber is inserted in the transmission chain. As a matter of fact, due to chromatic and modal group dispersion, the presence of the fiber induces a further bandwidth limitation to the system. The impact on the PAM4 signal is shown in Fig. 3(a): the maximum net bit rate at the FEC threshold is now 75.8 Gbps and 85.0 Gbps in case of FFE and MLSE, respectively, corresponding to a decrease of 32.2% and 31.6% with respect to the B2B case.

For the DMT, the maximum net bit rate is determined performing a margin adaptive DMT. This is shown in Fig. 3(b), where the SNR_{ma} is reported as a function of the net bit rate. The maximum

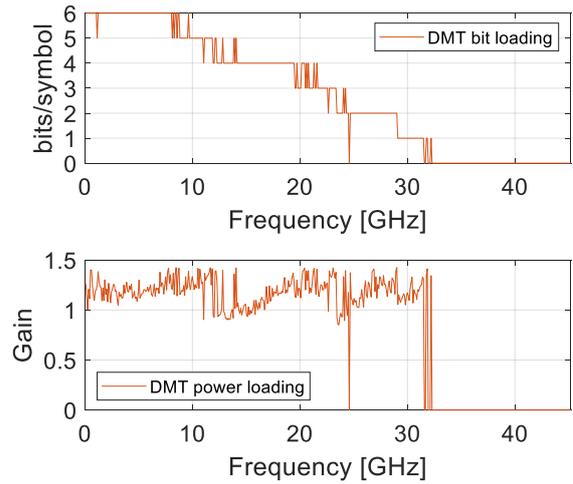


Fig. 4: Bit and power allocation given by the Levin-Campello algorithm for transmission at 111.1 Gbps over the 90 m OM3.

achievable bit rate, obtained for $\text{SNR}_{\text{ma}} = 0$ dB, is 111.1 Gbps, still a value higher than the PAM4 case. Compared to the B2B scenario, the bit rate reduction is 24.1%, lower than the $\sim 30\%$ obtained with PAM4. This is a direct consequence of the high adaptability of the DMT to the frequency response of the channel. For reference, the per-subcarrier bit and power allocation returned by the LC algorithm is reported in Fig. 4. From there we can see that larger quadrature amplitude modulation (QAM) constellations are allocated at lower frequencies. Being the system band-limited, at higher frequencies smaller QAM constellations are allocated. For frequencies above 32 GHz, all the subcarriers are turned off, due to the strong band limitation effect.

Conclusions

An experimental comparison between DMT and PAM4 was carried out in B2B condition and for propagation over a 90 m of OM3 MMF, typical of legacy intra-datacenter connections. For PAM4, we tested two different equalizers, FFE and MLSE. To maximize the transmission rates, a preliminary optimization of I_{bias} and V_{pp} was performed in B2B for both DMT and PAM4, achieving bit rates >100 Gbps. Interestingly, this optimization showed that DMT performs better for higher values of V_{pp} than PAM4. Instead, when the fiber is present, only the DMT is able to deliver net bit rates above 100 Gbps, more precisely 111.1 Gbps. This corresponds to a reduction of 24.1% with respect to the B2B case against the $\sim 30\%$ observed by PAM4, proving the ability of the DMT to adapt to the channel frequency response of the VCSEL-MMF link.

These results are in favor of the adoption of the DMT as transmission format for the next-generation intra-datacenter connections, for which transmissions at high bit rates are mainly limited by the VCSEL bandwidth and the frequency response of the MMF channel.

Acknowledgements

This work was supported by the CISCO Sponsored Research Agreement “BOOST 2025” and by the PhotoNext Center of Politecnico di Torino.

References

- [1] V. Bhatt, “On Continued Significance of Multimode Links in Data Centers”, *Journal of Lightwave Technology*, vol. 43, no. 4, pp. 1700–1707, 2025. DOI: 10.1109/JLT.2024.3471697.
- [2] M. R. Murty, J. Wang, S. Jiang, *et al.*, “Toward 200G per Lane VCSEL-based Multimode Links”, in *2024 Optical Fiber Communications Conference and Exhibition (OFC)*, 2024, pp. 1–3.
- [3] T. Zuo, T. Zhang, S. Zhang, and L. Liu, “850-nm VCSEL-Based Single-Lane 200-Gbps PAM-4 Transmission for Datacenter Intra-Connections”, *IEEE Photonics Technology Letters*, vol. 33, no. 18, pp. 1042–1045, 2021. DOI: 10.1109/LPT.2021.3076828.
- [4] C.-H. Cheng, W.-C. Lo, B. Su, C.-H. Wu, and G.-R. Lin, “Review of VCSELS for Complex Data-Format Transmission Beyond 100-Gbit/s”, *IEEE Photonics Journal*, vol. 13, no. 5, pp. 1–13, 2021. DOI: 10.1109/JPHOT.2021.3104647.
- [5] N. Ledentsov Jr., Ł. Chorchos, O. Y. Makarov, *et al.*, “Serial data transmission at 224 Gbit/s applying directly modulated 850 and 910 nm VCSELS”, *Electronics Letters*, vol. 57, no. 19, pp. 735–737, 2021. DOI: 10.1049/e112.12236.
- [6] J. M. Cioffi, “Lighting up copper [History of Communications]”, *IEEE Communications Magazine*, vol. 49, no. 5, pp. 30–43, 2011. DOI: 10.1109/MCOM.2011.5762795.
- [7] S. C. J. Lee, F. Breyer, S. Randel, *et al.*, “Discrete Multitone Modulation for Maximizing Transmission Rate in Step-Index Plastic Optical Fibers”, *Journal of Lightwave Technology*, vol. 27, no. 11, pp. 1503–1513, 2009. DOI: 10.1109/JLT.2009.2013480.
- [8] S. Randel, F. Breyer, S. C. J. Lee, and J. W. Walewski, “Advanced Modulation Schemes for Short-Range Optical Communications”, *IEEE Journal of Selected Topics in Quantum Electronics*, vol. 16, no. 5, pp. 1280–1289, 2010. DOI: 10.1109/JSTQE.2010.2040808.
- [9] D. Che, “Comparison between PAM and DMT in a 200-Gb/s IM-DD System Considering the Interaction between Bandwidth Limit and Peak Power Constraint at Transmitter”, in *2023 Optical Fiber Communications Conference and Exhibition (OFC)*, 2023, pp. 1–3. DOI: 10.1364/OFC.2023.W4E.4.
- [10] A. M. Rosa Brusin, D. Pileri, F. Aquilino, F. Forghieri, and A. Carena, “Comparing PAM and DMT for VCSELs-modulated Links over MMF”, in *Advanced Photonics Congress 2025*, Optica Publishing Group, 2025, SpTh3E.4.
- [11] P. Torres-Ferrera, G. Rizzelli, A. Nespola, *et al.*, “Statistical Analysis of 100 Gbps per Wavelength SWDM VCSEL-MMF Data Center Links on a Large Set of OM3 and OM4 Fibers”, *Journal of Lightwave Technology*, vol. 40, no. 4, pp. 1018–1026, 2022. DOI: 10.1109/JLT.2021.3129455.
- [12] J. Campello, “Practical bit loading for DMT”, in *1999 IEEE International Conference on Communications (Cat. No. 99CH36311)*, vol. 2, 1999, 801–805 vol.2. DOI: 10.1109/ICC.1999.765384.
- [13] H. Levin, “A complete and optimal data allocation method for practical discrete multitone systems”, in *GLOBECOM’01. IEEE Global Telecommunications Conference (Cat. No.01CH37270)*, vol. 1, 2001, 369–374 vol.1. DOI: 10.1109/GLOCOM.2001.965141.