POLITECNICO DI TORINO
Repository ISTITUZIONALE

H-Band Multilayer Waveguide Using Glide Symmetric Ebg

*Original*
H-Band Multilayer Waveguide Using Glide Symmetric Ebg / Martin Villar, J., Petek, M., Vasquez, J.T., He, Z.S., Vipiana, F.. - (2025), pp. 1-3. (19th European Conference on Antennas and Propagation, EuCAP 2025 Stockholm (Sve) 30 March 2025 - 04 April 2025) [10.23919/eucap63536.2025.10999729].

*Availability:*
This version is available at: 11583/3010839 since: 2026-09-03T08:21:29Z

*Publisher:*
IEEE

*Published*
DOI:10.23919/eucap63536.2025.10999729

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*
IEEE postprint/Author's Accepted Manuscript

©2025 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

09 November 2026

# H-band Multilayer Waveguide Using Glide Symmetric EBG

Jorge Martín-Villar*, Martin Petek*, Jorge Tobon Vasquez*, Zhongxia Simon He†‖, Francesca Vipiana*
*Dept. of Electronics and Telecommunications, Politecnico di Torino, Torino, Italy, jorge_martin@polito.it
†Sinowave, Götheborg, Sweden, simon@sinowave.se
‖School of Cyberspace Science and Technology, Beijing Institute of Technology, Beijing, China

***Abstract*—This work presents a fully metallic air-filled multilayer waveguide (MLW), that utilizes a glide symmetric unit cell as electromagnetic band-gap for improving manufacture tolerance. The proposed MLW is designed for the H-band, $220 - 330$ GHz, obtaining an insertion losses below $0.4$ dB. Additionally, the electromagnetic properties of the used unit cell, in particular its stopband attenuation, are investigated with the multimodal transfer matrix method, to better understand its physics.**

***Index Terms*—gap waveguides, glide symmetry, H-band, multilayer waveguide.**

## I. Introduction

The H-band ($220 - 330$ GHz) is reserved by the Federal Communications Commission (FCC) and the Body of European Regulators for Electronic Communications (BEREC) for applications such as high-resolution imaging, spectroscopy, and advanced communication systems. These applications leverage the unique properties of the H-band to provide high-resolution, non-intrusive, and highly sensitive measurements, making it a powerful tool in various scientific and industrial fields [1].

Due to the transition to higher frequencies, the dimensions of the elements are significantly reduced. This reduction necessitates a highly demanding manufacturing process in terms of accuracy, which in turn leads to higher manufacturing costs. Traditional printed circuit board (PCB) dielectric material exhibited high loss tangent factor at these frequencies [2]. Thus, air-filled waveguide structures are preferred; however, the dimension of such waveguide sturcture is also demanding in term of machining accuracy. To ease the tolerance of manufacturing, perfect magnetic conductor (PMC) are proposed to suppress unwanted leakage caused by manufacture errors. The PMC is usually implemented by a periodic structure, i.e. using gap waveguides [3]; however, this concept is hard to scale up to the H-band due to challenging of manufacture accuracy at sub-millimeter scale.

In this work, we present a multilayer waveguide, designed for H-band. In most literature, gap waveguides are implemented with two metallic plates, as e.g. in [4] and [5]. Here, instead, we make use of glide symmetric unit cells stacking several metallic layers. A glide symmetric unit cell is obtained after a translation by half a period and a mirroring of the initial one. Several previous works demonstrated that glide-symmetric structures possess a wide stopband (see e.g. [6]). The unit cell designed here is inspired by [7], that works at lower frequencies.

Moreover, the multi-gap structure unit cell stopband behavior is here studied in the H-band by means of the multimodal transfer matrix method (MMTMM) [8], [9]. With the MMTMM, we are able to obtain the complex propagation constant of modes in the analyzed periodic structure. The real propagation constants of modes are compared with the commercial CST ES software, but, to the best of our knowledge, the analysis of the attenuation in the stopband has not been published yet for a multi-gap structure.

## II. Multilayer Unit Cell Analisis

In this section the analysis of a unit cell built from several metallic layers is reported. The unit cell is shown in Fig. 1(a). The structure is composed of square holes that are mirrored and shifted by half a period, constructing a glide symmetric structure. The dimensions of the unit cell are reported in Table I. A top-down and side view with dimensions can be seen in Fig. 1(b) and (c).

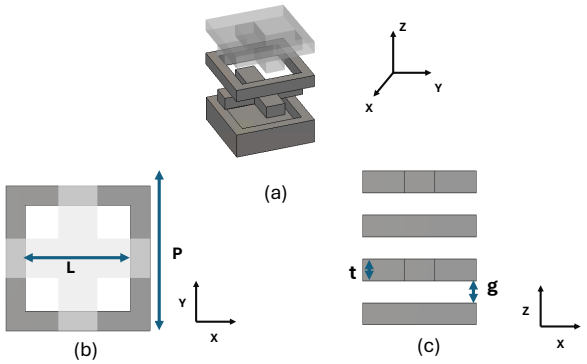


Fig. 1: (a) 3D Unit cell view. (b) Unit cell top-down view. (c) Unit cell side view.

In Fig. 2, the comparison between the real part of the dispersion diagram, obtained with CST ES and the MMTMM is presented. The stopband for this structure is between $184$ and $398$ GHz, covering the entire H-band. Moreover, an excellent agreement is obtained between MMTMM and CST ES.

TABLE I: Geometrical dimensions

| Unit cell | | |
|---|---|---|
| Parameter | Dimension ($\mu$m) | Description |
| L | 480 | Square hole width |
| P | 659 | Unit cell period |
| t | 200 | plate thickness |
| g | 10 | Gap between layers |
| Waveguide | | |
| W1 | 750 | Plate width |
| W2 | 860 | Waveguide port width |
| H | 432 | Port height |

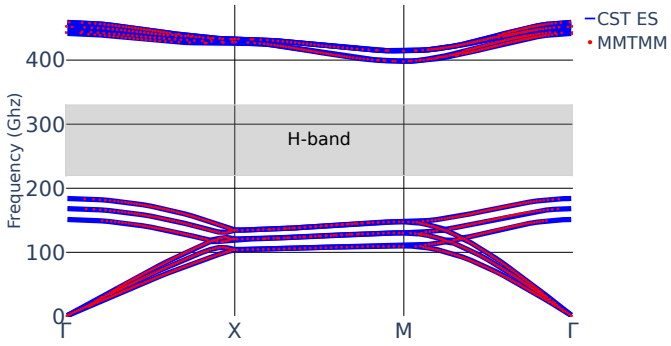


Fig. 2: Dispersion Diagram. The results of the CST ES (blue line) are compared with the MMTMM results (red dotted)

In Fig. 3, the minimum attenuation for path $\overline{\Gamma X}$ is shown. The attenuation in the $220-330$ GHz band is above $0.5$ and, in some cases, exceeds $1$. Such attenuation is sufficient to confine the wave in the groove a demonstrated in [10].

Considering the wide stopband and high attenuation in the band of interest, it is possible to use this unit cell as an EBG to build a waveguide for this band, as detailed in the next section.

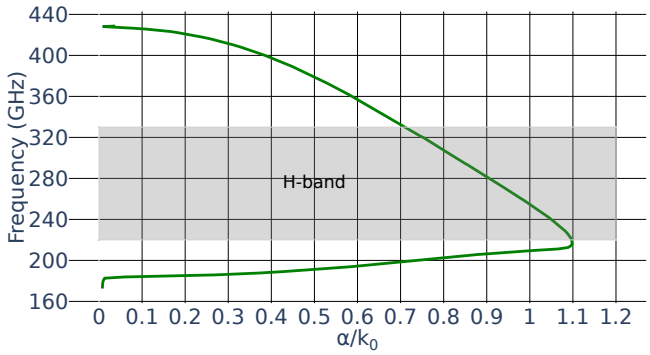


Fig. 3: Minimum attenuation in the $\overline{\Gamma X}$ path.

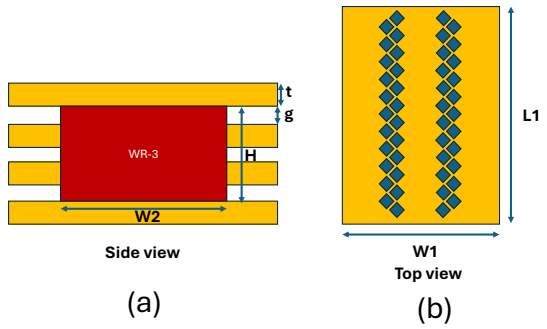


Fig. 4: MLW design. (a) Side view; (b) Top-down view.

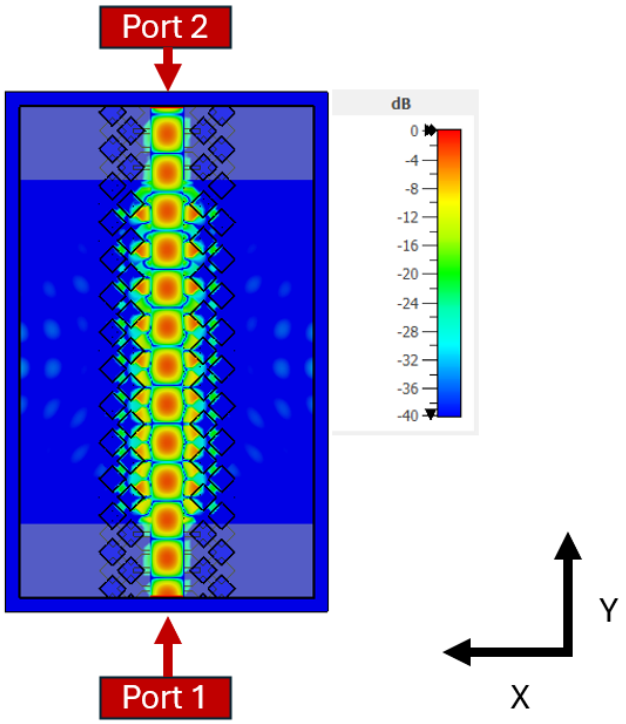


Fig. 5: E-field distribution at 230 GHz in the middle of a gap between layers

## III. H-band Gap Waveguide

The designed gap waveguide is illustrated in Fig. 4, with dimensions listed in Table I. The unit cell is oriented in a way to maximize the attenuation, as proposed in [10].

The simulations performed with the CST time domain solver with the metallic parts modeled as a lossy gold material. In Fig. 5 the E-field distribution at 230 GHz is reported. It can be notice that the E-field is confined in the groove. In order to excite a TE10 mode a rectangular waveguide is implemented as an input. This rectangular waveguide is done with a metallic block that can be notice in Fig. 5 close to the ports.

In Fig. 6(a), the amplitudes of the S-parameters at the waveguide ports are presented. The $|S_{11}|$ is below $-20$ dB for

the entire band. The $|S_{21}|$ is presented in Fig. 6(b): it is above $-0.4$ dB throught the whole band indicating that the wave is well-confined within the groove. Confirming previous results, the electric field is confined in the gap waveguide, indicating the EBG is well-designed.




(a)




(b)

Fig. 6: (a) Waveguide S-parameters in the H-band; (b) Enlargement of the $S_{21}$
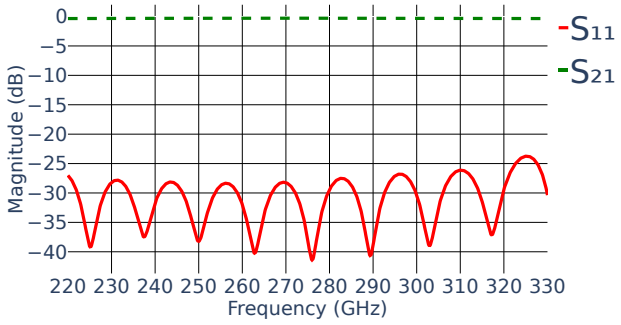
## IV. Conclusion and Perspectives

In this paper a glide symmetric unit cells, stacking several metallic layers, has been designed and used as EBG to realize a gap waveguide, working in the whole H-band. It suitably confines the wave in the groove, preventing additional losses due to leakage in the entire band. Moreover, the MMTMM is applied to the unit cell analysis, evaluating the stopband attenuation, high throughout the entire H-band.

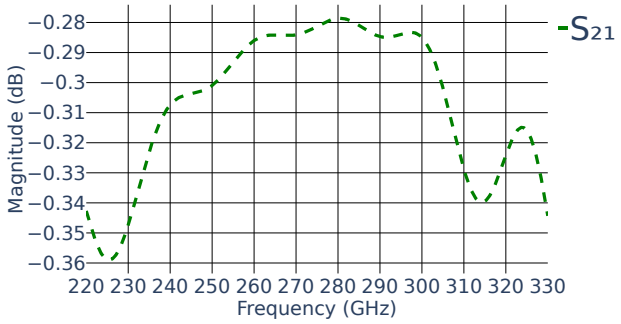In the future work, we aim to further analyze the performance of the unit cell with the MMTMM, including other sections of the dispersion diagram. Furthermore, we plan to utilize the MLW technology for radar design.

## Acknowledgment

This publication is based upon work supported by the Horizon Europe Research and Innovation Program and UKRI under the GENIUS Project, Marie Skłodowska-Curie Grant under Agreement 101072560. This work is also supported by Unite! – University Network for Innovation, Technology and Engineering.

## References

[1] D. Lockie and D. Peck, "High-data-rate millimeter-wave radios," *IEEE Microwave Magazine*, vol. 10, no. 5, pp. 75–83, 2009.

[2] W. T. Khan, A. C. Ulusoy, and J. Papapolymerou, "D-band characterization of co-planar wave guide and microstrip transmission lines on liquid crystal polymer," in *2013 IEEE 63rd Electronic Components and Technology Conference*, 2013, pp. 2304–2309.

[3] P.-S. Kildal, E. Alfonso, A. Valero-Nogueira, and E. Rajo-Iglesias, "Local metamaterial-based waveguides in gaps between parallel metal plates," *IEEE Antennas and Wireless Propagation Letters*, vol. 8, pp. 84–87, 2009.

[4] M. Ebrahimpouri, E. Rajo-Iglesias, Z. Sipus, and O. Quevedo-Teruel, "Cost-effective gap waveguide technology based on glide-symmetric holey ebg structures," *IEEE Transactions on Microwave Theory and Techniques*, vol. 66, no. 2, pp. 927–934, 2018.

[5] S. Li, Y. Yao, X. Cheng, and J. Yu, "Design of a dual-band filter based on the band gap waveguide," *Electronics*, vol. 13, no. 20, 2024. [Online]. Available: https://www.mdpi.com/2079-9292/13/20/3982

[6] O. Quevedo-Teruel, Q. Chen, F. Mesa, N. J. G. Fonseca, and G. Valerio, "On the benefits of glide symmetries for microwave devices," *IEEE Journal of Microwaves*, vol. 1, no. 1, pp. 457–469, 2021.

[7] A. Vosoogh, H. Zirath, and Z. S. He, "Novel air-filled waveguide transmission line based on multilayer thin metal plates," *IEEE Transactions on Terahertz Science and Technology*, vol. 9, no. 3, pp. 282–290, 2019.

[8] F. Mesa, G. Valerio, R. Rodríguez-Berral, and O. Quevedo-Teruel, "Simulation-assisted efficient computation of the dispersion diagram of periodic structures: A comprehensive overview with applications to filters, leaky-wave antennas and metasurfaces," *IEEE Antennas and Propagation Magazine*, vol. 63, no. 5, pp. 33–45, 2021.

[9] F. Giusti, Q. Chen, F. Mesa, M. Albani, and O. Quevedo-Teruel, "Efficient bloch analysis of general periodic structures with a linearized multimodal transfer-matrix approach," *IEEE Transactions on Antennas and Propagation*, vol. 70, no. 7, pp. 5555–5562, 2022.

[10] Q. Chen, F. Mesa, X. Yin, and O. Quevedo-Teruel, "Accurate characterization and design guidelines of glide-symmetric holey ebg," *IEEE Transactions on Microwave Theory and Techniques*, vol. 68, no. 12, pp. 4984–4994, 2020.

.