

MONITORING EXTREME ROCKFALL IMPACTS: A 10,000 KJ FULLSCALE TEST

Original

MONITORING EXTREME ROCKFALL IMPACTS: A 10,000 KJ FULLSCALE TEST / Vigna, S., Nadalini, M., Marchelli, M., De Biagi, V., Saltarin, S., Grimod, A., Peila, D.. - (2026). (Rocexs: the 8th Interdisciplinary Workshop on Rockfall Protection Grenoble (Fra) 7-9 July 2026).

Availability:

This version is available at: 11583/3012936 since: 2026-07-10T10:40:26Z

Publisher:

RocExs 2026

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

MONITORING EXTREME ROCKFALL IMPACTS: A 10,000 KJ FULL-SCALE TEST

Vigna Stefano¹, Matteo Nadalini¹, Maddalena Marchelli², Valerio De Biagi², Simone Saltarin², Alberto Grimod³, Daniele Peila²

¹ INCOFIL TECH SRL, Pergine Valsugana (TN), Italy

² Politecnico di Torino, Torino (TO), Italy

³ FRANCE MACCAFERRI S.A.S, Valence, France

OBJECTIVES

Rockfall events pose a severe hazard to infrastructures, residential areas, and human life in mountainous regions. Among passive mitigation measures, rockfall protection embankments (RPEs) are the most energy-dissipative structures, typically employed for impacts exceeding 10,000 kJ. Despite their relevance, full-scale impact tests on reinforced embankments (RE-RPEs) are extremely complex, and literature reports only a few cases, with maximum energies of 4,200 kJ [1] and 6,600 kJ [2]. These tests provided only macroscopic observations about the resisting mechanism, as all sensor measurements failed under impact conditions. This work presents an innovative full-scale impact test on a RE-RPE reinforced with the Terramesh system by Maccaferri at an unprecedented energy level of approximately 10,000 kJ developed in the framework of the PERSEIDI project (CUP: C39J21046780001) (Figure 1). The primary objective was to design and implement a sensor network capable of accurately recording key impact parameters under extreme conditions and to validate its effectiveness during the test.

MATERIALS AND METHODS

- 19-ton block launched at 33 m/s via cableway, impacting the embankment's upper layers.
- Abaqus/Explicit numerical model calibrated on prior tests to predict measurements and prevent signal saturation.
- 32-sensor network embedded in the embankment plus a block-mounted stand-alone system: accelerometers, load cells, strain gauges, and gyroscope.
- High-speed cameras synchronized with sensor data for full impact monitoring.

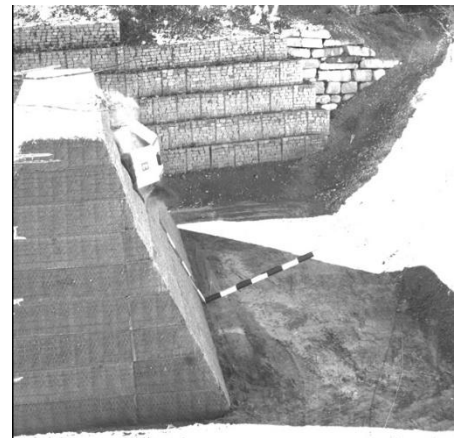


Figure 1: side view of the impacted embankment

MAIN RESULTS AND CONCLUSIONS

- Impact performed as designed, bringing the RE-RPE to near-collapse.
- Sensor network performed reliably under extreme conditions, delivering clean, accurate data.
- Peak block acceleration ~60 g; embankment and foundation load cell readings matched numerical predictions.
- First validated monitoring of a rockfall impact at 10,000 kJ: a new benchmark for RE-RPE research.

REFERENCES

- [1] Peila, D., Oggeri, C. & Castiglia, C. (2007), Ground reinforced embankments for rockfall protection: design and evaluation of full-scale tests. *Landslides*, 4, 255-265.
- [2] L. Mongiovi, M. Bighignoli, A. Danzi, and P. Recalcati (2014), An impact test on a reinforced earth embankment. In *Proceedings of Interdisciplinary workshop on rockfall protection-Rocexs*.