

Interactions between suspended kaolinite deposition and hyporheic exchange flux under losing and gaining flow conditions

Original

Interactions between suspended kaolinite deposition and hyporheic exchange flux under losing and gaining flow conditions / Fox, A., Packman, A.I., Boano, F., Phillips, C.B., Arnon, S.. - In: GEOPHYSICAL RESEARCH LETTERS. - ISSN 0094-8276. - ELETTRONICO. - 45:(2018), pp. 4077-4085. [10.1029/2018GL077951]

Availability:

This version is available at: 11583/2706555 since: 2021-03-29T16:21:11Z

Publisher:

Wiley

Published

DOI:10.1029/2018GL077951

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright
AGU

Da definire

(Article begins on next page)



RESEARCH LETTER

10.1029/2018GL077951

Key Points:

- Suspended particle deposition dynamics were different under losing flow conditions as compared to gaining flow conditions
- Pore clogging processes significantly reduce the hyporheic exchange flux for all tested flow conditions
- Experiments reveal that fine particle deposition and clogging causes increased subsurface lateral flow

Supporting Information:

- Supporting Information S1
- Table S1

Correspondence to:

A. Fox and S. Arnon,
aryehfoxxx@gmail.com;
sarnon@bgu.ac.il

Citation:

Fox, A., Packman, A. I., Boano, F., Phillips, C. B., & Arnon, S. (2018). Interactions between suspended kaolinite deposition and hyporheic exchange flux under losing and gaining flow conditions. *Geophysical Research Letters*, 45. <https://doi.org/10.1029/2018GL077951>

Received 16 MAR 2018

Accepted 25 APR 2018

Accepted article online 30 APR 2018

Interactions Between Suspended Kaolinite Deposition and Hyporheic Exchange Flux Under Losing and Gaining Flow Conditions

Aryeh Fox¹, Aaron I. Packman² , Fulvio Boano³ , Colin B. Phillips² , and Shai Arnon¹ 

¹Zuckerberg Institute for Water Research, The J. Blaustein Institutes for Desert Research, Ben-Gurion University of the Negev, Beersheba, Israel, ²Department of Civil and Environmental Engineering, Northwestern University, Evanston, IL, USA, ³Department of Environment, Land and Infrastructure Engineering, Politecnico di Torino, Turin, Italy

Abstract Fine particle deposition and streambed clogging affect many ecological and biogeochemical processes, but little is known about the effects of groundwater flow into and out of rivers on clogging. We evaluated the effects of losing and gaining flow on the deposition of suspended kaolinite clay particles in a sand streambed and the resulting changes in rates and patterns of hyporheic exchange flux (HEF). Observations of clay deposition from the water column, clay accumulation in the streambed sediments, and water exchange with the bed demonstrated that clay deposition in the bed substantially reduced both HEF and the size of the hyporheic zone. Clay deposition and HEF were strongly coupled, leading to rapid clogging in areas of water and clay influx into the bed. Local clogging diverted exchanged water laterally, producing clay deposit layers that reduced vertical hyporheic flow and favored horizontal flow. Under gaining conditions, HEF was spatially constrained by upwelling water, which focused clay deposition in a small region on the upstream side of each bed form. Because the area of inflow into the bed was smallest under gaining conditions, local clogging required less clay mass under gaining conditions than neutral or losing conditions. These results indicate that losing and gaining flow conditions need to be considered in assessments of hyporheic exchange, fine particle dynamics in streams, and streambed clogging and restoration.

Plain Language Summary Deposition and accumulation of excessive amounts of clay and silt is one of the common causes of degradation of river ecosystems. We conducted experiments to evaluate the effects of flow from the stream into the groundwater (losing stream) and from the groundwater into the stream (gaining stream) on the deposition of clay particles in a sand bed and the resulting changes in water exchange between the stream and the subsurface. We found that clay deposition substantially reduced water exchange due to clogging. Computer simulations of this process revealed that the locations of clogging are closely related to locations where water exchange occurred, but these patterns differed in losing and gaining streams. This type of clay accumulation influences water budgets in streams and reduces connectivity between streams, floodplains, and the underlying aquifers. Such a reduction in connectivity may negatively affect water resources, ecosystem functions, and river resilience. These results indicate that losing and gaining flow conditions in streams need to be considered in assessments of streambed clogging and river restoration.

1. Introduction

Suspended sediment is constantly moving in streams and rivers and is a vital part of their aquatic ecosystems (Brunke, 1999). While all types and sizes of sediment can be transported by rivers, suspended fine particles (<10 μm), which are often composed of clay particles or organic matter, are ubiquitously found throughout river networks even under low flow conditions. Land use changes have drastically increased the amount of fine particles that are traveling through streams and rivers (Wohl, 2015). Under certain conditions, fine particles can accumulate in streambeds within coarser material, a process that is commonly termed siltation or clogging (e.g., Brunke, 1999; Mathers et al., 2014; Wharton et al., 2017). Streambed clogging reduces the hydraulic conductivity (K_s) of the streambed affecting a myriad of processes including water fluxes into and out of the channel bed and banks (hyporheic exchange; Findlay, 1995; Rehg et al., 2005), the hydraulic connections between streams and groundwater (Veličković, 2005), biogeochemical processes (Mendoza-Lera & Datry, 2017; Mendoza-Lera & Mutz, 2013; Navel et al., 2011; Nogaro et al., 2010), and a wide variety of ecological processes (Boulton et al., 2010; Mathers et al., 2014).

Suspended fine particle deposition in streams is controlled by streamflow conditions and sediment characteristics (Hünken & Mutz, 2007; Packman et al., 2000). For example, slow streamflow conditions favor particle deposition due to settling (García, 2008). For increasing flow velocities, advective particle transport and deposition become increasingly important since hyporheic exchange flux (HEF) increases exponentially with streamflow velocity (Arnon et al., 2013; Packman et al., 2004). The effect of overlying water velocity on fine particle deposition has been extensively studied (e.g., Fries & Trowbridge, 2003; Rehg et al., 2005; Stewardson et al., 2016). Recently, it has been suggested that the exchange of water between the stream and the groundwater (i.e., losing or gaining flow conditions) also plays a significant role in fine particle depositional processes (Chen et al., 2013; Partington et al., 2017), hyporheic exchange, and biogeochemical processes (Azizian et al., 2017; Cardenas & Wilson, 2007; De Falco et al., 2016; Trauth & Fleckenstein, 2017). Some field surveys have demonstrated that the K_s of the streambed is lower under losing conditions, but the mechanisms controlling this process are not known (Chen et al., 2013; Dong et al., 2012; Simpson & Meixner, 2012).

The aforementioned studies provide evidence for the influence of stream-groundwater interactions on streambed clogging. However, because the history of flow conditions and streambed characteristics are generally not known in field studies, they do not provide an unambiguous explanation of the governing processes. In order to fill this gap, we conducted controlled flume experiments to quantify how losing and gaining flow conditions affect the deposition of suspended clay and how this particle deposition influences HEF. We postulated that particle deposition should increase with increasing HEF, but streambed clogging depends on local deposition patterns controlled by interactions between gaining/losing fluxes and bed form-induced HEF.

2. Materials and Methods

2.1. Experimental Setup

Interactions between kaolinite particle deposition and HEF were studied in a 640-cm-long and 29-cm-wide recirculating flume (supporting information I, Fox et al., 2016). The flume was filled with natural silica sand (384 μm mean diameter) to form a 20-cm deep streambed over a 540-cm flume channel. The bed surface was manually formed into dune-shaped bed forms, which were 15 cm long and 1.5 cm tall with the crest positioned 10 cm from the downstream trough. The porosity of the sand was 0.33, and the K_s was 0.12 cm s^{-1} . The sand used in all experiments was washed with a weak acid and base solution in order to remove residual salts, similar to the procedures that were described by Packman et al. (1997). Average water depth measured from the water surface to the bed form crest was 9 cm. Water in the flume was recirculated using a centrifugal pump (Lowara CEA 370/2/A), and discharge was measured with a magnetic flowmeter within the return pipe (Siemens SITRANS F mag 5000). To enforce losing or gaining flow conditions in the streambed, a drainage system was constructed on the bottom of the flume and connected to a peristaltic pump, which enables control of the direction and magnitude of vertical flow through the streambed (i.e., losing and gaining flux; Fox et al., 2014). The volume of water in the flume was maintained constant by compensating for gains or losses by pumping water into or out of the main channel with an additional peristaltic pump for losing and gaining conditions, respectively (supporting information I). The bed form dimensions mentioned above, as well as the flow conditions used in this study, are typical of sand-bed streams (e.g., Harvey et al., 2012; Hünken & Mutz, 2007; Mutz, 2003; Mutz, 2000; Stofleth et al., 2008; Strommer & Smock, 1989; Wörman et al., 2007, and references within).

2.2. Experimental Approach

Three sets of flume experiments were conducted with an average overlying water velocity of 15 cm s^{-1} (calculated by dividing the discharge by the channel cross-section area that was measured at the bed form crest). One set of experiments was conducted under losing flux of 12.5 cm d^{-1} , another under gaining flux of 12.5 cm d^{-1} , and the third conducted under neutral conditions (i.e., without imposing a vertical flux). Losing and gaining fluxes were calculated by dividing the imposed vertical discharge by the streambed surface area. A detailed description of the experiments, including a detailed time line, experimental procedures, and preparations before each tracer experiment, are given in supporting information II. Briefly, in each set of experiments, the flow conditions were set and an initial characterization was conducted by measuring HEF with a salt tracer and by visualizing the flow patterns in the streambed using a dye tracer (see details in

section 2.3). After the initial characterization, consecutive additions of suspended clay particles (kaolinite) were performed until HEF substantially reduced. The extent of clay deposition was recorded continuously by measuring water turbidity. HEF was measured after each addition of kaolinite. Dye injections were used to visualize HEF both before and after each set of kaolinite additions. Finally, streambed core samples were collected along the bed form to evaluate the spatial distribution of kaolinite deposits.

2.3. Particle, Salt, and Dye Tracer Additions

Kaolinite deposition rates were measured by adding kaolinite to the surface water and measuring the decline in concentration over time. Each individual addition contained 80 g of kaolinite (cat. 470025-474, Ward's Natural Science, USA) suspended in 5 L of deionized water containing 10-mM NaCl. The suspension was vigorously mixed for 24 hr prior to the experiment, and then added into the endwell over the duration of a single water recirculation time in the flume to ensure efficient mixing of kaolinite in the surface water. After dilution in the flume, the background electrolyte concentration was approximately 3-mM NaCl, which is far below the critical coagulation concentration of aqueous suspensions of kaolinite (Tombácz & Szekeres, 2006). Kaolinite concentrations in the surface water were measured continuously (every 30 s) by a turbidity sensor (TurboVis, Xylem, UK), which was calibrated with known concentrations of kaolinite samples prior to the experiments.

Salt tracer additions were performed to measure HEF. Each tracer solution contained 120 gr of NaCl dissolved in 5 L of deionized water, which was added to the flume similarly to the kaolinite solution. The concentration of the salt in the water was monitored with an EC meter (multi 3430 logger, WTW, UK). The EC was maintained between 300 and 1,000 $\mu\text{S cm}^{-1}$.

Dye additions were used in order to visualize the exchange flow paths before and after kaolinite deposition in the streambed. Twenty-five grams of Brilliant Blue dye was dissolved in 5 L of water and added to the flume. The dye penetration into the sediment was recorded for 24 hr by sequential photographs taken every 30 s through the glass sidewalls of the flume.

2.4. Distribution of Kaolinite in the Streambed

We assessed the distribution of kaolinite in the streambed by taking core samples along each bed form after each experiment. Triplicate samples were taken from four sections along the bed form (within 0–3, 4–7, 8–11, and 12–15 cm from trough to trough, supporting information III). For orientation, location 0 cm is the trough, 4 cm is on the stoss side, 8 cm is close to the crest, and 12 cm is on the lee side of the bed form. Modified plastic syringes with a diameter of 2.9 cm and a length of 10 cm were used to collect core samples (supporting information III). Before taking cores, the flow was stopped and the water level was gently lowered in order not to disturb the surface layer of the streambed. Syringes were then inserted into the bed, sealed from the bottom, and then carefully removed in order not to disturb the structure of the core sample. The cores were then sectioned every 0.5 cm, which yielded samples of approximately 7 g of wet sand. Extraction of kaolinite from the sand was done by vigorously mixing each section with 50 mL of deionized water. The concentration of kaolinite in the water was measured with a spectrophotometer (Evolution 220, Thermo Scientific, USA) by calibrating kaolinite concentrations to absorbance at 600 nm.

2.5. Data Analysis

Hyporheic exchange flux was quantified using mass balance equations based on the work of Elliott and Brooks (1997), which was extended by Fox et al. (2014). The latter developed a method that separates the effect of the imposed losing/gaining flux from the HEF. Images from all the dye additions were analyzed for the dye distribution in the streambed, using a MATLAB batch image analysis routine developed by Fox et al. (2016). Comparing time-lapse images enabled us to follow the spatial and temporal changes in HEF before and after kaolinite deposition.

We visualized the initial porewater velocity field using a numerical model developed previously for HEF under gaining and losing conditions (Boano et al., 2018). The model was built in COMSOL to reproduce 2-D laminar water flow below a periodic bed form. Following previous studies (e.g., Elliott & Brooks, 1997), a sinusoidal function was used to describe the hydraulic head distribution along the bed form profile, and a constant flux boundary condition was set at the domain bottom to match the flux imposed in each laboratory experiment. A complete description of the model can be found in the supporting information (section IV).

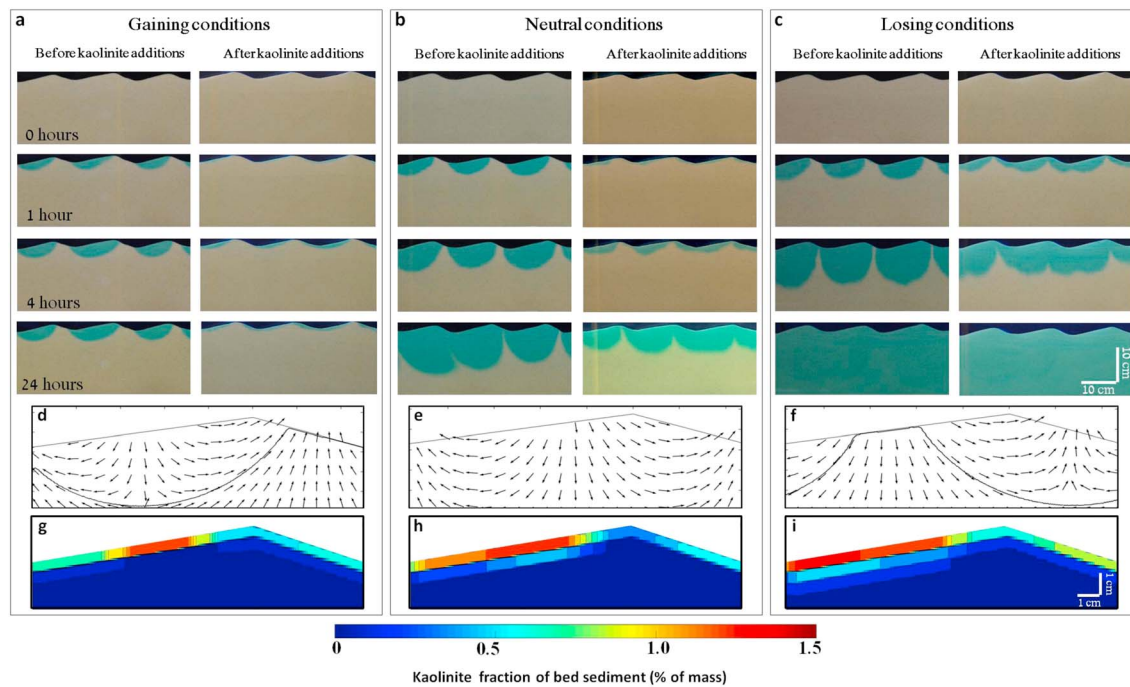


Figure 1. Time series photographs of dye penetration into the bed under (a) gaining, (b) neutral, and (c) losing flow conditions before and after kaolinite additions (end of experiments). Flow was from left to right at an overlying water velocity of 15 cm s^{-1} , and the losing/gaining flux was 12.5 cm d^{-1} . (d–f) The velocity field within the sand before the kaolinite additions is shown below the relevant images, (g–i) while the patterns of kaolinite concentrations within the sand at the end of the experiments are shown in images. Kaolinite concentrations are represented as averages of nine samples (supporting information III), while standard deviations of kaolinite concentrations were lower than $\pm 0.38\%$ (supporting information VIII).

Kaolinite flux into the bed was calculated as the average removal of clay mass from the surface water per time normalized by the streambed surface area. The effect of kaolinite deposition on HEFs under gaining, neutral, and losing conditions was evaluated by fitting a linear function to the reduction of HEF over time. Differences in HEF between flow conditions were evaluated by comparing the sum-of-squares for each independent fit and the combined fit that was calculated using the extra sum-of-squares F test in the statistical software GraphPad Prism (version 5).

3. Results and Discussion

Dye propagation in the clean sand before the kaolinite additions was observed with time-lapse photography to assess the evolution of porewater flow patterns (Figures 1a–1c). Dye fronts propagated quickly into the bed for the first few hours, but with differences between gaining, losing and neutral flow conditions. The dye propagation rate decreased quickly under gaining conditions as compared to neutral conditions where it continued to propagate even after 24 hr (Figures 1a–1c and supporting information V). Under losing conditions, the dye propagated quickly downward until it reached the bottom of the bed. Under gaining and neutral conditions, the dye distribution within the bed is solely related to HEF, since the upwelling water was dye-free. Thus, the photographs show nicely how upwelling flow under gaining conditions suppressed the size of the hyporheic zone as compared to neutral conditions. Under losing conditions, the dye patterns reflect a combination of HEF and the imposed losing flux, which prevents determination of the extent of the hyporheic zone using this method.

Comparing the dye images with modeled flow fields reveals a good match under gaining and neutral flow conditions, which is illustrated by the similar size and shapes of the hyporheic zone (Figures 1a, 1b, 1d, and 1e). The flow fields show that water infiltrated into the subsurface on the stoss side of the bed forms and returned back not only to the stream in the lee side but also on the lower parts of the stoss side due to some backward flow paths (lower left side of the images in Figures 1d and 1e; Cardenas & Wilson, 2007). Under gaining flow conditions, upwelling groundwater enclosed the hyporheic zone from both sides

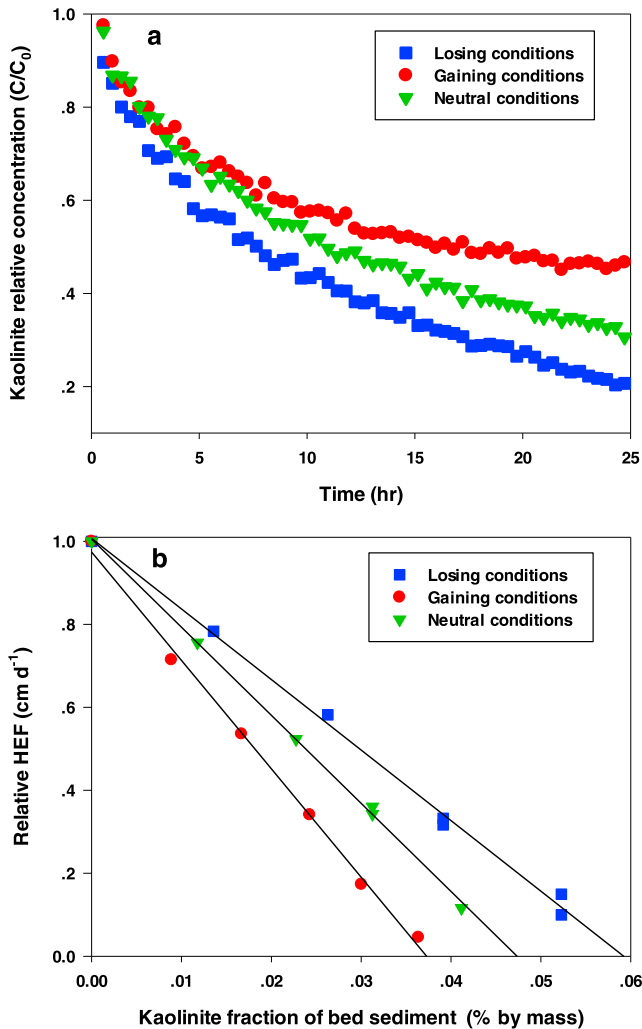


Figure 2. (a) Reduction in the relative kaolinite concentrations in the surface water during three separate additions and the (b) influence of kaolinite deposition on hyporheic exchange flux (HEF). Each data point in (b) represents one addition of kaolinite while the sand was initially particle-free. The HEF decreases linearly with increasing amounts of kaolinite deposition. All fits had $R^2 > 0.99$ and were statistically different from each other ($p < 0.05$).

and redistributes the porewater flow field (Figures 1d–1f; Cardenas & Wilson, 2007; Fox et al., 2016; Trauth et al., 2013). Under gaining and neutral flow conditions, the total flux into the bed equals the measured HEF, while under losing conditions it is the sum of HEF and the losing flux. Here the imposed losing and gaining fluxes were both 12.5 cm d^{-1} . Therefore, the total water fluxes from the surface water into the clean sand bed (before kaolinite addition) were smallest under gaining conditions (12 cm d^{-1}), intermediate under neutral conditions (17 cm d^{-1}), and greatest under losing conditions (24.5 cm d^{-1}). The trends in these imposed total water fluxes into the beds follow observed trends in kaolinite deposition in the bed. Finally, consecutive additions of the same kaolinite mass resulted in a linear reduction in HEF under all flow conditions, with a greater rate of decrease under gaining conditions than under neutral and losing conditions (Figure 2b).

These observations can be understood as the coupling between hyporheic exchange and particle deposition. Advective flux into the bed carries suspended kaolinite particles that become filtered along hyporheic flow paths (Elimelech, 1995; Packman et al., 2000). This filtration ultimately results in deposition and clogging in regions of water inflow to the bed, which reduces the pore space and decreases HEF and porewater flow (Packman & Mackay, 2003). Reduction of the pore space due to kaolinite deposition leads to an accelerated

and entered the stream mostly within the lee side. Under losing conditions, downwelling flow entered the bed on the entire stoss side, but bed form-induced hyporheic exchange still occurred with flow paths returning to the stream on the lee side (Figure 1f).

Differences in the observed dye propagation rates before and after kaolinite addition clearly demonstrate that clogging affected the sub-surface flow (Figures 1a–1c and supporting information V). Dye fronts propagated in the bed more slowly after the kaolinite additions under all flow conditions, indicating that clay deposition decreased HEF and the size of the hyporheic zone. After the kaolinite addition, the extent of dye penetration determined from images (Figures 1a–1c) was 3%, 13%, and 75% of the bed after 480 min under gaining, neutral, and losing flow conditions, respectively. The same extent of penetration in the clean sand bed (before clay addition) required only 20 min for gaining conditions, 60 min for neutral conditions, and 460 min for losing conditions (supporting information VI). The extent of dye penetration after 24 hr of kaolinite deposition was markedly smaller for the gaining and neutral conditions than the losing conditions (supporting information V).

Decreases in HEF coincided with decreases in kaolinite deposition flux (Figure 2). In each kaolinite addition, the kaolinite concentration in the surface water column declined rapidly for the first few hours, and then the deposition rate decayed slowly for the remainder of each experiment. In all cases, the clay concentration in the water column decreased by at least 50% after 25 hr (Figure 2a). The largest amount of kaolinite deposition occurred under losing conditions, and the smallest occurred under gaining conditions (supporting information VII). Kaolinite fluxes into the bed averaged $3.25, 3.3,$ and $4.12 \text{ g m}^{-2} \text{ hr}^{-1}$ over the first 5 hr under gaining, neutral, and losing conditions, respectively, and thereafter decreased to $0.49, 0.76,$ and $0.82 \text{ g m}^{-2} \text{ hr}^{-1}$, respectively, over the remaining 19 hr of each clay addition. These differences in kaolinite deposition rates under neutral, losing, and gaining flow conditions reflect the total water flux into the bed for each condition. Under neutral conditions, the exchange flux is purely driven by the bed structure and the overlying flow conditions (Elliott & Brooks, 1997; Fox et al., 2014; Packman & Salehin, 2003). Here the neutral bed form-induced HEF was 17 cm d^{-1} . Losing/gaining fluxes are superimposed on the bed form-induced hyporheic exchange, which reduces HEF

local deposition of later clay additions due to the smaller pore sizes. While the clay accumulation was very small, yielding average clay mass fractions in the total bed of 0.036%, 0.041%, and 0.052% under gaining, neutral, and losing conditions, respectively, accumulation was locally much greater in regions of porewater inflow into the bed. Streambed core samples showed that kaolinite deposition was more pronounced along the surface of the stoss side of the bed forms under all flow conditions (Figures 1g–1i and supporting information VIII). Flow simulations indicate that this region is where most of the advective hyporheic flux enters the bed (Figures 1d–1f). Gaining conditions yielded clay concentrations of >1% mass fraction of bed sediments in a small region in the area of greatest HEF: the middle of the stoss side of bed forms (Figure 1g). Under neutral conditions, concentrations of kaolinite also ranged between 1.0 and 1.2% but occupied a much larger area covering the majority of the stoss side of the bed form, with lower amounts of deposition in the region where flow leaves the bed (Figure 1h). Kaolinite deposition under losing conditions was also focused along hyporheic flow paths (Figure 1f) but occurred over a wider region of the streambed surface and yielded clay accumulation deeper in the bed. Under losing conditions, kaolinite concentrations ranged between 1.2 and 1.5% along the stoss side, with lower concentrations observed along the lee side and at the crest (Figure 1i).

The horizontal layered structure of kaolinite deposits not only decreased HEF and vertical dye penetration but also led to an increase in the lateral spreading of exchanged dye. Under neutral conditions, regions of hyporheic upwelling flow paths shifted from the recirculation zone on the lee side of each bed form—the location predicted for homogeneous streambeds—to underneath the crest (indicated by dye-free regions in Figure 1b). Under losing conditions, the dye-free upwelling zones between bed forms disappeared as a result of clogging (Figure 1c). While these upwelling zones were visible after 4 hr of exchange in the clean bed, they disappeared in the clogged bed after approximately 1 hr (Figure 1c). These shifts in porewater flow patterns reflect an evolution of the hyporheic exchange flow trajectories due to the clogging of pore spaces. In particular, initial clogging occurred mostly at the stoss side of the bed forms where the higher water flux into the bed was predicted (Figures 1d–1f). Therefore, the increased horizontal spreading of the dye fronts indicates that clay deposition in regions of porewater inflow reduced HEF, decreased vertical dye penetration, and shifted hyporheic flow horizontally. Counterintuitively, HEF decreased more quickly under gaining conditions and required less clay mass than neutral or losing conditions, despite the fact that the initial water exchange and clay deposition flux were lowest under gaining conditions (Figure 2b). This is because the area of hyporheic exchange is much smaller under gaining conditions and highly constrained by the upflowing water. Under neutral and losing conditions, clay deposition and clogging in the area of water inflow to the bed diverted inflowing water laterally, shifting inflow to other areas of the bed form (Figures 1b and 1c) and ultimately producing layered deposits over much of the stoss side of the bed form (Figures 1h and 1i). However, under gaining conditions, the region of inflow and deposition is highly limited to a narrow region in the middle of the stoss side of the bed form (Figure 1a) and clay deposition is focused specifically in this region (Figure 1g). This constraint imposed by upwelling means that clogging of the small region of influx to the bed more readily reduces HEF under gaining conditions than under neutral or losing conditions.

The deposition of fine particles near the streambed surface found here has been commonly observed in both laboratory and field studies (Arnon et al., 2010; Drummond et al., 2014, 2017; Stewardson et al., 2016). An implication of this is that fine particle accumulation within streambeds is highly sensitive to flow events capable of scouring the upper layer of the streambed and remobilizing deposited fine particles. Fine particles near the surface are often remobilized due to bed mobility and scour, while some particles can be propagated deeper into the streambed where retention times are significantly longer (Drummond et al., 2014). Other studies that have followed the temporal dynamics of streambed K_s have found that streams with less frequent bed disturbances have lower streambed K_s and reduced HEF (Blaschke et al., 2003; Detry et al., 2015; Stewardson et al., 2016). Blaschke et al. (2003) specifically observed in the Danube River that clogging occurred mostly in the upper few centimeters. The deposition patterns observed in our experiments show that this behavior may be caused by the strong deposition and clogging in bed forms under neutral and gaining conditions, and more distributed particle deposition under losing conditions.

The layered depositional structures observed here are also common in streambeds and can be formed by various mechanisms, mostly by depositional patterns during mobile bed conditions (Huggenberger et al., 1998; Powell, 1998). Layered depositional structures in streambeds produce anisotropy that decreases vertical hyporheic exchange and favors flow parallel to deposit layers (Fox et al., 2016; Gomez-Velez et al., 2014;

Jesus et al., 2014; Salehin et al., 2004; Zlotnik et al., 2011). Our results indicate that significant anisotropy can develop in immobile beds under constant flow conditions due to the combination of advective exchange and filtration of fine particles, and this will restrict vertical HEF and favor shallow HEF in horizontal layers under bed forms. HEF and fine particle deposition decreased over time in the clogged bed (supporting information VII). While deposition due to filtration is reduced over time, it may be that other mechanisms of deposition, such as mass transfer due to stream turbulence, still occur and contribute more to the overall deposition at later stages.

These spatial patterns of HEF and clay deposition have several important implications. The impact of clay accumulation on HEF is expected to influence water budgets in streams and connectivity between streams, floodplains, and the underlying aquifers (e.g., Nowinski et al., 2011). Such a reduction in connectivity may negatively affect bank filtration (Goldschneider et al., 2007). The reduced HEF and altered flow patterns will change the residence time of solutes in the streambed, thereby influencing biogeochemical processes. Clogging can result in shallower flow paths and a shrinking of the hyporheic zone (Figure 1), which would induce a thinner oxic zone (Caruso et al., 2017; De Falco et al., 2016; Kaufman et al., 2017). Changes in HEF, flow patterns, and chemistry will initiate a response in the ecological communities and their functions. For example, clogging of the hyporheic zone degrades habitat for benthic fauna, which reduces diversity and can affect metabolism and the productivity of the lotic ecosystem (Arnon et al., 2007; Brunke, 1999; Jones et al., 2015; Mathers et al., 2014). These processes could broadly influence stream ecosystem functions and resilience with implications for management (Nogaro et al., 2010; Wharton et al., 2017). The presence of unclogged sand beds indicates that there must be either very little input of fines to the system or relatively frequent bed sediment transport to resuspend deposited fines. Prior experimental observations indicate that clogging occurs below the active layer during periods of mobile bed forms (Rehg et al., 2005); however, the temporal variability of scour and K_s remains unclear. In addition, biological processes, such as bioturbation, can also remobilize fine material and maintain K_s (Nogaro et al., 2006; Song et al., 2010).

This study provides clear evidence that stream-groundwater interactions and deposition of suspended particles are generally coupled over a wide range of scales. Prior studies have shown that fine suspended particles are transported into sandy streambeds, leading to clogging of the streambed in locations of hyporheic inflow (Packman & Mackay, 2003). Here we showed unique experimental evidence that both clay accumulation in the streambed and resulting changes in hyporheic exchange flows strongly interact with larger-scale gaining and losing flows. The relative importance of HEF versus losing or gaining flux on fine suspended particle deposition depends on the losing/gaining flux (Fox et al., 2014). Since we showed here that deposition is related to the advective flux into the bed, it is expected that when HEF is reduced due to increase in losing or gaining fluxes, the relative importance of the losing/gaining flux to deposition becomes higher. Kaolinite deposition led to a decrease in HEF, changed patterns of hyporheic exchange, and reduced the size of the hyporheic zone. Following clay deposition, hyporheic flow spread laterally within the near-subsurface region and propagated outside of the zone of hyporheic exchange identified in the clean bed (prior to clay addition). This lateral hyporheic spreading was observed under all flow conditions but was more prevalent under gaining and neutral flow conditions.

A major outcome of these observations is that it is essential to evaluate the spatial distribution of K_s when quantifying exchange fluxes and biogeochemical processes within a reach. The spatial distributions of clay in coarse sediment beds are also important for assessing the potential for resuspension when assessing the effects of siltation on hyporheic ecosystems. Including the effects of losing and gaining flow is necessary to ensure that stream restoration will produce the desired outcomes for hyporheic exchange and ecological function. While geomorphic field studies often characterize the bulk fine fraction in streambed sediments, our results show that the clogging process is much more local to the streambed surface, particularly in areas of HEF into sand beds. Furthermore, the extent of heterogeneity in clogging strongly depends on the pattern of both hyporheic exchange induced by local streambed features (e.g., bed forms) and larger patterns of river gaining and losing. Field studies characterizing the K_s of river reaches for the purpose of assessing clogging and/or restoring degraded hyporheic zones should design sampling schemes to capture the multiscale exchange and clogging behavior shown here. In particular, a greater number of samples will be needed to characterize streambed K_s and clogging in reaches with strong internal geomorphic complexity than in reaches where fine particle deposition and clogging are dominated by general downwelling conditions. Disconnection of near-surface and deeper porewater by formation of clogging deposits that lead to

horizontal preferential HEF should also be considered in field site assessments, as these types of flows may be missed by methods that assume homogeneity and/or isotropy, such as estimations of exchange fluxes from measurements of vertical hydraulic gradients in streambeds. Coupling these observations of fine particle clogging and HEF patterns to sediment bed dynamics under transient flow (floods) remains an area of active research; however, environments with frequent floods, capable of moving sediment, may require even more frequent assessments of streambed K_s to properly characterize the system.

Acknowledgments

This research was supported by the NSF-BSF Joint Program in Earth Sciences, award EAR-1734300. We thank Claire Howard for laboratory assistance, with support provided by the McCormick School of Engineering and the Buffett Institute for Global Studies at Northwestern. We also thank an anonymous reviewer, Stanley Grant, and the Associate Editor Bayani Cardenas for providing constructive comments that greatly improved this paper. The data of the experiments are provided in the supporting information.

References

- Arnon, S., Gray, K. A., & Packman, A. I. (2007). Biophysicochemical process coupling controls nitrate use by benthic biofilms. *Limnology and Oceanography*, 52(4), 1665–1671. <https://doi.org/10.4319/lo.2007.52.4.1665>
- Arnon, S., Marx, L. P., Searcy, K. E., & Packman, A. I. (2010). Effects of overlying velocity, particle size, and biofilm growth on stream-subsurface exchange of particles. *Hydrological Processes*, 114, 108–114. <https://doi.org/10.1002/hyp>
- Arnon, S., Peterson, C. G., Gray, K. a., & Packman, A. I. (2007). Influence of flow conditions and system geometry on nitrate use by benthic biofilms: Implications for nutrient mitigation. *Environmental Science & Technology*, 41(23), 8142–8148. <https://doi.org/10.1021/es0710048>
- Arnon, S., Yanuka, K., & Nejidat, A. (2013). Impact of overlying water velocity on ammonium uptake by benthic biofilms. *Hydrological Processes*, 27(4), 570–578. <https://doi.org/10.1002/hyp.9239>
- Azizian, M., Boano, F., Cook, P. L. M., Detwiler, R. L., Rippey, M. A., & Grant, S. B. (2017). Ambient groundwater flow diminishes nitrate processing in the hyporheic zone of streams. *Water Resources Research*, 53, 3941–3967. <https://doi.org/10.1002/2016WR020048>
- Blaschke, A. P., Steiner, K., Schmalfluss, R., Gutknecht, D., & Sengschmitt, D. (2003). Clogging processes in hyporheic interstices of an impounded river, the Danube at Vienna, Austria. *International Review of Hydrobiology*, 88(3/4), 397–413. <https://doi.org/10.1002/iroh.200390034>
- Boano, F., De Falco, N., & Arnon, S. (2018). Modeling chemical gradients in sediments under losing and gaining flow conditions: The GRADIENT code. *Advances in Water Resources*, 112, 72–82. <https://doi.org/10.1016/j.advwatres.2017.12.002>
- Boulton, A. J., Darcy, T., Kasahara, T., Mutz, M., & Stanford, J. A. (2010). Ecology and management of the hyporheic zone: Stream-groundwater interactions of running waters and their floodplains. *Journal of the North American Benthological Society*, 29(1), 26–40. <https://doi.org/10.1899/08-017.1>
- Brunke, M. (1999). Colmation and depth filtration within streambeds: Retention of particles in hyporheic interstices. *International Review of Hydrobiology*, 84(2), 99–117. <https://doi.org/10.1002/iroh.199900014>
- Cardenas, M. B., & Wilson, J. L. (2007). Exchange across a sediment-water interface with ambient groundwater discharge. *Journal of Hydrology*, 346(3–4), 69–80. <https://doi.org/10.1016/j.jhydrol.2007.08.019>
- Caruso, A., Boano, F., Ridolfi, L., Chopp, D. L., & Packman, A. (2017). Biofilm-induced bioclogging produces sharp interfaces in hyporheic flow, redox conditions, and microbial community structure. *Geophysical Research Letters*, 44, 4917–4925. <https://doi.org/10.1002/2017GL073651>
- Chen, X., Dong, W., Ou, G., Wang, Z., & Liu, C. (2013). Gaining and losing stream reaches have opposite hydraulic conductivity distribution patterns. *Hydrology and Earth System Sciences*, 17(7), 2569–2579. <https://doi.org/10.5194/hess-17-2569-2013>
- Darcy, T., Lamouroux, N., Thivin, G., Descloux, S., & Baudoin, J. M. (2015). Estimation of sediment hydraulic conductivity in river reaches and its potential use to evaluate streambed clogging. *River Research and Applications*, 31(7), 880–891. <https://doi.org/10.1002/rra.2784>
- De Falco, N., Boano, F., & Arnon, S. (2016). Biodegradation of labile dissolved organic carbon under losing and gaining streamflow conditions simulated in a laboratory flume. *Limnology and Oceanography*, 61(5), 1839–1852. <https://doi.org/10.1002/lno.10344>
- Dong, W., Chen, X., Wang, Z., Ou, G., & Liu, C. (2012). Comparison of vertical hydraulic conductivity in a streambed-point bar system of a gaining stream. *Journal of Hydrology*, 450–451, 9–16. <https://doi.org/10.1016/j.jhydrol.2012.05.037>
- Drummond, J. D., Davies-Colley, R. J., Stott, R., Sukias, J. P., Nagels, J. W., Sharp, A., & Packman, A. I. (2014). Retention and remobilization dynamics of fine particles and microorganisms in pastoral streams. *Water Research*, 66, 459–472. <https://doi.org/10.1016/j.watres.2014.08.025>
- Drummond, J. D., Larsen, L. G., Gonzalez-Pinzon, R., Packman, A. I., & Harvey, J. W. (2017). Fine particle retention within stream storage areas at base flow and in response to a storm event. *Water Resources Research*, 53, 5690–5705. <https://doi.org/10.1002/2016WR020202>
- Elimelech, M., Gregory, J., Jia, X., & Williams, R. A. (1995). *Particle Deposition and Aggregation: Measurement, Modeling, and Simulation*. Oxford: Butterworth-Heinemann.
- Elliott, A. H., & Brooks, N. H. (1997). Transfer of nonsorbing solutes to a streambed with bed forms: Theory. *Water Resources Research*, 33, 123–136. <https://doi.org/10.1029/96WR02784>
- Findlay, S. E. G. (1995). Importance of surface-subsurface exchange in stream ecosystems: The hyporheic zone. *Limnology and Oceanography*, 40(1), 159–164. <https://doi.org/10.4319/lo.1995.40.1.0159>
- Fox, A., Boano, F., & Arnon, S. (2014). Impact of losing and gaining streamflow conditions on hyporheic exchange fluxes induced by dune-shaped bed forms. *Water Resources Research*, 50, 1895–1907. <https://doi.org/10.1002/2013WR014668>
- Fox, A., Laube, G., Schmidt, C., Fleckenstein, J. H., & Arnon, S. (2016). The effect of losing and gaining flow conditions on hyporheic exchange in heterogeneous streambeds. *Water Resources Research*, 52, 7460–7477. <https://doi.org/10.1002/2016WR018677>
- Fries, J. S., & Trowbridge, J. H. (2003). Flume observations of enhanced fine-particle deposition to permeable sediment beds. *Limnology and Oceanography*, 48(2), 802–812. <https://doi.org/10.4319/lo.2003.48.2.0802>
- García, M. H. (2008). Sediment transport and morphodynamics. In M. H. García (Ed.), *Sedimentation engineering* (pp. 21–164). Reston, VA: ASCE. <https://doi.org/10.1061/9780784408148.ch02>
- Goldschneider, A. A., Haralampides, K. A., & MacQuarrie, K. T. B. (2007). River sediment and flow characteristics near a bank filtration water supply: Implications for riverbed clogging. *Journal of Hydrology*, 344(1–2), 55–69. <https://doi.org/10.1016/j.jhydrol.2007.06.031>
- Gomez-Velez, J. D., Krause, S., & Wilson, J. L. (2014). Effect of low-permeability layers on spatial patterns of hyporheic exchange and groundwater upwelling. *Water Resources Research*, 50, 5196–5215. <https://doi.org/10.1002/2013WR015054>
- Harvey, J. W., Drummond, J. D., Martin, R. L., McPhillips, L. E., Packman, A. I., Jerolmack, D. J., et al. (2012). Hydrogeomorphology of the hyporheic zone: Stream solute and fine particle interactions with a dynamic streambed. *Journal of Geophysical Research*, 117, G00N11. <https://doi.org/10.1029/2012JG002043>
- Huggenberger, P., Hoehn, E., Bescha, R., & Woessner, W. (1998). Abiotic aspects of channels and floodplains in riparian ecology. *Freshwater Biology*, 40(3), 407–425. <https://doi.org/10.1046/j.1365-2427.1998.00371.x>
- Hünken, A., & Mutz, M. (2007). Field studies on factors affecting very fine and ultra fine particulate organic matter deposition in low-gradient sand-bed streams. *Hydrological Processes*, 533(21), 525–533. <https://doi.org/10.1002/hyp.6263>

- Jesus, D. G.-V., Stefan, K., & Wilson, J. L. (2014). Effect of low-permeability layers on spatial patterns of hyporheic exchange and groundwater upwelling. *Water Resources Research*, *50*, 2108–2123. <https://doi.org/10.1002/2012WR013085d>
- Jones, I., Growns, I., Arnold, A., McCall, S., & Bowes, M. (2015). The effects of increased flow and fine sediment on hyporheic invertebrates and nutrients in stream mesocosms. *Freshwater Biology*, *60*(4), 813–826. <https://doi.org/10.1111/fwb.12536>
- Kaufman, M. H., Cardenas, M. B., Buttles, J., Kessler, A. J., & Cook, P. L. M. (2017). Hyporheic hot moments: Dissolved oxygen dynamics in the hyporheic zone in response to surface flow perturbations. *Water Resources Research*, *53*, 6642–6662. <https://doi.org/10.1002/2016WR020296>
- Mathers, K. L., Millett, J., Robertson, A. L., Stubbington, R., & Wood, P. J. (2014). Faunal response to benthic and hyporheic sedimentation varies with direction of vertical hydrological exchange. *Freshwater Biology*, *59*(11), 2278–2289. <https://doi.org/10.1111/fwb.12430>
- Mendoza-lera, C., & Detry, T. (2017). Relating hydraulic conductivity and hyporheic zone biogeochemical processing to conserve and restore river ecosystem services. *Science of the Total Environment*, *579*, 1815–1821. <https://doi.org/10.1016/j.scitotenv.2016.11.166>
- Mendoza-Lera, C., & Mutz, M. (2013). Microbial activity and sediment disturbance modulate the vertical water flux in sandy sediments. *Freshwater Science*, *32*(1), 26–38. <https://doi.org/10.1899/11-165.1>
- Mutz, M. (2000). Influences of woody debris on flow patterns and channel morphology in a low energy, sand-bed stream reach. *International Review of Hydrobiology*, *85*(1), 107–121. [https://doi.org/10.1002/\(SICI\)1522-2632\(200003\)85:1%3C107::AID-IROH107%3E3.0.CO;2-L](https://doi.org/10.1002/(SICI)1522-2632(200003)85:1%3C107::AID-IROH107%3E3.0.CO;2-L)
- Mutz, M. (2003). Processes of surface-subsurface water exchange in a low energy sand-bed stream. *International Review of Hydrobiology*, *88*(3/4), 290–303. <https://doi.org/10.1002/iroh.200390026>
- Navel, S., Mermillod-Blondin, F., Montuelle, B., Chauvet, E., Simon, L., & Marmonier, P. (2011). Water-sediment exchanges control microbial processes associated with leaf litter degradation in the hyporheic zone: A microcosm study. *Microbial Ecology*, *61*(4), 968–979. <https://doi.org/10.1007/s00248-010-9774-7>
- Nogaro, G., Detry, T., Mermillod-Blondin, F., Descloux, S., & Montuelle, B. (2010). Influence of streambed sediment clogging on microbial processes in the hyporheic zone. *Freshwater Biology*, *55*(6), 1288–1302. <https://doi.org/10.1111/j.1365-2427.2009.02352.x>
- Nogaro, G., Mermillod-Blondin, F., François-Carcaillet, F., Gaudet, J. P., Lafont, M., & Gibert, J. (2006). Invertebrate bioturbation can reduce the clogging of sediment: An experimental study using infiltration sediment columns. *Freshwater Biology*, *51*(8), 1458–1473. <https://doi.org/10.1111/j.1365-2427.2006.01577.x>
- Nowinski, J. D., Cardenas, M. B., & Lightbody, A. F. (2011). Evolution of hydraulic conductivity in the floodplain of a meandering river due to hyporheic transport of fine materials. *Geophysical Research Letters*, *38*, L01401. <https://doi.org/10.1029/2010GL045819>
- Packman, A., Salehin, M., & Zaramella, M. (2004). Hyporheic exchange with gravel beds: Basic hydrodynamic interactions and bedform-induced advective flows. *Journal of Hydraulic Engineering*, *130*(7), 647–656. [https://doi.org/10.1061/\(ASCE\)0733-9429\(2004\)130:7\(647\)](https://doi.org/10.1061/(ASCE)0733-9429(2004)130:7(647))
- Packman, A. I., Brooks, N. H., & Morgan, J. J. (1997). Experimental techniques for laboratory investigation of clay colloid transport and filtration in a stream with a sand bed. *Water, Air, and Soil Pollution*, *99*(1–4), 113–122. <https://doi.org/10.1007/BF02406850>
- Packman, A. I., Brooks, N. H., & Morgan, J. J. (2000). Kaolinite exchange between a stream and streambed: Laboratory experiments and validation of a colloid transport model. *Water Resources Research*, *36*, 2363–2372. <https://doi.org/10.1029/2000WR900058>
- Packman, A. I., & Mackay, J. S. (2003). Interplay of stream-subsurface exchange, clay particle deposition, and streambed evolution. *Water Resources Research*, *39*(4), 1097. <https://doi.org/10.1029/2002WR001432>
- Packman, A. I., & Salehin, M. (2003). Relative roles of stream flow and sedimentary conditions in controlling hyporheic exchange. *Hydrobiologia*, *494*(1–3), 291–297. <https://doi.org/10.1023/A:1025403424063>
- Partington, D., Therrien, R., Simmons, C. T., & Brunner, P. (2017). Blueprint for a coupled model of sedimentology, hydrology, and hydrogeology in streambeds. *Reviews of Geophysics*, *55*, 287–309. <https://doi.org/10.1002/2016RG000530>
- Powell, D. M. (1998). Patterns and processes of sediment sorting in gravel-bed rivers. *Progress in Physical Geography*, *22*(1), 1–32. <https://doi.org/10.1177/030913339802200101>
- Rehg, K. J., Packman, A. I., & Ren, J. H. (2005). Effects of suspended sediment characteristics and bed sediment transport on streambed clogging. *Hydrological Processes*, *19*(2), 413–427. <https://doi.org/10.1002/hyp.5540>
- Salehin, M., Packman, A. I., & Paradis, M. (2004). Hyporheic exchange with heterogeneous streambeds: Laboratory experiments and modeling. *Water Resources Research*, *40*, W11504. <https://doi.org/10.1029/2003WR002567>
- Simpson, S. C., & Meixner, T. (2012). Modeling effects of floods on streambed hydraulic conductivity and groundwater-surface water interactions. *Water Resources Research*, *48*, W02515. <https://doi.org/10.1029/2011WR011022>
- Song, J., Chen, X., & Cheng, C. (2010). Observation of bioturbation and hyporheic flux in streambeds. *Frontiers of Environmental Science & Engineering in China*, *4*(3), 340–348. <https://doi.org/10.1007/s11783-010-0233-y>
- Stewardson, M. J., Detry, T., Lamouroux, N., Pella, H., Thommeret, N., Valette, L., & Grant, S. B. (2016). Variation in reach-scale hydraulic conductivity of streambeds. *Geomorphology*, *259*, 70–80. <https://doi.org/10.1016/j.geomorph.2016.02.001>
- Stofleth, J. M., Douglas Shield, F. Jr., & Fox, G. A. (2008). Hyporheic and total transient storage in small, sand-bed streams. *Hydrological Processes*, *1894*, 1885–1894. <https://doi.org/10.1002/hyp>
- Strommer, J., & Smock, L. (1989). Vertical distribution and abundance of invertebrates within the sandy substrate of a low-gradient headwater stream. *Freshwater Biology*, *22*(2), 263–274. <https://doi.org/10.1111/j.1365-2427.1989.tb01099.x/abstract>
- Tombácz, E., & Szekeres, M. (2006). Surface charge heterogeneity of kaolinite in aqueous suspension in comparison with montmorillonite. *Applied Clay Science*, *34*(1–4), 105–124. <https://doi.org/10.1016/j.clay.2006.05.009>
- Trauth, N., & Fleckenstein, J. H. (2017). Single discharge events increase reactive efficiency of the hyporheic zone. *Water Resources Research*, *53*, 779–798. <https://doi.org/10.1002/2016WR019488>
- Trauth, N., Schmidt, C., Maier, U., Vieweg, M., & Fleckenstein, J. H. (2013). Coupled 3D stream flow and hyporheic flow model under varying stream and ambient groundwater flow conditions in a pool-riffle system. *Water Resources Research*, *49*, 5834–5850. <https://doi.org/10.1002/wrcr.20442>
- Veličković, B. (2005). Colmation as one of the processes in interaction between the groundwater and surface water. *Facta Universitatis-Series: Architecture and Civil Engineering*, *3*(2), 165–172. <https://doi.org/10.2298/FUACE0502165V>
- Wharton, G., Mohajeri, S. H., & Righetti, M. (2017). The pernicious problem of streambed colmation: A multi-disciplinary reflection on the mechanisms, causes, impacts, and management challenges. *WIREs Water*, *e1231*, 1–17. <https://doi.org/10.1002/wat2.1231>
- Wohl, E. (2015). Legacy effects on sediments in river corridors. *Earth-Science Reviews*, *147*, 30–53. <https://doi.org/10.1016/j.earscirev.2015.05.001>
- Wörman, A., Packman, A. I., Marklund, L., Harvey, J. W., & Stone, S. H. (2007). Fractal topography and subsurface water flows from fluvial bedforms to the continental shield. *Geophysical Research Letters*, *34*, L07402. <https://doi.org/10.1029/2007GL029426>
- Zlotnik, V. A., Cardenas, M. B., & Toundykov, D. (2011). Effects of multiscale anisotropy on basin and hyporheic groundwater flow. *Ground Water*, *49*(4), 576–583. <https://doi.org/10.1111/j.1745-6584.2010.00775.x>