

Emerging pollutants removal through advanced drinking water treatment: A review on processes and environmental performances assessment

*Original*

Emerging pollutants removal through advanced drinking water treatment: A review on processes and environmental performances assessment / Teodosiu, C., Gilca, A., Barjoveanu, G., Fiore, S.. - In: JOURNAL OF CLEANER PRODUCTION. - ISSN 0959-6526. - STAMPA. - 197:(2018), pp. 1210-1221. [10.1016/j.jclepro.2018.06.247]

*Availability:*

This version is available at: 11583/2710518 since: 2018-07-05T11:11:27Z

*Publisher:*

ELSEVIER

*Published*

DOI:10.1016/j.jclepro.2018.06.247

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Elsevier postprint/Author's Accepted Manuscript

© 2018. This manuscript version is made available under the CC-BY-NC-ND 4.0 license  
<http://creativecommons.org/licenses/by-nc-nd/4.0/>. The final authenticated version is available online at:  
<http://dx.doi.org/10.1016/j.jclepro.2018.06.247>

(Article begins on next page)

## Emerging pollutants removal through advanced drinking water treatment: A review on processes and environmental performances assessment

Carmen Teodosiu<sup>1\*</sup>, Andreea-Florina Gilca<sup>1</sup>, George Barjoveanu<sup>1\*</sup>, Silvia Fiore<sup>2\*</sup>

1. „Gheorghe Asachi” Technical University of Iasi, Department of Environmental Engineering and Management, 73 Prof. Dr. Doc. Dimitrie Mangeron Street, 700050 Iasi, Romania
2. DIATI (Department of Engineering for Environment, Land and Infrastructures), Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy

\*Corresponding authors' e-mails: [cteo@ch.tuiasi.ro](mailto:cteo@ch.tuiasi.ro) (C.Teodosiu); [silvia.fiore@polito.it](mailto:silvia.fiore@polito.it) (S.Fiore); [gb@ch.tuiasi.ro](mailto:gb@ch.tuiasi.ro) (G.Barjoveanu)

### Abstract

The presence of emerging pollutants in the aquatic environment in relatively small concentrations and the fact that they cannot be removed by conventional water/wastewater treatment processes bring new challenges in terms of adequate selection of technologies from the technical, economical and environmental points of view. Generally, literature discusses emerging pollutants' removal at significant concentrations (such as those in wastewater), while few studies consider their low concentrations occurring in raw water. This study presents a comprehensive review of the research efforts related to the occurrence, fate, health effects and impacts of emerging pollutants on advanced drinking water treatment and the environmental performance evaluation of different technological options, with a focus on pilot and full-scale installations. All presented case studies consider pollutants removed, process conditions and removal efficiencies, thus making possible comparisons between membrane processes, advanced oxidation processes and adsorption on activated carbon and other materials. The study is completed by an analysis of the environmental assessment instruments (life cycle assessment, carbon, water footprints, other type of assessments) that may be used for selecting sustainable advanced drinking water treatment processes able to remove emerging pollutants. This paper critically reviews the main research topics concerning emerging pollutants: classification, legislative framework, up-to-date removal processes and their environmental performances assessment, to offer a comprehensive analysis of the strategic issues that may constitute future research directions for sustainable water supply.

**Keywords:** emerging, priority, pollutants, drinking water treatment, environmental, assessments

## 1. Introduction

Drinking water treatment (DWT) plants face great challenges in optimizing technologies to avoid human health problems and to ensure environmental sustainability, in direct correlation with population growth, water sources lower availability, deterioration due to land use and climate changes, hydrology and water quality changes. These water related problems are better understood and controlled through the improved detection and increased knowledge of the environmental, toxicological and biological effects of an ever increasing list of compounds currently known as: *Emerging Pollutants* (EPs) or *Contaminants of Emerging Concern* (CECs) or *Micropollutants* (MPs) or *Priority Pollutants* (PPs) or *Persistent Toxic Substances* (PTS) or *Substances of Very High Concern* (SVHC) (Li et al., 2011; Sauv e and Desrosiers, 2014). They are characterised by environmental persistence and threats to human health (Miniero et al., 2014). Pesticides, pharmaceuticals, personal care products, detergents, disinfection by-products, drugs, flame-retardants are a few examples of EPs. Through their presence, ecotoxicological and human health effects, bio-accumulative and degradation characteristics they may influence aquatic biota and also the performance and costs of DWT technologies.

Although a vast scientific literature is available on multiple aspects of concern regarding EPs' monitoring and analysis, we consider that it is important to review in a holistic way these research efforts especially in relation to the technological developments of water supplies and their sustainability assessment. EPs' research topics usually refer to: identification/classification/regulation of new compounds; identification/characterization of toxicological effects, environmental pathways and fate and human health risks (Stiborova et al., 2017); development of analytical methods for detection and advanced drinking water treatment processes (ADWT) for their removal from water (Deblonde and Cossu-Leguille, 2011); development of tools for their environmental impact assessment (Ternes et al., 2015).

To our best knowledge, there is not yet a review paper that structures all the research efforts related to the fate and effects of EPs on DWT and the environmental performance evaluation of different technological options. As a consequence, this study aims to perform a comprehensive literature assessment regarding the presence of EPs in water sources, their occurrence and impacts on the treatment processes and to identify research hot-spots that need further investigation. In detail, this review paper approaches the following research questions (RQs):

- *RQ1) Identification, classification and regulations of EPs.* Numerous concepts, definitions and criteria, were developed to classify and characterize these compounds, leading to a certain level of controversy in the scientific community. Over 1000 substances are classified as EPs (Norman Network, 2016), however only some tens of them are recognized by international regulations and organizations, with a significant lack of consistency;

- RQ2) *Presentation of EPs' characteristics that are relevant for the choice of technology for their removal within DWT.* In detail: raw water characteristics, EPs' toxicological and chemical characteristics, fate and impacts on treatment efficiency, environment and human health;
- RQ3) *Discussion of DWT processes specifically developed for EPs' removal in pilot and full-scale installations.* Scientific literature mostly refers to waterborne EPs and research efforts mainly focus on their fate and effects in natural water sources, or on removal processes from wastewater;
- RQ4) *Investigation of the assessment instruments that are used to evaluate the environmental performances of DWT processes dedicated to EPs' removal, as a consistent support for more sustainable water supply technologies.*

## 2. Review methodology

The selection of scientific literature was made considering [partially the integrative literature review and the](#) following screening criteria:

- a) *Relevant international databases and information sources.* Bibliometric sources such as: Web of Science, Science Direct, Scopus were used to retrieve articles, book-chapters and international proceedings articles. International databases of the European Environmental Agency and of the European Commission were used for the selection of Directives or Reports related to EPs' regulation or classification; the relevant scientific content was sourced for this review from scientific articles (119 documents – 88.2%), technical reports (9 documents – 6.6%) and legal documents (7 documents – 5.2%);
- b) *Chronological order.* The majority of the references (81.4%) in this review are from 2010 to 2018 (110 references from the total of 135 references), the rest of the references belonging to 2001-2009. Other 45 references (out of which 35 references from 2010-2018) are presented in Annex 1 as information to support the research concerning EPs sources and health effects;
- c) *Relevant keywords for the topics of interest* (EPs' definitions, classifications, regulations, occurrence, fate and impacts, methods of analysis, ADWT processes and their pilot or full-scale application, environmental assessment of ADWT processes). The following keywords have been used in different combinations: *EPs/Priority pollutants/Toxic pollutants/Persistent pollutants/Regulation/ Methods of analysis/Drinking water treatment/Advanced drinking water treatment/Membrane processes/Advanced oxidation processes/Adsorption/Pilot/Full-scale applications/Life cycle assessment/Water Footprint/Carbon footprint/Multi-criteria assessment*;

d) *Selection of the references cited in this review based on content analysis.* After eliminating the articles that concern removal of EPs from wastewater (a search on Science Direct after the keywords: *advanced drinking water treatment* and *emerging pollutants* and *pilot scale* provided 900 results, with over 54% strictly related to wastewater treatment processes), the remaining articles/book chapters were analyzed thoroughly. Abstracts of all references left after the first screening process (by using keywords, publication years, elimination of wastewater applications), were analyzed and out of more than 680 identified literature sources, only 135 relevant references were analyzed as full content and finally included in this review, while in Annex 1 were included 45 supplementary references;


e) *Analysis of the overall process of data collection and selection.* The selected scientific literature mirrors the evolution of the studied field in terms of instrumental analysis methods for EPs' detection, development and innovation of ADWT processes and their environmental assessment. However, it was observed that many studies present inconsistencies in terms of terminology used (EPs or PPs, CECs or MPs, PTS or SVHC), many processes are limited only to laboratory-scale and environmental assessments are not always used to support pilot or full-scale applications.

### **3. Emerging pollutants occurrence, classification and impacts**

#### *3.1. Definitions, classifications and regulations*

International organizations and regulations dedicated considerable efforts in defining and characterizing EPs (see Figure 1). "*Emerging*" refers to either new pollutants identified in aquatic media and organisms or to new characteristics and impacts of compounds that are already present in the environment. The Norman Network (2016) defined EPs as *substances detected into environment but currently not included in routine environmental monitoring programmes and which may be candidate for future legislation due to its adverse effects and/or persistency*. More than 1000 substances, gathered in 16 classes (algal toxins, antifoaming and complexing agents, antioxidants, detergents, disinfection by-products, plasticizers, flame retardants, fragrances, gasoline additives, nanoparticles, perfluoroalkylated substances, personal care products, pharmaceuticals, pesticides, anticorrosives), are classified as EPs addressing their environmental and health effects and some of their sources (see Annex 1, Table I). The European Environmental Agency considers that EPs (referred to also as "hazardous substances and chemicals") should be closely monitored as concentrations and effects, since they are increasingly being found in water bodies across the EU (EEA, 2012).

If EPs are relatively new and not very well regulated, this is not the case of **priority pollutants** (PPs), which are mostly part of EPs but are regulated at the international and national levels due to their high risk towards the aquatic biota and human health, hence their “*priority*” status (Richardson et al., 2007). The Water Framework Directive (WFD) 2000/60/EC (EC, 2000) and Decision 2455/2001/EC (EC, 2001) identified **33 PPs** based on their significant risks **to** or **via** the aquatic environment. Through Directive 2008/105/EC (EC, 2008) and Technical Report 2009-025 (EC, 2009), Environmental Quality Standards and strict monitoring rules regarding sampling points and analytical methods were issued. PPs’ list was completed with other **13** substances and the distinction between **priority** and **priority hazardous substances** was made (for the last ones, Member States should implement necessary measures with the aim of ceasing or phasing out emissions, discharges and losses).

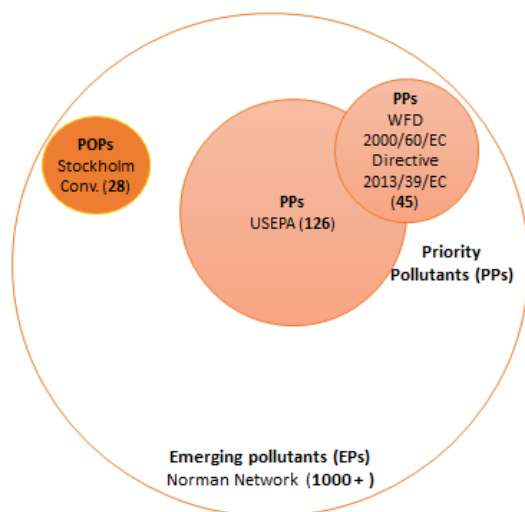

**Fig. 1.** Emerging, persistent and priority pollutants and specific regulations

Directive 2013/39/EU (EC, 2013) amended WFD 2000/60/EC (EC, 2000) and Directive 2008/105/EC (EC, 2008), new priority pollutants being identified and standards were targeted for implementation (by 2021 for existent PPs and by 2027 for the newly identified ones). Although this directive is based on the preventive actions and the *polluter-pays principles*, it focuses on PPs monitoring and assessment and it does not specifically approach issues related to DWT. Directive 2013/39/EU defines a list of **45**-priority pollutants grouped as single or classes of substances, which contains pesticides, industrial additives and by-products, pharmaceuticals, personal care products, steroid hormones, drugs of abuse, food additives, flame/fire retards, surfactants and others, from which an initial 10 compounds form a *watch list*. The first PPs included in the watch list were diclofenac, 17-beta-estradiol (E2) and 17-alfa-

etiniestradiol (EE2); afterwards, measures to avoid the risks involved by their release into aquatic environment should be established (Barbosa et al., 2016; Geissen et al., 2015). However, since PPs are currently not included in the routine monitoring programmes at EU level, but may pose a significant eco-toxicological risk, a recent study (Brack et al., 2017) proposes some specific solutions for the forthcoming WFD review in 2019 based on the developments of EU collaborative projects and Norman Networks contributions. Thus, ten recommendations to improve monitoring and strengthen comprehensive prioritization of pollutants, to foster consistent assessment and support solution-oriented management of surface waters were developed. The United States Environmental Protection Agency regulates **126** priority pollutants, including heavy metals and organic chemicals and their specific analytical test methods (US EPA, 2014).

A smaller group of EPs includes the so called **persistent organic pollutants** (POPs) which are defined as *chemical substances that persist in the environment, bio-accumulate through the food chain and pose a risk of causing adverse effects to human health and the environment* (Stockholm Convention, 2010). Starting with **12** substances, new POPs have regularly been added into the Stockholm Convention annexes. Presently, **28** POPs are listed, grouped in 3 categories as pesticides, industrial chemicals and unintentional chemical by-products (Stockholm Convention, 2017). POPs may enter the aquatic environment from point sources (as wastewater discharges or spills), non-point sources (as agricultural runoff) or indirectly via atmospheric transport and ocean currents.

### 3.2. Drinking water sources, occurrence, fate and impacts of EPs

Freshwater represents the main raw water source for human consumption, industry, agriculture and energy production. Seawater is considered only in cases of water scarcity due to the high energy and chemicals requirements for its treatment. Nonetheless, EPs are often detected in freshwater and ADWT technologies are required to achieve the necessary quality needed for human consumption (Ternes et al., 2015). This review focus on DWT of raw surface water, usually affected by organic and inorganic micro-pollutants that are of concern for human health and the environment. Inadequate wastewater treatment, excessive use of pesticides or hospital wastewater discharges are important causes of surface water pollution by EPs (Emmanuel et al., 2009). River freshwater is the most exposed to contamination from industrial, agricultural and animal farming discharges (WHO, 2011). EPs are found in surface water due to different factors (see Figure 2), then they undergo transport phenomena in natural waters and soil by runoff, erosion or leaching (Fàbrega et al., 2014). EPs' concentration can vary from wastewater discharge point to the water abstraction point because of:

biotransformation, volatilisation, photolysis, sorption, dispersion or different water sources combination, which can attenuate initial concentrations or transform pollutants.

The environmental impacts and health risks are not so well identified and characterized for all EPs (Bui et al., 2016), but there is a growing interest in the scientific community to deepen this field of knowledge. EPs' transformation through DWT processes can lead to compounds which may be more toxic, persistent and less biodegradable than their predecessors (Farré et al., 2008). The most important environmental effects of EPs refer to: bioaccumulation and biomagnification, persistency, toxicity, endocrine disruption potential, carcinogenic effects, mutagenic and teratogenic effects (Guillén et al., 2012). Some EPs can be harmful for both humans and aquatic organisms, with endocrine disturbing effects, estrogenic or hormone disruption, foetal malformation, or even DNA damages (Fawell and Ong, 2012). Human exposure pathways include: ingestion, inhalation and dermal contact through water and food (Pease and Gentry, 2016).

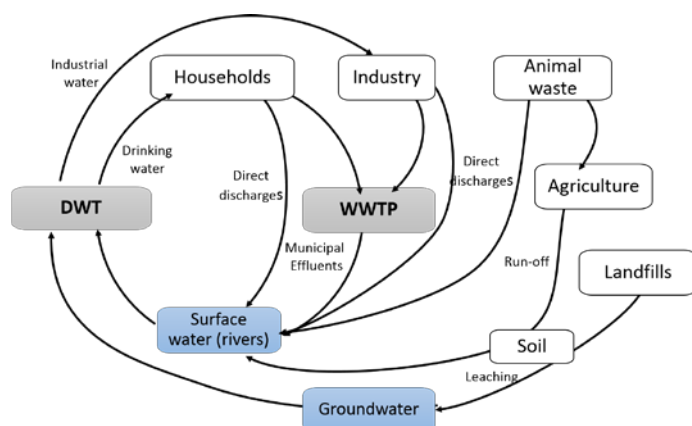


Fig. 2. EPs' pathways and related impacts related to the water uses (DWT: drinking water treatment; WWTP: wastewater treatment plant)

### 3.3. Methods of analysis

As most EPs are organic compounds and their concentrations are very low, their analysis is challenging and it entails continuous updates (about new compounds to be detected) and improvements (about required sensitivity). Analysis techniques include gas chromatography (GC) coupled with mass spectrometry (MS) and liquid chromatography (LC) coupled with MS (Guillén et al., 2012; Ribeiro et al., 2015; Richardson and Ternes, 2014). EPs analysis procedures are continuously adapted considering the pollutants concentration, specific media and level of precision. Some analysis methods use nuclear magnetic resonance spectroscopy

(Wu et al., 2010), solid-phase extraction coupled to LC-MS, hydrophilic interaction liquid chromatography (HILIC) (Postigo et al., 2008), liquid chromatography–tandem mass spectrometry (LC–MS/MS) analysis method for flame retardants, pesticides, personal care products (Pal et al., 2014; Rodil et al., 2012). EPs or their transformation products may be also qualitatively confirmed by nuclear magnetic resonance (NMR) spectroscopy (Richardson and Ternes, 2018).

#### **4. Advanced drinking water treatment (ADWT) processes for EPs' removal**

Conventional DWT processes are dedicated to the removal of solids of various sizes, organic matter and microorganisms/pathogens. They refer to: bar-screening, grit removal, pre-oxidation, coagulation-flocculation, sedimentation, rapid/slow sand and/or granular active carbon filtration, disinfection. The widespread use of chemicals, pharmaceuticals and personal care products (PPCPs), pesticides and solvents made necessary the adoption of advanced technologies, because conventional DWT were not designed to remove EPs (Rodriguez-Narvaez et al., 2017). This situation is exacerbated by the increasing pressures on water resources due to population growth, deterioration of natural water sources, knowledge of new EPs and therefore new guidelines and regulations involving more restrictive concentration limits.

The removal of specific EPs with low concentration in raw water by ADWT is associated with energy and chemicals consumption, which in turn leads to higher treatment costs and additional environmental impacts. From a technological point of view, ADWT may be applied (with the due modifications) for either water or wastewater treatment. To our knowledge (see Section 2), the scientific literature is far more abundant on case studies (mostly at lab-scale and to a lesser extent at pilot/full-scale) on advanced technologies for EPs' removal from wastewater, while studies specifically dedicated to drinking water production are far fewer. Due to their hydrophilic character, most EPs are difficult to remove during wastewater treatment processes, thus they reach surface water and their persistence afterwards affects DWT (Rodil et al., 2012).

Bui et al. (2016) discussed EPs regulated by the Swiss Government and the cases of advanced water or wastewater treatment for their removal (having as final end-use: water supply, wastewater recycling and reuse) that should consider at least the following criteria: (i) range of treated pollutants, treatment efficiency and removal mechanisms, (ii) environmental friendliness, (iii) simplicity of operation and maintenance, (iv) cost-effectiveness and (v) social acceptance.

In the next sections, the most used and promising (in terms of removal efficiencies) ADWT technologies for EPs' specific removal at pilot and/or full-scale will be presented.

#### 4.1. Membrane processes

Membrane processes effectively remove a wide variety of organic, inorganic and solid particles from surface and seawater or wastewater, through semipermeable materials that allow the separation of water (permeate) and of the concentrate (retained at the membrane surface). Membranes are produced from different materials, which provide specific characteristics (pore size, surface charge and hydrophobicity) that determine what type of contaminants can be retained (Gupta and Ali, 2013a). A wide variety of chemically and thermally stable polymers or polymer blends, but also other materials, such as ceramics, metals, glasses or mixed matrix membranes may be used (Arribas et al., 2015).

For drinking water production, several membrane processes may be used, which can be classified considering the force that drives the separation (Arribas et al., 2015):

- a) *Pressure driven processes*: microfiltration (MF), ultrafiltration (UF), nanofiltration (NF), reverse osmosis (RO),
- b) *Electric potential gradient*: electrodialysis (ED),
- c) *Concentration gradient*: forward osmosis (FO).

DWT requirements, the influent quality, the necessity to remove specific target pollutants and their concentrations dictate the process type and membrane material. The major operational parameters refer to: driving force characteristics (pressure, electric potential), mode of operation (cross flow, dead-end), water flow and initial solute concentrations, pH, membrane material, pore size and retention capacity (Rodriguez-Narvaez et al., 2017). The risk of fouling, clogging or concentration-polarisation depends on the water matrix (concentrations and type of contaminants), membrane material and process control, and therefore different cleaning methods (flushing, backward flushing, air flushing or chemical cleaning) have been developed (Sperlich et al., 2010).

A disadvantage of membrane processes (when comparing them to advanced oxidation processes) is that the pollutants are transferred into the concentrate streams and not destroyed, therefore the concentrate requires further treatment and disposal (Rodriguez-Mozaz et al., 2015). This is compensated by advantages as: ease of operation and adaption to existent treatment facilities, modular design, very small chemical requirements, low energy consumption. The most suitable membrane processes for EPs removal, due to their small pore sizes are: UF, NF and RO (Arribas et al., 2015). Among these processes, RO is the most effective in removing pesticides, PPCPs, toxic metals and cyanides (Malaeb and Ayoub, 2011). Over 99% of total organic and inorganic species were removed from surface waters and groundwater through RO (Gupta and Ali, 2013b; Schoonenberg Kegel et al., 2010). *Ion-*

*exchange membranes* (cation/anion exchange and bipolar membranes) are used in DWT, especially for sea water desalination by ED or reverse electrodialysis (Alzahrani and Mohammad, 2014; Singh, 2014). The most effective membrane processes that may be used for EPs removal at pilot and full-scale level are presented in Table 1, either as stand-alone or combined treatment.

#### 4.2. Advanced oxidation processes (AOPs)

AOPs are based on the production of hydroxyl radicals ( $\text{HO}\bullet$ ), one of the strongest oxidants (oxidation potential 2.8 V) that may be used for the removal/destruction of EPs for several purposes: raw water pre-treatment, DWT, wastewater treatment (Antonopoulou et al., 2014). The production of hydroxyl radical can be achieved by many pathways, which allow to choose the adequate AOP according to the specific characteristics of the raw water/wastewater and the necessary treatment targets (Catrinescu et al., 2011).

AOPs may be classified by considering the method to generate hydroxyl radicals into chemical, electro-chemical, sono-chemical and photochemical processes, combinations of AOPs with other processes being also frequently used (Molinari et al., 2017; D. Wang et al., 2015). Depending on how reactants get in contact, AOPs may be homogeneous or heterogeneous processes. In the heterogeneous processes, a catalyst such as metal supported catalysts, clays, carbon materials or semiconductors such as  $\text{TiO}_2$ ,  $\text{ZnO}$ ,  $\text{WO}_3$ ,  $\text{Cu}_2\text{O}$  or composite materials are also used (Enesca et al., 2016; Orha et al., 2017). EPs' removal efficiencies in homogeneous processes is dependent on the interactions between the chemical reagents and target compounds; while in heterogeneous processes, the adsorption of reactants and desorption of products that occur at the active sites of the catalyst surface are also very important (Klavarioti et al., 2009).

The most common radical generators/catalyst systems for AOPs include (X. Wang et al., 2015): Fenton's reagent involving iron species ( $\text{Fe}^{2+}$  or  $\text{Fe}^{3+}$ ) and Hydrogen peroxide ( $\text{H}_2\text{O}_2$ ), Ozone ( $\text{O}_3$ ), UV light (UV),  $\text{H}_2\text{O}_2/\text{UV}$ ,  $\text{H}_2\text{O}_2/\text{O}_3$ ,  $\text{H}_2\text{O}_2/\text{O}_3/\text{UV}$ , Photocatalysts/UV or solar radiation, Fenton combined processes (ultrasound/electro/photo Fenton with addition of  $\text{H}_2\text{O}_2$  and  $\text{Fe}^{2+}$ ). Hybrid processes that combine membrane separation and heterogeneous photocatalysis such as the photocatalytic membrane reactors are also interesting because each process complements the advantages and overcomes the challenges of the other (Molinari et al., 2017).

Although there are many lab-scale applications of AOPs for EPs removal from water/wastewater, there are only few studies performed at pilot-scale (Antonopoulou et al., 2014; Bui et al., 2016). It is worth mentioning that the major challenges referring to the use of

AOPs for EPs' removal from water are related to: a) the small concentrations of these compounds in water, b) the generation of reaction intermediates (when complete mineralisation of target compounds is not achieved), c) relatively high cost of processes when large scale installations are considered. The most effective AOPs that may be used for EPs' removal at pilot and full-scale level are presented in Table 1.

#### 4.3. Adsorption on activated carbon and other materials

Adsorption is an important ADWT process that is efficient and cost-effective if the adsorbent has high porosity and specific surface area, is easy to operate and regenerate (thermally or chemically) and is available in sufficient quantities. The adsorbents' removal capacity depends on densities (material, particle and bulk), porosities (particle and bulk), external surface area, internal surface area, pore-size distribution (among macropores, mesopores and micropores), surface chemistry and operational parameters (temperature, pH, contact time) (Zaitseva et al., 2013).

Various studies demonstrated that granular or powder activated carbon adsorption is one of the best technologies used for EPs' removal from surface water (Zhang et al., 2016; Rodriguez-Narvaez et al., 2017) along with silica gel (Sharma and Bhattacharya, 2016), activated alumina (Kumar et al., 2014), zeolites (Lofrano, 2012) and metal oxide adsorbents (Amin et al., 2014), but the energy used to produce adsorbents is very high (Arena et al., 2016).

In order to increase EPs' removal efficiencies, organic or inorganic materials were developed to obtain nanoadsorbents or engineered nanomaterials (which possess a minimum of one external dimension ranging from 1 to 100 nm) with improved adsorption properties, being able to remove efficiently EPs with various molecular sizes, hydrophobicity and speciation behaviour (Thines et al., 2017).

Engineered nanomaterials are classified as: carbonaceous nanomaterials (C-ENMs, carbon nanotubes, carbon nanofibers, fullerenes, graphenes and carbonaceous composites), metal and metal oxides (nanoscale zero-valent iron, TiO<sub>2</sub>, Ag and ZnO) and magnetic-core composite nano/micro particles that have cores made with magnetic elements such as iron, nickel, cobalt or their oxides and alloys with ferromagnetic or superparamagnetic properties, and shells (silica, alumina or polymers or surfactants).

#### 4.4. Single and combined ADWT

Taking into account the wide range of contaminants that belong to EPs category, it is obvious that many processes could be adopted independently or in combination and that their overall

removal efficiencies depend on the water matrix (contaminants structure and properties) and on the operational parameters (Bui et al., 2016; Verlicchi et al., 2010). These two criteria, namely the removal efficiency and the operational conditions represent the most used instruments for technical performance evaluation and ADWT comparison in the vast majority of studies.

However, ADWT such as AOPs, adsorption on activated carbon or other materials, RO and NF demonstrated their efficiency independently in EPs removal (Hofmann et al., 2011; Jin and Peldszus, 2012). The same stands for ADWT combined treatments such as: ozonation coupled to granular activated carbon (van der Aa et al., 2012), UV/H<sub>2</sub>O<sub>2</sub> and UV/H<sub>2</sub>O<sub>2</sub>/O<sub>3</sub> oxidation (Lester et al., 2011; Scheideler, 2011), ion exchange combined with ceramic microfiltration (Galjaard, 2011). Specifically considering pharmaceuticals in surface water, it was demonstrated that while DWT guarantee 50% removal, ADWT are able to reach >90% efficiency (van der Hoek et al., 2014; WHO, 2012). As a general remark, literature generally discusses EPs' removal at significant concentrations, while very few studies are available considering the low concentrations occurring in surface water (Barbosa et al., 2016; Ribeiro et al., 2015).

Nanomaterials may be used in stand-alone applications (adsorption) to remove contaminants (organic or inorganic) or may be incorporated in conventional membranes, chemical degradation, photodegradation or even in chemical disinfection steps (Simate et al., 2012). Adeleye et al. (2016) compared ADWT nanomaterials based processes with the conventional ones and found out that for EPs removal from surface waters, RO or ozonation are more expensive than C-ENMs or nano/micro particles.

The most effective ADWT processes that are used for EPs removal at pilot and full-scale level are presented in Table 1.

**Table 1.** Overview of EPs' removal by ADWT at pilot and full scale

Treatment Processes	EPs class target	Removal efficiencies	References
<b>Single processes</b>			
Ozonisation	Pharmaceuticals	>98%	(Talib and Randhir, 2016)
UV-photolysis	Pharmaceuticals	30-70%	(Pal et al., 2010)
Nanofiltration	Pharmaceuticals	15 – 100%	(García-Vaquero et al., 2014)
GAC adsorption	Mix of pharmaceuticals, pesticides	30 20- 50% as DOC	(Kennedy et al., 2015)
<b>Combined processes</b>			
Dioxychlorination , coagulation/flocculation, sand filtration, ozonation, carbon filtration and final disinfection with chlorine	Pharmaceuticals and drugs of abuse	>98%	(Boleda et al., 2011)

Treatment Processes	EPs class target	Removal efficiencies	References
Coagulation, ultrafiltration, and GAC filtration	Pharmaceuticals, hormones, antibiotics and flame retardants	99%	(Kim et al., 2007)
UV pre-disinfection, filtration, nanofiltration/reverse osmosis, remineralisation and chlorine disinfection	Pharmaceuticals	>85%	(Radjenović et al., 2008)
Chlorine, coagulation/flocculation, sedimentation, filtration, chloramine, ozonation, GAC filtration, chlorine disinfection	Drugs of abuse	89 – 100%	(Huerta-Fontela et al., 2008)
Chlorine, coagulation/flocculation, filtration, ozonation, granular activated carbon, final chlorination	Drugs of abuse	88 – 100%	(Boleda et al., 2009)
Coagulation/ flocculation, filtration, final chlorination	Drugs of abuse	0 – 18%	(Rodayan et al., 2016)
Filtration, coagulation /flocculation and final chlorination	Pharmaceuticals, flame retardants, plasticizers, biocides, pesticides, herbicides, UV filters	>60%	(Rodil et al., 2012)
Coagulation, flocculation, sedimentation, rapid sand filtration, ozonisation, two-step GAC filtration and Ultraviolet disinfection	Pharmaceuticals	51-95%	(Vieno et al., 2007)
Advanced oxidation	Pharmaceuticals	>99%	(Klavarioti et al., 2009)
Ultrafiltration and nanofiltration	Estrogens	>90%	(Sanches et al., 2012)
Photocatalysis and solar photolysis	Pharmaceuticals	66-82%	(Kanakaraju et al., 2014)
UV / H2O2 integrated into an existing full scale plant	10 pesticides, Pharmaceuticals, Microorganisms	60-98% 67-98% 100%	(Kruithof et al., 2007)
Ultraviolet -photolysis	Pharmaceuticals	80%	(Lekkerkerker-Teunissen et al., 2013)
Dioxychlorination, coagulation/ flocculation, settling, sand filtration, ultrafiltration, ultraviolet disinfection, reverse osmosis and remineralization	perfluorooctane sulfonate (PFOS) / perfluorooctanoate (PFOA)	≥99%	(Flores et al., 2013)

Formattato: Italiano (Italia)

## 5. Environmental assessments of ADWT processes

As presented in the previous sections, ADWT technologies are needed for EPs' removal implying the use of additional energy and/or chemicals, which translates into higher investment and operational costs (Bui et al., 2016). These environmental impacts increase in indirect correlation with EPs' concentrations (i.e. large water quantities to be treated usually by combined ADWT so as to remove small pollutant loads). Therefore, the selection of ADWT processes for EPs' removal should take into account complex criteria involving technical, environmental and economic aspects to ensure a sustainable technological option. These criteria may consider: environmental assessment instruments (e.g. life cycle assessment, carbon and water footprint, multi criteria assessments, etc.), technical performance indicators (removal efficiencies, specific energy consumption, reagent quantities, etc.), and economical evaluation tools (life cycle costing, cost-benefit analysis). In the next sections the most used

environmental evaluation instruments for the assessment of ADWT technologies are discussed.

### 5.1. Life cycle assessment

Life Cycle Assessment (LCA) identifies possible environmental impacts generated in all life cycle stages from “*cradle-to-grave*” (raw material, production, use and disposal, including recycling and reuse) of products (Vince et al., 2008). LCA follows a standardized procedure according to ISO 14040:2006 (Bonton et al., 2012; ISO, 2006) which includes a planning phase (goal and scope definition), a input/output analysis phase (life cycle inventory), an environmental impact assessment phase (LCIA- Life cycle impact assessment) and an interpretation phase.

LCA [has](#) received a growing attention in evaluation of the whole water use cycle (Barjoveanu et al., 2014; Loubet et al., 2014) and environmental assessment of water and wastewater treatment technologies (Corominas et al., 2013). [When LCA considers the whole water cycle \(Barjoveanu et al., 2014; Lemos et al., 2013; Loubet et al., 2014\) the analysis focuses on identifying, describing and comparing impacts of all phases \(water production, distribution, wastewater collection, wastewater treatment\).](#) [Referring strictly](#) to drinking water, LCA was extensively used [on the operational phase of drinking water production, mainly](#) to compare the environmental impacts of various treatment processes, technologies and development scenarios [\(Table 2\), and only a few studies have considered the construction and decommissioning phases of water production facilities \(Igos et al., 2014\), or other relevant aspects for water production like distribution systems performance \(Sanjuan-Delmás et al., 2015\) and alternative water sources \(Godskesen et al., 2013; Lundie et al., 2004\).](#)

In Table 2, a selection of LCA applications for ADWT is presented considering the studies objectives, system limits and most important environmental impacts.

The most used functional unit is the water production volume (usually 1 m<sup>3</sup>) and most LCA studies focus on process or technology performance from an environmental and sometimes economic point of view (Barrios et al., 2008; Jeswani et al., 2015). With regard to the present review it is important to notice that, with very few exceptions (Amini et al., 2015; Bonton et al., 2012; Gifford et al., 2017), LCA studies do not consider aspects like raw water quality, water quality standards, treatability in the definition of the functional unit. Amini et al. (2015) discussed the importance of functional unit definition for LCA evaluation of treatment technologies in a study on ion exchange technology performance, and showed that the lower the initial concentration of the target substance, the higher the associated environmental impacts will be. Bonton et al (2012) mentioned 4 usual indicators in the definition of the functional unit (1 m<sup>3</sup> treated water), but [did not](#) mention EPs nor the methodology to include

them in the functional unit definition. A limited number of studies compare human health risks and risk assessment with LCA; most of these focus on the assessment or comparison of processes and technologies like membrane processes (Manda et al., 2014), ion exchange (Amini et al., 2015; Choe et al., 2013), sorption (Gifford, 2016). Gifford et al. (2017) explored through LCA the trade-offs between DWT impacts and the reduction in human health but mainly considers inorganic contaminants.

Critical impacts of ADWT in LCA studies refer to: electricity consumption, and subsequent carbon emissions; chemicals production which contribute to eutrophication and eco-toxicity, but the way these are described varies greatly due to differences in analysed systems and different assessment methods. More examples for comparing DWT and ADWT alternatives by means of LCA studies are presented in Table 2.

Table 2. Overview of LCA applied for different ADWT/DWT processes evaluation (water supply: surface water)

Goals and objectives	System boundaries (technological stages)	LCIA impacts and contributors	References
<b>Technology performance comparison</b>			
Eco-design of DWT	DIS-Oz,C/F,SED,F,DIS-Oz,GAC,DIS-NaClO	Electricity consumption due to ozone generation system, GAC regeneration using fossil resources and reagents	(Ahmadi et al., 2016)
Reduction of operating cost and environmental impacts of DWT through six algorithms	DIS-OZ,C/F,SED,F,DIS-OZ,GAC,DIS	Ozonation, GAC regeneration and coagulant dose	(Capitanescu et al., 2016)
Two NF systems compared with conventional DWT	cellulose acetate membrane filtration system vs. polyethersulfine membrane filtration system (pilot-scale) vs. GAC	Electricity and chemicals for membrane production; GAC production and energy for DWT	(Manda et al., 2014)
Comparison of 2 DWT plants	a) DIS-OZ, pre-MIN, C/F, OX, MIN, SED, SF, UF, DIS-NaClO b) Pre-MIN, C/F, SED, OX, MIN, SED, post-MIN, SF, UF, DIS-NaClO	Site A: higher electricity consumption; site B: impacts due to reagent consumption and DWT process complexity.	(Igos et al., 2014)
Comparison of 2 DWT plants to assess impacts due to choice of energy sources and chemicals	1. F, NF, DIS-Cl2 2. C/F,SED, SF, GAC, DIS-Cl2	Conventional DWT's impact is higher due to electricity consumption, reagents and GAC	(Bonton et al., 2012)
Comparison of "Arvia" process vs GAC. Focus on adsorbents recovery	1. Avira process: SF / adsorption onto Nyex, SED 2. SF, GAC	Electricity consumption for GAC and Nyex regeneration.	Jeswani <i>et al.</i> , 2015)
<b>Scenario analysis</b>			
Comparison of 5 scenarios of drinking water sources and identification of environmental impacts caused by drinking water consumption	S1: C/F,SED,SF,GAC,DIS (Oz, Cl2) S2: (S1+RO and remineralization); S3: (S1 + domestic RO); S4: mineral water in plastic bottles; S5: mineral water in glass bottles.	S1 is the most convenient alternative compared with PET and glass bottles. Comparing S1 with S2 and S3, electricity consumption and reagents lead to higher environmental impacts	(Garfi et al., 2016)

Goals and objectives	System boundaries (technological stages)	LCIA impacts and contributors	References
Comparison of different scenarios in Paris metropolitan area	Two DWT plants with conventional treatment: C/F,SED,SF,GAC,DIS-Oz, Dis-UV, CL Membrane process: F,SED, Pre-F,UF,NF,DIS-UV, DIS-CI)	Complex evaluation of scenarios and impacts. Water resources depletion and electricity consumption	(Loubet et al., 2016)
Environmental assessment of coagulant and PAC dose; chemicals alternative; different alternative technologies for ozone production and electricity consumption.	a) C/F,SED,GAC,SF, DIS-Oz b) C/F,SED/SF,DIS-Oz, GAC c) C/F,SED,SF,DIS-Oz, GAC	Chemicals and electricity consumption.	(Mery et al., 2014)
Environmental impacts produced by 2 DWT	Conventional: SF,DIS-Oz, pH adjustment, GAC, pH Adjustment, SF Alternative 1: DIS-Oz,GAC,pH adjustment,SF,RO Alternative 2: SF,RO, pH adjustment.	Electricity, chemicals, GAC.	(Mohapatra et al., 2002)

**Notes:** DIS-Disinfection (Oz–ozonation, NaClO–sodium hypochlorite, HClO–hypochlorous acid, Cl<sub>2</sub>–chlorine gas) C/F–coagulation/flocculation, F–Filtration (SF–sand filtration), GAC–Adsorption on granular activated carbon, MIN–mineralization, OX–oxidation, DWD–Drinking water distribution, WWC–wastewater collection, WWT–wastewater treatment

## 5.2. Carbon Footprint and Water Footprint

The footprint family indicators was developed in the last two decades to quantitatively measure the impacts of human activities over natural resources and the environment, as well as to assess sustainability (Čuček et al., 2012; Fang et al., 2014). The most used footprints are: ecological footprint, water footprint, and carbon footprint although other types of footprints are also used for different studies such as: social, economic, energy, chemical nitrogen footprints (Fang et al., 2014).

Carbon footprint (**CF**) is defined as the amount of CO<sub>2</sub>-equivalent emissions caused directly and indirectly by an activity (Wiedmann and Minx, 2008), or as the total amount of greenhouse gas (GHG) emissions over the life cycle of a process or product (BSI, 2008). CF takes into account non-CO<sub>2</sub> emissions (e.g. CH<sub>4</sub>, N<sub>2</sub>O and fluorinated gases) whose global warming potentials are much higher than that of CO<sub>2</sub>, and the CF gives the responsibility for global warming to consumers (Strutt et al., 2008; Wiedmann and Minx, 2008). CF assessment is usually based on the GHG (that are process relevant) accounting, considering certain boundaries and it is expressed as a sum of mass units or mass flows of CO<sub>2</sub> equivalents (Pandey et al., 2011).

CF analysis may be used to evaluate alternatives for water treatment and technological facilities distribution and storage, in order to reduce emissions and the associated impacts and costs. Software instruments such as **CCaLC**-Carbon Footprinting Tool (2013) or **ECAM**-Energy performance and Carbon emissions Assessment and Monitoring Tool (2015) are

available, however there are few studies (Qi and Chang, 2013; Wu et al., 2015) that assess the CF of DWT plants due to the difficulty of quantifying the emissions and estimating the associated costs.

Qi and Chang (2013) compared through CF actual DWT production capacity (surface and groundwater sources) with the expansion of 5 different water sources (groundwater, surface water, transferred water use permit, regional water and other options). The impact generated on climate change by GHGs and the costs involved in each stage of DWT plants construction, production, transportation, treatment, use (drinking water distribution and wastewater collection), wastewater treatment and discharge into rivers was evaluated. CF and cost analysis for water supply systems boost continuous improvements for the related technologies, cost-effectiveness of each stage of drinking water production and reduction of generated impacts (Qi and Chang, 2013).

In a recent study, Wu et al. (2015) [have](#) used life cycle CF accounting (LCA-CF) and life cycle costing (LCC) to optimise the [placement of the water treatment works](#) of Ningbo city (China) [considering the performance of other water systems elements \(raw water transport, water treatment facility and the downstream distribution network\)](#). The analysis showed that a clear accounting of LCA-CF and the inclusion of CF costs as a decision-making component affect the priority ranking of various DWT siting options, facilitating the decision for an alternative with the lowest LCC (with CF cost) when achieving the same water supply benefits.

A comprehensive mathematical model was developed in order to estimate and compare on-site and off-site CO<sub>2</sub> emissions, from conventional and ADWT plants in South Korea (Kyung et al., 2013). Coagulation-flocculation, sedimentation and filtration were chosen as conventional treatment scheme, while advanced treatments involved coagulation-flocculation followed by MF and ozone disinfection. A sensitivity analysis to examine the effect of operation factors and conditions on CO<sub>2</sub> emission and to suggest better options for sustainable operation was also carried out. This study results, apart from providing basic knowledge on CO<sub>2</sub> emissions from different types of DWTs, suggest possibilities to efficiently reduce CO<sub>2</sub> emission while enhancing the quality of treated water, and offers guidelines to properly operate each unit in the water treatment process (Kyung et al., 2013).

**Water footprint (WF)** concept was introduced in 2003 [by A. Hoekstra](#) and is defined as the cumulative virtual water content of all products and services consumed by individuals or communities within a given region (Hoekstra et al., 2011). WF [assessment](#) is used to evaluate the extent to which a product, process or activity may affect the environment, social or economic sustainability. As in LCA, WF can be expressed in a specific functional unit (e.g. m<sup>3</sup>/t of production, per hectare of cropland, etc.). WF has three components: a) *Blue water footprint* refers to consumption of blue water resources (surface and groundwater); b) *Green*

*water footprint* refers to consumption of green water resources (rainwater as it does not become run-off); c) *Grey water footprint* is defined as the volume of freshwater required to assimilate the pollutants loads considering the natural background concentrations and existing ambient water quality standards.

Although there are many studies related to WF of products, production processes, industries (Hoekstra, 2015; Lovarelli et al., 2016; Skouteris et al., 2018), there are only few studies related to water supply and ADWT. At global level, the WF of municipal water supply has been estimated as 3.6% of the total WF of humanity (Hoekstra, 2015). Considering that the ratio of net to gross abstraction has been estimated to be 5-15% in urban areas and 10-50% in rural areas, the blue WF of drinking water from the tap can vary in the interval 0.065-0.65 L/L, assuming that the rest of the water returns to the water system from which it was abstracted (Hoekstra, 2015). To our current knowledge, other studies that consider ADWT assessment through WF were not found in the international scientific literature.

### 5.3. Other type of assessments

#### **Cost performance analysis**

Below are discussed several evaluation efforts that have been targeted towards finding a trade-off between the benefits of implementing various EPs' removal technologies and the technical and environmental problems and impacts that come along with these technologies. This is also the framework into which the few ADWT cost-performance analysis studies have been realized. Adeleye et al. (2016) evaluated the applications of various engineered nanomaterials and their potential use in ADWT. This assessment has considered technical performances (targeted compounds, removal efficiencies), environmental aspects (direct impacts, secondary pollution and toxicity), as well as cost estimates (where available) with comparisons to conventional technologies for the same target EPs. The results showed a great variability of performances and costs, but the authors advocate for the benefits of these emerging technologies over the conventional ones.

The cost performance analysis performed by Iqos et al. (2014) show that both capital costs for retrofitting/upgrading of existing DWT to advanced processes, as well as operational costs increase with decreasing concentrations of target contaminants.

Solutions to minimize the costs and environmental impacts in the water sector should approach operational aspects and associated impacts by switching to electricity consumption from renewable sources, increasing membrane life-time and cleaning periods (Ahmadi et al., 2016; Chollom et al., 2017; Liikanen et al., 2006). Control parameters for optimizing environmental impacts and operational costs of DWT technologies improvements have been

proposed: temperature, pH, turbidity, UV absorbance, dissolved organic carbon, microorganisms, inorganic compounds, micropollutants and by-products (Capitanescu et al., 2016).

### **Multi criteria assessment**

Multi-criteria assessment (MCA) tool has been used by researchers as a support for decision making processes, evaluation, generation or comparison of alternatives, in order to better understand the aim of contextual analysis, some interests or relations between processes and stakeholders (Ahmadi and Tiruta-Barna, 2015; Paneque Salgado et al., 2009). The main goal of multi-criteria evaluation techniques is to discover connections and relations between the evaluated actions and actors involved in the decisional process, in order to have a clearer vision on how the entire assessment process takes place, not only to identify or compare different alternatives, depending on certain set criteria. MCA is supposed to identify all social, economic and governance issues, from multiple points of view, solving all interest disputes, many information from different disciplines and the involvement of social, governmental and communities representatives being needed (Martin-Ortega and Berbel, 2010; Yan et al., 2016).

Multi-criteria assessment of ADWT technologies for EPs removal was realized in a small number of studies. [Mery et al.](#) (2013), [have](#) considered [in their assessment](#): type of treated pollutants (organic micropollutants, PPCPs and steroid hormones), operational parameters and removal efficiencies (reagents dose, pH, contact time and water characteristics) and treatment technologies (GAC filters, AOPs, membrane processes and membrane bioreactors processes). [A similar complex MCA was performed by Sudhakaran et al \(2013\) to compare EPs removal of several DWT and ADWT processes: riverbank filtration, various oxidations \(O<sub>3</sub>, AOP and UV-AOP using H<sub>2</sub>O<sub>2</sub>\), GAC adsorption, membrane processes \(RO and NF\). The analysis criteria were: treatability, costs, technical considerations, sustainability and residence time period.](#) Other MCA focus on environmental impacts (energy consumption, reagents used, by-products, waste production and disposal) (Ahmadi et al., 2016), technological features (construction, operation, maintenance, flexibility and reliability of treatment methods) or economic [aspects](#) (DWT plant scale, treatment targets, technologies applied and electricity consumption) (Capitanescu et al., 2016) and social aspects (Bui et al., 2016; Müller et al., 2016)

## **6. Conclusions**

In the last two decades consistent efforts have been made towards the identification, characterisation, classification, international regulation, evaluation of toxicity and fate of EPs

in the aquatic environment and their impacts on human health, as well as to the identification and assessment of various treatment technologies for removing such pollutants (especially from wastewater). Emerging pollutants are classes of chemical compounds with different origins and aquatic routes that have increased risks for the human health and aquatic biota.

[This paper critically reviews the main research topics related to the importance of emerging pollutants removal for drinking water production by addressing both the issues of pilot/ full scale advanced treatment options and the instruments for environmental performance assessment.](#)

There are important issues that need to be further studied or to be addressed by scientists and water companies about the safe and sustainable supply of drinking water from surface sources:

- Consistent definitions, criteria for classification and regulation of maximum allowable concentrations of EPs need to be addressed at the level of international and national regulation bodies towards water supplies and DWT, especially considering the risks for human health;
- Removal or degradation of EPs is performed by ADWT, which usually completes (as pre-treatment or final treatment) the conventional stages for drinking water production from surface sources. Thus, membrane processes, AOPs and adsorption on activated carbon or other materials found many applications at pilot and full scale, and their selection is mainly based on technical and economic issues;
- Comparisons of ADWT options in relation to the “degradation” (AOPs) or “phase change” (membrane processes, adsorption) processes is rarely made for DWT, due to the relatively small concentrations of target pollutants in the influent, although there are many studies at laboratory scale that support these applications. However, these comparisons should be used for scaling up studies that refer to EPs removal;
- Various assessment instruments may complete the sustainability profile for the selection of ADWT options for EPs’ removal, since all these alternatives involve additional energy and material consumption. There are only few studies that consider this type of approach to support full-scale installations. Although many of them pointed out that electricity consumption is one of the most significant impact generators, there are few investigations that consider the impact of using renewable energy sources. Finally, these assessment tools need to be refined to better capture the associated environmental impacts of removing EPs.

### **Acknowledgements**

This work was supported by a grant of the Romanian Ministry of Research and Innovation, CCCDI-UEFISCDI, project number 26PCCDI/01.03.2018, “*Integrated and sustainable*

processes for environmental clean-up, wastewater reuse and waste valorization" (SUSTENVPRO), within PNCDI III.

## References

1. Adeleye, A.S., Conway, J.R., Garner, K., Huang, Y., Su, Y., Keller, A.A., 2016. Engineered nanomaterials for water treatment and remediation: Costs, benefits, and applicability. *Chem. Eng. J.* 286, 640–662. doi:10.1016/j.cej.2015.10.105
2. Ahmadi, A., Tiruta-Barna, L., 2015. A process modelling-life cycle assessment-multiobjective optimization tool for the eco-design of conventional treatment processes of potable water. *J. Clean. Prod.* 100, 116–125. doi:10.1016/j.jclepro.2015.03.045
3. Ahmadi, A., Tiruta-Barna, L., Benetto, E., Capitanescu, F., Marvuglia, A., 2016. On the importance of integrating alternative renewable energy resources and their life cycle networks in the eco-design of conventional drinking water plants. *J. Clean. Prod.* 135, 872–883. doi:10.1016/j.jclepro.2016.06.201
4. Alzahrani, S., Mohammad, A.W., 2014. Challenges and trends in membrane technology implementation for produced water treatment: A review. *J. Water Process Eng.* 4, 107–133. doi:10.1016/j.jwpe.2014.09.007
5. Amin, M.T., Alazba, a a, Manzoor, U., 2014. A Review of Removal of Pollutants from Water / Wastewater Using Different Types of Nanomaterials. *Adv. Mater. Sci. Eng.* 2014, 1–25. doi:10.1155/2014/825910
6. Amini, A., Kim, Y., Zhang, J., Boyer, T., Zhang, Q., 2015. Environmental and economic sustainability of ion exchange drinking water treatment for organics removal. *J. Clean. Prod.* 104, 413–421. doi:10.1016/j.jclepro.2015.05.056
7. Antonopoulou, M., Evgenidou, E., Lambropoulou, D., Konstantinou, I., 2014. A review on advanced oxidation processes for the removal of taste and odor compounds from aqueous media. *Water Res.* 53, 215–234. doi:10.1016/j.watres.2014.01.028
8. Arena, N., Lee, J., Clift, R., 2016. Life Cycle Assessment of activated carbon production from coconut shells. *J. Clean. Prod.* 125, 68–77. doi:10.1016/J.JCLEPRO.2016.03.073
9. Arribas, P., Khayet, M., García-Payo, M.C., Gil, L., 2015. Novel and emerging membranes for water treatment by hydrostatic pressure and vapor pressure gradient membrane processes, *Advances in Membrane Technologies for Water Treatment*. Elsevier Ltd. doi:10.1016/B978-1-78242-121-4.00008-3
10. Barbosa, M.O., Moreira, N.F.F., Ribeiro, A.R., Pereira, M.F.R., Silva, A.M.T., 2016. Occurrence and removal of organic micropollutants: An overview of the watch list of EU Decision 2015/495. *Water Res.* 94, 257–279. doi:10.1016/j.watres.2016.02.047
11. Barjoveanu, G., Comandaru, I.M., Rodriguez-Garcia, G., Hospido, A., Teodosiu, C., 2014. Evaluation of water services system through LCA. A case study for Iasi City, Romania. *Int. J. Life Cycle Assess.* 19, 449–462. doi:10.1007/s11367-013-0635-8
12. Barrios, R., Siebel, M., van der Helm, A., Bosklopper, K., Gijzen, H., 2008. Environmental and financial life cycle impact assessment of drinking water production at Waternet. *J. Clean. Prod.* 16, 471–476. doi:10.1016/j.jclepro.2006.07.052
13. Boleda, M.R., Galceran, M.T., Ventura, F., 2011. Behavior of pharmaceuticals and drugs of abuse in a drinking water treatment plant (DWTP) using combined conventional and ultrafiltration and reverse osmosis (UF/RO) treatments. *Environ. Pollut.* 159, 1584–1591. doi:10.1016/j.envpol.2011.02.051
14. Boleda, M.R., Galceran, M.T., Ventura, F., 2009. Monitoring of opiates, cannabinoids and their metabolites in wastewater, surface water and finished water in Catalonia, Spain. *Water Res.* 43, 1126–1136. doi:10.1016/j.watres.2008.11.056
15. Bonton, A., Bouchard, C., Barbeau, B., Jedrzejak, S., 2012. Comparative life cycle assessment of water treatment plants. *Desalination* 284, 42–54. doi:10.1016/j.desal.2011.08.035
16. Brack, W., Dulio, V., Ågerstrand, M., Allan, I., Altenburger, R., Brinkmann, M., Bunke, D., Burgess, R.M., Cousins, I., Escher, B.I., Hernández, F.J., Hewitt, L.M., Hilscherová, K., Hollender, J., Hollert, H., Kase, R., Klauer, B., Lindim, C., Herráez, D.L., Miège, C., Munthe, J., O'Toole, S., Posthuma, L., Rüdél, H., Schäfer, R.B., Sengl, M., Smedes, F., van de Meent, D., van den Brink, P.J., van Gils, J., van Wezel, A.P., Vethaak, A.D., Vermeirssen, E., von der Ohe, P.C., Vrana, B., 2017.

Towards the review of the European Union Water Framework management of chemical contamination in European surface water resources. *Sci. Total Environ.* 576, 720–737. doi:10.1016/j.scitotenv.2016.10.104

17. BSI, B.S., 2008. How to assess the carbon footprint of goods and services. Surrey, United Kingdom.
18. Bui, X.T., Vo, T.P.T., Ngo, H.H., Guo, W.S., Nguyen, T.T., 2016. Multicriteria assessment of advanced treatment technologies for micropollutants removal at large-scale applications. *Sci. Total Environ.* 563–564, 1050–1067. doi:10.1016/j.scitotenv.2016.04.191
19. Capitanescu, F., Rege, S., Marvuglia, A., Benetto, E., Ahmadi, A., Gutiérrez, T.N., Tiruta-Barna, L., 2016. Cost versus life cycle assessment-based environmental impact optimization of drinking water production plants. *J. Environ. Manage.* 177, 278–287. doi:10.1016/j.jenvman.2016.04.027
20. Catrinescu, C., Daniela, A., Teodosiu, C., 2011. Catalytic wet hydrogen peroxide oxidation of para-chlorophenol over Al/Fe pillared clays (AlFePILCs) prepared from different host clays. *Appl. Catal. B Environ.* 101, 451–460. doi:10.1016/J.APCATB.2010.10.015
21. CCalc [WWW Document], 2007. URL <http://www.ccalc.org.uk/> (accessed 7.20.17).
22. Choe, J.K., Mehnert, M.H., Guest, J.S., Strathmann, T.J., Werth, C.J., 2013. Comparative assessment of the environmental sustainability of existing and emerging perchlorate treatment technologies for drinking water. *Environ. Sci. Technol.* 47, 4644–4652. doi:10.1021/es3042862
23. Chollom, M.N., Pikwa, K., Rathilal, S., Pillay, V.L., 2017. Fouling mitigation on a woven fibre microfiltration membrane for the treatment of raw water. *South African J. Chem. Eng.* 23, 1–9. doi:10.1016/j.sajce.2016.12.003
24. Corominas, L., Foley, J., Guest, J.S., Hospido, A., Larsen, H.F., Morera, S., Shaw, A., 2013. Life cycle assessment applied to wastewater treatment: State of the art. *Water Res.* 47, 5480–5492. doi:10.1016/j.watres.2013.06.049
25. Čuček, L., Klemeš, J.J., Kravanja, Z., 2012. A review of footprint analysis tools for monitoring impacts on sustainability. *J. Clean. Prod.* 34, 9–20. doi:10.1016/j.jclepro.2012.02.036
26. Deblonde, T., Cossu-Leguille, C., 2011. Emerging pollutants in wastewater: A review of the literature. *Int. J. Hyg. Environ. Health* 214, 442–448. doi:10.1016/j.ijheh.2011.08.002
27. ECAM [WWW Document], 2015. . ECAM by IWA GIZ, implemented by ICRA WaCCliM Proj. URL <http://wacclim.org/ecam>
28. EEA [WWW Document], 2012. . Water Resour. Eur. Context vulnerability EEA 2012 state water assessment, EEA Rep. No 11/2012. URL [http://www.eea.europa.eu/publications/water-resources-and-vulnerability/at\\_download/file](http://www.eea.europa.eu/publications/water-resources-and-vulnerability/at_download/file)
29. Emmanuel, E., Pierre, M.G., Perrodin, Y., 2009. Groundwater contamination by microbiological and chemical substances released from hospital wastewater: Health risk assessment for drinking water consumers. *Environ. Int.* 35, 718–726. doi:10.1016/j.envint.2009.01.011
30. Enesca, A., Baneto, M., Perniu, D., Isac, L., Bogatu, C., Duta, A., 2016. Solar-activated tandem thin films based on CuInS<sub>2</sub>, TiO<sub>2</sub> and SnO<sub>2</sub> in optimized wastewater treatment processes. *Appl. Catal. B Environ.* 186, 69–76. doi:10.1016/j.apcatb.2015.12.053
31. Fàbrega, F., Kumar, V., Schuhmacher, M., Domingo, J.L., Nadal, M., 2014. PBPK modeling for PFOS and PFOA: Validation with human experimental data. *Toxicol. Lett.* 230, 244–251. doi:10.1016/j.toxlet.2014.01.007
32. Fang, K., Heijungs, R., De Snoo, G.R., 2014. Theoretical exploration for the combination of the ecological, energy, carbon, and water footprints: Overview of a footprint family. *Ecol. Indic.* 36, 508–518. doi:10.1016/j.ecolind.2013.08.017
33. Farré, M. la, Pérez, S., Kantiani, L., Barceló, D., 2008. Fate and toxicity of emerging pollutants, their metabolites and transformation products in the aquatic environment. *TrAC - Trends Anal. Chem.* 27, 991–1007. doi:10.1016/j.trac.2008.09.010
34. Fawell, J., Ong, C.N., 2012. Emerging Contaminants and the Implications for Drinking Water. *Int. J. Water Resour. Dev.* 28, 247–263. doi:10.1080/07900627.2012.672394
35. Flores, C., Ventura, F., Martín-Alonso, J., Caixach, J., 2013. Occurrence of perfluorooctane sulfonate (PFOS) and perfluorooctanoate (PFOA) in N.E. Spanish surface waters and their removal in a drinking water treatment plant that combines conventional and advanced treatments in parallel lines. *Sci. Total Environ.* 461–462, 618–626. doi:10.1016/j.scitotenv.2013.05.026
36. Galjaard, G., 2011. Performance Evaluation SIX®-Ceramac® in Comparison with Conventional Pre-Treatment Techniques for Surface Water Treatment. *Water Pract. Technol.* 6, 1–2. doi:10.2166/wpt.2011.0066
37. García-Vaquero, N., Lee, E., Jiménez Castañeda, R., Cho, J., López-Ramírez, J.A., 2014.

Comparison of drinking water pollutant removal using a nanofiltration pilot plant powered by renewable energy and a conventional treatment facility. *Desalination* 347, 94–102. doi:10.1016/j.desal.2014.05.036

38. Garfí, M., Cadena, E., Sanchez-Ramos, D., Ferrer, I., 2016. Life cycle assessment of drinking water: Comparing conventional water treatment, reverse osmosis and mineral water in glass and plastic bottles. *J. Clean. Prod.* 137, 997–1003. doi:10.1016/j.jclepro.2016.07.218

39. Geissen, V., Mol, H., Klumpp, E., Umlauf, G., Nadal, M., van der Ploeg, M., van de Zee, S.E.A.T.M., Ritsema, C.J., 2015. Emerging pollutants in the environment: A challenge for water resource management. *Int. Soil Water Conserv. Res.* 3, 57–65. doi:10.1016/j.iswcr.2015.03.002

40. Gifford, J.M., 2016. Sustainable Drinking Water Treatment : Using Weak Base Anion Exchange Sorbents Embedded With Metal Oxide Nanoparticles to Simultaneously Remove Multiple Oxoanions 295.

41. Gifford, M., Chester, M., Hristovski, K., Westerhoff, P., 2017. Human health tradeoffs in wellhead drinking water treatment: Comparing exposure reduction to embedded life cycle risks. *Water Res.* doi:10.1016/j.watres.2017.10.014

42. Godskesen, B., Hauschild, M., Rygaard, M., Zambrano, K., Albrechtsen, H.J., 2013. Life-cycle and freshwater withdrawal impact assessment of water supply technologies. *Water Res.* 47, 2363–2374. doi:10.1016/j.watres.2013.02.005

43. Guillén, D., Ginebreda, A., Farré, M., Darbra, R.M., Petrovic, M., Gros, M., Barceló, D., 2012. Prioritization of chemicals in the aquatic environment based on risk assessment: Analytical, modeling and regulatory perspective. *Sci. Total Environ.* 440, 236–252. doi:10.1016/j.scitotenv.2012.06.064

44. Gupta, V.K., Ali, I., 2013a. Chapter 5 - Water Treatment by Membrane Filtration Techniques. *Environ. Water* 135–154. doi:10.1016/B978-0-444-59399-3.00005-2

45. Gupta, V.K., Ali, I., 2013b. Chapter 7 - Wastewater Treatment by Biological Methods. *Environ. Water* 179–204. doi:10.1016/B978-0-444-59399-3.00007-6

46. Hoekstra, A.Y., 2015. The water footprint of industry, Assessing and Measuring Environmental Impact and Sustainability. Elsevier Inc. doi:10.1016/B978-0-12-799968-5.00007-5

47. Hoekstra, A.Y., Chapagain, A.K., Aldaya, M.M., Mekonnen, M.M., 2011. The Water Footprint Assessment Manual - Setting the Global Standard.

48. Hofmann, R., Amiri, F., Wilson, S., Garvey, E., Metcalfe, C., Ishida, C., Lin, K., 2011. Comparing methods to remove emerging contaminants and disinfection by-product precursors at pilot scale. *J. Water Supply Res. Technol.* 60, 425. doi:10.2166/aqua.2011.152

49. Huerta-Fontela, M., Galceran, M.T., Ventura, F., 2008. Stimulatory Drugs of Abuse in Surface Waters and Their Removal in a Conventional Drinking Water Treatment Plant. *Environ. Sci. Technol.* 42, 6809–6816. doi:10.1021/es800768h

50. Igos, E., Dalle, A., Tiruta-Barna, L., Benetto, E., Baudin, I., Mery, Y., 2014. Life Cycle Assessment of water treatment: What is the contribution of infrastructure and operation at unit process level? *J. Clean. Prod.* 65, 424–431. doi:10.1016/j.jclepro.2013.07.061

51. ISO, I.S.O., 2006. ISO 14040:2006(en) Environmental management — Life cycle assessment — Principles and framework, ISO 14040:2006(en) Environmental management — Life cycle assessment — Principles and framework.

52. Jeswani, H.K., Gujba, H., Brown, N.W., Roberts, E.P.L., Azapagic, A., 2015. Removal of organic compounds from water: Life cycle environmental impacts and economic costs of the Arvia process compared to granulated activated carbon. *J. Clean. Prod.* 89, 203–213. doi:10.1016/j.jclepro.2014.11.017

53. Jin, X., Peldszus, S., 2012. Selection of representative emerging micropollutants for drinking water treatment studies: A systematic approach. *Sci. Total Environ.* 414, 653–663. doi:10.1016/j.scitotenv.2011.11.035

54. Kanakaraju, D., Motti, C.A., Glass, B.D., Oelgemöller, M., 2014. Photolysis and TiO<sub>2</sub>-catalysed degradation of diclofenac in surface and drinking water using circulating batch photoreactors. *Environ. Chem.* 11, 51. doi:10.1071/EN13098

55. Kennedy, A.M., Reinert, A.M., Knappe, D.R.U., Ferrer, I., Summers, R.S., 2015. Full- and pilot-scale GAC adsorption of organic micropollutants. *Water Res.* 68, 238–248. doi:10.1016/j.watres.2014.10.010

56. Kim, S.D., Cho, J., Kim, I.S., Vanderford, B.J., Snyder, S.A., 2007. Occurrence and removal of pharmaceuticals and endocrine disruptors in South Korean surface, drinking, and waste waters. *Water Res.* 41, 1013–1021. doi:10.1016/j.watres.2006.06.034

57. Klavarioti, M., Mantzavinos, D., Kassinos, D., 2009. Removal of residual pharmaceuticals from

- aqueous systems by advanced oxidation processes. *Environ. Int.* 35, 402–417. doi:10.1016/j.envint.2008.07.009
58. Kruijthof, J.C., Kamp, P.C., Martijn, B.J., 2007. UV/H<sub>2</sub>O<sub>2</sub> Treatment: A Practical Solution for Organic Contaminant Control and Primary Disinfection. *Ozone Sci. Eng.* 29, 273–280. doi:10.1080/01919510701459311
59. Kumar, E., Bhatnagar, A., Hogland, W., Marques, M., Sillanpää, M., 2014. Interaction of anionic pollutants with Al-based adsorbents in aqueous media – A review. *Chem. Eng. J.* 241, 443–456. doi:10.1016/j.cej.2013.10.065
60. Kyung, D., Kim, D., Park, N., Lee, W., 2013. Estimation of CO<sub>2</sub> emission from water treatment plant - Model development and application. *J. Environ. Manage.* 131, 74–81. doi:10.1016/j.jenvman.2013.09.019
61. Lekkerkerker-Teunissen, K., Knol, A.H., Derks, J.G., Heringa, M.B., Houtman, C.J., Hofman-Caris, C.H.M., Beerendonk, E.F., Reus, A., Verberk, J.Q.J.C., van Dijk, J.C., 2013. Pilot Plant Results with Three Different Types of UV Lamps for Advanced Oxidation. *Ozone Sci. Eng.* 35, 38–48. doi:10.1080/01919512.2013.721317
62. Lemos, D., Dias, A.C., Gabarrell, X., Arroja, L., 2013. Environmental assessment of an urban water system. *J. Clean. Prod.* 54, 157–165. doi:10.1016/j.jclepro.2013.04.029
63. Lester, Y., Avisar, D., Gozlan, I., Mamane, H., 2011. Removal of pharmaceuticals using combination of UV/H<sub>2</sub>O<sub>2</sub> /O<sub>3</sub> advanced oxidation process. *Water Sci. Technol.* 64, 2230. doi:10.2166/wst.2011.079
64. Li, J., Lu, Y., Shi, Y., Wang, T., Wang, G., Luo, W., Jiao, W., Chen, C., Yan, F., 2011. Environmental pollution by persistent toxic substances and health risk in an industrial area of China. *J. Environ. Sci.* 23, 1359–1367. doi:10.1016/S1001-0742(10)60554-2
65. Liikanen, R., Yli-Kuivila, J., Tenhunen, J., Laukkanen, R., 2006. Cost and environmental impact of nanofiltration in treating chemically pre-treated surface water. *Desalination* 201, 58–70. doi:10.1016/j.desal.2006.03.520
66. Lofrano, G. (Ed.), 2012. Emerging Compounds Removal from Wastewater, SpringerBriefs in Molecular Science. Springer Netherlands, Dordrecht. doi:10.1007/978-94-007-3916-1
67. Loubet, P., Roux, P., Guérin-Schneider, L., Bellon-Maurel, V., 2016. Life cycle assessment of forecasting scenarios for urban water management: A first implementation of the WaLA model on Paris suburban area. *Water Res.* 90, 128–140. doi:10.1016/j.watres.2015.12.008
68. Loubet, P., Roux, P., Loiseau, E., Bellon-Maurel, V., 2014. Life cycle assessments of urban water systems: A comparative analysis of selected peer-reviewed literature. *Water Res.* 67, 187–202. doi:10.1016/j.watres.2014.08.048
69. Lovarelli, D., Bacenetti, J., Fiala, M., 2016. Water Footprint of crop productions: A review. *Sci. Total Environ.* 548–549, 236–251. doi:10.1016/j.scitotenv.2016.01.022
70. Lundie, S., Peters, G.M., Beavis, P.C., 2004. Life Cycle Assessment for Sustainable Metropolitan Water Systems Planning. *Environ. Sci. Technol.* 38, 3465–3473. doi:10.1021/es034206m
71. Malaeb, L., Ayoub, G.M., 2011. Reverse osmosis technology for water treatment: State of the art review. *Desalination* 267, 1–8. doi:10.1016/j.desal.2010.09.001
72. Manda, B.M.K., Worrell, E., Patel, M.K., 2014. Innovative membrane filtration system for micropollutant removal from drinking water - Prospective environmental LCA and its integration in business decisions. *J. Clean. Prod.* 72, 153–166. doi:10.1016/j.jclepro.2014.02.045
73. Martin-Ortega, J., Berbel, J., 2010. Using multi-criteria analysis to explore non-market monetary values of water quality changes in the context of the Water Framework Directive. *Sci. Total Environ.* 408, 3990–3997. doi:10.1016/j.scitotenv.2010.03.048
74. Mery, Y., Tiruta-Barna, L., Baudin, I., Benetto, E., Igos, E., 2014. Formalization of a technical procedure for process ecodesign dedicated to drinking water treatment plants. *J. Clean. Prod.* 68, 16–24. doi:10.1016/j.jclepro.2014.01.011
75. Mery, Y., Tiruta-Barna, L., Benetto, E., Baudin, I., 2013. An integrated “process modelling-life cycle assessment” tool for the assessment and design of water treatment processes. *Int. J. Life Cycle Assess.* 18, 1062–1070. doi:10.1007/s11367-012-0541-5
76. Miniero, R., Abate, V., Brambilla, G., Davoli, E., De Felip, E., De Filippis, S.P., Dellatte, E., De Luca, S., Fanelli, R., Fattore, E., Ferri, F., Fochi, I., Rita Fulgenzi, A., Iacovella, N., Iamiceli, A.L., Lucchetti, D., Melotti, P., Moret, I., Piazza, R., Roncarati, A., Ubaldi, A., Zambon, S., di Domenico, A., 2014. Persistent toxic substances in Mediterranean aquatic species. *Sci. Total Environ.* 494–495, 18–27. doi:10.1016/j.scitotenv.2014.05.131
77. Mohapatra, P.K., Siebel, M.A., Gijzen, H.J., van der Hoek, J.P., Groot, C.A., 2002. Improving

- eco-efficiency of Amsterdam water supply: A LCA approach. *J. Water Supply Res. Technol.* 51, 217–227.
78. Molinari, R., Lavorato, C., Argurio, P., 2017. Recent progress of photocatalytic membrane reactors in water treatment and in synthesis of organic compounds. A review. *Catal. Today* 281, 144–164. doi:10.1016/j.cattod.2016.06.047
79. Müller, N.A., Marlow, D.R., Moglia, M., 2016. Business model in the context of Sustainable Urban Water Management - A comparative assessment between two urban regions in Australia and Germany. *Util. Policy* 41, 148–159. doi:10.1016/j.jup.2016.07.003
80. Norman Network [WWW Document], 2016. . Norman Netw. Ref. Lab. Res. centres Relat. Organ. *Monit. Emerg. Environ. Subst.* 2015, (LIST Emerg. Subst. latest Updat. Febr. 2016). URL [http://www.norman-network.net/sites/default/files/files/Emerging\\_substances\\_list\\_Feb\\_16/NORMAN\\_list\\_2016\\_FINAL.XLSX](http://www.norman-network.net/sites/default/files/files/Emerging_substances_list_Feb_16/NORMAN_list_2016_FINAL.XLSX) (accessed 10.11.16).
81. Orha, C., Pode, R., Manea, F., Lazau, C., Bandas, C., 2017. Titanium dioxide-modified activated carbon for advanced drinking water treatment. *Process Saf. Environ. Prot.* 108, 26–33. doi:10.1016/j.psep.2016.07.013
82. Pal, A., Gin, K.Y.-H., Lin, A.Y.-C., Reinhard, M., 2010. Impacts of emerging organic contaminants on freshwater resources: Review of recent occurrences, sources, fate and effects. *Sci. Total Environ.* 408, 6062–6069. doi:10.1016/j.scitotenv.2010.09.026
83. Pal, A., He, Y., Jekel, M., Reinhard, M., Gin, K.Y.H., 2014. Emerging contaminants of public health significance as water quality indicator compounds in the urban water cycle. *Environ. Int.* 71, 46–62. doi:10.1016/j.envint.2014.05.025
84. Pandey, D., Agrawal, M., Pandey, J.S., 2011. Carbon footprint: current methods of estimation. *Environ. Monit. Assess.* 178, 135–160. doi:10.1007/s10661-010-1678-y
85. Paneque Salgado, P., Corral Quintana, S., Guimarães Pereira, Â., del Moral Ituarte, L., Pedregal Mateos, B., 2009. Participative multi-criteria analysis for the evaluation of water governance alternatives. A case in the Costa del Sol (Málaga). *Ecol. Econ.* 68, 990–1005. doi:10.1016/j.ecolecon.2006.11.008
86. Pease, C.K., Gentry, R.P., 2016. Systematic review in chemical risk assessment — A chemical industry perspective. *Environ. Int.* 92–93, 574–577. doi:10.1016/j.envint.2015.12.007
87. Postigo, C., Lopez de Alda, M.J., Barceló, D., 2008. Fully Automated Determination in the Low Nanogram per Liter Level of Different Classes of Drugs of Abuse in Sewage Water by On-Line Solid-Phase Extraction-Liquid Chromatography-Electrospray-Tandem Mass Spectrometry. *Anal. Chem.* 80, 3123–3134. doi:10.1021/ac702060j
88. Qi, C., Chang, N.-B., 2013. Integrated carbon footprint and cost evaluation of a drinking water infrastructure system for screening expansion alternativesq. *J. Clean. Prod.* 60, 170–181. doi:10.1016/j.jclepro.2012.10.032
89. Radjenović, J., Petrović, M., Ventura, F., Barceló, D., 2008. Rejection of pharmaceuticals in nanofiltration and reverse osmosis membrane drinking water treatment. *Water Res.* 42, 3601–3610. doi:10.1016/j.watres.2008.05.020
90. Ribeiro, A.R., Nunes, O.C., Pereira, M.F.R., Silva, A.M.T., 2015. An overview on the advanced oxidation processes applied for the treatment of water pollutants defined in the recently launched Directive 2013/39/EU. *Environ. Int.* 75, 33–51. doi:10.1016/j.envint.2014.10.027
91. Richardson, S., Plewa, M., Wagner, E., Schoeny, R., Demarini, D., 2007. Occurrence, genotoxicity, and carcinogenicity of regulated and emerging disinfection by-products in drinking water: A review and roadmap for research. *Mutat. Res. Mutat. Res.* 636, 178–242. doi:10.1016/j.mrrev.2007.09.001
92. Richardson, S.D., Ternes, T.A., 2018. Water Analysis: Emerging Contaminants and Current Issues. *Anal. Chem.* 90, 398–428. doi:10.1021/acs.analchem.7b04577
93. Richardson, S.D., Ternes, T.A., 2014. Water Analysis: Emerging Contaminants and Current Issues. *Anal. Chem.* 86, 2813–2848. doi:10.1021/ac500508t
94. Rodayan, A., Afana, S., Segura, P.A., Sultana, T., Metcalfe, C.D., Yargeau, V., 2016. Linking drugs of abuse in wastewater to contamination of surface and drinking water. *Environ. Toxicol. Chem.* 35, 843–849. doi:10.1002/etc.3085
95. Rodil, R., Quintana, J.B., Concha-Graña, E., López-Mahía, P., Muniategui-Lorenzo, S., Prada-Rodríguez, D., 2012. Emerging pollutants in sewage, surface and drinking water in Galicia (NW Spain). *Chemosphere* 86, 1040–1049. doi:10.1016/j.chemosphere.2011.11.053
96. Rodríguez-Mozaz, S., Ricart, M., Köck-Schulmeyer, M., Guasch, H., Bonninaeu, C., Proia, L., Lopez de Alda, M., Sabater, S., Barceló, D., 2015. Pharmaceuticals and pesticides in reclaimed water:

Efficiency assessment of a microfiltration–reverse osmosis (MF–RO) pilot plant. *J. Hazard. Mater.* 282, 165–173. doi:10.1016/J.JHAZMAT.2014.09.015

97. Rodríguez-Narvaez, O.M., Peralta-Hernandez, J.M., Goonetilleke, A., Bandala, E.R., 2017. Treatment technologies for emerging contaminants in water: A review. *Chem. Eng. J.* 323, 361–380. doi:10.1016/j.cej.2017.04.106

98. Sanches, S., Penetra, A., Rodrigues, A., Ferreira, E., Cardoso, V. V., Benoliel, M.J., Barreto Crespo, M.T., Pereira, V.J., Crespo, J.G., 2012. Nanofiltration of hormones and pesticides in different real drinking water sources. *Sep. Purif. Technol.* 94, 44–53. doi:10.1016/j.seppur.2012.04.003

99. Sanjuan-Delmás, D., Petit-Boix, A., Gasol, C.M., Farreny, R., Villalba, G., Suarez-Ojeda, M.E., Gabarrell, X., Josa, A., Rieradevall, J., 2015. Environmental assessment of drinking water transport and distribution network use phase for small to medium-sized municipalities in Spain. *J. Clean. Prod.* 87, 573–582. doi:10.1016/j.jclepro.2014.09.042

100. Sauvé, S., Desrosiers, M., 2014. A review of what is an emerging contaminant. *Chem. Cent. J.* 8, 15. doi:10.1186/1752-153X-8-15

101. Scheideler, J., 2011. Combination of O<sub>3</sub>/H<sub>2</sub>O<sub>2</sub> and UV for multiple barrier micropollutant treatment and bromate formation control – an economic attractive option. *Water Pract. Technol.* 6, 1–2. doi:10.2166/wpt.2011.0063

102. Schoonenberg Kegel, F., Rietman, B.M., Verliefde, A.R.D., 2010. Reverse osmosis followed by activated carbon filtration for efficient removal of organic micropollutants from river bank filtrate. *Water Sci. Technol.* 61, 2603. doi:10.2166/wst.2010.166

103. Sharma, S., Bhattacharya, A., 2016. Drinking water contamination and treatment techniques. *Appl. Water Sci.* doi:10.1007/s13201-016-0455-7

104. Simate, G.S., Iyuke, S.E., Ndlovu, S., Heydenrych, M., Walubita, L.F., 2012. Human health effects of residual carbon nanotubes and traditional water treatment chemicals in drinking water. *Environ. Int.* 39, 38–49. doi:10.1016/j.envint.2011.09.006

105. Singh, R., 2014. Water and membrane treatment, Hybrid Membrane Systems for Water Purification. doi:10.1016/B978-0-444-63362-0.00002-1

106. Skouteris, G., Ouki, S., Foo, D., Saroj, D., Altini, M., Melidis, P., Cowley, B., Ells, G., Palmer, S., O'Dell, S., 2018. Water footprint and water pinch analysis techniques for sustainable water management in the brick-manufacturing industry. *J. Clean. Prod.* 172, 786–794. doi:10.1016/j.jclepro.2017.10.213

107. Sperlich, A., Warschke, D., Wegmann, C., Ernst, M., Jekel, M., 2010. Treatment of membrane concentrates: phosphate removal and reduction of scaling potential. *Water Sci. Technol.* 61, 301. doi:10.2166/wst.2010.800

108. Stiborova, H., Kolar, M., Vrkoslavova, J., Pulkrabova, J., Hajslova, J., Demnerova, K., Uhlík, O., 2017. Linking toxicity profiles to pollutants in sludge and sediments. *J. Hazard. Mater.* 321, 672–680. doi:10.1016/j.jhazmat.2016.09.051

109. Stockholm\_Convention, 2017. The 16 New POPs - An introduction to the chemicals added to the Stockholm Convention as Persistent Organic Pollutants by the Conference of the Parties 25.

110. Stockholm Convention [WWW Document], 2010. . Stock. Conv. Persistent Org. Pollut. (POPs). Text Annex. URL [https://www.env.go.jp/chemi/pops/treaty/treaty\\_en2009.pdf](https://www.env.go.jp/chemi/pops/treaty/treaty_en2009.pdf)

111. Strutt, J., Wilson, S., Shorney-Darby, H., Shaw, A., Byers, A., 2008. Assessing the carbon footprint of water production. *Am. Water Work. Assoc.* 100, 80.

112. Sudhakaran, S., Lattemann, S., Amy, G.L., 2013. Appropriate drinking water treatment processes for organic micropollutants removal based on experimental and model studies - A multi-criteria analysis study. *Sci. Total Environ.* 442, 478–488. doi:10.1016/j.scitotenv.2012.09.076

113. Talib, A., Randhir, T.O., 2016. Managing Emerging Contaminants: Status, Impacts, and Watershed-Wide Strategies. *Expo. Heal.* 8, 143–158. doi:10.1007/s12403-015-0192-4

114. Technical Report 2009-025 [WWW Document], 2009. . Guid. Doc. No. 19 Guid. Surf. WATER Chem. Monit. UNDER WATER Framew. Dir. URL [https://circabc.europa.eu/sd/a/e54e8583-faf5-478f-9b11-41fda9e9c564/Guidance No 19 - Surface water chemical monitoring.pdf](https://circabc.europa.eu/sd/a/e54e8583-faf5-478f-9b11-41fda9e9c564/Guidance%20No%2019%20-%20Surface%20water%20chemical%20monitoring.pdf)

115. Ternes, T., Joss, A., Oehlmann, J., 2015. Occurrence, fate, removal and assessment of emerging contaminants in water in the water cycle (from wastewater to drinking water). *Water Res.* 72, 1–2. doi:10.1016/j.watres.2015.02.055

116. The European Parliament and the Council of the European Union, 2013. Directive 2013/39/EU [WWW Document]. Dir. 2013/39/EU Eur. Parliam. Counc. 12 August 2013 Amend. Dir. 2000/60/EC 2008/105/EC as regards Prior. Subst. F. water policy. Off. J. Eur. Union L226, 1–17. URL Directive 2013/39/EU of the European Parliament and of the Council of 12 August 2013 amending Directives

2000/60/EC and 2008/105/EC as regards priority substances in the field of water policy. Off. J. Eur. Union L226, 1–17. <http://eur-lex.europa.eu/legal->

117. The European Parliament and the Council of the European Union, 2001. Decision No 2455/2001/EC of the European Parliament and of the Council of 20 November 2001 establishing the list of priority substances in the field of water policy and amending Directive 2000/60/EC. Off. J. Eur. Communities L 331, 1–5. doi:[http://eur-lex.europa.eu/pri/en/oj/dat/2003/l\\_285/l\\_28520031101en00330037.pdf](http://eur-lex.europa.eu/pri/en/oj/dat/2003/l_285/l_28520031101en00330037.pdf)

118. The European Parliament and the Council of the European Union, 2000. Directive 2000/60/EC of the European Parliament and of the Council of 23 October 2000 establishing a framework for Community action in the field of water policy. Off. J. Eur. Parliam. L327, 1–82. doi:10.1039/ap9842100196

119. The European Parliament and the Council of the European Union, 2008. Directive 2008/105/EC of 16 December 2008 on environmental quality standards in the field of water policy, amending and subsequently repealing Council Directives 82/176/EEC, 83/513/EEC, 84/156/EEC, 84/491/ECC, 86/280/ECC and amending Directive 2000/60/EC. Off. J. Eur. Union L348, 84–97. doi:<http://eur-lex.europa.eu/legal-content/EN/TXT/?uri=celex:32008L0105>

120. Thines, R.K., Mubarak, N.M., Nizamuddin, S., Sahu, J.N., Abdullah, E.C., Ganesan, P., 2017. Application potential of carbon nanomaterials in water and wastewater treatment: A review. *J. Taiwan Inst. Chem. Eng.* 72, 116–133. doi:10.1016/j.jtice.2017.01.018

121. US EPA [WWW Document], 2014. . United States Environ. Prot. Agency Prior. Pollut. List. URL <https://www.epa.gov/sites/production/files/2015-09/documents/priority-pollutant-list-epa.pdf>

122. van der Aa, L.T.J., Kolpa, R.J., Rietveld, L.C., van Dijk, J.C., 2012. Improved removal of pesticides in biological granular activated carbon filters by pre-oxidation of natural organic matter. *J. Water Supply Res. Technol.* 61, 153. doi:10.2166/aqua.2012.031

123. van der Hoek, J.P., Bertelkamp, C., Verliefe, A.R.D., Singhal, N., 2014. Drinking water treatment technologies in Europe: state of the art – challenges – research needs. *J. Water Supply Res. Technol.* 63, 124. doi:10.2166/aqua.2013.007

124. Verlicchi, P., Galletti, A., Petrovic, M., Barceló, D., 2010. Hospital effluents as a source of emerging pollutants: An overview of micropollutants and sustainable treatment options. *J. Hydrol.* 389, 416–428. doi:10.1016/j.jhydrol.2010.06.005

125. Vieno, N.M., Härkki, H., Tuhkanen, T., Kronberg, L., 2007. Occurrence of Pharmaceuticals in River Water and Their Elimination in a Pilot-Scale Drinking Water Treatment Plant. *Environ. Sci. Technol.* 41, 5077–5084. doi:10.1021/es062720x

126. Vince, F., Aoustin, E., Bréant, P., Marechal, F., 2008. LCA tool for the environmental evaluation of potable water production. *Desalination* 220, 37–56. doi:10.1016/j.desal.2007.01.021

127. Wang, D., Bolton, J.R., Andrews, S.A., Hofmann, R., 2015. Formation of disinfection by-products in the ultraviolet/chlorine advanced oxidation process. *Sci. Total Environ.* 518–519, 49–57. doi:10.1016/j.scitotenv.2015.02.094

128. Wang, X., Mao, Y., Tang, S., Yang, H., Xie, Y.F., 2015. Disinfection byproducts in drinking water and regulatory compliance: A critical review. *Front. Environ. Sci. Eng.* 9, 3–15. doi:10.1007/s11783-014-0734-1

129. WHO, 2011. , World Health Organization: Guidelines for drinking-water quality - 4th ed.

130. WHO [WWW Document], 2012. . World Heal. Organ. Pharm. Drink. URL [http://apps.who.int/iris/bitstream/10665/44630/1/9789241502085\\_eng.pdf](http://apps.who.int/iris/bitstream/10665/44630/1/9789241502085_eng.pdf)

131. Wiedmann, T., Minx, J., 2008. A Definition of “Carbon Footprint,” in: C.C. Pertsova, Ecological Economics Research Trends. Nova Science Publishers, Hauppauge NY, USA, pp. 1–11. doi:10.1088/978-0-750-31040-6

132. Wu, J., Zhang, L., Yang, Z., 2010. A Review on the Analysis of Emerging Contaminants in Aquatic Environment. *Crit. Rev. Anal. Chem.* 40, 234–245. doi:10.1080/10408347.2010.515467

133. Wu, L., Mao, X.Q., Zeng, A., 2015. Carbon footprint accounting in support of city water supply infrastructure siting decision making: A case study in Ningbo, China. *J. Clean. Prod.* 103, 737–746. doi:10.1016/j.jclepro.2015.01.060

134. Yan, W., Li, J., Bai, X., 2016. Comprehensive assessment and visualized monitoring of urban drinking water quality. *Chemom. Intell. Lab. Syst.* 155, 26–35. doi:10.1016/j.chemolab.2016.03.026

135. Zaitseva, N., Zaitsev, V., Walcarius, A., 2013. Chromium(VI) removal via reduction–sorption on bi-functional silica adsorbents. *J. Hazard. Mater.* 250–251, 454–461. doi:10.1016/j.jhazmat.2013.02.019

|