

Brain-Computer Interfaces: Investigating the Transition from Visually Evoked to Purely Imagined Steady-State Potentials

Original

Brain-Computer Interfaces: Investigating the Transition from Visually Evoked to Purely Imagined Steady-State Potentials / Micheli, Arturo; Consoli, Davide; Merlini, Adrien; Ricci, Paolo; Andriulli, Francesco P. - ELETTRONICO. - 2022:(2022), pp. 222-225. (2022 44th Annual International Conference of the IEEE Engineering in Medicine & Biology Society (EMBC) Glasgow, Scotland, United Kingdom 11-15 July 2022) [10.1109/EMBC48229.2022.9870831].

Availability:

This version is available at: 11583/2973335 since: 2022-11-23T17:07:16Z

Publisher:

IEEE

Published

DOI:10.1109/EMBC48229.2022.9870831

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2022 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Brain-Computer Interfaces: Investigating the Transition from Visually Evoked to Purely Imagined Steady-State Potentials

Arturo Micheli¹, Davide Consoli², Adrien Merlini³, Paolo Ricci⁴, and Francesco P. Andriulli⁵

Abstract—Brain-Computer Interfaces (BCIs) based on Steady State Visually Evoked Potentials (SSVEPs) have proven effective and provide significant accuracy and information-transfer rates. This family of strategies, however, requires external devices that provide the frequency stimuli required by the technique. This limits the scenarios in which they can be applied, especially when compared to other BCI approaches. In this work, we have investigated the possibility of obtaining frequency responses in the EEG output based on the pure visual imagination of SSVEP-eliciting stimuli. Our results show that not only that EEG signals present frequency-specific peaks related to the frequency the user is focusing on, but also that promising classification accuracy can be achieved, paving the way for a robust and reliable visual imagery BCI modality.

Clinical relevance—Brain computer interfaces play a fundamental role in enhancing the quality of life of patients with severe motor impairments. Strategies based on purely imagined stimuli, like the one presented here, are particularly impacting, especially in the most severe cases.

I. INTRODUCTION

Brain-computer interfaces (BCIs) aim at obtaining non-muscular channels to send information to external devices [1], and their clinical relevance spans several fields including the improvement of the quality of life for patients with motor impairments of diverse degrees of severity [2]. Among non-invasive BCI approaches, substantial research has been devoted to systems based on electroencephalography (EEG). As in other strategies, EEG-based BCIs generally follow a standard workflow: signal acquisition, pre-processing and signal enhancement, feature extraction and classification, and translation of the features into commands.

Among common EEG-based BCI approaches, several studies have focused on investigating steady-state visually

evoked potentials (SSVEPs) [3], [4], [5]. In this paradigm, a visual stimulus, often a pattern flickering at a specific frequency [6], results in peaks in the power spectral density (PSD) of the EEG acquisitions, both at the frequency of the stimulus and at its higher order harmonics. When a set of different panels flickering at different frequencies are presented to the user—who selects and concentrates only on one of them—a PSD analysis can discriminate among the panels and find the selected one, which results in a usable transfer of information with significant accuracy and high bit-rates [7]. This notwithstanding, standard SSVEP techniques come with some drawbacks. Since SSVEP entirely relies on an external stimulus, subjects need to continuously gaze at a screen to be able to communicate. This may not always be possible in all application scenarios, for example when the users suffer from ocular motor dysfunction or very severe forms of motor impairments.

In this work, to overcome the limitations of standard SSVEP-based BCIs, we propose and analyze a new visual imagery (VI) paradigm, based on imagining SSVEP-eliciting stimuli and investigating the feasibility of BCIs based on the analysis of the corresponding EEG signals. Preliminary tests confirm the the new paradigm is suitable for real-time applications including moving a cursor on a screen and selecting elements from a grid. In Section II we briefly describe our experimental setting, the methods and the strategies adopted, while Section III presents our results and discussion. Finally, Section IV delineates our conclusions and venues for further investigations.

II. METHODS

Visual imagery can be defined as the representation of information related to perception in the absence of retinal inputs [8]. On the contrary, visual perception (VP) is derived from the acquisition of visual information through the eyes [9]. The objective of this work is to propose a new form of VI, investigating whether mental representations of flickering patterns could provide a frequency-specific power increase (as examined through PSD analysis), similar to those obtained for SSVEPs. Several studies on SSVEP-based BCIs and related datasets have been presented in the literature [14], [15], but to the best of the authors' knowledge, they do not include studies on VI-based BCIs relying on the proposed paradigm.

The experimental setting consisted of a 16 active wet electrodes EEG device, working with a sampling frequency of 256Hz, a monitor showing chessboard flickering patterns with controllable frequency, and of two speakers producing

*This work was supported in part by the European Research Council (ERC) through the European Union's Horizon 2020 Research and Innovation Programme under Grant 724846 (Project 321) and in part by the Italian Ministry of University and Research within the Program FARE, CELER, under Grant R187PMFXA4.

¹Arturo Micheli is a former research assistant at the Department of Electronics and Telecommunications, Politecnico di Torino, 10129 Turin, Italy arturo.micheli@polito.it

²Davide Consoli is a PhD student at the Department of Electronics and Telecommunications, Politecnico di Torino, 10129 Turin, Italy davide.consoli@polito.it

³Adrien Merlini is an Associate Professor at the Microwave Department, IMT Atlantique, 29238 Brest, France adrien.merlini@imt-atlantique.fr

⁴Paolo Ricci is a PhD student at the Department of Electronics and Telecommunications, Politecnico di Torino, 10129 Turin, Italy paolo.ricci@polito.it

⁵Francesco Andriulli is a Full Professor at the Department of Electronics and Telecommunications, Politecnico di Torino, 10129 Turin, Italy francesco.andriulli@polito.it

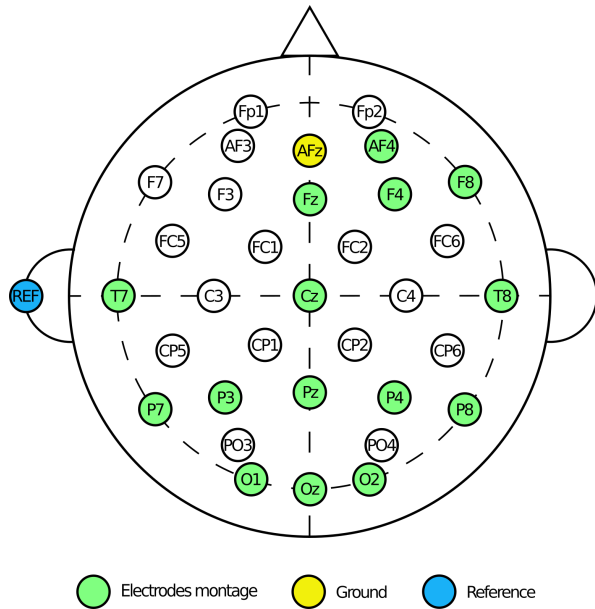


Fig. 1. Electrode positioning on the EEG cap, using the international 10–20 system. Our signal acquisition electrodes are indicated in green, while yellow and blue indicate the the ground and reference electrodes, respectively.

auditory stimuli of controllable switch frequency. The origin of the VI signal is still a matter of discussion and various regions of activation have been suggested. The most relevant ones are the occipital areas (associated with the similarity of VI with VP) [10] and the parietal and frontal networks [11], with a particular attention to the right-frontal zone [12]. This dictated our choice of principal locations for our EEG acquisitions. Following the literature we have selected: AF4, F4, F8, O1, O2, Pz, P3, P4, Fz, Cz, Oz, T7, T8, P7 and P8 (refer to Fig. 1 for electrodes positioning configuration).

To train a subject to drive a BCI via VI signals, we followed three protocols. In the first protocol, experiments were lead using one single frequency at a time, either 5 Hz or 7 Hz. These frequencies were chosen because they were sufficiently low to be easily imagined but still distant enough from each other to be easily classified. In the protocol, SSVEP trials were classified together with VI trials and rest. In VI trials, the subject was asked to imagine SSVEP-eliciting visual stimuli. This protocol was conceived as a concurrent VI-SSVEP one, precisely to frequently refresh the user’s memory of a SSVEP stimulus via the SSVEP trials. In some experiments of this first protocol (1.a and 1.b below) we provided an additional support to the user: an auditory co-stimulus during VI trials, which was beeping at the same frequency at which VI had to be conducted. These acoustic stimuli were then removed once the subjects were feeling more confident (1.c and 1.d). Experiments without acoustic stimuli always followed experiments with acoustic stimuli.

In the second protocol, experiments were lead using two frequencies at a time, 5 Hz and 7 Hz. As in the previous protocol, SSVEP trials were classified together with VI trials and rest. Like before in the VI trials, the subject was asked to

imagine SSVEP-eliciting visual stimuli by imagining SSVEP trials. In this protocol no auditory co-stimuli were provided to the subject. This second protocol always followed the sessions of the previous one.

In the third and final protocol, experiments were lead using two frequencies at a time, 5 Hz and 7 Hz. Differently from previous protocols, however, no SSVEP trials were classified together with VI trials and rest and no auditory co-stimuli were provided. This third protocol always followed the sessions of the two previous ones.

For the sake of clarity, the three protocols are summarized below. The first 3 numbers represent the trial duration (in seconds), the amount of trials per each class, and the number of classes for the specific session, respectively.

- 1) **Single frequency concurrent VI and SSVEP** – Concurrent classification of SSVEP, VI, and rest at one single frequency
 - a) $6s \times 15 \times 3$ at 5 Hz, with SSVEP, VI, rest, with auditory co-stimuli during VI trials;
 - b) $6s \times 15 \times 3$ at 7 Hz, with SSVEP, VI, rest, with auditory co-stimuli during VI trials;
 - c) $6s \times 15 \times 3$ at 5 Hz, with SSVEP, VI, rest;
 - d) $6s \times 15 \times 3$ at 7 Hz, with SSVEP, VI, rest;
- 2) **Multiple frequencies concurrent VI and SSVEP** – Concurrent classification of SSVEP, VI and rest at two frequencies
 - a) $6s \times 18 \times 5$, with 5 Hz on the left side of the monitor and 7 Hz on the right side (for SSVEPs only), including SSVEP, VI, and rest;
- 3) **Multiple frequencies VI only** – Concurrent classification of VI and rest classes at two frequencies
 - a) $9s \times 20 \times 3$, with 5 Hz and 7 Hz, including only VI and rest trials;

From the above summary it is clear that trials lasted from 6 to 9 seconds, depending on the test conducted. In sessions with visual stimuli, 6 seconds were considered sufficient to elicit a response. For pure VI experiments instead, we opted to increase the duration, to facilitate the observation of the studied signal. Trials were proposed to the subject in a random order, so as to prevent the the user from anticipating the task he needed to perform. Two-frequencies experiments were implemented with an arrow pointing to the frequency the user had to concentrate on.

Signals obtained from the acquisition sessions were processed through a 60 Hz low-pass filter for electromyographic signal and high frequency noise attenuation, and a 48–52 Hz notch filter, for the rejection of the line noise. Then, a 8th order Butterworth filter was implemented, with bandpass frequencies in the range 2–36 Hz. From the raw data collected, only windows of 4 seconds were utilized for classification, specifically from second 2 to second 6 for the first two protocols and from second 3 to second 7 for the third protocol. PSDs estimations were performed on the windowed signals for every electrode. After this processing we collected for each trial a data vector containing the average power

TABLE I

CLASSIFICATION ACCURACY ON TRAINING AND TESTING SETS, "TRAIN/TEST ACC." AND RELATIVE SIZE OF DATA-SETS IN NUMBER OF TRIALS, "TRAIN/TEST #". TABLE LEGEND: "5-7 Hz w/ s.": SINGLE FREQUENCY WITH AUDITORY CO-STIMULI; "5-7 Hz w/o s.": SINGLE FREQUENCY WITHOUT AUDITORY CO-STIMULI; "MULT. FREQ.": MULTIPLE FREQUENCIES WITH SSVEPs; "PURE VI": ONLY VI MULTIPLE FREQUENCIES AND REST, NO VISUAL STIMULI.

Session	Train acc.	Test acc.	Train #	Test #
5 Hz w/ s.	100.00%	81.11%	450	180
7 Hz w/ s.	96.48%	88.15%	540	270
5 Hz w/o s.	94.72%	85.00%	360	180
7 Hz w/o s.	100.00%	75.56%	450	180
Mult. freq.	91.67%	72.78%	1080	540
Pure VI	75.77%	71.39%	780	360

TABLE II

AVERAGE CLASSIFICATION ACCURACY FOR TESTS ON THE SAME SUBJECT AFTER 9 MONTHS WITHOUT TRAINING. FOR TABLE II LEGEND PLEASE REFER TO TABLE I.

Session	Train acc.	Test acc.	Train #	Test #
5 Hz w/ s.	100.00%	82.22%	630	45
7 Hz w/ s.	95.80%	88.89%	810	45
5 Hz w/o s.	93.15%	91.11%	540	45
7 Hz w/o s.	100.00%	86.67%	630	45
Mult. freq.	89.38%	72.22%	1620	90
Pure VI	76.93%	73.33%	1140	60

frequency sessions without auditory co-stimuli. Increases of 6.11% and of 11.11% could be seen for 5 Hz and 7 Hz sessions respectively. This suggests that a BCI based on VI signals would not require an extensive and continuous training.

The results presented here are very preliminary and have to be confirmed by following the protocol on a wider cohort of subjects; this extended study is currently underway.

IV. CONCLUSIONS

In conclusion, in this work experiments aimed at a preliminary evaluation of the feasibility of a BCI based purely on VI signals have been carried out. For each of our different sessions, encouraging results were gathered from our BCI pipeline, both in terms of visualization of the signals and of classification accuracy. Thus, the testing of our approach on a wider cohort of subjects together with further investigations in the development of a BCI driven by purely imagined flickering patterns are warranted. Future developments will also include tests in which several frequencies are used within the same experiment (thus extending the paradigm's number of commands and bit-rate), the implementation of an online session for more realistic BCI studies, statistical tests on more subjects, and optimization of our spatial filter using inverse source approaches, comparing the classification accuracy before and after processing.

APPENDIX

ALS = Amyotrophic Lateral Sclerosis
 BCI = Brain-Computer Interface
 EEG = Electroencephalography
 PSD = Power Spectral Density
 SSVEP = Steady-State Visually Evoked Potential
 SVM = Support Vector Machine
 VI = Visual Imagery
 VP = Visual Perception

REFERENCES

- [1] Luis Fernando Nicolas-alonso and Jaime Gomez-gil, Brain Computer Interfaces, a Review, in: *Sensors*, 2012, pp. 1211–1279, doi: 10.3390/s120201211.
- [2] Ioulietta Lazarou, Spiros Nikolopoulos, Panagiotis C. Petrantonakis, Ioannis Kompatsiaris, and Magda Tsolaki, EEG-based brain-computer interfaces for communication and rehabilitation of people with motor impairment: A novel approach of the 21st century, in: *Frontiers in Human Neuroscience* 12.January, 2018, pp. 1–18, issn: 16625161, doi: 10.3389/fnhum.2018.00014.
- [3] Christoph Guger, Brendan Z. Allison, Bernhard Grobwindhager, Robert Prückl, Christoph Hintermüller, Christoph Kapeller, Markus Bruckner, Gunther Krausz, and Günter Edlinger, How many people could use an SSVEP BCI?, in: *Frontiers in Neuroscience* 6.NOV, 2012, pp. 2–7, issn: 16624548, doi: 10.3389/fnins.2012.00169.
- [4] Zhenghua Wu, Yongxiu Lai, Yang Xia, Dan Wu, and Dezhong Yao, Stimulator selection in SSVEP-based BCI, in: *Medical Engineering and Physics* 30.8, 2008, pp. 1079–1088, issn: 13504533, doi: 10.1016/j.medengphy.2008.01.004.
- [5] Danhua Zhu, Jordi Bieger, Gary Garcia Molina, and Ronald M. Aarts, A survey of stimulation methods used in SSVEP-based BCIs, in: *Computational Intelligence and Neuroscience* 2010, 2010, issn: 16875265, doi: 10.1155/2010/702357.
- [6] Wolpaw, *Brain-Computer Interfaces Principles and Practice*, Vol. 53.9, 2012, pp. 1689-1699, isbn: 9788578110796, arXiv:1011.1669v3.
- [7] Xiaogang Chen, Yijun Wang, Masaki Nakanishi, Xiaorong Gao, Tzzy Ping Jung, and Shangkai Gao, High-speed spelling with a non invasive brain-computer interface, in: *Proceedings of the National Academy of Sciences of the United States of America* 112.44, 2015, E6058–E6067, issn: 10916490, doi: 10.1073/pnas.1508080112.
- [8] Diego Kaski, Revision: Is visual perception a requisite for visual imagery?, in: *Perception* 31.6, 2002, pp. 717–731, issn: 03010066, doi: 10.1068/p3360.
- [9] William L. Thompson and Stephen M. Kosslyn, Neural Systems Activated during Visual Mental Imagery, in: *Brain Mapping: The Systems*, 2000, pp. 535–560, doi: 10.1016/b978-012692545-6/50020-9.
- [10] Sabbah et al., Functional magnetic resonance imaging at 1.5 T during sensorimotor and cognitive task, in: *European Neurology* 35, 1995, pp. 131–136, doi: 10.1159/000117108.
- [11] Nataliya Kosmyna, Jussi T. Lindgren, and Anatole Léculuyer, Attending to Visual Stimuli versus Performing Visual Imagery as a Control Strategy for EEG-based Brain-Computer Interfaces, in: *Scientific Reports* 8.1, 2018, pp. 1–14, issn: 20452322, doi: 10.1038/s41598-018-31472-9.
- [12] Husnaini Azmy and Norlaili Mat Safri, EEG based BCI using visual imagery task for robot control, in: *Jurnal Teknologi (Sciences and Engineering)* 61.2 SUPPL, 2013, pp. 7–11, issn: 01279696, doi: 10.11113/jt.v61.1628.
- [13] Jonathan R Wolpaw, Niels Birbaumer, Dennis J McFarland, Gert Pfurtscheller, Theresa M Vaughan, Brain-computer interfaces for communication and control, *Clinical Neurophysiology*, Volume 113, Issue 6, 2002, pp. 767-791, issn: 1388-2457, doi: 10.1016/S1388-2457(02)00057-3.
- [14] Giovanni Acampora, Pasquale Trinchese, and Autilia Vitiello, A dataset of EEG signals from a single-channel SSVEP-based brain computer interface, in: *Data in Brief*, Volume 35, 2021.
- [15] Yijun Wang, Xiaogang Chen, Xiaorong Gao, and Shangkai Gao, A benchmark dataset for SSVEP-based brain-computer interfaces, in: *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, Volume 25, Issue 10, 2016, pp. 1746-1752.