

Measuring Temperature Swing with Optical Fibers during Power Cycling of Power Components

Original

Measuring Temperature Swing with Optical Fibers during Power Cycling of Power Components / Zhang, Kaichen; Iannuzzo, Francesco. - ELETTRONICO. - (2022). (2022 IEEE 13th International Symposium on Power Electronics for Distributed Generation Systems, PEDG 2022 Kiel (Germany) 26/06/2022 - 29/06/2022) [10.1109/PEDG54999.2022.9923077].

Availability:

This version is available at: 11583/2999833 since: 2025-06-06T13:40:52Z

Publisher:

IEEE (Institute of Electrical and Electronics Engineers)

Published

DOI:10.1109/PEDG54999.2022.9923077

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2022 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Measuring Temperature Swing with Optical Fibers during Power Cycling of Power Components

Zhang, Kaichen; Iannuzzo, Francesco

Published in:

2022 IEEE 13th International Symposium on Power Electronics for Distributed Generation Systems, PEDG 2022

DOI (link to publication from Publisher):

[10.1109/PEDG54999.2022.9923077](https://doi.org/10.1109/PEDG54999.2022.9923077)

Publication date:

2022

Document Version

Accepted author manuscript, peer reviewed version

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Zhang, K., & Iannuzzo, F. (2022). Measuring Temperature Swing with Optical Fibers during Power Cycling of Power Components. In *2022 IEEE 13th International Symposium on Power Electronics for Distributed Generation Systems, PEDG 2022 IEEE* (Institute of Electrical and Electronics Engineers). <https://doi.org/10.1109/PEDG54999.2022.9923077>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.

Measuring Temperature Swing with Optical Fibers during Power Cycling of Power Components

Kaichen Zhang and Francesco Iannuzzo
Center of Reliable Power Electronics (CORPE)
Department of Energy, Aalborg University
Aalborg 9220, Denmark
kzh@energy.aau.dk, fia@energy.aau.dk

Abstract—Power semiconductor components play an important role in the power electronics field and their reliability and lifetime have been attracting more and more attention recently. The power cycling test method has been widely used to accelerate the degradation of the device and evaluate its reliability and lifetime. This paper presents a power cycling setup based on optical fibers to measure the power module's chip junction temperature during operation under different loading conditions. The setup has been used to conduct both the DC- and AC-power cycling tests, and the junction temperature measured by the optical fibers during the tests can help to evaluate the thermal stress during operation, indicate the health status of the device under test (DUT) and record its degradation process. Experimental results verified that implementing optical fibers is an effective way of measuring the junction temperature while conducting the accelerating test.

Index Terms—junction temperature measurement, accelerated power cycling test, reliability, on-line monitoring, IGBTs, power module, lifetime prediction

I. INTRODUCTION

Reliability issues of the power semiconductor components have been highly stressed in many applications such as renewable energy and traction. More knowledge about the expected lifetime of the device is demanded, [1]. For designers, to choose the proper power modules applied for realizing the specific mission profiles, relevant reliability investigation is necessary for the early development stage. For device manufacturers, a deep understanding of the power semiconductor component's lifetime and failure modes can help to evaluate and improve in the aspect of packaging materials and designs [2] - [6].

The lifetime prediction methods generally consist of two categories. The first one is based on physics-of-failure (PoF) lifetime models, which are limited due to the lack of detailed information on the materials and geometries of the power modules. Another one is the analytical models, the many use of the rain-flow counting methods, etc, which all need experimental power cycling tests [7] - [8].

Power cycling test in power semiconductor devices generates repetitive thermal-mechanical stresses, which will bring accumulated fatigue and accelerate the aging of the device till the end of life. Among other failure indicators, the junction temperature is one of the most strongly focused. For instance, in the distributed generation applications such as the photovoltaic (PV) system, the knowledge of the junction

temperature of the power semiconductor of a converter is of high importance, as the thermal cycling induced failure could impact a lot of the PV energy. These all make the detection of the junction temperature itself is a challenging and necessary research goal [9] - [13].

One of the most critical bottlenecks of the power cycling test is that while the junction temperature can be derived by $V_{ce,on}$ ($V_{ds,on}$) during DC power cycling, the off- time can be used to inject a monitoring current and measure the on-state voltage at low current this way, i.e., making effects of degradation such as bond-wire degradation, negligible. However, in the case of modern AC power cycling, this is not possible as injecting a measurement current requires additional circuitry able to disconnect the IGBT / MOSFET from the circuit, thus introducing measurement artifacts, such as stray inductance and resistance [4]. Besides, in the aspect of junction temperature measurement for IGBT Multichip Power Modules, it's only possible to estimate the average IGBT junction temperature among paralleled chips due to physical limit [14].

Normally, it has been believed that direct access to the


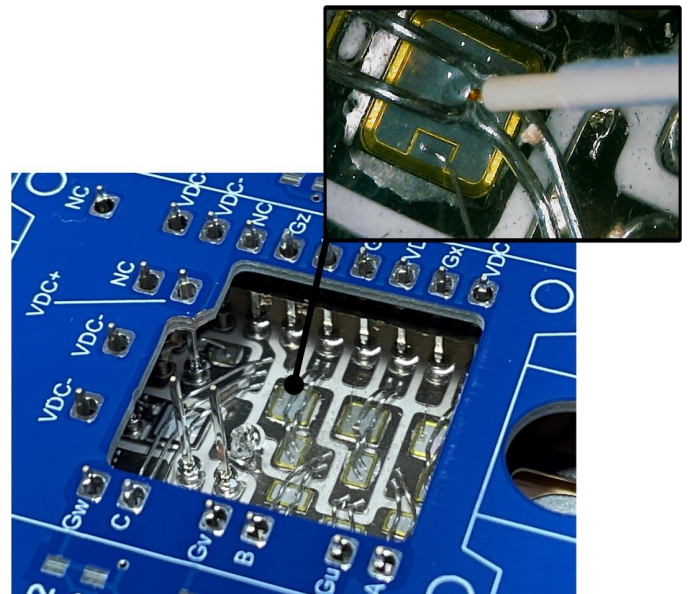


Fig. 1. DUT adapter PCB with optical fiber installed on the power module.

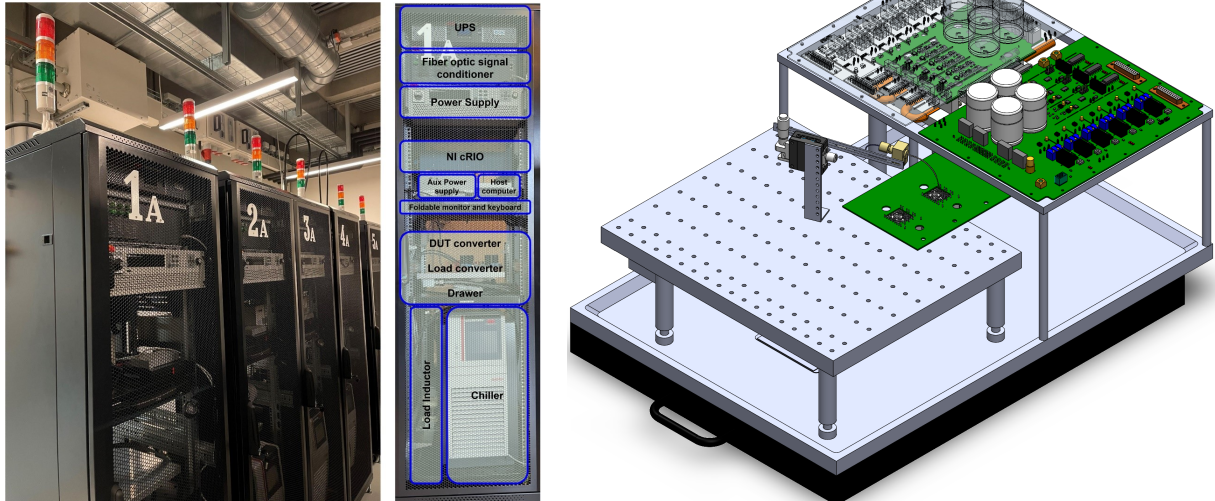

(a) 6-unit, 19" industrial rack array with detailed configuration.

(b) Three-dimensional mechanical layout of the developed test bench.

Fig. 2. Power cycling setup at AAU Energy, Aalborg University.

chips to measure the junction temperature can be difficult due to the limit of the module packaging and the dielectric gel [9], even though the optical fibers can be a valid alternative for measuring the T_j in a non-invasive and isolated manner, especially under the case (AC power cycling) when the traditional TSEP (Temperature Sensitive Electrical Parameter) method is not easy to implement. Not until recently, one innovative optical fiber sensing technology is proposed by the OpSense Solutions©, which enables an online junction temperature measurement during the power cycling test. In this paper, the details of using the optical fibers to measure the junction temperature under both DC- and AC- power cycling tests are explained, also comes with the experimental results and conclusions.

II. FIBER PRINCIPLE

The implementation of optical fiber sensor OTG-PM makes the direct online junction temperature measurement method

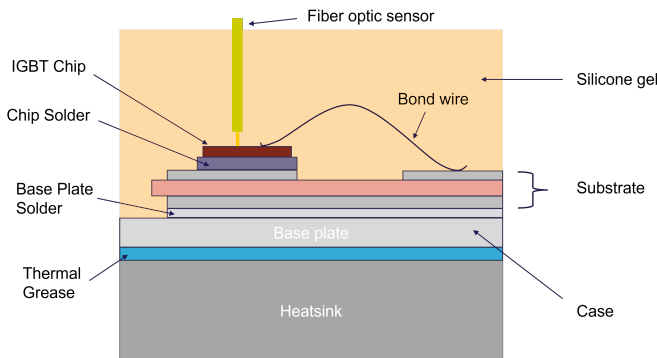


Fig. 3. Scheme of installation of optical fiber in contact with the chip to measure the junction temperature.

possible when conducting AC power cycling test. Details of the junction temperature measurement using an optical fiber sensor are described as follows.

Fig.1 and Fig.3 depict the way of using the isolated optical fiber to measure the junction temperatures of one 650V - 20A IGBT module in real-time. One cutout is made on top of the plastic housing of the power module in order to have the sensor able to reach out to the chip surface. As is essential to keep the packaging's insulation property to assure that the converter can run under rated power, voltage, and normal working conditions, the way of implementing the temperature measurement system can be challenging.

Designed in a way that the miniature sensor head is protected by rigid ceramic tubing, which allows for ease of piercing. Not until the sensor tip is getting close to the chip surface, the miniature tip will be spun out of the tube using one screw. In such a way, the OTG-PM sensor can get in touch with the chip surface without removing the silicone gel. Before getting the sensor tip penetrated through the gel, the sensor is prepositioned with the help of fiber holders, and the target zone is determined to be between the two bonding wires in the active area [15].

Except for its ease of mounting on the gel-filled power module, the sensor's fast response time feature (few ms), wide operating temperature range (-40 °C - 250 °C), immunity to EM and RF interference, etc, all make it well suited for in-situ junction temperature measurement during the power cycling test.

III. CASE STUDY

The test setup shown in Fig.4 is designed to perform power-cycling tests on several kinds of samples and under different conditions, including varied junction temperature swings. As shown in Fig.2, two 3-phase converters are back-to-back

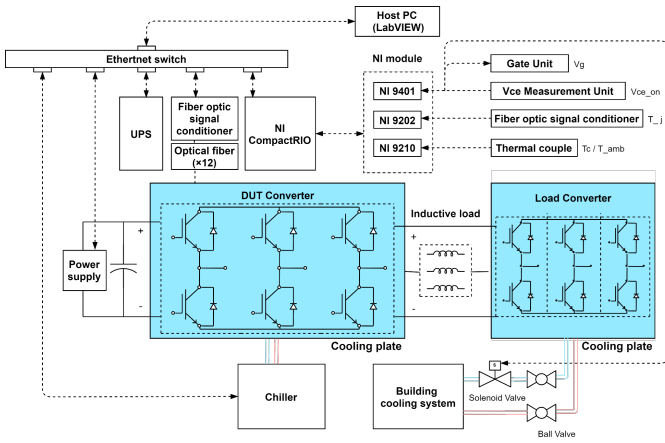


Fig. 4. Schematic of the power cycling setup.

connected in order to circulate power. A load converter is used to regulate the current through the inductor at the wanted amplitude and phase. Large space around the DUT converter is saved for optical fiber holder placement. More details of the setup can be found in [16].

Both DC- and AC- power cycling tests can be conducted on this setup, and the experimental test results are shown below:

A. DC Power Cycling


The DC power cycling is conducted with a load current of 20A, 2s on/off time, and the current is commutating between two phases of the power module. A diagram of the on-state voltage and gate voltage measurement results and a diagram of T_j vs time are reported in Fig.5.

B. AC Power Cycling


The AC power cycling is conducted with a circulated AC current among phases, of which the fundamental frequency is 0.25 Hz. Correspondingly, for each IGBT chip, it will be actively heated up by the switching losses and conducting losses for 2s and cooled down for another 2s. The corresponding junction temperature measurement result is shown in Fig.6, with a temperature swing of 80°C.

IV. CONCLUSION

This paper demonstrates that implementing the OpSens optical fiber sensors on the DUT can be one effective and practical way of measuring the junction temperature in power cycling tests (especially for AC-). The results reveal that a stable and accurate measurement result can be achieved without influencing the converter's normal operation. Note: it is possible to further elaborate on the study of the junction temperature swing, however, the chief goal of this paper was to illustrate the concept of using the optical fiber to measure the junction temperature during AC- and DC power cycling, and hence the lifetime estimation of the power semiconductor components is the subject of future work.

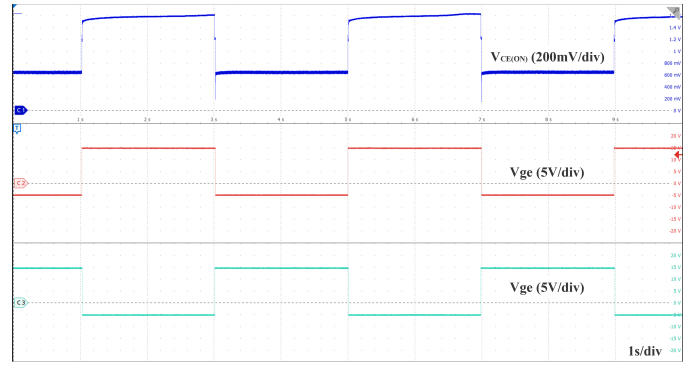


(a) On-state voltage and gate voltage measurement results.

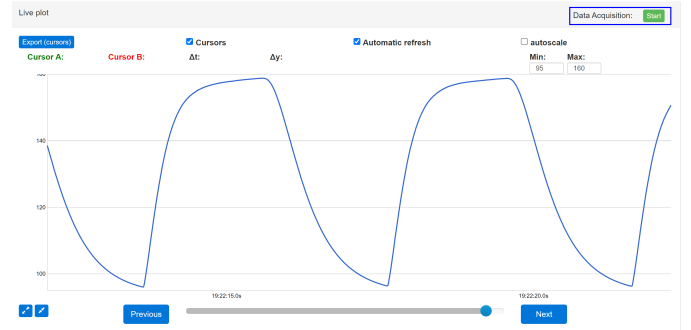


(b) Junction temperature measurement result.

Fig. 5. DC power-cycling test waveform.

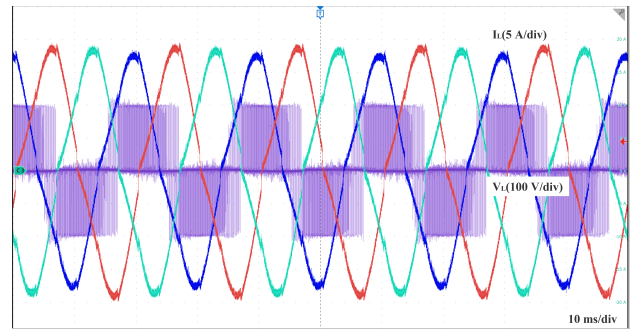

(a) Load current and voltage measurement results.

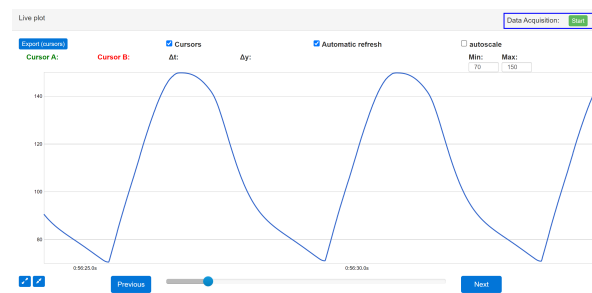

(b) Junction temperature measurement result.

Fig. 6. AC power-cycling test waveform.

ACKNOWLEDGMENT

This work is funded by the X-POWER project from Danish Agency for Science and Higher Education. The authors would like to thank J. Christiansen, M. Lund, B. B. Jensen for their support in the setup implementation.

REFERENCES

- [1] H. Wang, M. Liserre and F. Blaabjerg, "Toward Reliable Power Electronics: Challenges, Design Tools, and Opportunities," in *IEEE Industrial Electronics Magazine*, vol. 7, no. 2, pp. 17-26, June 2013.
- [2] Schuler, Stefan & Scheuermann, Uwe. (2010). "Impact of Test Control Strategy on Power Cycling Lifetime," in *PCIM Europe (Power Conversion Intelligent Motion)*, pp.355-360, May 2010.
- [3] L. R. GopiReddy, L. M. Tolbert and B. Ozpineci, "Power Cycle Testing of Power Switches: A Literature Survey," in *IEEE Transactions on Power Electronics*, vol. 30, no. 5, pp. 2465-2473, May 2015.
- [4] Choi, Ui-Min & Blaabjerg, F. & Jorgensen, Soren. (2017). Power Cycling Test Methods for Reliability Assessment of Power Device Modules in Respect to Temperature Stress. *IEEE Transactions on Power Electronics*. PP. 1-1. 10.1109/TPEL, May 2017.
- [5] IEC standard 60749-34:2010 "Semiconductor devices -Mechanical and climatic test methods - Part 34: Power cycling"
- [6] Automotive Electronic Council. AEC-Q101-Rev-E; 2021.
- [7] S. Kitzler, J. Stöckl, F. Kupzog and Z. Miletic, "Tracking of Aging Processes in Power Electronic Converters Using the Rainflow Method," *IECON 2018 - 44th Annual Conference of the IEEE Industrial Electronics Society*, 2018.
- [8] Y. Zhang, H. Wang, Z. Wang, Y. Yang and F. Blaabjerg, "Impact of lifetime model selections on the reliability prediction of IGBT modules in modular multilevel converters," *2017 IEEE Energy Conversion Congress and Exposition (ECCE)*, 2017.
- [9] N. Baker, M. Liserre, L. Dupont and Y. Avenas, "Improved Reliability of Power Modules: A Review of Online Junction Temperature Measurement Methods," in *IEEE Industrial Electronics Magazine*, vol. 8, no. 3, pp. 17-27, Sept. 2014.
- [10] M. Andresen, G. Buticchi and M. Liserre, "Thermal Stress Analysis and MPPT Optimization of Photovoltaic Systems," in *IEEE Transactions on Industrial Electronics*, vol. 63, no. 8, pp. 4889-4898, Aug. 2016.
- [11] G. Petrone, G. Spagnuolo, R. Teodorescu, M. Veerachary, M. Vitelli, "Reliability Issues in Photovoltaic Power Processing Systems," *IEEE Trans. Ind. Electron.*, vol.55, no.7, pp.2569-2580, 2008.
- [12] H. Wang, M. Liserre, F. Blaabjerg, P. de Place Rimmen, J.B. Jacobsen, T. Kvisgaard, J. Landkildehus, "Transitioning to Physics-of-Failure as a Reliability Driver in Power Electronics," *IEEE Trans. Emerg. Sel. Topics Power Electron.*, vol.2, no.1, pp.97-114, March 2014.
- [13] M. Musallam, C. Yin, C. Bailey, M. Johnson, "Mission Profile-Based Reliability Design and Real-Time Life Consumption Estimation in Power Electronics," *IEEE Trans. Ind. Electron*, vol.30, no.5, pp.2601-2613, May 2015.
- [14] F. Gonzalez-Hernando, J. San-Sebastian, A. Garcia-Bediaga, M. Arias and A. Rujas, "Junction Temperature Model and Degradation Effect in IGBT Multichip Power Modules," *2019 IEEE Energy Conversion Congress and Exposition (ECCE)*, 2019.
- [15] M.Piton, B.Chauchat, J.F.Servière, "Implementation of direct Chip junction temperature measurement in high power IGBT module in operation — Railway traction converter." *Microelectronics Reliability*, 2018.
- [16] K. Zhang, M. B. Fogsgaard and F. Iannuzzo, "Intelligent DC- and AC Power-Cycling Platform for Power Electronic Components," *2022 IEEE Applied Power Electronics Conference and Exposition (APEC)*, 2022.