

On the hazardous situations due to the presence of HV/MV substations in urban areas

Original

On the hazardous situations due to the presence of HV/MV substations in urban areas / Sa'Ed, J. A.; Di Silvestre, M. L.; Riva Sanseverino, E.; Zizzo, G.; Colella, Pietro; Pons, Enrico. - ELETTRONICO. - (2017), pp. 1-4. (Intervento presentato al convegno 17th IEEE International Conference on Environment and Electrical Engineering and 2017 1st IEEE Industrial and Commercial Power Systems Europe, IEEEIC / I and CPS Europe 2017 tenutosi a Milano (IT) nel 6-9 June 2017) [10.1109/IEEEIC.2017.7977507].

Availability:

This version is available at: 11583/2679569 since: 2020-01-17T15:30:43Z

Publisher:

IEEE

Published

DOI:10.1109/IEEEIC.2017.7977507

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2017 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

On the Hazardous Situations Due to the Presence of HV/MV Substations in Urban Areas

J. A. Sa'ed

Department of Electrical and
Computer Engineering
Birzeit University
Birzeit, Palestine

M. L. Di Silvestre, E. Riva
Sanseverino, G. Zizzo

DEIM – Department of Energy,
Information Engineering and
Mathematical Models
Università di Palermo
Palermo, Italy

P. Colella, E. Pons

DENERG – Department of Energy
Politecnico di Torino
Turin, Italy

Abstract— The paper focuses on the hazardous situations that can rise in urban areas in case of earth fault inside a High Voltage/Medium Voltage station. IEEE and IEC/EN Standards and technical documents are examined and discussed, in order to propose some practical guidelines for a safe integration of such installations in contexts characterized by the presence of low voltage systems and not trained persons.

Keywords— Substations; Safety; Earth fault; Global Earthing Systems

I. INTRODUCTION

High Voltage/Medium Voltage (HV/MV) stations are integrated in the urban context and, therefore, built very close to residential, commercial and tertiary buildings supplied by the low voltage (LV) utility grid (Fig. 1).



Fig. 1. Example of HV/MV station integrated in an urban area with residential building in the neighborhood.

In the event of a single-line-to-earth (1LtE) fault occurring on the HV side inside such a station, high voltages can be transferred to the closest buildings, creating dangerous situations for persons or damage to equipment insulation.

by the Research on the Electric System Programme. Consequently, a proper design of the earthing system of a HV/MV station in an urban areas must take into account not only the protection

This work was supported by the METERGLOB project funded by the Italian Minister for the Economic Development.

against electric shock of the station personnel but also the protection of persons outside its boundaries.

In particular, it is mandatory to protect against dangerous touch and step voltages the public immediately outside the station fences or outer walls, that are mainly exposed in the case of 1LtE.

Also the presence of water or gas pipelines, external continuous metal fences or railways must be considered in the design of the earth electrode of the station [1]. In fact, the above-mentioned metal elements can be responsible of the transfer of the earth potential rise (or part of it) to great distances from the fault, in places where an adequate protection against dangerous touch and step voltage can not be easily put into effect [2].

Starting from these considerations, the present paper analyses various elements that influence the transfer of the hazard from the station towards neighboring installations, when a 1LtE fault occurs within a HV/MV station. Moreover, based on IEEE and IEC/EN standards, the paper proposes an operative protocol for assessing the risk and some measures to be applied for reducing the hazard due to the fault. Finally, an application example of the risk assessment methodology is proposed.

The novelty of the paper is in the merging of both IEEE and IEC/EN main recommendations in order to propose an unique and practical guide for protecting against the risks due to the proximity of HV/MV substations to LV installations.

II. HAZARDOUS SITUATIONS

The presence of a HV/MV station inside an urban areas gives place to hazardous situations for persons due to the following issues:

- voltages transferred from the faulted HV/MV station to MV/LV cabins, trough the metal shields of the cables of the MV lines supplied by the station;
- accessible metal fences;

- metal pipelines connecting the earthing system of the faulted substations to the earth electrodes of the surrounding buildings;
- metal railways outgoing from the station;
- stress voltages rising in presence of LV network neutral point earthed at the same earthing system of the faulted station.

A. Transferred voltages

This issue has been deeply discussed in some previous papers of the same authors [3]-[4]. The studies carried out show that in case of a 1LtE fault occurring at the HV/MV substation, the substations closest to the supply experiment very high values of the earth potential rise. These values are less influenced by the number of secondary substations of the MV line, the number of MV lines, the distance between the substations and the values of the substation's earth resistance. The increase of the number of line outgoing the HV/MV station gives place to a reduction of the earth potential rise at the substations. On the other side, the connection of the earth electrodes of the secondary substations to the earthing system of the HV/MV substation does not give significant advantages to the HV/MV substations itself.

B. Metal fences

A correct earthing of metal fences around HV/MV substations is of vital importance because they are accessible to the public. The safety concerns related to these elements are deeply discussed in the IEEE Standard 80/2013 [5], in the National Electric Code [6] and in the IEC Standard 61936-1 [7]. Metal fences' earthing can be accomplished in two different ways: electrically connecting the fence to the substation earthing grid (in this case the metal fence can be inside or outside the grid area), using a separated earthing systems (in this case the metal fence MUST be outside the grid area). IEC Standard 61936-1 suggests, as a measure for reducing touch voltage outdoor the substation, to install a supplementary horizontal earth electrode connected to the fence at about 1 m from the fence and at a maximum depth of 0.5 m, as depicted in Fig. 2 (recognized specified measure M2.2).

A situation that must be addressed in presence of metal fences is the case in which metal fences do not follow the normal equipotential lines on the earth surface resulting from a fault in the HV/MV station. In such a case, a voltage distribution as that reported in Fig. 3 can occur, due to the electrical continuity of the fence. For avoiding the rise of dangerous voltages in correspondence of the fence poles, it is necessary to introduce insulating joints in the fence.

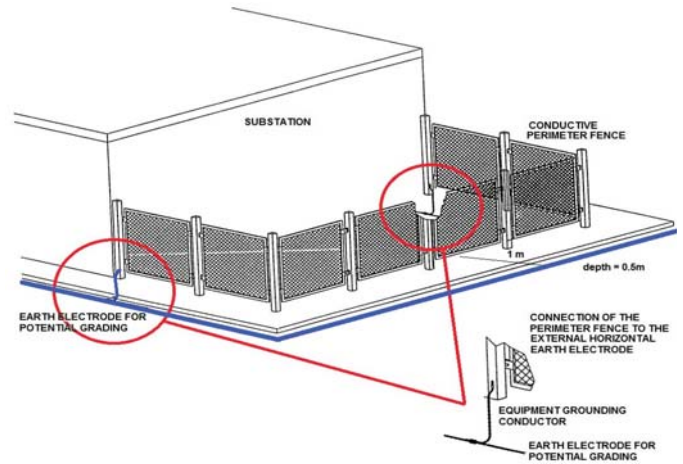


Fig. 2. Potential grading for substations' metal fences [17].

C. Metal pipelines

When metal pipes electrically connect the HV/MV station to surrounding buildings, the latter should be treated as part of the station with regards to the protection against dangerous voltages. This is not always possible in an urban area where the buildings are supplied by the LV utility grid and are equipped with simple rods as earth electrodes. LV installations' earth electrodes are, indeed, able to contain the Earth Potential Rise (EPR) due to a fault at the LV side below the tolerable limits imposed [6], [8], [9], whereas the protection against electric shock assured by the earth electrode of a HV/MV station is, generally, done containing touch and step voltages. For this reason, the connection between LV and HV installations' earthing systems can be accepted without further investigation only if the earthing system of the station is declared intrinsically safe, as defined in [10].

Consequently, insulating joints should be installed on the metal pipes outgoing the station, as represented in Fig. 4.

Electrical separations of parts of pipelines on the two sides of the substations border is suggested both by IEEE Standards [5], [11], [12], and by IEC/EN standards [7], [13], [14], [15], [16], [17].

D. Metal railways

Railways entering a substation must be connected to its earthing systems. The connection can create a hazard situation at an external location by transferring all or a portion of the earth potential rise due to a 1LtE fault.

IEEE Standard 80/2013 suggest removing the track sections from the substation or, as indicated also by EN Standard 50522, using insulating joints (Fig. 5). Instead of insulating joints, an alternative solution is that of substituting a metal track section with an insulating one. This solution reduces the probability of short circuit of the tracks towards remote earth.

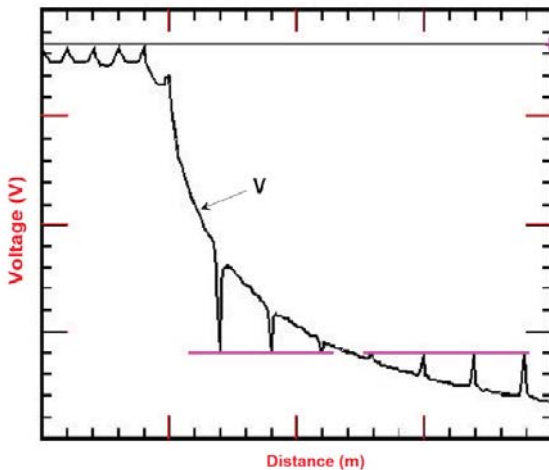
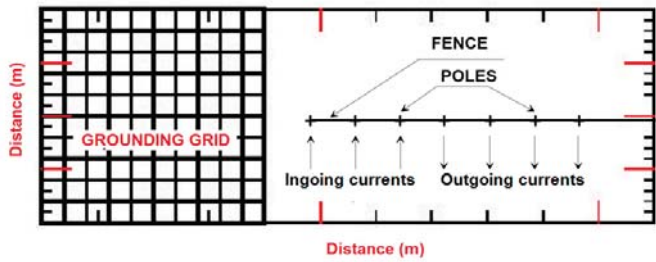


Fig. 3. Voltage profile on the soil surface due to a 1Lte fault in the substation, in presence of a long continuous metal fence [17].

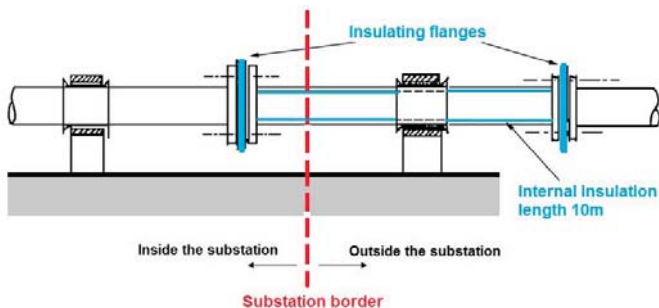


Fig. 4. Metal water pipeline crossing the substation border [17].

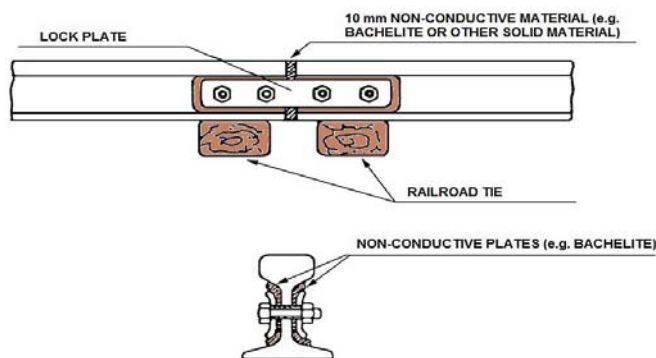


Fig. 5. Insulating flanges for railways [17].

E. Stress voltages

In the case the neutral point of MV/LV transformers is connected to the grounding system of a close HV/MV station, the hazard due to stress voltages on the insulation of the components connected to the LV network must be checked. According to EN Standard 50522. Being 1Lte faults eliminated in less than 5 seconds, LV neutral point can be connected to the station earth electrodes if the maximum earth potential rise due to the fault does not exceed 1200 V.

III. GUIDELINES FOR RISK ASSESSMENT

Table I reports a checklist for assessing the risk due to a 1Lte fault occurring in a HV/MV station located in an urban areas. The list is based on the above-reported considerations and on the application of the recognized specified measures M defined by IEC Standard 61936-1 and EN Standard 50522.

The table reports:

- measures I, assuring safety with reference to all the aspects reported in Section II (pipelines, fences, etc.);
- measures M, assuring protection against the transfer of dangerous voltage to the MV/LV substations through the metal shields of the MV cables;
- measures F, assuring protection of persons in contact with the outer walls or fences of the HV/MV station;
- measures P, assuring protection against the transfer of dangerous voltages through metal pipes;
- measure R, assuring protection against the transfer of dangerous voltages through railways;
- measure S, assuring protection of the insulation of the LV installations.
- The risk assessment is done as described below.
- It is evaluated if the earthing system is intrinsically safe. If so, no other measures are necessary. If not, it must be investigated if metal fences, cable metal shields, pipelines and railways are present and, if so, measures C, F, P, R and S must be taken. In the following an application example is reported.

IV. APPLICATION EXAMPLE

Let's consider a HV/MV station in an urban areas, with the following characteristics:

- five MV cable lines with ARG7H1RX cables, outgoing from the station;
- perimeter reinforced concrete walls on three sides and a metal fence on one side;

- earthing grid of the station within the boundaries of the station (outer wall and fence);
- no railways ingoing in the station;
- one metal pipe from the local aqueduct entering the station boundaries.

The EPR at the station due to a 1Lte fault on the HV side is 6000V. Therefore, the earthing system is not intrinsically safe and, in addition, measure S.1 must be carried out for preventing damage of LV insulation due to stress voltages (EPR is above 1200V).

The MV cables have copper screens that must be disconnected from the earthing system of the station (measure C.1), connected together and isolated for becoming not accessible to the personnel (measure C.2).

For protecting the public close to the perimeter walls and fence, the floor outside the station must be done with high resistivity material (measure F.7). Potential grading is carried out by installing a horizontal earth electrode connected to the earthing grid of the station at a distance of 1 m outside the fences and buried at a depth not over 0.5 m (measure F.5). Moreover, the fences must be interrupted by insulating joints (measure F.6). Finally, the metal pipe arriving at the station must be connected to not metal pipes for the water distribution within the station and must be isolated from the soil (measure P.2).

V. CONCLUSION

An analysis of the hazard due to a 1Lte fault inside a HV/MV station located in an urban area has been presented. The main international standards have been examined in order to define a procedure for assessing the risk for the LV installations due to the fault. Finally, an application example of the risk assessment methodology has been provided.

REFERENCES

- [1] G. Cafaro, P. Montegiglio, F. Torelli, P. Colella, E. Pons, R. Tommasini, G. Valtorta, "Global earthing systems: Characterization of buried metallic parts", Environment and Electrical Engineering (EEEIC), 2016 IEEE 16th International Conference on, 7-10 June 2016, pp. 1-6, Florence (Italy).
- [2] E. Pons, P. Colella, R. Tommasini, R. Napoli, P. Montegiglio, G. Cafaro, F. Torelli, "Global Earthing System: Can Buried Metallic Structures Significantly Modify the Ground Potential Profile?", IEEE Transactions on Industry Applications, vol. 51, n.6, 2015, pp. 5237-5246.
- [3] A. Campoccia, L. Mineo, G. Zizzo. "A method to evaluate voltages to earth during an earth fault on a HV network in a system of interconnected earth electrodes of MV/LV substations", IEEE Transactions on Power Delivery, vol. 23, n. 4, 2008, pp. 1763-1772.
- [4] M. L. Di Silvestre, L. Dusonchet, S. Mangione, G. Zizzo, "On the effects of HV/MV stations on global grounding systems", Environment and Electrical Engineering (EEEIC), 2016 IEEE 16th International Conference on, 7-10 June 2016, pp. 1-6, Florence (Italy).
- [5] IEEE Standard 80-2013, IEEE Guide for safety in AC substations grounding, January 2000.
- [6] NFPA 70, National Electrical Code, 2014 Edition.
- [7] IEC 61936-1, Power installations exceeding 1 kV a.c. - Part 1: Common rules, 2014.
- [8] IEC Standard 60364-4-41:2005, Low-voltage electrical installations - Part 4-41: Protection for safety - Protection against electric shock
- [9] G. Parise, "A Summary of the IEC Protection Against Electric Shock", IEEE Transactions on Industry Applications, vol. 34, n. 5, 1998.
- [10] G. Parise, L. Parise, L. Martirano, "Single grounding system intrinsically safe and global grounding system safe as set". Environment and Electrical Engineering (EEEIC), 2016 IEEE 16th International Conference on, 7-10 June 2016, pp. 1-6, Florence (Italy).
- [11] IEEE Standard 142-2007, IEEE Recommended practice for grounding of industrial and commercial power systems, June 2007.
- [12] IEEE standard 665-2001, IEEE Guide for generating station grounding,
- [13] CEI Guide 99-5, Guideline for the execution of earthing system of active and passive consumers connected to distribution systems with voltage exceeding 1 kV a.c., 2015.
- [14] CEI Standard 0-16, Reference technical rules for the connection of active and passive consumers to the HV and MV electrical networks of distribution Company, September 2014.
- [15] EN Standard 50522, Earthing of power installations exceeding 1 kV a.c., July 2011.
- [16] Power installations exceeding 1 kV a.c., CENELEC Document HD 637 S1:1999E, July 1999.
- [17] CEI Guide 11-37, Guida per l'esecuzione degli impianti di terra nei sistemi utilizzatori di energia alimentati a tensione maggiore di 1 KV, 2003.

TABLE I
CHECKLIST FOR ASSESSING THE RISK IN CASE OF 1Lte FAULT IN A HV/MV STATION

I.1	The earthing system of the station is intrinsically safe and is able to contain the EPR within the value of 50V.
C.1	Disconnection of the metal shields of the MV cables from the earthing system of the HV/MV station. The connection point must be made not accessible to the workers inside the station.
C.2	Connection of all the metal shields of all the MV lines outgoing the station. The connection point must be made not accessible to the workers inside the station.
F.1	Use of non conductive fences.
F.2	Use of non-conductive outer walls.
F.3	No grounded metal parts accessible from outside the HV/MV station.
F.4	Earthing of the metal fence by the station earthing system or by a separated earthing system if the fence is outside the station's earth electrode area.
F.5	In case of conductive perimeter fences, potential grading by installing a horizontal ground electrode connected to the grounding grid at a distance of 1 m outside the fences and buried at a depth not over 0.5 m.
F.6	Installation of insulating joints in the metal fences.
F.7	Use of high resistivity material for covering the soil outside the station
P.1	Use of insulating flanges on metal pipes outgoing the station.
P.2	Use of insulating pipes inside the station.
R.1	Remove unused track sections.
R.2	Installation of insulating joints between tracks.
R.3	Substitution of a metal track section with an insulating one.
S.1	If the maximum earth potential rise in the HV/MV station is over 1200 V, disconnect the neutral point of the MV/LV transformers from the earth electrode of the station.