

Self-Generation of Optical Frequency Combs in III-V/SiN External Cavity Laser with Frequency-Selective Mirror

Original

Self-Generation of Optical Frequency Combs in III-V/SiN External Cavity Laser with Frequency-Selective Mirror / Rimoldi, Cristina; Columbo, Lorenzo L.; Gioannini, Mariangela. - ELETTRONICO. - (2023), pp. 1-1. (Intervento presentato al convegno 2023 Conference on Lasers and Electro-Optics Europe & European Quantum Electronics Conference (CLEO/Europe-EQEC) tenutosi a Munich, Germany nel 26-30 June 2023) [10.1109/CLEO/Europe-EQEC57999.2023.10231703].

Availability:

This version is available at: 11583/2985311 since: 2024-01-22T15:00:32Z

Publisher:

IEEE

Published

DOI:10.1109/CLEO/Europe-EQEC57999.2023.10231703

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2023 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Self-generation of optical frequency combs in III-V/SiN external cavity laser with frequency-selective mirror

Cristina Rimoldi¹, Lorenzo L. Columbo¹, Mariangela Gioannini¹

¹. Dipartimento di Elettronica e Telecomunicazioni, Politecnico di Torino, IT-10129 Torino, Italy

In recent years, laser sources based on hybrid integration have been attracting surging interest for their compatibility with silicon photonic (SiPh) platforms making them the key components for many applications in optical communication and sensing. Furthermore, this technology is appealing for the realization of optical frequency combs (OFC) [1] at chip scale [2]. In this contribution, we address the dynamics of III-V/SiN hybrid lasers with high-Q SiN rings (Fig. 1a), providing a narrowband effective reflectivity ($|r_{eff}|^2$ in Fig.1c). Our model makes use of time-delayed algebraic equations accounting for mirror frequency selectivity [4].

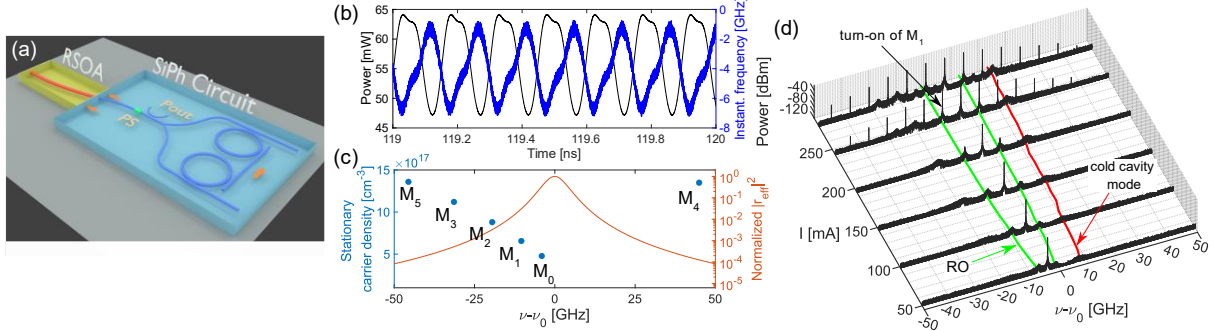


Fig. 1 (a) Schematics of the optical setup. (b) Temporal dynamics in output power (black) and instantaneous frequency (blue) in an OFC regime for bias current $I_{bias}=240$ mA and $|r_{eff}|^2$ FWHM=6 GHz (other parameters as in [4]). (c) Corresponding cavity modes (blue) and normalized SiPh mirror reflectivity profile (orange). (d) Optical spectra for increasing bias currents (RO: relaxation oscillations).

While this configuration has been proposed for the increased resilience of the laser to spurious back-reflections [3,4] and for the narrow emission linewidth [5], in [6] preliminary experimental results have also shown its potential in generating OFCs. Here, we investigate in detail (with the tools we presented in [4]) the mechanism that leads to the self-generation of the OFC. We highlight that the emergence of the comb relies on an unstable regime that is possible thanks to the very narrowband dispersive mirror feasible in this platform. In Fig. 1b we report an example of this regime, showing the temporal dynamics of both instantaneous frequency and optical power. Solving the oscillation condition, we plot in Fig.1c the cavity modes M_i in their frequencies (detuned with respect to the peak of effective reflection coefficient) and the corresponding carrier density that each mode would require to reach its threshold. Mode M_0 is detuned of $\Delta\nu=-4$ GHz with respect to the effective reflectivity peak by adjusting the phase shift of the phase control section (PS). The other modes are asymmetric with respect to M_0 because of the non-null α -parameter of the RSOA (set to $\alpha_H=3$). To explain the mechanism leading to the self-starting of the OFC, we plot in Fig. 1d the optical spectra simulated at different currents above threshold (of about 20 mA). At low currents (50-100 mA) we have single mode lasing and the other bumps in the spectrum are (i) the sidebands of the laser relaxation oscillations (the green lines mark the trajectory of the RO for increasing current) and (ii) the cold cavity longitudinal modes (red line). Note that the cold cavity modes are different from M_i because of $\alpha_H=3$. At 240 mA, relaxation oscillations can become undamped [4], due to the detuning of -4 GHz and the dispersive mirror, turning the laser phase noise into intensity noise that again enhances phase noise. Such oscillations generate a parametric gain capable of turning on M_i . Then, Four Wave Mixing of the RSOA can maintain locking of the modes. We conclude that narrowband mirrors, proper detuning of the lasing frequency, and a non-null α -parameter are essential ingredients for the self-generation of OFCs. For instance, we have checked that, forcing $\alpha_H=0$, the laser remains single mode for most of the frequency detuning. Further analysis of the comb performance in terms of bandwidth, FM and AM component of the comb, and RF linewidth is currently ongoing.

References

- [1] T. W. Hänsch, “Nobel lecture: Passion for precision”, *Rev. Mod. Phys.* **78**, 1297–1309 (2006).
- [2] H. Shu *et al.*, “Microcomb-driven silicon photonic systems”, *Nature* **605**, 457 (2022).
- [3] L. Columbo *et al.*, “Efficient and optical feedback tolerant hybrid laser design for silicon photonics applications”, *IEEE J. Sel. Top. Quantum Electron.*, **26**, 8301210 (2020).
- [4] C. Rimoldi *et al.*, “Damping of relaxation oscillations, photon-photon resonance, and tolerance to external optical feedback of III-V/SiN hybrid lasers with a dispersive narrow band mirror”, *Opt. Express*, **30**, 11090 (2022).
- [5] M. A. Tran *et al.*, “Tutorial on narrow linewidth tunable semiconductor lasers using Si/III-V heterogeneous integration”, *APL Photonics* **4**, 111101 (2019).
- [6] J. Mak *et al.*, “Linewidth narrowing via low-loss dielectric waveguide feedback circuits in hybrid integrated frequency comb lasers”, *Opt. Express*, **27**, 13307 (2019).