

PAPER • OPEN ACCESS

## A first-order lumped parameters model of electrohydraulic actuators for low-inertia rotating systems with dry friction

To cite this article: M D L Dalla Vedova *et al* 2020 *J. Phys.: Conf. Ser.* **1603** 012017

View the [article online](#) for updates and enhancements.



**IOP | ebooks™**

Bringing together innovative digital publishing with leading authors from the global scientific community.

Start exploring the collection—download the first chapter of every title for free.

# A first-order lumped parameters model of electrohydraulic actuators for low-inertia rotating systems with dry friction

M D L Dalla Vedova<sup>1</sup>, P Maggiore<sup>2</sup>, P C Berri<sup>3</sup> and F Acquaviva<sup>4</sup>

<sup>1</sup> Assistant Professor, Dept. of Mechanical and Aerospace Engineering, Politecnico di Torino, 10129 Turin (IT)

<sup>2</sup> Associate Professor, Dept. of Mechanical and Aerospace Engineering, Politecnico di Torino, 10129 Turin (IT)

<sup>3</sup> PhD Student, Dept. of Mechanical and Aerospace Engineering, Politecnico di Torino, 10129 Turin (IT)

<sup>4</sup> Assistant Researcher, Dept. of Mechanical and Aerospace Engineering, Politecnico di Torino, 10129 Turin (IT)

E-mail: [matteo.dallavedova@polito.it](mailto:matteo.dallavedova@polito.it)

**Abstract.** In aerospace engineering, there are several control systems affected by dry friction, which are characterized by low inertia and high working frequencies. For these systems, it is possible to use a downgraded, first-order dynamic model to represent their behaviour properly without run into numerical problems that would be harmful for the solution itself and would require high computational power to be solved, which means more weight, costs, and complexity. Yet, the effect of dry friction is still possible to be accounted for accurately using a new algorithm based on the Coulomb friction model applied to the downgraded, first-order dynamic model. In this paper, the degraded first-order model is applied to an electrohydraulic servomechanism with its PID control unit, hydraulic motor, electrohydraulic servo-valve, and applied load. These components represent a classic airplane actuator system. The downgraded model will be compared to the second-order one focusing on the pros and cons of the reduction process with a focus on the effect of dry friction for reversible and irreversible actuators.

## 1. Introduction

The design of hydraulically powered flight controls for aerospace, typical high position accuracy servomechanisms, involves the in-depth knowledge of their behaviors (generally affected by several nonlinear phenomena such as backlashes, saturations, dry frictions, etc). As reported in [1], the simulation of the dynamic behaviors of these systems may require mathematical models capable of taking into account the said nonlinearities, which affect more or less all working conditions. Usually, these models describe the main characteristics of the simulated on-board devices (e.g. electrohydraulic or electromechanical actuators) with a wealth of details, adopting non-linear mathematical models of a sufficiently high order and with a suitable number of degrees of freedom. Therefore, accurate modelling of a considered mechatronic system generally implies the use of high order dynamic models (typically, of second-order nonlinear or higher) [1]. However, for several applications (preliminary design, monitoring, diagnostics or prognostics), the detailed digital twins mentioned above can be too cumbersome (from a computational point of view); they can slow down the system (compromising real-time) or request data that are difficult to find.



In these specific cases, it is necessary to develop simplified algorithms that allow combining reduced computational burdens with acceptable levels of accuracy and robustness. The optimal methods for developing the simplified model of a given system are still topics of debate; indeed, they are strongly influenced by the function of the model (preliminary design, monitoring, etc.), by the modeled system, and by the quality and quantity of the data available. Under certain conditions (discussed in the following section of this work), it is possible (and advisable) to simplify the mathematical structure of the numerical model, degrading it to a simple first-order. When the necessary conditions are verified (one or more higher-order terms of the differential equations constituting the mathematical model are negligible), the degradation of the model reduces the complexity and computational cost of the entire algorithm. At the same time, however, it guarantees results comparable with those provided by higher-order models. Nowadays, the development of downgraded models for mechanical systems is mandatory to reduce the time and costs of preliminary design analysis and to develop robust and reliable software for onboard monitoring of critical components. A reduced model is usually a lighter solution in terms of weight, and it often needs a more straightforward and less powerful central processing unit (CPU). To develop a first-order downgraded model for the analyses and simulations of an electro-hydraulic actuator (EHA) commonly used to control the position of an aircraft trim-tab, the authors developed a new MATLAB-Simulink numerical model. This model uses a PID control logic to command a flapper-nozzle type electro-hydraulic servo valve (EHSV), which drives a hydraulic motor of given cylinder capacity. The motor output torque is used to control the trim-tab position through a rotary actuator affected by dry friction. The model allows simulating both a reversible and irreversible actuator through aiding and opposing efficiencies. The motion transmission elements are generally influenced by dry friction, which may give rise to reversible or irreversible behavior of the whole system. So, the effect of the dry friction on the dynamic behavior of the mechanical system requires proper simulation models characterized by high computational accuracy, nevertheless compactness and efficiency. The model used to achieve the adequate simulation of dry friction is the Borello's algorithm [1], properly modified to match a first-order model instead of a second-order one.

## 2. Physical-mathematical model

The classic second-order dynamic mass-damper-spring (MCK) model [2-3] can be expressed as:

$$M\ddot{x} + C\dot{x} + Kx = F \quad (1)$$

In a nutshell, any mechanical system can be traced back to an elementary structure similar to that expressed in Eq. (1). As for the electrohydraulic rotary actuators commonly used onboard the aircraft, typically to drive the secondary flight controls, it is possible to implement this strategy starting from the detailed model illustrated in [4-5] and to simplify it in analogy to Eq. (1) obtaining:

$$J_{eq} \frac{d^2\theta}{dt^2} + CM \frac{d\theta}{dt} + TFR + TLD = T12 \quad (2)$$

where  $J_{eq}$  is the equivalent moment of inertia of the system,  $CM$  is the viscous damping coefficient,  $TFR$  is the friction torque,  $TLD$  is the aerodynamic load acting on the surface,  $T12$  is the motor torque and  $\theta$  is the actuator angular position. It should be noted that, apparently, in the model illustrated in Eq. (2) the elastic term does not appear. In reality, an action similar to that introduced by the spring is performed by the control ring in a position which, based on the comparison between the command input and the actual position of the system, determines the driving torque  $T12$ . When the inertia of the system is very low, the undamped natural frequency (proportional to  $1/\sqrt{J_{eq}}$ ) increases and its characteristic time decreases [2]; this can lead to some problems during the numerical solution process (numerical instabilities, limit cycles, calculation overflow). These numerical problems can be avoided (or at least reduced) by adopting a very short integration time, but this leads to very high computational burdens and processing times. In the cases of mobile surfaces with low inertia, considering the high viscous damping of a hydraulic system [6], it is possible to neglect the first term of Eq. (2). In this way the equation becomes a first-order downgraded differential equation:

$$C_{eq} \frac{d\theta}{dt} + TFR + TLD = T12 \tag{3}$$

where, referring to the symbols shown in [2], the equivalent viscous damping  $C_{eq}$  can be expressed as:


$$C_{eq} = CM + \frac{GP}{GQ} \cdot Disp^2 \tag{4}$$

The first term of the second member of Eq. (4) is the motor damping ( $CM$ ) whilst the second one is the EHSV viscous damping (where  $GP$  and  $GQ$  are respectively the valve pressure and flow gains [7], and  $Disp$  is the volumetric displacement of the hydraulic motor [5]). The EHSV viscous damping is generally 2÷3 order of magnitude greater than the motor one, and therefore can't be neglected. It is necessary to introduce this equivalent viscous damping because of the differences between the second-order Simulink model and the first-order one (see Figures 2 and 3). This degradation is possible only if the orders of magnitude of the elastic and viscous terms are greater than the inertial one, which means that the velocity transient is described by the instantaneous equilibrium between viscous forces and applied loads. In Figure 1 it is shown the effect of inertia (or mass) on the system behavior.

### 3. Dry friction model

In the simulation model developed by the authors, the phenomenon of dry friction is modeled according to the discrete parameter formulation proposed by Coulomb. The model proposed by the authors is based on the discrete parameter implementation proposed in [8] and declined for a rotary system, as illustrated in [1]. Hence, the instantaneous value of the friction torque  $TFR0$  is obtained as:

$$TFR0 = \begin{cases} T_{act} & IF \ \dot{\theta} = 0 \wedge |T_{act}| \leq TFR_{stat} \\ TFR_{stat} \cdot sign(T_{act}) & IF \ \dot{\theta} = 0 \wedge |T_{act}| > TFR_{stat} \\ TFR_{din} \cdot sign(\dot{\theta}) & IF \ \dot{\theta} \neq 0 \end{cases} \tag{5}$$

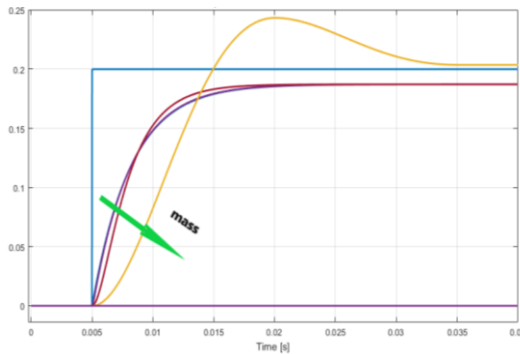

**Figure 1.** EHA Dynamic response for a step command, parameterized in the actuator mass. Comparison between the second-order model and the analogous first-order degraded one. For low inertia systems the first and second-order curves are almost identical, allowing us to run the first-order model with negligible errors.

where  $\dot{\theta}$  and  $T_{act}$  represent respectively the motor angular velocity ( $\dot{\theta} = \omega$  in rad/s) and the net active torque (which determinates the instantaneous value of the angular acceleration acting on the system). Referring to Eq. (2), the active torque  $T_{act}$  should be expressed as  $T12 - TFR - TLD - CM \cdot \omega$ . However, referring to [1-3], the model is also sensitive to the external load  $TLD$ , and is able to distinguish between aiding and opposing loads because of the reversible or irreversible behavior of the actuating system. The friction torque  $TFR$  is composed of the no-load torque ( $TFR0$ ), fundamentally due to preloads on bearings and gaskets, and an additional term, deriving to the external torque  $TLD$  (generated by the aerodynamic load applied on the control surface) through a proportionality coefficient related to loading conditions. The efficiency of the mechanism depends on the load condition related to the motion (aiding or opposing). Therefore, in slipping conditions, the Coulomb acting on moving elements is characterized by the following two different types of efficiency:  $EtOJ$  for the opposing case and  $EtAJ$  for the aiding one. The total friction torque ( $TFR$ ) is computed as:

$$TFR = TFR0 + \left(\frac{1}{EtOJ} - 1\right) \cdot TLD \tag{6}$$


$$TFR = TFR0 + (1 - EtAJ) \cdot TLD \tag{7}$$

where Eq. (6) represents the opposing load whilst Eq. (7) the aiding load conditions.



## 5. Results

To evaluate the performance of the proposed EHA model, we compared the dynamic responses generated by the detailed numerical algorithm with those obtained with the first order degraded actuator model. Figure 4(a) shows the dynamic response of a reversible actuator with low inertia (negligible compared to the other terms of the equation of equilibrium). The EHA command is a position step input with amplitude equal to  $20^\circ$ , applied at the initial instant of the simulation. This simulation is performed under the effect of a sinusoidal external torque  $TLD$ , applied at time 0.5 s, acting as disturbance input. Figure 4(b) shows the response of the corresponding degraded model.

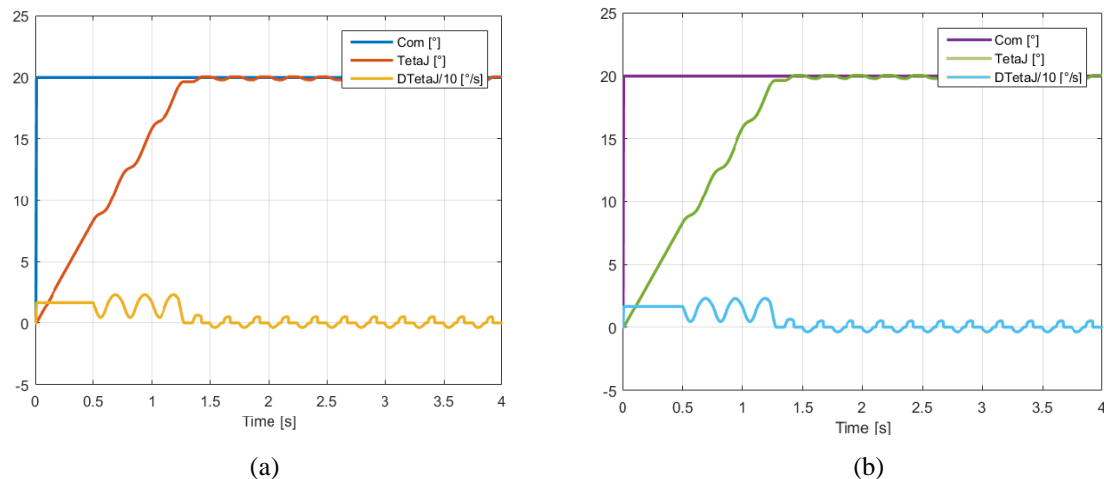

**Figure 4.** Dynamic response of the considered EHA (a) second-order model (b) first-order model

## 6. Conclusions

The simulations show the accuracy of the proposed algorithm taking into account the effects of the dry friction and the end-of-travel on the behavior of actuators. It must be noted the ability of the proposed model to describe the dynamic/static behavior of both reversible and irreversible types correctly, employing the proper values of the respective efficiencies. The proposed first-order model is still able to simulate with satisfactory accuracy the dynamic response of the servomechanism considered (friction, saturation, limit switch) and is also capable of simulating reversible and irreversible actuators under opposing and aiding loads. The simulations showed that the proposed first-order model is a good choice for those actuating systems characterized by low inertia (i.e. the inertial term of the mathematical model is negligible respect to the viscous or elastic contributions). At the same time, it is not recommended for higher-inertia systems. Moreover, for these dynamic systems, the second-order model can be used with larger time discretization due to the low speed and frequencies at which those work, and therefore the numerical issues shouldn't occur. In conclusion, it should be noted that the approach proposed by the authors in this work can also be extended to the case of linear actuators, without applying substantial changes to the algorithms illustrated here. In fact, without intervening on its mathematical model, it is possible to convert the Matlab-Simulink models proposed from a rotary configuration to a translational one, simply by changing the physical meaning of the parameters implemented in the model (e.g. by replacing the torques with the forces, the moments of inertia with the masses and the volumetric displacement of the hydraulic motor with the active area of the jack).

## References

- [1] Borello L and Dalla Vedova M D L 2012 A dry friction model and robust computational algorithm for reversible or irreversible motion transmissions *International Journal of Mechanics and Control (JoMaC)* **13**(02) pp 37-48.
- [2] Den Hartog J P 1934 *Mechanical Vibrations*, Dover Publications (New York).
- [3] Thomson W T 1993 *Theory of Vibrations with Applications*, Prentice-Hall.

- [4] Borello L, Villero G and Dalla Vedova M D L 2009 New asymmetry monitoring techniques: effects on attitude control *Aerospace Science and Technology* **13**(8) pp 475-487.
- [5] Borello L, Villero G and Dalla Vedova M D L 2014 Flap failure and aircraft controllability: Developments in asymmetry monitoring techniques *Journal of Mechanical Science and Technology* **28**(11) pp 4593-4603.
- [6] De Martin A, Dellacasa A, Jacazio G and Sorli M 2018 High-Fidelity Model of Electro-Hydraulic Actuators for Primary Flight Control Systems *BATH/ASME Symp. Fluid Power and Motion Control*.
- [7] Alimhillaj P, Borello L and Dalla Vedova M D L 2013 Proposal of Innovative Fluid Dynamic Nonlinear Servovalve Synthetic Models *Int. J. of Mechanics and Control* **14**(2) pp 39-49.
- [8] Borello L, Maggiore P, Villero G and Dalla Vedova M D L 2010 A comparison between dry friction discontinuous computational algorithms *27th Congress of the International Council of the Aeronautical Sciences 2010 (ICAS 2010)* **5** pp 3750-3759.
- [9] Quinn D 2004 A new regularization of Coulomb friction *Journal of Vibration and Acoustics* Vol. **126**(3) pp 391-397.
- [10] Karnopp D 1985 Computer simulation of stick-slip friction in mechanical dynamic systems *Journal of Dynamic Systems, Measurement, and Control* **107**(1) pp 100-103.
- [11] Dahl P R 1968 A solid friction model *Tech. Report Tor-0158(3107-18)-1* Aerospace Corporation.
- [12] Liu Y F, Li J, Zhang Z M, Hu X H and Zhang W J 2015 Experimental comparison of five friction models on the same test-bed of the micro stick-slip motion system *Mechanical Sciences* **6** pp 15-28
- [13] Dalla Vedova M D L and Salente E 2020 Proposal of a simplified Coulomb friction numerical model for the preliminary design of electrohydraulic servomechanisms. *4th International Conference on Applied Physics, Simulation and Computing (APSAC 2020)*.
- [14] Borello L, Dalla Vedova M D L, Jacazio G and Sorli M 2009 A prognostic model for electrohydraulic servovalves. *Annual Conference of the Prognostics and Health Management Society (PHM 2009)*.
- [15] Urata E 2004 Influence of eddy current on torque-motor dynamics *4th IFK Workshop* pp 71-82.
- [16] Urata E 2004 One degree of freedom model for torque motor dynamics *Int. J. of Fluid Power* **5**.
- [17] Urata E 2005 Influence of asymmetry of air-gap in servovalve torque motor. *9th Scandinavian Int. Conf. on Fluid Power*.
- [18] Henninger D, Zopey A, Ihde T and Mehring C 2017 High-Fidelity 1D Dynamic Model of a Hydraulic Servo Valve Using 3D Computational Fluid Dynamics and Electromagnetic Finite Element Analysis *Int. J. Mechanical and Mechatronics Eng.* **11**(8) pp 1476-1482.
- [19] Dalla Vedova M D L, Maggiore P and Pace L 2014 Proposal of prognostic parametric method applied to an electrohydraulic servomechanism affected by multiple failures *WSEAS Transactions on Environment and Development* **10** pp 478-490.