

Alternative Horizontal Markings along Curved Exit Ramp Terminals to Improve Driver-Safety-Related Performance

Original

Alternative Horizontal Markings along Curved Exit Ramp Terminals to Improve Driver-Safety-Related Performance / Raimondo, Giorgia; Lioi, Alessandra; Hazoor, Abrar; Portera, Alberto; Tefa, Luca; Bassani, Marco. - In: TRANSPORTATION RESEARCH RECORD. - ISSN 0361-1981. - ELETTRONICO. - 2676:6(2022), pp. 774-787. [10.1177/03611981221076443]

Availability:

This version is available at: 11583/2956449 since: 2023-03-31T15:46:16Z

Publisher:

SAGE

Published

DOI:10.1177/03611981221076443

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

Sage postprint/Author's Accepted Manuscript

Raimondo, Giorgia; Lioi, Alessandra; Hazoor, Abrar; Portera, Alberto; Tefa, Luca; Bassani, Marco, Alternative Horizontal Markings along Curved Exit Ramp Terminals to Improve Driver-Safety-Related Performance, accepted for publication in TRANSPORTATION RESEARCH RECORD (2676 6) pp. 774-787. © 2022 (Copyright Holder).

DOI:10.1177/03611981221076443

(Article begins on next page)

1 **Alternative Horizontal Markings Along Curved Exit Ramp Terminals to Improve Driver**
2 **Safety-Related Performance**

3
4
5 **Giorgia RAIMONDO**
6 giorgia.raimondo@studenti.polito.it

7
8 **Alessandra LIOI**
9 alessandra.lioi@polito.it

10
11 **Abrar HAZOOR**
12 abrar.hazoor@polito.it

13
14 **Alberto PORTERA**
15 alberto.portera@polito.it

16
17 **Luca TEFA***
18 luca.tefa@polito.it (* = corresponding author)

19
20 **Marco BASSANI**
21 marco.bassani@polito.it

22
23
24 Department of Environment, Land and Infrastructure Engineering
25 Politecnico di Torino, Torino, Italy,10129

26
27
28

1 **ABSTRACT**

2
3 Previous investigation revealed that diverging maneuvers along curved terminals lead to a deterioration in
4 the longitudinal and transversal performances of drivers with respect to linear ones. As a countermeasure,
5 innovative horizontal markings (HMs) may be used to compel drivers to drive more prudently and maintain
6 better vehicle control.

7 In this driving simulation study, the behavioral effects of alternative HMs along curved exit ramp
8 terminals were investigated. Forty-eight voluntary participants drove along randomly assigned exit ramp
9 terminals, the design of which involved combinations of the following input variables: (i) horizontal
10 markings (standard HM1, HM2 with internal lane bands, HM3 with external zebra stripes); (ii) lighting
11 conditions (day and night); (iii) traffic flow in the motorway (1000 pc/h and 3000 pc/h), and (iv) ramp
12 terminal connection type (continuous and reverse). Longitudinal (i.e., speed) and transversal (i.e., lateral
13 position and diverging abscissa) behavioral data were collected.

14 HM2 leads to greater improvements in the level of road safety thanks to better longitudinal and
15 transversal driver behavior. However, drivers did delay their exit from the motorway with respect to the
16 baseline condition (HM1) independently of the connection type. No relevant improvements were observed
17 with HM3, apart from speed reductions at the end of the terminal and more centered trajectories when
18 approaching the ramp. Results also show that drivers tended to enter the reverse terminal later than the
19 continuous one (where drivers correctly used the taper), thus revealing that the use of the innovative HMs
20 was not able to compensate for this inappropriate behavior adopted along reverse terminals.

21
22
23 **Keywords**

24 Horizontal markings, exiting terminal, diverging maneuver, driving simulation, driver behavior, statistical
25 data modelling.

1 INTRODUCTION

2
3 Interchange ramp terminals are intended to facilitate the smooth and safe transition and change in speed of
4 vehicles entering and exiting the motorway (1). However, on these road facilities a number of conflicts
5 among vehicles occur, resulting in a relevant crash frequency rate (2, 3). Ramp terminals are specialized
6 lanes on which drivers contextually change speed and lateral position, so their geometric characteristics
7 should be carefully designed to guarantee safe and efficient operations. Literature reveals that exit-ramps
8 are more dangerous than entry ones i.e., they have a higher crash frequency rate (4-6). Lane-changing
9 maneuvers, fluctuations in speed, and decision-making actions all contribute to an increase in the inherent
10 risk of exit ramps (7, 8).

11 Some studies have identified inconsistencies between the design criteria of ramp terminals and real
12 driving operations. Kinematic models used at the design stage assume uniform deceleration during
13 diverging maneuvers (9-11), while in a simulation-based investigation, Calvi et al. (12) showed that drivers
14 approaching exit ramps start reducing speed before the deceleration lane, thus slowing down the general
15 traffic flow along the motorway. Furthermore, Lyu et al. (13) found that in diverging maneuvers drivers
16 adopt speeds which are significantly higher than the posted speed limit when approaching exit ramp
17 terminals.

18 Several naturalistic and driving simulator-based studies have also investigated the factors affecting
19 the safety of linear deceleration terminals along tangent sections of mainline motorways. The volume of
20 traffic is one of the most critical factors determining safety at interchanges (14, 15) as well as the terminal
21 layout (16-18). During the deceleration operation, factors affecting driver behavior include the length of
22 the deceleration lane (19, 20), the number of lanes (21), the type of deceleration lane (parallel or tapered)
23 (22, 23), and the ramp geometry (5, 6).

24 25 **Problem statement**

26 Recently, Portera and Bassani (24) investigated driver behavior along the curved diverging terminals of
27 exit ramps. They found that the direction of the exit ramp curve with respect to the curvature of the
28 motorway has a strong impact on longitudinal and transversal driver behavior. Along continuous ramp
29 terminals (**Figure 1d**), i.e., ramps which have the same curvature as that of the motorway, drivers behave
30 similarly to the way they would along straight terminals. Conversely, along reverse ramp terminals (**Figure**
31 **1g**), i.e., ramps which have a different curvature to that of the motorway, drivers do not always select
32 appropriate speeds and lane change positions, thus highlighting critical driving situations that need to be
33 considered when adopting appropriate safety countermeasures at the design stage.

34 Road markings are generally regarded as a low-cost and effective measure for improving
35 longitudinal and transversal behavior along horizontal curves (25-27). In the past, different types of
36 perceptual road markings were proposed as a means to reduce speed and improve lateral position in
37 hazardous locations (28, 29). Several studies have demonstrated the effectiveness of perceptual horizontal
38 markings (HMs), i.e., transverse strips, colored median, herringbone patterns, etc. in speed reduction (30-
39 33). Perceptual treatments are specifically designed to enhance the perception of speed in drivers (34), with
40 this higher perception of risk being unconsciously induced in accordance with the risk homeostasis theory
41 (35). The majority of these studies focused on curved sections of rural roads (36-39), where any
42 miscalculations in speed and perception of curvature tend to be reflected in a higher incidence of crashes
43 (31). In motorway interchanges, Gu et al. (8) suggested the use of more efficient HMs as a safety
44 improvement.

45 Road markings can also affect the perception of lane width thus improving the lateral position of
46 the vehicle within the lane (28, 31). Rumble strips were found to be useful in decreasing the standard
47 deviation of lateral position (SDLP) of drivers travelling along a curve on a two-lane road section (40).
48 Awan et al. (37) observed that drivers followed a safe path along a curve when herringbone pattern markings
49 were present. They pointed out that this kind of perceptual marking can help to reduce the number of
50 head-on crashes along curves where drivers tend to adopt inappropriate lateral positions.

1 When considering exit ramps, the before-after observational study of Retting et al. (41) indicated
 2 that the installation of lateral pavement marking patterns narrowing the lane width led to an effective
 3 reduction in average speeds. In contrast, Hunter et al. (42) observed that the use of chevron pavement
 4 markings had only a moderate influence on driver speeds. They argued that these markings are only
 5 effective for a limited time following their installation but then their impact declines as drivers become
 6 familiar with them.

7 **Study objective**

8 In this driving simulation study, the effects of innovative horizontal markings along curved exit ramp
 9 terminals were investigated. The main hypothesis is that HMs designed to have an impact on perceptual
 10 lane width and speed may improve the lateral and longitudinal control of drivers as they exit from
 11 motorways. The experiment involved forty-eight volunteers. Four main factors were considered in the
 12 experimental design: (i) the HM layout (standard vs. innovative), (ii) the traffic flow along the motorway
 13 (1000 vs. 3000 pc/h/lane), (iii) the terminal geometry (continuous vs. reverse), and (iv) the environmental
 14 lighting conditions (i.e., day vs. night). Speeds and lateral positions at specific sections and the diverging
 15 abscissa i.e., the point at which drivers changed lane when moving from the motorway to the terminal, were
 16 taken into account in the analysis. Generalized Linear and Linear Mixed-Effects models were used to
 17 interpret the collected data and identify the factors influencing driver behaviour.

18 **METHODS**

19 **Scenarios, design of the experiment, and independent factors**

20 The virtual road scenarios consisted of two-lane highway and motorway segments and were designed in
 21 accordance with the prescribed Italian standard (43). Segments of these two road categories were linked
 22 through direct deceleration ramps (**Figure 1**) with a horizontal radius $R_r = 150$ m (44). A ramp with the
 23 same curvature as the curved motorway, i.e., a continuous transition (**Figure 1d**), was included together
 24 with a ramp with the opposite curvature sign to that of the curved motorway segment, i.e., a reverse
 25 transition (**Figure 1g**).

26 The circuit was developed with no longitudinal slope. The motorway segments included two 3.75
 27 m wide lanes per direction, while the highway segments had two 3.75 m wide lanes (one per direction).
 28 The motorway ramps included one 4.00 m wide lane, with shoulders of 1.00 m in width. The exit lane
 29 included a taper and a terminal. Both were curved and parallel to the adjacent through lanes as indicated in
 30 **Figure 1**. The deceleration length was calculated using the following equation:

$$31 \quad L_{d,u} = \frac{v_1^2 - v_2^2}{2a} \quad (1)$$

32 where v_1 (m/s) is the entry speed into the deceleration terminal (140 km/h), v_2 (m/s) is the exit speed at the
 33 end of the deceleration segment (60 km/h), and a is the deceleration rate assumed equal to 3 m/s^2 . Following
 34 these design rules, the deceleration length was 205 m. The taper length was set at 90 m according to the
 35 Italian standard (44).

36 Experimental independent factors included: (i) the horizontal marking (HM), i.e., conventional
 37 (HM1), alternative type 2 (HM2), and alternative type 3 (HM3); (ii) the connection type (CT) between
 38 terminal and ramp, i.e., continuous or reverse; (iii) the traffic flow (TF) in the motorway through lanes, i.e.,
 39 1000 and 3000 pc/h/lane; and (iv) the lighting conditions (LC), i.e., day and night.

40 **FIGURE 1. Images showing the three HMs and the two ramp terminal connection types (continuous and**
 41 **reverse). Vision of the three HMs from the driver point of view: (a) HM1 (baseline), (b) HM2 (type 2), and (c)**
 42 **HM3 (type 3). Plan view of the three layouts: (d) HM1 continuous ramp terminal, (e) HM2 continuous e ramp**
 43 **terminal, (f) HM3 continuous ramp terminals, (g) HM1 reverse ramp terminals, (h) HM2 reverse ramp**
 44 **terminals, and (i) HM3 reverse ramp terminals (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-**
 45 **spiral, SC = spiral-to-curve, CE = curve end).**

1 Each circuit was composed of two exit ramp terminals, one with the continuous design and the
2 other with the reverse design. For each scenario, a random combination of HM (3 levels), TF (2 levels) and
3 LC (2 levels) was assumed. Considering all possible combinations, a total of twelve ($= 3 \times 2 \times 2$) circuits were
4 generated.

5 HM2 (**Figure 1b**) consisted of internal white spaced bands of variable thickness placed inside the
6 lane of the exit ramp terminal. These internal bands widen along the ramp terminal, hence reducing the
7 perception of available lane width. The longitudinal size and spacing of the white bands, 0.70 m and 2.5 m
8 respectively, were maintained constant along the entire length of the exit ramp terminals. The thickness of
9 the bands changed at specific stations: between the taper-to-terminal (TT) and the terminal-to-spiral (TS)
10 sections it was 0.25 m, with the bands located on the right side of the lane only. From the TS to the
11 spiral-to-curve (SC) sections the thickness was equal to 0.40 m, while between SC and the ramp curve end
12 (CE) it was set equal to 0.55 m. The hypothesis with the use of HM2 is that drivers maintain better control
13 of their lateral position inside the ramp terminal lane (i.e., more centered trajectories in the lane), as
14 observed by Katz et al. (33) and Charlton (31).

15 HM3 consisted of stripes with variable longitudinal spacing placed on the shoulders only. In this
16 case, the hypothesis is that markings act on driver peripheral field of vision to increase the perception of
17 speed during deceleration (45). **Figure 1c** shows that HM3 has a spacing with stripes 0.15 m thick and
18 1.0 m long along the entire exit ramp terminal. Their spacing changed between TT and TS (10.0 m), TS
19 and SC (5.0 m), and SC and CE (2.5 m). When travelling at a constant speed, the shorter distance between
20 consecutive stripes leads drivers to believe that they are travelling at a higher speed than they actually are.
21 This perception should prompt drivers to reduce their speed during the maneuver, thereby adopting speeds
22 closer to those assumed at the design stage of the terminal (31, 41).

23 The third variable in the experiment was the rate of traffic flow along the motorway. In this
24 experiment, the same traffic conditions used by Portera and Bassani (46) were adopted. Specifically, (i)
25 high-volume traffic conditions (Level of Service, LOS C, with a flow of 3000 pc/h), and (ii) low-volume
26 traffic conditions (LOS A, 1000 pc/h flow) were used. These flows refer to pc/h per the whole travelled
27 way in the investigated direction. Finally, test drivers were subjected to both daytime and night-time driving
28 conditions. Since reduced visibility can make it difficult for drivers to clearly see the markings, this variable
29 can be decisive in the control of speed and trajectory.

31 **Participants and equipment**

32 The study was conducted in line with the Code of Ethics of the World Medical Association included in the
33 Declaration of Helsinki (47). Forty-eight licensed drivers took part in the experiment on a voluntary basis
34 without any remuneration. The sample set of participants was constructed to be representative of the general
35 Italian driving population (full driving license holders) in terms of gender and age (21 females and 27 males
36 divided into three classes: < 25 years old; 25-44 years old; 45-64 years old). Before participating in the
37 experiment, test drivers signed a privacy consent form as required by Italian law. **Table 1** summarizes the
38 aggregated information on participants in the experiment by age group.

39 The fixed-base simulator (AV Simulation, France) available at the Road Safety and Driving
40 Simulation laboratory (RSDS Lab) of Politecnico di Torino was employed. The system was relatively
41 validated for longitudinal, lateral, and passing behavior (48-50). The apparatus consists of three 32-inch
42 screens that provide an angle of view of 130°, a true force steering wheel, pedals, and gearbox. The
43 resolution of the visual scene is 1920×1080 pixel, and the refresh rate is 60 Hz. The simulator also includes
44 equipment to reproduce the sounds of both the engine and the surrounding environment. The recording
45 system acquired all data with a frequency of 100 Hz.

TABLE 1. Information on the sample of drivers (mean values and standard deviation between brackets).

Participant characteristics	< 25 years	25-44 years	45-64 years	Total Sample
Total number (females)	5 (2)	20 (9)	23 (10)	48 (21)
Age (years)	21.4 (1.7)	33.2 (6.1)	53.8 (4.0)	41.4 (12.9)
Driving Experience (years)	3.0 (2.0)	15.0 (6.3)	34.8 (4.6)	22.8 (12.8)
Distance travelled (km/year)	5,000 (3,082)	11,500 (10,000)	15,635 (11,890)	12,615 (10,790)
Number of accidents	0.20 (0.45)	0.60 (0.75)	1.81 (2.34)	1.11 (1.77)

Experimental protocol

Before starting the driving session, test drivers were asked to fill in a pre-drive questionnaire to evaluate their physical condition and health. Then, all drivers performed visual and auditory cognitive tests (available at: www.cognitivefun.net) to measure their reaction times to stimuli and detect any possible changes in their cognitive performances due to impairments resulting from the driving test. Reaction times were found to be normally distributed as per the Kolmogorov-Smirnov test (pre-drive visual reaction: $D_{48} = 0.08$, $p = .847$; pre-drive auditory reaction: $D_{48} = 0.14$, $p = .228$; post-drive visual reaction: $D_{48} = 0.12$, $p = .435$; post-drive auditory reaction: $D_{48} = 0.17$, $p = .102$). The duration of reactions to visual stimuli were evidently longer than those to auditory stimuli because of the difference in time needed to process and react to the signal received, which is longer in the case of visual stimuli (51). These results are consistent with previous observations from Thompson et al. (52) and Pain and Hibbs (53). Test results before and after the driving task for both visual ($F_{47,47} = 0.728$, $p = .140$; $t_{94} = 0.463$, $p = .644$) and auditory ($F_{47,47} = 1.018$, $p = .475$; $t_{94} = 0.087$, $p = .930$) reaction times were not found to be statistically different. Hence, the auditory and visual performances of participants were not altered by the experimental protocol adopted.

Prior to the experiment, each participant drove on a trial test track to gain familiarity with the simulator. Then, each participant drove on three circuits which were randomly assigned from the twelve possible. In addition, the age and gender of the drivers assigned to each circuit was proportionate to the age and gender makeup of the total sample of drivers. After the experimental drive, the participants performed the same two cognitive tests and completed a post-drive questionnaire.

The post-drive questionnaire was designed to elicit information from drivers on their experience of the driving simulation and to determine whether the alternative HMs represented a disturbance or distraction for them during the driving session. The questionnaires revealed that during the simulation 25% of participants experienced very minor ailments like visual fatigue, and blurred vision. These discomforts, being very mild in intensity, were deemed acceptable for the purpose of the experiment. Only one driver experienced a level of simulation sickness which prevented him from completing the driving task. Hence, he was replaced with another driver of the same age and gender. The decision to consider all the data collected valid was corroborated by the cognitive responses before and after the driving test.

Observed variables, data collection, and manipulation

Data on speed (S), lateral position in the lane (LP) and diverging abscissa (DA , the position where drivers changed lane to leave the motorway) were collected for each driver along the ramp terminal systems at a number of specific sections. The outcomes for S and LP were used to calibrate Linear Mixed-Effects models (LMM) which integrate both fixed and random effects and are suitable for the interpretation of experimental design with repeated measurements. The four experimental factors (HM type, rate of traffic flow, lighting conditions and connection type) and the covariates (age and driving experience) were accounted for as fixed effects, with the identification code of the driver regarded as a random effect (i.e., the cluster variable in the experiment). The LMM was calibrated by adopting the backward elimination technique. Data for LMM were extracted at TT, TS and SC sections for speeds, and at TS and SC sections for lateral position models. Finally, diverging abscissa data were used to calibrate a Generalized Linear Model (glm). Statistical data analyses and modelling were carried out with *Jamovi* ver. 1.8.1.0, with the three modules *GAMLj* ver. 2.4.5, *Moretests* ver. 0.9.3, and *Scatr* ver. 1.2.0. Significance levels were always set at 0.05.

1 RESULTS

2
3 **Figure 2** for speeds (S), **Figure 3** for lateral position (LP), and **Figure 4** for the diverging abscissa (DA)
4 provide a summary of the results. They have been sub-divided by rate of traffic flow (i.e., 1000 pc/h and
5 3000 pc/h), lighting conditions (i.e., day and night), and connection type (i.e., continuous and reverse). In
6 each graph, the results obtained when drivers negotiated ramp terminals with different horizontal markings
7 (i.e., HM1, HM2, and HM3) are presented. Each line represents the average speed value or lateral position
8 resulting from 12 data from station 0 m (section TB, taper beginning), 450 m (section TS, terminal-to-
9 spiral) and 640 m (section SC, spiral-to-curve).

10 **Figure 3** provides the LP of the vehicle center of gravity (CoG) with respect to the deceleration
11 lane centerline. Negative average values indicate that the vehicular CoG was located on the left side of the
12 lane centerline. The lateral position does not appear to be strongly influenced by HM during the diverging
13 maneuver, from the beginning of the taper (section TB), until the end of the deceleration lane (section TS).
14

15 **FIGURE 2. Longitudinal (speed) behavior along curved deceleration ramp terminals with a range of**
16 **experimental factor combinations (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-spiral, SC =**
17 **spiral-to-curve, CE = curve end).**

18
19 **FIGURE 3. Transversal (lateral position) behavior along curved deceleration ramp terminals with variable**
20 **experimental factor combinations (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-spiral, SC =**
21 **spiral-to-curve, CE = curve end).**

22
23 **FIGURE 4. Boxplots of diverging abscissa for three HM designs in continuous and reverse ramp terminals.**
24

26 ANALYSIS AND DISCUSSION

28 Statistical model outcomes

29 The Linear Mixed-Effects (LMM) and Generalized Linear Model (glm) outcomes are fully reported in
30 **Table 2**. In LMM , the R^2 conditional value describes the variance attributable to fixed and random effects,
31 while the R^2 marginal is determined by fixed effects only. Higher R^2 conditional values were found for
32 speed data (i.e., > 70%) with a relatively small marginal R^2 . This suggests that most of the variance in the
33 model may be explained by random effects, i.e., the subjective characteristics of drivers, rather than the
34 experimental factors. In the case of LP , the variance is attributable in equal measure to fixed and random
35 factors.
36

37 Speeds

38 The speed outcomes from LMM (**Table 2** and **Figure 5**) indicate that HM2 significantly reduces speeds
39 (i.e., the estimated model coefficient is negative) at the TT ($p = .015$), TS ($p < .001$) and SC sections
40 ($p = .025$) with respect to the baseline condition (HM1). This outcome evidences that HM2 had a secondary
41 effect on longitudinal behavior, albeit it was originally conceived to improve lateral control (35). This is
42 explained by the fact that the perception of a narrower lane compels drivers to adopt lower speeds as a
43 compensatory reaction. Although HM3 was intended to act on longitudinal driver behavior, LMM does not
44 reveal any significant difference between speeds observed under the influence of HM3 and HM1 at SC
45 ($S_{SC,HM3} - S_{SC,HM1} = -1.19$ km/h, $p = .288$) and TT ($S_{TT,HM3} - S_{TT,HM1} = -1.20$ km/h, $p = .372$) sections. The
46 effects of HM3 are relevant at the terminal end ($S_{TS,HM3} - S_{TS,HM1} = -3.93$ km/h, $p = .002$) where they worked
47 according to the hypothesis.

48 Gender was statistically significant in the LMM (**Table 2**). **Figure 5** shows that female (F) drivers
49 drove at lower speeds than males (M) ($S_{TT,F} - S_{TT,M} = -11.58$ km/h, $p = .003$; $S_{TS,F} - S_{TS,M} = -10.43$ km/h,
50 $p = .009$; $S_{SC,F} - S_{SC,M} = -8.63$ km/h, $p = .009$). This result is in line with the findings of Portera and Bassani

1 (24) and Oltedal and Rundmo (54), who stated that male drivers are more willing to take risks than female
 2 drivers.

3
 4 **TABLE 2. Estimated model coefficients (p-value)** on significant factors affecting speeds (*S*), lateral position (*LP*)
 5 and diverging abscissa (*DA*) along ramp terminals (HM = horizontal markings type, TF = traffic flow, LC = lighting
 6 conditions, CT = connection type, R = reverse, C = continuous, F = female, M = male, N = night, D = day, “ - ” = not
 7 statistically significant, N/A = not available). Significance level for p-value: *** < .001; ** < 0.01; * < .05

Model type		LMM					glm
Variables		<i>S_{TT}</i>	<i>S_{TS}</i>	<i>S_{SC}</i>	<i>LP_{TS}</i>	<i>LP_{SC}</i>	<i>DA</i>
Fixed Effects:							
Intercept		98.35 ***	84.41 ***	74.03 ***	-0.117 *	0.650 ***	68.881 ***
HM	<i>HM2 - HM1</i>	-3.27 *	-4.34 ***	-2.51 *	-0.150	-0.413 ***	11.760 *
	<i>HM3 - HM1</i>	-	-3.93 **	-	-	-0.198 ***	-
TF	<i>3000 - 1000 (pc/h)</i>	-1.85	-2.05 *	-	-	0.075 *	-
CT	<i>R - C</i>	-	5.72 ***	1.47	-0.516 ***	-0.399 ***	30.634 ***
Gender	<i>F - M</i>	-11.58 **	-10.14 **	-8.63 **	-	-	-
Gender * LC	<i>(F - M) * (N - D)</i>	-	-	-	-0.30 5*	-0.221 **	-
Gender * CT	<i>(F - M) * (R - C)</i>	-	-	-	-	-0.170 *	-
CT * LC	<i>(R - C) * (N - D)</i>	-	-	-	0.312 **	-	-
CT * HM	<i>(R - C) * (HM1 - HM2)</i>	-	-	-	-	0.230 *	-
Experience (y)		-	-	-	-	-	3.691 **
Age		-	-	-	-	-	-3.385 **
Random Effects:							
Test driver ID (p-value only)		***	***	***	***	***	N/A
Summary statistics:							
AIC		2183.7	2160.0	2088.1	494.1	245.0	2952.7
BIC		2197.8	2173.0	2105.0	568.3	349.0	2978.4
R ² marginal		0.166	0.160	0.118	0.211	0.326	N/A
R ² (conditional)		0.735	0.756	0.717	0.383	0.608	0.179
Observations		288					
Participants		48					
Observations/participants		6					
KS test on residual (p-value)		(.695)	(.905)	(.623)	(.136)	(.956)	N/A

8
 9 *LMM* in **Table 2** also revealed significant differences in speed along the two ramp terminal
 10 connection types (i.e., continuous vs. reverse). The geometric difference between the two CTs influenced
 11 driver longitudinal behaviors as confirmed by Portera and Bassani (24). This factor significantly affects
 12 speed at the TS (terminal end) section with the reverse design where drivers arrived at a higher speed than
 13 they did on a continuous one ($S_{TS,R} - S_{TS,C} = 5.72$ km/h, $p < .001$). A higher speed, albeit less significant in
 14 magnitude, is also evident at the SC section ($S_{SC,R} - S_{SC,C} = 1.47$ km/h, $p = .082$).

15 Speeds at the end of the deceleration lane (TS section) were only slightly affected by traffic volume
 16 ($S_{TS,3000} - S_{TS,1000} = 2.05$ km/h, $p = .031$), in contrast to results observed on linear terminals by Calvi et al.
 17 (12). The same trend was detected at the taper end (TT) with a lower level of significance
 18 ($S_{TT,3000} - S_{TT,1000} = -1.85$ km/h, $p = .061$). Finally, the traffic flow had no significant bearing on speeds at
 19 the SC section, i.e., the beginning of the curved ramp ($S_{SC,3000} - S_{SC,1000} = -1.31$ km/h, $p = .120$).

20
 21 **FIGURE 5. Speeds (*S*) for horizontal markings designs at TT (a, d), TS (b, e) and SC (c, f) sections. (a), (b) and
 22 (c) plots refer to male drivers, while (d), (e) and (f) refer to female drivers.**

23
 24 **Lateral positions**

25 *LMM* outcomes indicate that *LP* was significantly influenced by innovative HMs (**Table 2** and **Figure 6**).
 26 In particular, HM2 had a considerable impact on the lateral position maintained by drivers. At the SC
 27 section, the trajectory of drivers travelling in the ramp terminal with HM2 was significantly closer to the
 28 lane centerline, a result in keeping with the experimental hypothesis ($LP_{SC,HM2} - LP_{SC,HM1} = -0.413$ m,
 29 $p < .001$). However, this difference is only marginally significant at the end of the terminal

1 ($LP_{TS, HM2} - LP_{TS, HM1} = -0.150$ m, $p = .055$). In the case of HM3, the results at the SC section indicate that
 2 drivers stayed closer to the lane centerline with respect to the conventional marking HM1
 3 ($LP_{SC, HM3} - LP_{SC, HM1} = 0.198$ m, $p < .001$), albeit no significant differences ($p < .556$) were found at the
 4 terminal end (TS section).

5 The effect of the connection type (*CT*) on lateral position was significant for both sections (TS and
 6 SC). At the TS section, drivers maintained their position on the right side of the lane in the continuous
 7 connection type but failed to do so on the reverse one ($LP_{TS, R} - LP_{TS, C} = -0.516$ m, $p < .001$). At the
 8 beginning of the ramp (SC), results show that drivers tended to drive closer to the lane centerline in the
 9 reverse connection type ($LP_{SC, R} - LP_{SC, C} = -0.399$ m, $p < .001$). While traffic volume did have a slight impact
 10 on the lateral behavior of drivers, it was only at the beginning of the ramp curve (SC) as evidenced in **Table**
 11 **2** ($LP_{SC, 3000} - LP_{SC, 1000} = 0.075$ m, $p = .042$). The results are in line with those obtained by Portera and
 12 Bassani (24): traffic volume on the motorway has no impact on the lateral position of the vehicle at the end
 13 of the terminal (TS).

14
 15 **FIGURE 6. Plots of lateral position (*LP*), for the three horizontal markings designs at (a) TS and (b) SC sections.**

16
 17 **Figure 6** shows the effect of the interaction between *HM* and connection type on lateral positions
 18 at TS and SC sections. In **Figure 6a**, similar trends for both connection types with different HMs are
 19 depicted. Although no statistically significant differences were found at the TS section, Figure 6a indicates
 20 that HM2 led to an improved LP (LP close to 0) with respect to HM1 and HM3 in continuous ramp-terminal
 21 connections. Conversely, HM2 increased the distance between the vehicle CoG and the lane centerline in
 22 reverse connections. Significant effects on the lateral position at the beginning of the ramp (SC section)
 23 were found for both continuous and reverse ramp designs (**Figure 6b**). At the TS section, the HM2 was on
 24 the right side of the lane only (see Figure 1e and Figure 1h), and thus the perception of a narrowing lane
 25 was not as strong. Conversely, at the SC section, the HM2 is on both sides and, therefore, has a greater
 26 impact on driver perception. A post-hoc test with Bonferroni correction indicates a significant difference
 27 between HM1 and HM2 ($LP_{SC, R, HM1} - LP_{SC, R, HM2} = 0.298$ m, $t_{257} = 4.17$, $p < .001$). Similar outcomes were
 28 found for the continuous connection type ($LP_{SC, C, HM1} - LP_{SC, C, HM2} = 0.528$ m, $t_{243} = 7.80$, $p < .001$). In this
 29 case, the differences between HM1 and HM3 were also significant ($LP_{SC, C, HM3} - LP_{SC, C, HM1} = 0.292$ m, t_{260}
 30 $= 4.05$, $p = .001$).

31 **Diverging abscissa**

32 The *LMM* for the diverging abscissa produced poor quality results, with residuals that were not normally
 33 distributed ($p < .001$). A Shapiro-Wilk test revealed that 7 out of the 24 groups of *DA* data split into the
 34 four experimental factors (HM, connection type, lighting conditions, and traffic volume, levels:
 35 $3 \times 2 \times 2 \times 2 = 24$) were not normally distributed. As a result, the *glm* was used to interpret this set of
 36 experimental data.

37
 38 *glm* outputs (**Table 2**) indicate that innovative HMs impacted on *DA* in different ways: drivers
 39 responded to HM2 by adopting a longer *DA* than they did with HM1, conversely HM3 did not significantly
 40 reduce the *DA* in comparison to HM1. A post-hoc test with Bonferroni correction confirmed this outcome
 41 ($DA_{HM1} - DA_{HM3} = 3.04$ m, $z = 0.51$, $p = .605$). Furthermore, according to the data in **Figure 4**, the connection
 42 type had a relevant impact for reverse ramp terminal connections exhibiting larger values of *DA* than those
 43 observed along continuous ones ($DA_C - DA_R = -30.63$ m, $z = -6.47$, $p < .001$). Driver experience and age
 44 also had a relevant effect on *DA*, with more experienced drivers tending to enter the terminal at higher *DA*
 45 values than less experienced ones, and older drivers tending to initiate the diverging maneuver into the
 46 terminal sooner than younger drivers. These trends are in line with previous studies which observed a
 47 different attitude to risk taking among drivers of different ages (55) and with different levels of experience
 48 (56).

1 CONCLUSIONS

2
3 This study investigated the hypothesis that innovative horizontal markings (HMs) might result in
4 longitudinal and transversal driving performances along diverging ramp terminals superior to those
5 achieved with conventional markings. In this experiment, horizontal marking of type 2 (HM2) was designed
6 to act on the driver's perception of the lane width. The sense of lateral constraint would encourage the driver
7 to maintain a centered trajectory in the lane. Horizontal marking of type 3 (HM3) was intended to work
8 mainly on speed perception by acting on driver peripheral vision (i.e., the distance between the external
9 bands was progressively reduced), leading drivers to believe they were increasing speed. With HM3, the
10 hypothesis is that drivers react to this perception by reducing their speed to values lower than those observed
11 with conventional markings (HM1).

12 The experimental outcomes revealed that both alternative HM types (i.e., HM2 and HM3) had a
13 positive effect on the behavior of drivers involved in this maneuver. In particular, exposure to HM2 resulted
14 in a clear improvement in lateral behavior as hypothesized with drivers closer to the continuous terminal
15 centerline when approaching the ramp (section SC, spiral-to-curve). This is due to the perception of a
16 narrower path which prompts the driver to select a more central trajectory than that adopted in response to
17 the standard design (HM1). HM2 also had a significant impact on speeds, which were lower than in cases
18 where drivers interacted with HM1. In fact, the effect of a perceived reduction in lane width is also extended
19 to speeds, which were lower in all the considered sections in the case of the alternative design HM2
20 independently of the traffic and environmental lighting conditions. Similarly, and in line with the
21 hypothesis, HM3 had a significant effect on speed, resulting in improved driver longitudinal control at the
22 end of the terminal (section TS, terminal-to-spiral). Nevertheless, it promoted better lateral behavior only
23 when the driver was close to the ramp. In those specific sections, the ramp shoulders were indicated by the
24 markings with the result that the lane contours were clearly visible making it easier for drivers to position
25 their vehicles in the center.

26 In this study, the geometric difference between the two types of connection joining the curved
27 terminal to the ramp was considered. With the continuous connection type, HM2 had a significant positive
28 impact on longitudinal and transversal driver response. HM3, in contrast, had a lower and, indeed, in some
29 cases negligible impact on both speed and lateral position. With the reverse design, drivers merged into the
30 terminal and arrived at the ramp at a higher speed than they did with the continuous design. However, the
31 innovative markings contributed more than conventional one to a reduction in speeds. The connection type
32 also impacted on the driver position in the lane along the same connection, with HM2 allowing drivers to
33 maintain a trajectory which was mostly centered in the lane. However, innovative HMs were not able to
34 contrast the tendency of some drivers to change lane at the end of the reverse terminal when exiting from
35 same. As a result, in this specific case, it is necessary to contrast this inappropriate behavior with the use of
36 alternative countermeasures.

37 This research confirms the effectiveness of the perceptual techniques used in these specific areas
38 of road design, where drivers are engaged in maneuvers involving changes to speed and/or trajectory. The
39 study demonstrated that innovative markings influence both lateral and longitudinal perceptions leading to
40 improved driver performances and, consequently, contribute in part to an increase in the safety of diverging
41 operations as drivers move from the motorway to the ramp.

42 The work carried out has limitations as it focused on the influence of a limited number of
43 independent variables, while excluding others from active consideration. The effects of the motorway
44 radius, traffic barriers, and surrounding vehicles in the terminal are all variables which merit investigation
45 in future studies.

46 FUNDING

47 This research did not receive any funds from public, commercial, or not-for-profit sectors. All activities
48 were conducted in the Laboratory of Road Safety and Driving Simulation (RSDS Lab) at the Department
49 of Environment, Land and Infrastructure Engineering (Politecnico di Torino, Torino, Italy).
50
51

1 **AUTHOR CONTRIBUTIONS**
2

3 The authors confirm contribution to the paper as follows: study conception and design: M. Bassani, G.
4 Raimondo, A. Portera; data collection: A. Portera, G. Raimondo; analysis and interpretation of results: M.
5 Bassani, A. Portera, L. Tefa, A. Lioi, A. Hazoor; draft manuscript preparation: M. Bassani, A. Portera, L.
6 Tefa, A. Lioi, A. Hazoor. All authors reviewed the results and approved the final version of the manuscript.
7

8 **REFERENCES**
9

- 10 1. Bauer, K. M., and D. W. Harwood. *Statistical Models of Accidents on Interchange Ramps and Speed-*
11 *Change Lanes*. Publication FHWA-RD-97-106. Office of Safety and Traffic Operations Research and
12 Development Federal Highway Administration, McLean, Virginia, US, 1998.
- 13 2. Torbic, D. J., D. W. Harwood, D. K. Gilmore, K. R. Richard, and J. G. Bared. Safety Analysis of
14 Interchanges. *Transportation Research Record*, Vol. 2092, No. 1, 2009, pp. 39–47.
15 <https://doi.org/10.3141/2092-05>.
- 16 3. Farah, H., A. van Beinum, and W. Daamen. Empirical Speed Behavior on Horizontal Ramp Curves in
17 Interchanges in the Netherlands. *Transportation Research Record*, Vol. 2618, No. 1, 2017, pp. 38–47.
18 <https://doi.org/10.3141/2618-04>.
- 19 4. McCartt, A. T., V. S. Northrup, and R. A. Retting. Types and Characteristics of Ramp-Related Motor
20 Vehicle Crashes on Urban Interstate Roadways in Northern Virginia. *Journal of Safety Research*, Vol.
21 35, No. 1, 2004, pp. 107–114. <https://doi.org/10.1016/j.jsr.2003.09.019>.
- 22 5. Lord, D., and J. A. Bonneson. Calibration of Predictive Models for Estimating Safety of Ramp Design
23 Configurations. *Transportation Research Record*, Vol. 1908, No. 1, 2005, pp. 88–95.
24 <https://doi.org/10.1177/0361198105190800111>.
- 25 6. Lundy, R. A. The Effect of Ramp Type and Geometry on Accidents. *California Department of Public*
26 *Works*, 1965.
- 27 7. Zhang, L., C. Chen, J. Zhang, S. Fang, J. You, and J. Guo. Modeling Lane-Changing Behavior in
28 Freeway Off-Ramp Areas from the Shanghai Naturalistic Driving Study. *Journal of Advanced*
29 *Transportation*, Vol. 2018, 2018, p. e8645709. <https://doi.org/10.1155/2018/8645709>.
- 30 8. Gu, X., M. Abdel-Aty, J. Lee, Q. Xiang, and Y. Ma. Identification of Contributing Factors for
31 Interchange Crashes Based on a Quasi-Induced Exposure Method. *Journal of Transportation Safety &*
32 *Security*, 2020, pp. 1–22. <https://doi.org/10.1080/19439962.2020.1812783>.
- 33 9. Harwood, D. W., and J. M. Mason Jr. Ramp/Mainline Speed Relationships and Design Considerations.
34 *Transportation Research Record*, No. 1385, 1993.
- 35 10. Garcia, A., and M. A. Romero. Experimental Observation of Vehicle Evolution on Deceleration Lanes
36 with Different Lengths. Presented at the Compendium of 85th Transportation Research Board Annual
37 Meeting, Washington D.C., 2006.
- 38 11. Livneh, M., A. Polus, and J. Factor. Vehicle Behavior on Deceleration Lanes. *Journal of*
39 *Transportation Engineering*, Vol. 114, No. 6, 1988, pp. 706–717.
40 [https://doi.org/10.1061/\(ASCE\)0733-947X\(1988\)114:6\(706\)](https://doi.org/10.1061/(ASCE)0733-947X(1988)114:6(706)).
- 41 12. Calvi, A., A. Benedetto, and M. R. De Blasiis. A Driving Simulator Study of Driver Performance on
42 Deceleration Lanes. *Accident Analysis & Prevention*, Vol. 45, 2012, pp. 195–203.
43 <https://doi.org/10.1016/j.aap.2011.06.010>.
- 44 13. Lyu, N., Y. Cao, C. Wu, J. Xu, and L. Xie. The Effect of Gender, Occupation and Experience on
45 Behavior While Driving on a Freeway Deceleration Lane Based on Field Operational Test Data.
46 *Accident Analysis & Prevention*, Vol. 121, 2018, pp. 82–93. <https://doi.org/10.1016/j.aap.2018.07.034>.
- 47 14. Cirillo, J. A., S. K. Dietz, and R. L. Beatty. Analysis and Modeling of Relationships Between Accidents
48 and the Geometric and Traffic Characteristics of the Interstate System. *Federal Highway*
49 *Administration*, 1969.
- 50 15. Bared, J., G. L. Giering, and D. L. Warren. Safety Evaluation of Acceleration and Deceleration Lane
51 Lengths. *ITE Journal*, Vol. 69, No. 5, 1999.

- 1 16. Cirillo, J. A. The Relationship of Accidents to Length of Speed-Change Lanes and Weaving Areas on
2 Interstate Highways. *Highway Research Record*, No. 312, 1970, pp. 17–32.
- 3 17. Chen, H., P. Liu, J. J. Lu, and B. Behzadi. Evaluating the Safety Impacts of the Number and
4 Arrangement of Lanes on Freeway Exit Ramps. *Accident Analysis & Prevention*, Vol. 41, No. 3, 2009,
5 pp. 543–551. <https://doi.org/10.1016/j.aap.2009.01.016>.
- 6 18. Wang, Z., H. Chen, and J. J. Lu. Exploring Impacts of Factors Contributing to Injury Severity at
7 Freeway Diverge Areas. *Transportation Research Record*, Vol. 2102, No. 1, 2009, pp. 43–52.
8 <https://doi.org/10.3141/2102-06>.
- 9 19. Chen, H., H. Zhou, and P.-S. Lin. Freeway Deceleration Lane Lengths Effects on Traffic Safety and
10 Operation. *Safety Science*, Vol. 64, 2014, pp. 39–49. <https://doi.org/10.1016/j.ssci.2013.11.007>.
- 11 20. Sarhan, M., Y. Hassan, and A. O. Abd El Halim. Safety Performance of Freeway Sections and Relation
12 to Length of Speed-Change Lanes. *Canadian Journal of Civil Engineering*, Vol. 35, No. 5, 2008, pp.
13 531–541. <https://doi.org/10.1139/L07-135>.
- 14 21. Calvi, A., F. Bella, and F. D’Amico. Evaluating the Effects of the Number of Exit Lanes on the
15 Diverging Driver Performance. *Journal of Transportation Safety & Security*, Vol. 10, No. 1–2, 2018,
16 pp. 105–123. <https://doi.org/10.1080/19439962.2016.1208313>.
- 17 22. Ahammed, M. A., Y. Hassan, and T. A. Sayed. Modeling Driver Behavior and Safety on Freeway
18 Merging Areas. *Journal of Transportation Engineering*, Vol. 134, No. 9, 2008, pp. 370–377.
19 [https://doi.org/10.1061/\(ASCE\)0733-947X\(2008\)134:9\(370\)](https://doi.org/10.1061/(ASCE)0733-947X(2008)134:9(370)).
- 20 23. Calvi, A., F. Bella, and F. D’Amico. Diverging Driver Performance along Deceleration Lanes: Driving
21 Simulator Study. *Transportation Research Record*, Vol. 2518, No. 1, 2015, pp. 95–103.
22 <https://doi.org/10.3141/2518-13>.
- 23 24. Portera, A., and M. Bassani. Experimental Investigation into Driver Behavior along Curved and
24 Parallel Diverging Terminals of Exit Interchange Ramps. *Transportation Research Record*, 2021, p.
25 0361198121997420. <https://doi.org/10.1177/0361198121997420>.
- 26 25. Retting, R., and C. Farmer. Use of Pavement Markings to Reduce Excessive Traffic Speeds on
27 Hazardous Curves. *ITE Journal*, Vol. 68, 1998, pp. 30–41.
- 28 26. Carlson, P. J., E. S. Park, and C. K. Andersen. Benefits of Pavement Markings: A Renewed Perspective
29 Based on Recent and Ongoing Research. *Transportation Research Record*, Vol. 2107, No. 1, 2009, pp.
30 59–68. <https://doi.org/10.3141/2107-06>.
- 31 27. Hummer, J. E., W. Rasdorf, D. J. Findley, C. V. Zegeer, and C. A. Sundstrom. Curve Collisions: Road
32 and Collision Characteristics and Countermeasures. *Journal of Transportation Safety & Security*, Vol.
33 2, No. 3, 2010, pp. 203–220. <https://doi.org/10.1080/19439961003734880>.
- 34 28. Godley, S. T., T. J. Triggs, and B. N. Fildes. Perceptual Lane Width, Wide Perceptual Road Centre
35 Markings and Driving Speeds. *Ergonomics*, Vol. 47, No. 3, 2004, pp. 237–256.
36 <https://doi.org/10.1080/00140130310001629711>.
- 37 29. Babić, D., M. Fiolić, D. Babić, and T. Gates. Road Markings and Their Impact on Driver Behaviour
38 and Road Safety: A Systematic Review of Current Findings. *Journal of Advanced Transportation*, Vol.
39 2020, 2020, p. e7843743. <https://doi.org/10.1155/2020/7843743>.
- 40 30. Montella, A., F. Galante, F. Mauriello, and L. Pariota. Effects of Traffic Control Devices on Rural
41 Curve Driving Behavior. *Transportation Research Record*, Vol. 2492, No. 1, 2015, pp. 10–22.
42 <https://doi.org/10.3141/2492-02>.
- 43 31. Charlton, S. G. The Role of Attention in Horizontal Curves: A Comparison of Advance Warning,
44 Delineation, and Road Marking Treatments. *Accident Analysis & Prevention*, Vol. 39, No. 5, 2007, pp.
45 873–885. <https://doi.org/10.1016/j.aap.2006.12.007>.
- 46 32. Ding, H., X. Zhao, J. Rong, and J. Ma. Experimental Research on the Effectiveness of Speed Reduction
47 Markings Based on Driving Simulation: A Case Study. *Accident Analysis & Prevention*, Vol. 60, 2013,
48 pp. 211–218. <https://doi.org/10.1016/j.aap.2013.08.007>.
- 49 33. Katz, B., J. Molino, and H. A. Rakha. Evaluation of Design Alternatives of Peripheral Transverse Bars
50 to Reduce Vehicle Speeds and Center Line Encroachment in a Driving Simulator. Presented at the

- 1 Transportation Research Board 87th Annual MeetingTransportation Research Board, Washington,
2 D.C., 2008.
- 3 34. Liu, B., S. Zhu, H. Wang, and J. Xia. Literature Review and Prospect on the Study of Perceptual Speed
4 Reduction. In *2008 IEEE International Conference on Service Operations and Logistics, and*
5 *Informatics*, No. 1, 2008, pp. 342–346.
- 6 35. Wilde, G. J. S. Risk Homeostasis Theory: An Overview. *Injury Prevention*, Vol. 4, No. 2, 1998, pp.
7 89–91. <https://doi.org/10.1136/ip.4.2.89>.
- 8 36. Ariën, C., K. Brijs, G. Vanroelen, W. Ceulemans, E. M. M. Jongen, S. Daniels, T. Brijs, and G. Wets.
9 The Effect of Pavement Markings on Driving Behaviour in Curves: A Simulator Study. *Ergonomics*,
10 Vol. 60, No. 5, 2017, pp. 701–713. <https://doi.org/10.1080/00140139.2016.1200749>.
- 11 37. Awan, H. H., A. Pirdavani, A. Houben, S. Westhof, M. Adnan, and T. Brijs. Impact of Perceptual
12 Countermeasures on Driving Behavior at Curves Using Driving Simulator. *Traffic Injury Prevention*,
13 Vol. 20, No. 1, 2019, pp. 93–99. <https://doi.org/10.1080/15389588.2018.1532568>.
- 14 38. Babić, D., and T. Brijs. Low-Cost Road Marking Measures for Increasing Safety in Horizontal Curves:
15 A Driving Simulator Study. *Accident Analysis & Prevention*, Vol. 153, 2021, p. 106013.
16 <https://doi.org/10.1016/j.aap.2021.106013>.
- 17 39. Calvi, A., F. D’Amico, C. Ferrante, L. Bianchini Ciampoli, and F. Tosti. Applying Perceptual
18 Treatments for Reducing Operating Speeds on Curves: A Driving Simulator Study for Investigating
19 Driver’s Speed Behavior. Cham, 2020.
- 20 40. Räsänen, M. Effects of a Rumble Strip Barrier Line on Lane Keeping in a Curve. *Accident Analysis &*
21 *Prevention*, Vol. 37, No. 3, 2005, pp. 575–581. <https://doi.org/10.1016/j.aap.2005.02.001>.
- 22 41. Retting, R. A., H. W. McGee, and C. M. Farmer. Influence of Experimental Pavement Markings on
23 Urban Freeway Exit-Ramp Traffic Speeds. *Transportation Research Record*, Vol. 1705, No. 1, 2000,
24 pp. 116–121. <https://doi.org/10.3141/1705-17>.
- 25 42. Hunter, M., S. Boonsiripant, A. Guin, M. O. Rodgers, and D. Jared. Evaluation of Effectiveness of
26 Converging Chevron Pavement Markings in Reducing Speed on Freeway Ramps. *Transportation*
27 *Research Record*, Vol. 2149, No. 1, 2010, pp. 50–58. <https://doi.org/10.3141/2149-06>.
- 28 43. Ministero delle Infrastrutture e dei Trasporti. Norme Funzionali e Geometriche per la Costruzione delle
29 Strade. Decreto Ministeriale 5 novembre 2001, n. 6792, Gazzetta Ufficiale n.3 del 4-1-2002-Suppl.
30 Ordinario n.5, 2001.
- 31 44. Ministero delle Infrastrutture e dei Trasporti. Norme Funzionali e Geometriche per la Costruzione delle
32 Intersezioni Stradali. Decreto Ministeriale 19 aprile 2006, Gazzetta Ufficiale n.170 del 24-7–2006,
33 2006.
- 34 45. Rakha, H. A., B. J. Katz, and D. Duke. Design and Evaluation of Peripheral Transverse Bars to Reduce
35 Vehicle Speed. Presented at the Transportation Research Board 85th Annual MeetingTransportation
36 Research Board, Washington, D.C., 2006.
- 37 46. Portera, A., and M. Bassani. Factors Influencing Driver Behaviour along Curved Merging Interchange
38 Terminals. *Transportation Research Part F: Traffic Psychology and Behaviour*, Vol. 75, 2020, pp.
39 187–202. <https://doi.org/10.1016/j.trf.2020.10.006>.
- 40 47. World Medical Association. *WMA Declaration of Helsinki - Ethical Principles for Medical Research*
41 *Involving Human Subjects*. 2018.
- 42 48. Bassani, M., L. Catani, A. A. Ignazzi, and M. Piras. Validation of a Fixed-Base Driving Simulator to
43 Assess Behavioural Effects of Road Geometrics. Presented at the DSC 2018 EUROPE VR Driving
44 Simulation Conference & Exhibition, Antibes, France, 2018.
- 45 49. Catani, L., and M. Bassani. Anticipatory Distance, Curvature, and Curvature Change Rate in
46 Compound Curve Negotiation: A Comparison between Real and Simulated Driving. Presented at the
47 98th Annual Meeting of the Transportation Research Board, Washington, D.C., 2019.
- 48 50. Karimi, A., A. M. Boroujerdian, and M. Bassani. Investigation of Influential Variables to Predict
49 Passing Rate at Short Passing Zones on Two-Lane Rural Highways. *Journal of Transportation*
50 *Engineering, Part A: Systems*, Vol. 146, No. 10, 2020, p. 04020117.
51 <https://doi.org/10.1061/JTEPBS.0000440>.

- 1 51. Kemp, B. J. Reaction Time of Young and Elderly Subjects in Relation to Perceptual Deprivation and
2 Signal-on versus Signal-off Conditions. *Developmental Psychology*, Vol. 8, No. 2, 1973, pp. 268–272.
3 <https://doi.org/10.1037/h0034147>.
- 4 52. Thompson, P. D., J. G. Colebatch, P. Brown, J. C. Rothwell, B. L. Day, J. A. Obeso, and C. D. Marsden.
5 Voluntary Stimulus-Sensitive Jerks and Jumps Mimicking Myoclonus or Pathological Startle
6 Syndromes. *Movement Disorders*, Vol. 7, No. 3, 1992, pp. 257–262.
7 <https://doi.org/10.1002/mds.870070312>.
- 8 53. Pain, M. T. G., and A. Hibbs. Sprint Starts and the Minimum Auditory Reaction Time. *Journal of*
9 *Sports Sciences*, Vol. 25, No. 1, 2007, pp. 79–86. <https://doi.org/10.1080/02640410600718004>.
- 10 54. Oltedal, S., and T. Rundmo. The Effects of Personality and Gender on Risky Driving Behaviour and
11 Accident Involvement. *Safety Science*, Vol. 44, No. 7, 2006, pp. 621–628.
12 <https://doi.org/10.1016/j.ssci.2005.12.003>.
- 13 55. Krahe, B., and I. Fenske. Predicting Aggressive Driving Behavior: The Role of Macho Personality,
14 Age, and Power of Car. *Aggressive Behavior*, Vol. 28, No. 1, 2002, pp. 21–29.
15 <https://doi.org/10.1002/ab.90003>.
- 16 56. Karimi, A., A. M. Boroujerdian, L. Catani, and M. Bassani. Who Overtakes More? Explanatory
17 Analysis of the Characteristics of Drivers from Low/Middle and High-Income Countries on Passing
18 Frequency. *Transportation Research Part F: Traffic Psychology and Behaviour*, Vol. 76, 2021, pp.
19 167–177. <https://doi.org/10.1016/j.trf.2020.11.005>.
- 20

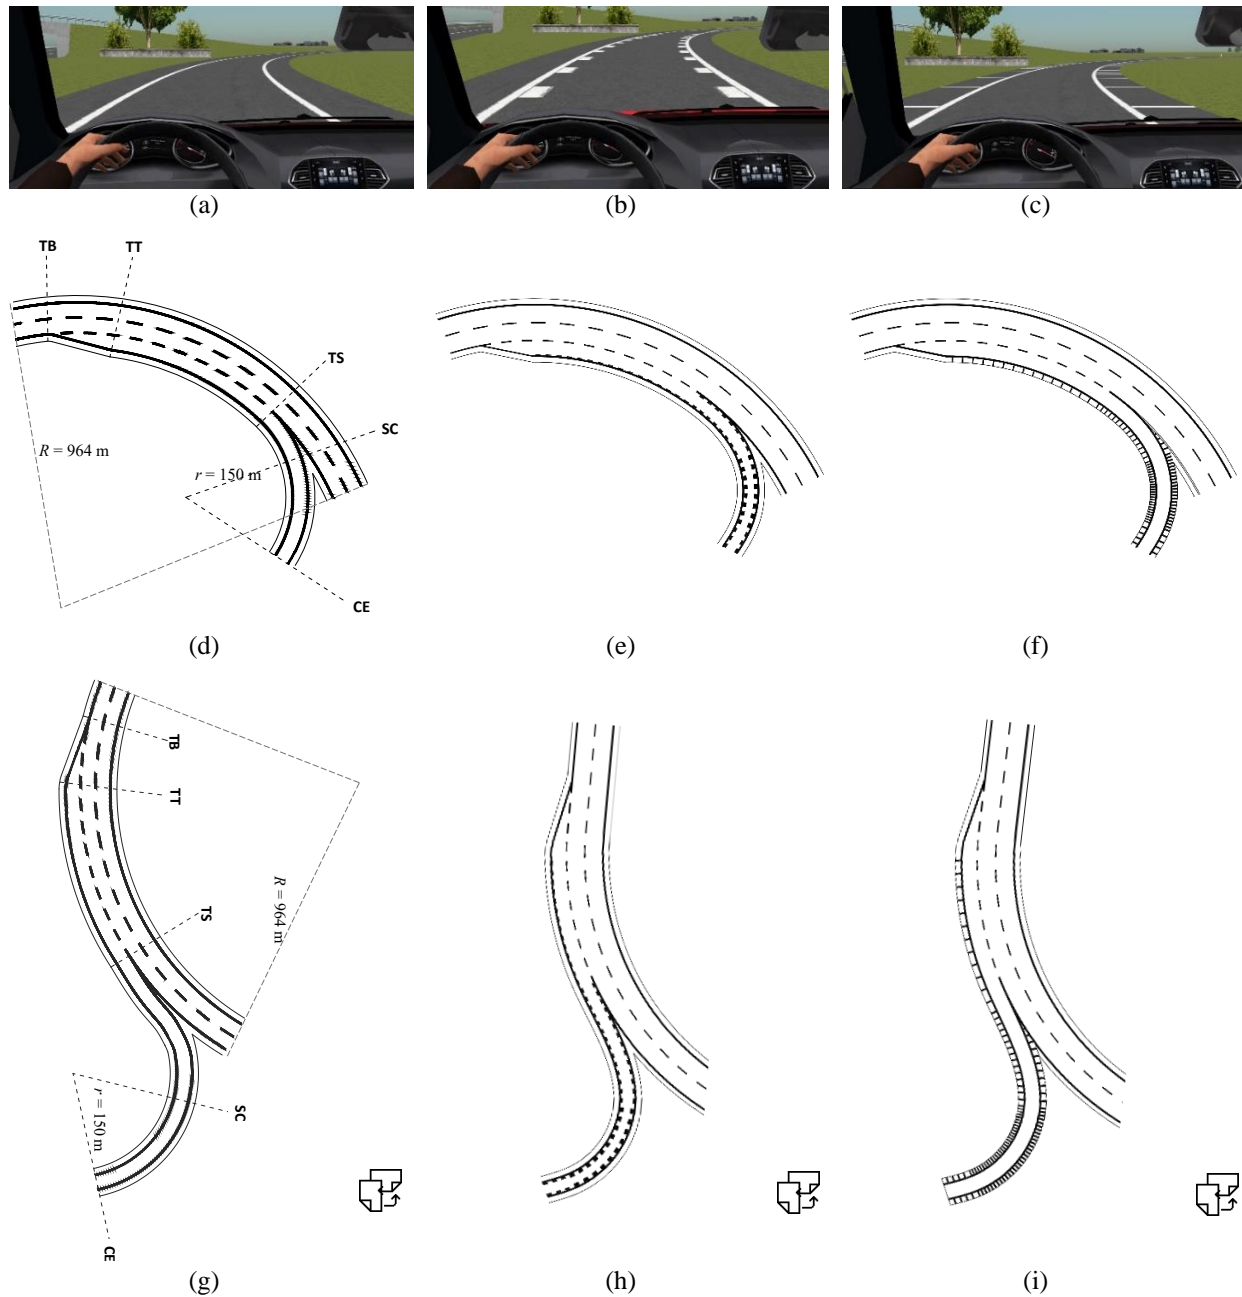


FIGURE 1. Images showing the three HMs and the two ramp terminal connection types (continuous and reverse). Vision of the three HMs from the driver point of view: (a) HM1 (baseline), (b) HM2 (type 2), and (c) HM3 (type 3). Plan view of the three layouts: (d) HM1 continuous ramp terminal, (e) HM2 continuous e ramp terminal, (f) HM3 continuous ramp terminals, (g) HM1 reverse ramp terminals, (h) HM2 reverse ramp terminals, and (i) HM3 reverse ramp terminals (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-spiral, SC = spiral-to-curve, CE = curve end).

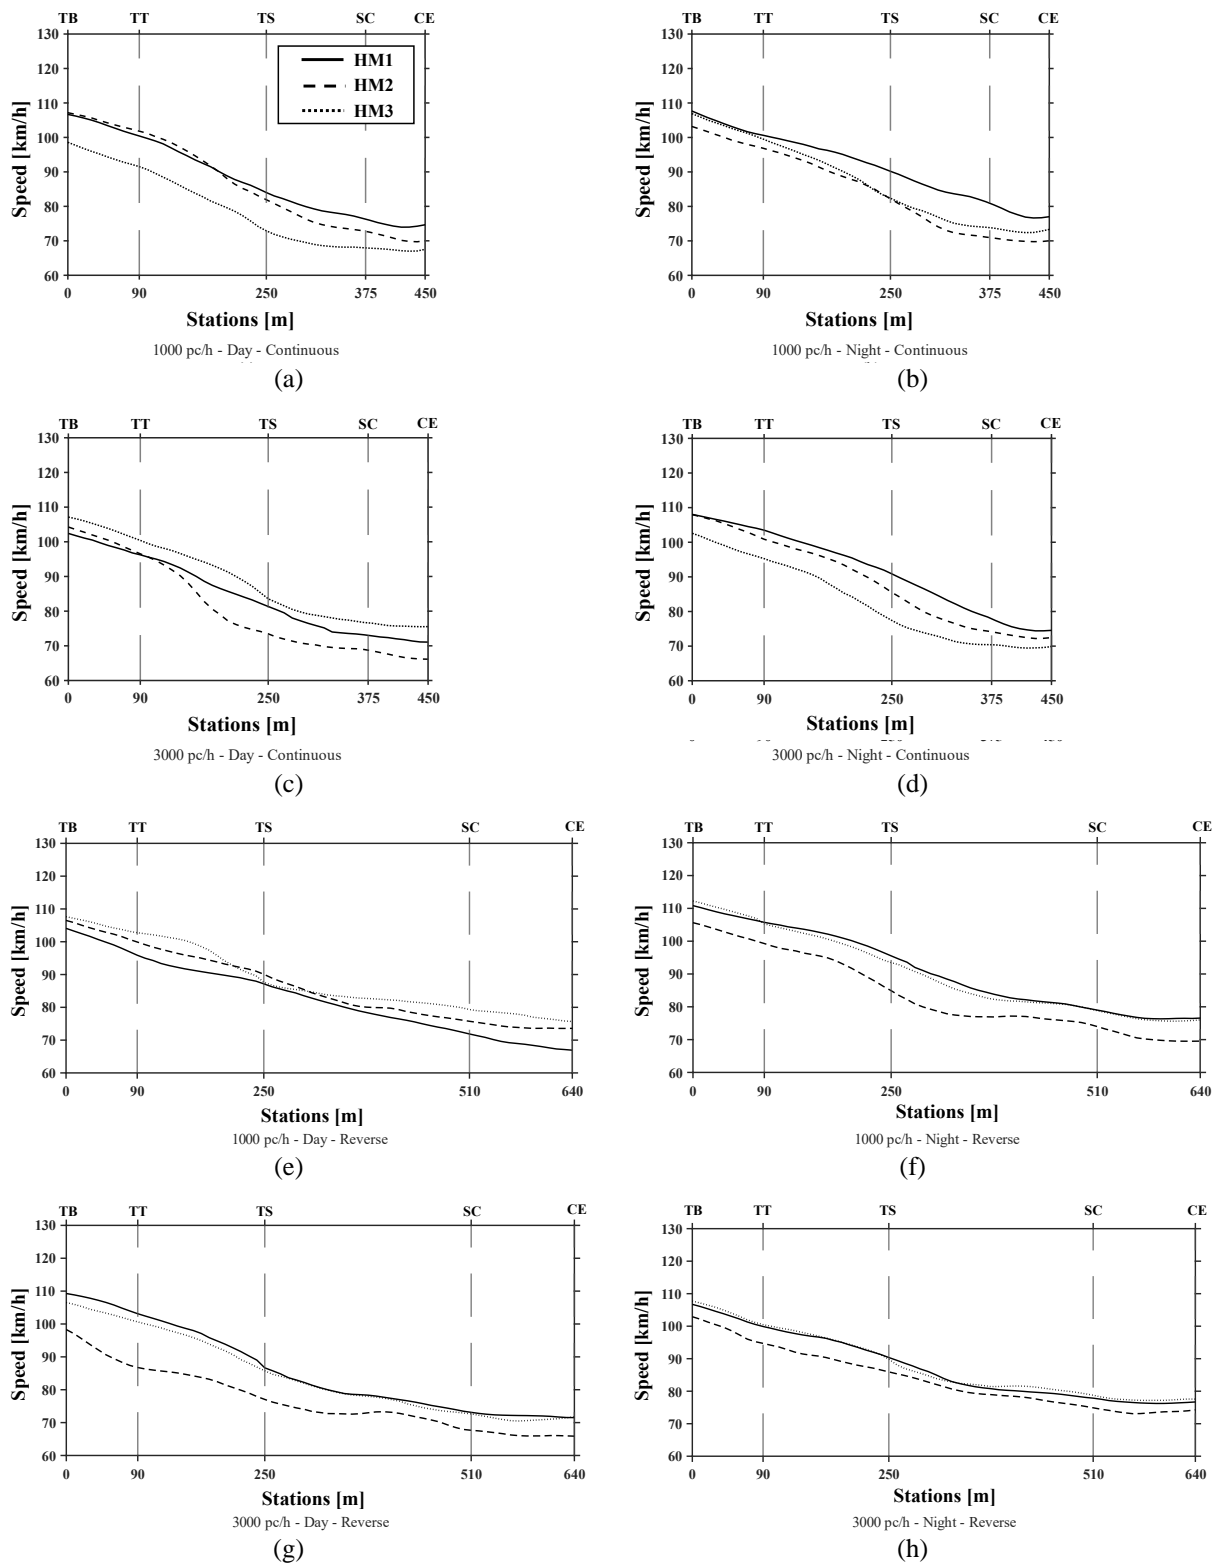


FIGURE 2. Longitudinal (speed) behavior along curved deceleration ramp terminals with a range of experimental factor combinations (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-spiral, SC = spiral-to-curve, CE = curve end).

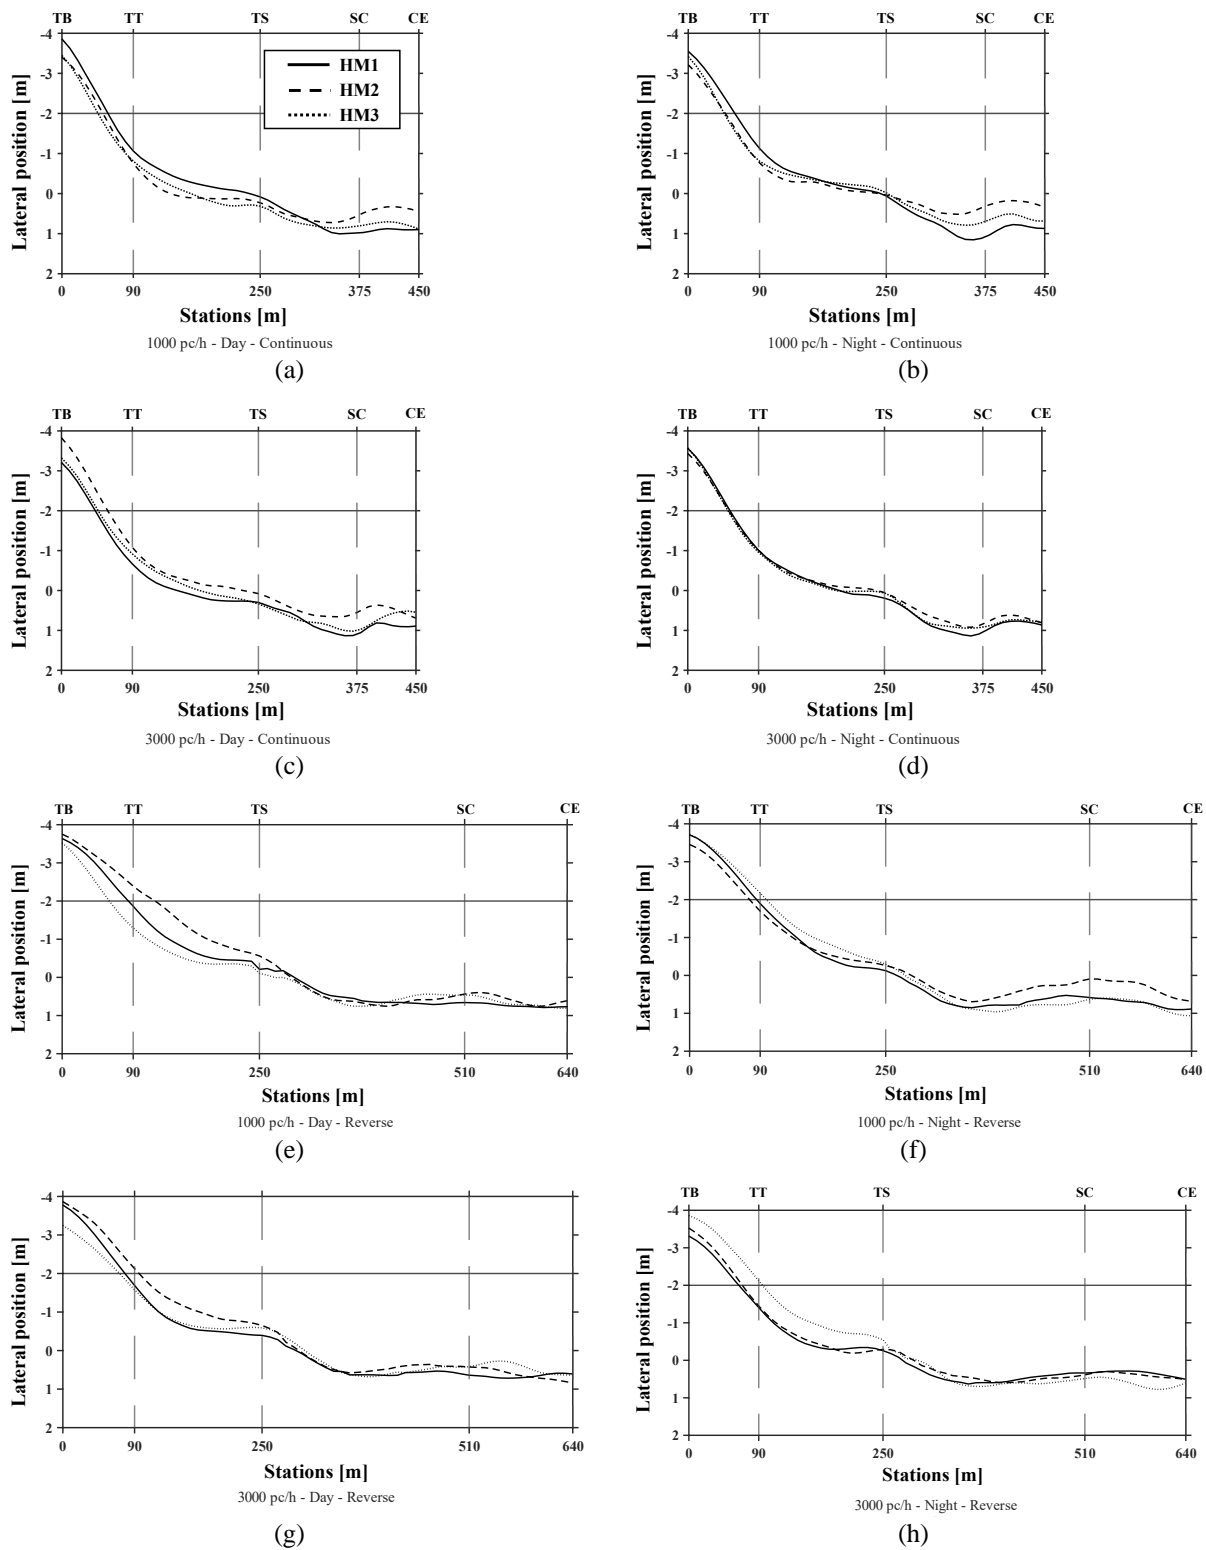


FIGURE 3. Transversal (lateral position) behavior along curved deceleration ramp terminals with variable experimental factor combinations (TB = taper begin, TT = taper-to-terminal, TS = terminal-to-spiral, SC = spiral-to-curve, CE = curve end).

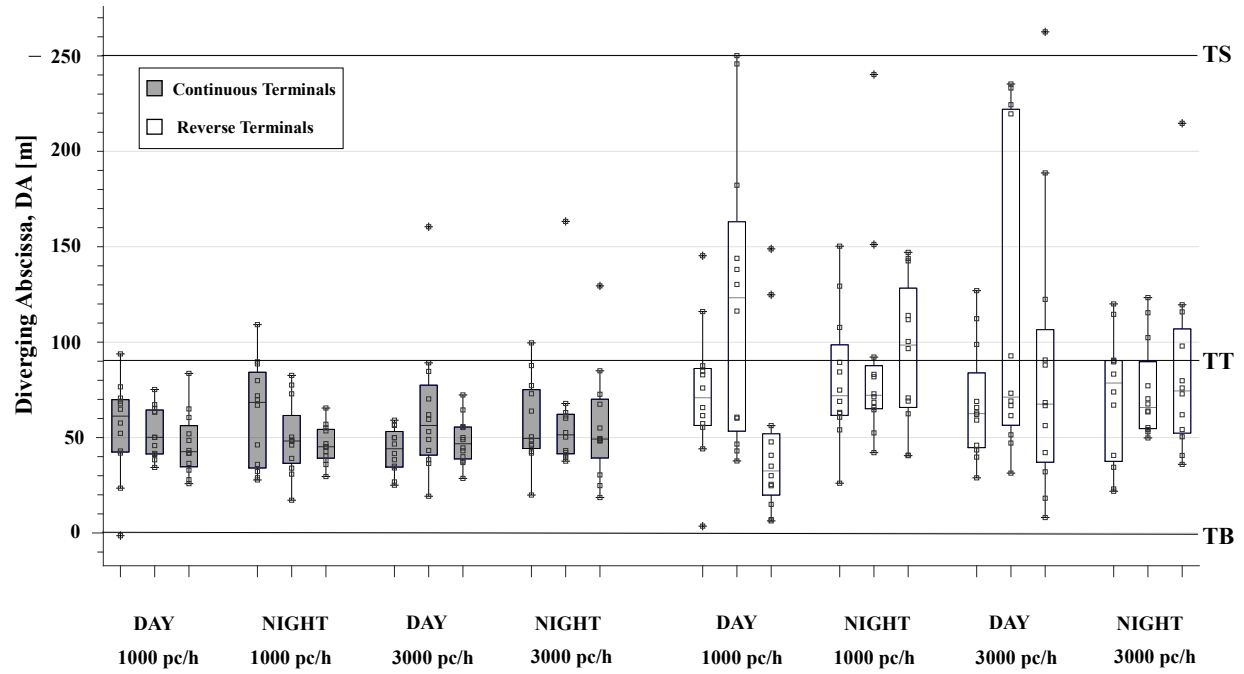


FIGURE 4. Boxplots of diverging abscissa for three HM designs in continuous and reverse ramp terminals.

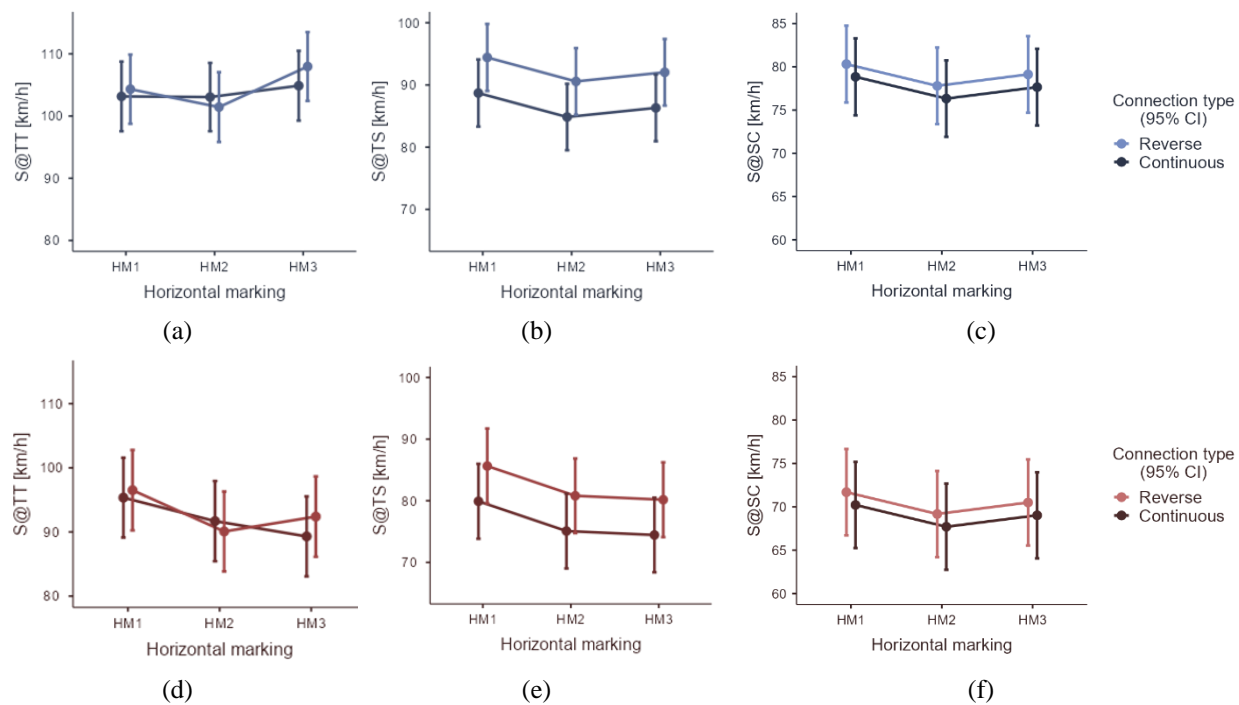


FIGURE 5. Speeds (S) for horizontal markings designs at TT (a, d), TS (b, e) and SC (c, f) sections. (a), (b) and (c) plots refer to male drivers, while (d), (e) and (f) refer to female drivers.

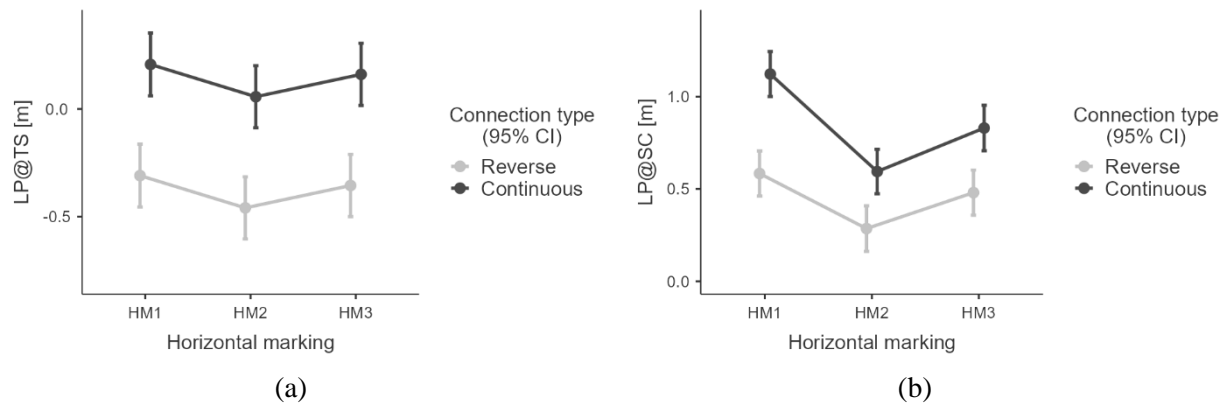


FIGURE 6. Plots of lateral position (LP), for the three horizontal markings designs at (a) TS and (b) SC sections.