

Techno-economic dataset for hydrogen storage-based microgrids

Original

Techno-economic dataset for hydrogen storage-based microgrids / Rozzi, E., Minuto, F.D., Lanzini, A.. - In: DATA IN BRIEF. - ISSN 2352-3409. - ELETTRONICO. - 56:(2024). [10.1016/j.dib.2024.110795]

Availability:

This version is available at: 11583/2991691 since: 2024-08-14T10:12:46Z

Publisher:

Elsevier

Published

DOI:10.1016/j.dib.2024.110795

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)



Data Article

Techno-economic dataset for hydrogen storage-based microgrids

Elena Rozzi^{a,b,*}, Francesco D. Minuto^{a,b}, Andrea Lanzini^{a,b}^a Department of Energy, Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy^b Energy Center Lab, Politecnico di Torino, Via Paolo Borsellino, 38, 10138 Torino, Italy

ARTICLE INFO

Article history:

Received 22 July 2024

Accepted 29 July 2024

Available online 8 August 2024

Dataset link: [Techno-Economic Data for Hydrogen Storage-Based Microgrids \(Reference data\)](#)

Keywords:

Electrolyser

Fuel cell

Hydrogen storage

Battery energy storage system, capital costs

Operational Costs

Efficiency

Operational Lifetime

ABSTRACT

The challenge of energy storage is a pivotal consideration in renewable energy-based power systems. Hydrogen emerges as a highly promising alternative or complementary solution to electric batteries, showcasing its potential for long-term and high-capacity storage. In this context, energy system modeling and optimization has gained prominence as an indispensable research tool, aiding in the processes of designing, sizing, and managing the day-to-day operations of renewable energy systems integrated with a hydrogen storage unit. However, the gathering of reliable and accurate techno-economic data emerges as time-consuming tasks, and the lack of standardized reference data introduces variability in model results. This variability arises from inconsistent input parameters rather than the physics or complexity of energy systems, leading to potentially erroneous results and misguided policy recommendations. Recognizing the need for comprehensive and transparent datasets, we introduce this open data techno-economic repository. The dataset is meticulously designed to encompass key technologies essential for hydrogen production, compression, storage, and utilization within a power-to-power system. Specifically, techno-economic data are reported for electrolysers, fuel cells, battery energy storage systems, hydrogen compression units, and hydrogen storage vessels. The learning curves and cost functions embedded in this paper, delineating investment costs as a function of production scale up and size, are de-

* Corresponding author at: Department of Energy, Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy.

E-mail address: elena.rozzi@polito.it (E. Rozzi).

rived directly from the raw data, providing a nuanced understanding of the economic landscape.

© 2024 The Authors. Published by Elsevier Inc.

This is an open access article under the CC BY-NC license (<http://creativecommons.org/licenses/by-nc/4.0/>)

Specifications Table

Subject	Energy
Specific subject area	Techno-economic data for green hydrogen production, compression, storage, and utilization
Type of data	Table Raw, Processed
Data collection	Literature survey (databases, reports from national and international institutions, peer-reviewed journal articles)
Data source location	Raw data sources are listed in this article and in the data repository
Data accessibility	Repository name: Zenodo Data - Techno-Economic Data for Hydrogen Storage-Based Microgrids Data identification number: 10.5281/zenodo.12784515 Direct URL to data: https://zenodo.org/records/12784516

1. Value of the Data

- The dataset encompasses the power-to-power hydrogen-based systems designed for the integration of microgrids and renewable energy communities.
- This dataset serves as a valuable resource for modelling hydrogen-based systems, especially for techno-economic assessments in stationary applications.
- All recordings adhere to a standardized format with consistent units and currencies. This uniformity allows for swift comparison across various sources and ensures a dependable method for validating both model inputs and outputs.
- Generalized cost functions have been derived to establish a benchmark for similar studies in the modelling of hydrogen-based systems, encouraging the adoption of open data principles.

2. Background

This dataset is developed to support energy system modeling of hydrogen-based renewable energy systems, aiding in the design, management and optimization of energy systems that integrating hydrogen technologies, such as microgrids, energy communities, and positive energy districts.

It assists in modeling hydrogen production, storage, and utilization, as well as complete power-to-power solutions.

The repository provides comprehensive coverage of techno-economic data of key hydrogen technologies, including electrolyzer, hydrogen compression, storage and power fuel cells. It also includes battery energy storage systems (BESS), which are often required to better optimize the management of surplus renewable generation. The database offers detailed data for energy modeling, covering investment and operational costs, energy efficiency, technology lifetime, and operating parameters, collected through extensive literature review and normalized into standard units.

By presenting investment cost functions derived from size-based raw data, the dataset enhances transparency and supports scientific reproducibility. This initiative aims to advance knowledge and encourage collaboration towards sustainable and efficient energy solutions. Additionally, this dataset offers insights into capital expenditures, cost trends, and scaling behav-

iors, making it a valuable resource for modeling and analyzing the techno-economic aspects of power-to-power technologies. It serves as a foundation for researchers, policymakers, and industry stakeholders to advance the development and deployment of these crucial technologies in the transition to a sustainable energy future.

3. Data Description

This paper details the dataset available in the linked repository [1], which encompasses the techno-economic parameters of equipment used in power-to-power plants. This includes water electrolysis for green hydrogen production, compression units, storage tanks, fuel cells and battery energy storage systems. The data was gathered through a literature review covering publications from 2014 to May 2024. The search was conducted in English using three online bibliographic sources to ensure comprehensive coverage of relevant materials: Scopus (<https://www.scopus.com/>), Google Scholar (<https://scholar.google.com/>) and the Google search engine (<https://www.google.com/>). For each technology assessed, we selected documents that provided at least one estimate of uninstalled capital costs (CAPEX). These selected documents were then thoroughly analyzed through full-text review to extract the necessary data. Additionally, during this process, we identified and included further relevant materials referenced in the collected documents. Finally, we reviewed all entries in the database to ensure the absence of obvious duplicate reports or errors.

This dataset contains 20 sheets within a single Excel file. The first two sheets, named “Constants” and “References”, respectively, summarize the constant values used in the data elaboration (such as inflation rate, hydrogen, lower heating value (LHV), higher heating value (HHV) and density, and currency conversion factors) and the references of the collected data, categorized into peer-reviewed journal articles and report/other online sources and databases. Additionally, there are nine sheets, each ending with the suffix “_raw”, that compile the collected data as reported in the referenced literature for the analysed technologies:

1. PEMEC_raw: Proton Exchange Membrane Electrolyser (PEMEC).
2. AEL_raw: Alkaline Electrolyser (AEL).
3. other_EL_raw: this sheet includes Solid Oxide Electrolyzer Cell (SOEC) and Anion Exchange Membrane Electrolyser (AEM). These technologies are less mature and have less data available in literature.
4. PEMFC_raw: Proton Exchange Membrane Fuel Cells (PEMFC).
5. SOFC_raw: Solid Oxide Fuel Cells (SOFC).
6. other_FC_raw: this sheet includes Phosphoric Acid Fuel Cells (PAFC), Molten-Carbonate Fuel Cells (MCFC), and Alkaline Fuel Cells (AFC). These technologies are less mature and have less data available in literature.
7. compressor_raw: hydrogen compression units.
8. H2_tank_raw: hydrogen storage tanks.
9. Li_BESS_raw: Lithium-ion Battery Energy Storage Systems (BESS).

Table 1 outlines the main references from which were sourced the technological and economic data.

The dataset includes key technical and economic parameters essential for modelling and analysing the techno-economic aspects of power-to-power technologies, offering detailed insights into capital expenditures, conversion efficiencies and technologies lifetime. An overview of the collected data is provided in **Table 2**.

The other nine sheets in the Excel file display the processed data. Specifically, for each raw data sheet, there is a corresponding “_actualized” sheet where the data has been processed to ensure consistency and comparability across different studies and sources. This includes adjusting for inflation to reflect 2024 values based on the average annual inflation rate for the European Union [94], converting costs from various currencies to euros [95], and standardizing units of measurement. Moreover, learning curves have been derived to illustrate the expected

Table 1

List of sources for technical and economic data per technology and number of values collected for each technology.

Technology	References	Number of datapoints
PEMEC	[2–40]	114
AEL	[3–5,7–9,12–21,23–26,32,33,35–38,41–43]	110
Other electrolyser technologies	[9,12,23,33,35–37,44–52]	38
PEMFC	[19,27,30,32,40,53–59]	124
SOFC	[19,56,57,59–63]	41
Other fuel cell technologies	[19,60,63–72]	24
Compressor	[14,19,28–31,38,40,68,72–84]	70
H ₂ tank	[14,19,26,31,33,34,38,42,43,53,75,76,78,79,81,82,85,86]	71
Li BESS	[26,30,34,40,44,63,87–93]	258

Table 2

Technical and economic parameters of raw data included in the dataset across technologies.

Parameter	Code	Unit	Description
References	reference	–	Bibliographic reference or source for which the data was extracted
Reference years	report_year estimation_year	–	Year of the report and year of data estimation
Specific technology	technology	–	Technology to which the reported data pertains
Nominal size	nominal_power	kW	Nominal capacity metrics representative of the technology size
	nominal_capacity	kWh	
	nominal_gravimetric_capacity	kg/h	
	nominal_volumetric_capacity	kg m ³	
Pressure	maximum_working_pressure	bar	Pressure levels representative of the operating conditions of the technology
	minimum_pressure_in		
	maximum_pressure_out		
Efficiency	efficiency_HHV	%	Efficiency metrics relevant to the reported technology
	efficiency_LHV	kWh/kg	
	specific_consumption		
	thermal_efficiency_cogeneration_LHV		
	total_cogeneration_efficiency		
	compression_efficiency		
	charge_efficiency		
	discharge_efficiency		
round_trip_efficiency			
Capital Expenditure	CAPEX	currency/kW	Capital expenditure metrics related to the technology
	CAPEX_input	currency/(kg/h)	
	CAPEX_output_LHV	cur- rency/equipment	
	CAPEX_output_HHV	currency/kg	
	CAPEX_H2_power	currency/m ³	
	CAPEX_power	currency/kWh	
	CAPEX_H2_flow_rate		
	CAPEX_equipment		
	CAPEX_gravimetric		
	CAPEX_volumetric		
	CAPEX_energy		
Operational Expenditure	OPEX_percent_CAPEX	%CAPEX	Operating expenses metrics representative of the technology
	OPEX_LHV	currency/(kWh/yr)	
	OPEX_HHV		
	OPEX_kW		
Cost for equipment replacement	replacement_costs	%CAPEX	Costs associated with equipment replacement
Reported currency	currency	€	Currency denomination for costs
		US\$	
		A\$ £	

(continued on next page)

Table 2 (continued)

Parameter	Code	Unit	Description
Lifetime	lifetime_hours	h	Lifetime metrics of the technology
	lifetime_years	yr	
	lifetime_cycles	cycles	
System availability	availability	%	Annual availability of the technology
Other parameters	Cogeneration	Y/N	Other characteristics of the reported technologies
	projected_production_capacity	units/yr	
	vessel_class	-	
	energy_to_power_ratio	h	
	depth_of_discharge	%	
	self_discharge		

reduction in costs as technologies mature and production scales up. The final result of capital expenditure is expressed in euros per unit of size, actualized and projected to 2024 values.

Finally, the cost functions, based on available size data, provide insights into how costs are anticipated to decrease with increasing system sizes

4. Experimental Design, Materials and Methods

Raw data were processed to standardize data and ensure comparability across different sources. A summary of the data reported in the “_actualized” sheets is presented in [Table 3](#).

When a range is proposed in the raw data, it is substituted by the mean value of the bounds in the processed data. The average inflation rate was calculated by the mean value of the inflation factors between the report year and the reference year (2024).

Table 3

Processed data included in the dataset across technologies.

Parameter	Code	Unit	Description
Reference years	estimation_year	-	Year of the data estimation
Inflation rate	avg_inflation_rate	%	Average inflation rate between report year and reference year (2024)
Nominal size	nominal_power	kW	Standardization of the nominal size units
	nominal_capacity	kg	
Efficiency	efficiency	% _{LHV}	Standardization of the efficiency units
	round_trip_efficiency	%	
Capital Expenditure	CAPEX	currency/kW currency/kWh	Standardization of CAPEX units
Operational Expenditure	OPEX	%CAPEX	Standardization of OPEX units
CAPEX actualization	CAPEX_actualized	Currency ₂₀₂₄ /kW	Actualization of the CAPEX at 2024
CAPEX currency conversion	CAPEX_EUR	€ ₂₀₂₄ /kW	Conversion of the original currency into euros
CAPEX projection to 2024	CAPEX_EUR_learning_curve	€ ₂₀₂₄ /kW	Projection of the CAPEX_EUR to the reference year 2024
CAPEX based on cost functions	CAPEX_EUR_cost_function	€ ₂₀₂₄ /kW	Estimation of the CAPEX based on the system size
Pressure	working_pressure_status minimum_pressure_in maximum_pressure_out	Pressurized/Atmospheric bar	Status of the system's operating pressure

The average learning curve index was derived by fitting the actualized CAPEX data, expressed in euros, as a function of the data estimation year ($Y_{estimation}$). The fitting coefficients $CAPEX_{ref}$ and exp were obtained by minimizing the root mean square error (RMSE) between the $CAPEX_{EUR}$ data and the values estimated by the learning curve function defined in Eq. (1). Then, the average yearly learning index ($I_{learning}$) for each year (Y) relative to 2024 was computed using equation Eq. (2). This index is subsequently used in Eq. (3) to compute the CAPEX projections for 2024 ($CAPEX_{EUR}$ learning curve).

$$CAPEX_{learning\ curve} = CAPEX_{ref} \cdot \left(\frac{Y_{estimation}}{2024} \right)^{-exp} \quad (1)$$

$$I_{learning} = \frac{\frac{CAPEX_{learning\ curve, Y}}{CAPEX_{learning\ curve, 2024}} - 1}{2024 - Y} \quad (2)$$

$$CAPEX_{EUR\ learning\ curve} = CAPEX_{EUR} [1 + I_{learning} \cdot (2024 - Y_{estimation})] \quad (3)$$

The CAPEX as a function of size ($CAPEX_{cost\ function}$) was calculated by fitting the CAPEX projected to 2024 as a function of the standardized nominal size (S_{st}). The fitting coefficients C_{ref} , S_{ref} and exp were estimated by minimizing the RMSE between the $CAPEX_{learning\ curve}$ data and the values estimated by the cost function defined in the following equation (Eq. (4)).

$$CAPEX_{cost\ function} = \frac{C_{ref} S_{ref} \left(\frac{S_{st}}{S_{ref}} \right)^{exp}}{S_{st}} \quad (4)$$

Table 4 provides learning curve indices, fitting coefficients of the cost functions along with their performance metrics for the reported technologies.

Table 4
learning curve indices and cost function coefficients.

Technology	Learning curve index [%]	Performance metrics learning curve	Cost function coefficients	Performance metrics cost function
PEMEC	-5.6 %	RMSE: 770 R ² : 0.19	C _{ref} : 1300 S _{ref} : 897 exp: 0.9	RMSE: 383 R ² : 0.31
AEL	-4.5 %	RMSE: 575 R ² : 0.10	C _{ref} : 1039 S _{ref} : 890 exp: 0.9	RMSE: 300 R ² : 0.34
PEMFC	0 %	RMSE: 2833	C _{ref} : 2911 S _{ref} : 1137 exp: 0.92	RMSE: 2713 R ² : 0.08
SOFC	0 %	RMSE: 3652	C _{ref} : 719 S _{ref} : 948 exp: 0.58	RMSE: 1918 R ² : 0.72
Compressor	-5.9 %	RMSE: 5586 R ² : 0.07	C _{ref} : 1769 S _{ref} : 2154 exp: 0.77	RMSE: 2568 R ² : 0.41
H ₂ tank	-7.1 %	RMSE: 983 R ² : 0.07	C _{ref} : 467 S _{ref} : 2028 exp: 0.83	RMSE: 473 R ² : 0.22
Li BESS	-5.4 %	RMSE: 196 R ² : 0.30	C _{ref1} : 452 S _{ref1} : 17 exp ₁ : 0.97 C _{ref2} : 99 * S _{ref2} : 106 exp ₂ : 0.7	RMSE: 112 R ² : 0.45

* Note: For Li BESS, refer to Eq. (21) for details on the cost function coefficients.

4.1. Electrolysers

For electrolyser technologies, the following calculations were conducted:

1. Standardizing nominal size into input power capacity expressed in kW ($S_{EL,st}$) according to Eq. (5).
2. Reporting efficiency metrics as a percentage relative to the hydrogen lower heating value ($\eta_{LHV,st}$) according to Eq. (6).
3. Expressing CAPEX as currency per unit of input power ($CAPEX_{st}$), as per Eq. (7).
4. Adjusting CAPEX data to euros 2024 by applying the inflation rate ($CAPEX_{actualized, 2024}$) and currency-to-euros conversion factors ($CAPEX_{EUR}$) based on Eqs. (8) and (9).
5. Expressing OPEX as a percentage of CAPEX, with the conversion detailed in Eq. (10).
6. Setting the system's operating pressure status to "Atmospheric" if the maximum operating pressure of the electrolyser is 1 bar, and "Pressurized" otherwise (Eq. (11)).

$$\begin{cases} S_{EL,st} = S_{EL} \text{ if } S_{EL} = \text{kW} \\ S_{EL,st} = \frac{S_{EL} \cdot LHV}{\eta_{LHV,st}} \text{ if } S_{EL} = \frac{\text{kg}}{\text{h}} \end{cases} \quad (5)$$

$$\begin{cases} \eta_{LHV,st} = \eta \text{ if } \eta = \%_{LHV} \\ \eta_{LHV,st} = \eta \cdot \frac{LHV}{HHV} \text{ if } \eta = \%_{HHV} \\ \eta_{LHV,st} = \frac{LHV}{\eta} \text{ if } \eta = \frac{\text{kWh}}{\text{kg}} \end{cases} \quad (6)$$

$$\begin{cases} CAPEX_{st} = CAPEX \text{ if } CAPEX = \frac{\text{currency}}{\text{kW}_{input}} \\ CAPEX_{st} = CAPEX \cdot \eta_{LHV,st} \text{ if } CAPEX = \frac{\text{currency}}{\text{kW}_{output,LHV}} \\ CAPEX_{st} = CAPEX \cdot \eta_{LHV,st} \cdot \frac{HHV}{LHV} \text{ if } CAPEX = \frac{\text{currency}}{\text{kW}_{output,HHV}} \end{cases} \quad (7)$$

$$CAPEX_{actualized, 2024} = CAPEX_{st} \cdot (1 + i)^{(2024 - Y_{report})} \quad (8)$$

$$\begin{cases} CAPEX_{EUR} = CAPEX \text{ if } \text{currency} = \text{€} \\ CAPEX_{EUR} = CAPEX \cdot 0.92 \text{ if } \text{currency} = \text{US\$} \\ CAPEX_{EUR} = CAPEX \cdot 0.61 \text{ if } \text{currency} = \text{A\$} \\ CAPEX_{EUR} = CAPEX \cdot 1.17 \text{ if } \text{currency} = \text{£} \end{cases} \quad (9)$$

$$\begin{cases} OPEX_{st} = OPEX \text{ if } OPEX = \%CAPEX \\ OPEX_{st} = OPEX \cdot \frac{\eta_{LHV,st}}{CAPEX_{st}} \text{ if } OPEX = \frac{\text{currency}}{\text{kWh}_{LHV} \cdot \text{yr}} \\ OPEX_{st} = OPEX \cdot \frac{\eta_{LHV,st} \cdot \frac{HHV}{LHV}}{CAPEX_{st}} \text{ if } OPEX = \frac{\text{currency}}{\text{kWh}_{HHV} \cdot \text{yr}} \end{cases} \quad (10)$$

$$\begin{cases} \text{Pressure Status} = \text{Atmospheric} \text{ if } \text{Pressure} = 1 \\ \text{Pressure Status} = \text{Pressurized} \text{ if } \text{Pressure} > 1 \end{cases} \quad (11)$$

Where P_{EL} is the nominal power of the electrolyser, LHV and HHV are the hydrogen lower and higher heating values respectively, η is the electrolyser efficiency, and Y_{report} is the data publication year.

Fig. 1 illustrates trends and variations over time in capital costs across PEM and AEL electrolysers, showcasing the decrease in capital costs with cumulative production or development.

Fig. 2 displays the relationship between capital cost and nominal power, along with cost function estimates for PEM and AEL electrolysers.

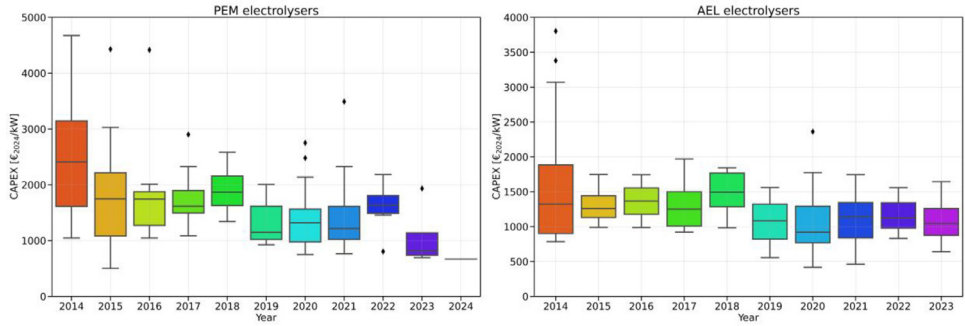


Fig. 1. Capital cost range over time for PEM (left) and AEL (right) electrolyzers.

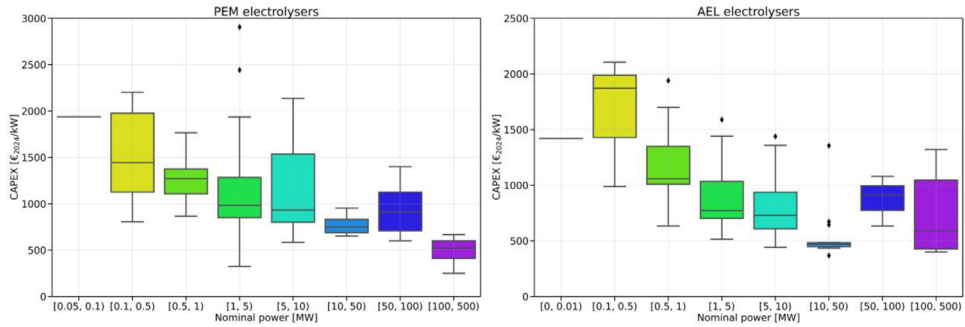


Fig. 2. Capital cost as a function of nominal power range for PEM (left) and AEL (right) electrolyzers.

4.2. Fuel cells

The data processing for fuel cell technologies follows a similar approach as described for electrolyzers:

1. Standardizing nominal size into output power capacity expressed in kW ($S_{FC,st}$) according to Eq. (12).
2. Reporting efficiency metrics as a percentage relative to the hydrogen lower heating value ($\eta_{LHV,st}$) according to Eq. (13).
3. CAPEX values are all expressed as currency per unit of output power ($CAPEX_{st}$), and OPEX data are reported as a percentage of CAPEX. Thus, no additional processing is required for these parameters.
4. Adjusting CAPEX data to euros 2024 by applying the inflation rate ($CAPEX_{actualized, 2024}$) and the currency-to-euro conversion factors ($CAPEX_{EUR}$) based on Eqs. (8) and (9).

$$\begin{cases} S_{FC,st} = S_{FC} & \text{if } S_{FC} = kW \\ S_{FC,st} = S_{FC} \cdot LHV \cdot \eta_{LHV,st} & \text{if } S_{FC} = \frac{kg}{h} \end{cases} \quad (12)$$

$$\begin{cases} \eta_{LHV,st} = \eta & \text{if } \eta = \%LHV \\ \eta_{LHV,st} = \eta \cdot \frac{LHV}{HHV} & \text{if } \eta = \%HHV \end{cases} \quad (13)$$

Figs. 3 and 4 depict trends in capital costs over time and nominal size for PEMFC and SOFC fuel cells.

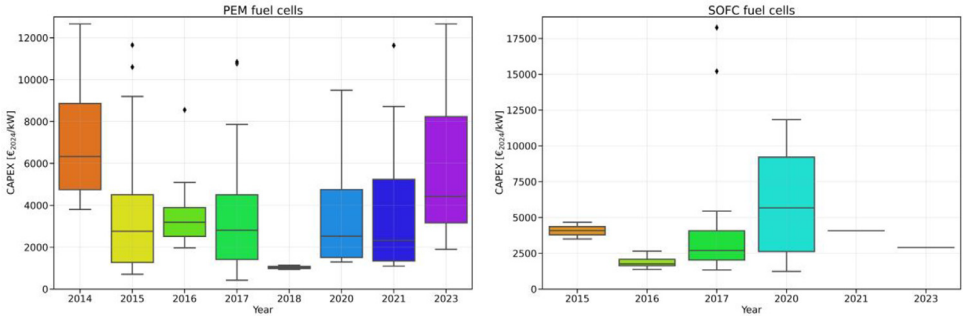


Fig. 3. Capital cost range over time for PEMFC (left) and SOFC (right) fuel cells.

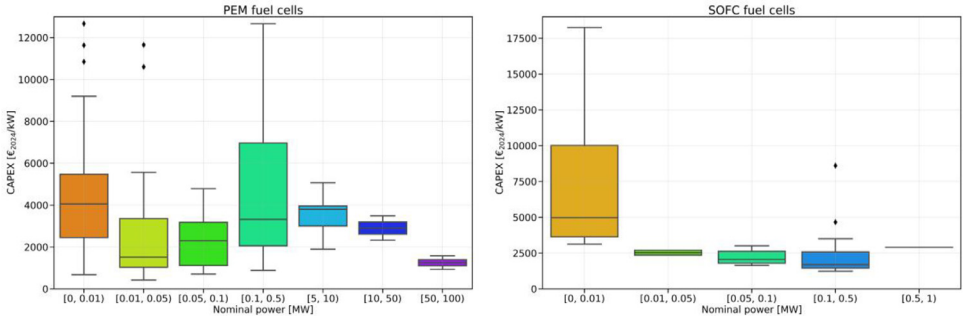


Fig. 4. Capital cost as a function of nominal power range for PEMFC (left) and SOFC (right) fuel cells.

4.3. Hydrogen compression units

The raw data pertaining to hydrogen compression units were processed through the following steps:

1. Standardizing nominal size into electrical input power expressed in kW ($S_{compr,st}$) according to Eq. (14).
2. Expressing CAPEX as currency per unit of input power ($CAPEX_{st}$), as per Eq. (15).
3. Adjusting CAPEX data to euros 2024 by applying the inflation rate ($CAPEX_{actualized, 2024}$) and currency-to-euros conversion factors ($CAPEX_{EUR}$) based on Eqs. (8) and (9).
4. Setting the minimum inlet pressure (P_{in}) at 1 and the maximum outlet pressure equal to "N/A" if raw data are not available in the reference report .

$$\begin{aligned}
 S_{compr,st} &= S_{compr} \text{ if } S_{compr} = kW \\
 S_{compr,st} &= S_{compr} \cdot \frac{Z \cdot T \cdot R}{M_{H_2} \cdot \eta_{st}} \cdot \frac{N \cdot \gamma}{\gamma - 1} \left[\left(\frac{P_{out}}{P_{in}} \right)^{\frac{\gamma-1}{N\gamma}} - 1 \right] \text{ if } S_{compr} = \frac{kg}{h} \\
 N &= \frac{\text{ceil}\left(\frac{P_{out}}{P_{in}}\right)}{\beta_{max}}
 \end{aligned} \tag{14}$$

$$\begin{cases}
 CAPEX_{st} = CAPEX \text{ if } CAPEX = \frac{\text{currency}}{kW_{input}} \\
 CAPEX_{st} = \frac{CAPEX \cdot S_{compr, st} \cdot \text{kg/h}}{S_{compr, st}} \text{ if } CAPEX = \frac{\text{currency}}{\text{kg/h}} \\
 CAPEX_{st} = \frac{CAPEX}{S_{compr,st}} \text{ if } CAPEX = \frac{\text{currency}}{\text{compression unit}}
 \end{cases} \tag{15}$$

Where Z is the hydrogen compressibility factor, T is the temperature at the inlet of the compressor, R is the ideal gas constant, M_{H_2} is the molecular mass of hydrogen, η_{st} is the compression efficiency, N the number of compressor stages, γ the diatomic constant factor, and β_{max} is the maximum compression ratio set equal to 8.

The trends in capital costs over time and nominal size for the hydrogen compression units is shown in Fig. 5.

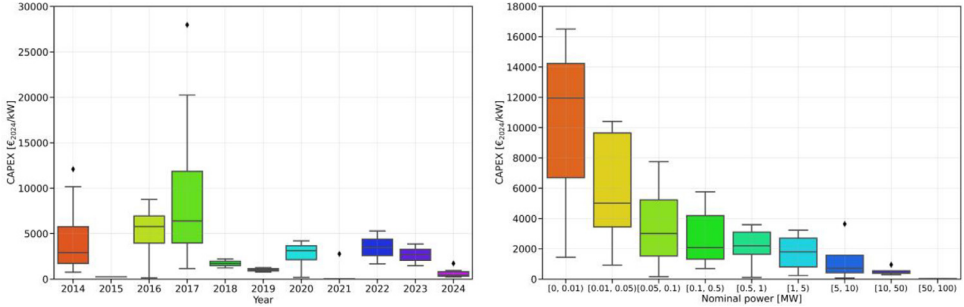


Fig. 5. Capital cost range over time (left) and capital cost as a function of nominal power range (right) for hydrogen compression units.

4.4. Hydrogen storage tank

The following steps were taken to process the raw data for hydrogen storage:

1. Standardizing nominal size into gravimetric capacity in kg ($S_{H_2 tank, st}$) according to Eq. (16).
2. Expressing CAPEX as currency per unit of storage capacity ($CAPEX_{st}$), as per Eq. (17).
3. Adjusting CAPEX data to euros 2024 by applying the inflation rate ($CAPEX_{actualized, 2024}$) and currency-to-euros conversion factors ($CAPEX_{EUR}$) based on Eqs. (8) and (9).

$$\begin{cases} S_{H_2 tank, st} = S_{H_2 tank} & \text{if } S_{H_2 tank} = \text{kg} \\ S_{H_2 tank, st} = S_{H_2 tank} \cdot \rho_{H_2} & \text{if } S_{H_2 tank} = \text{m}^3 \\ S_{H_2 tank, st} = \frac{S_{H_2 tank}}{LHV} & \text{if } S_{H_2 tank} = \text{kWh} \end{cases} \quad (16)$$

$$\begin{cases} CAPEX_{st} = CAPEX & \text{if } CAPEX = \frac{\text{currency}}{\text{kg}} \\ CAPEX_{st} = \frac{CAPEX}{\rho_{H_2}} & \text{if } CAPEX = \frac{\text{currency}}{\text{m}^3} \\ CAPEX_{st} = \frac{CAPEX}{LHV} & \text{if } CAPEX = \frac{\text{currency}}{\text{kWh}_{H_2}} \\ CAPEX_{st} = \frac{CAPEX}{S_{H_2 tank, st}} & \text{if } CAPEX = \frac{\text{currency}}{\text{tank}} \end{cases} \quad (17)$$

Where ρ_{H_2} is the hydrogen density.

Fig. 6 illustrates the trend of capital costs for hydrogen storage tanks over time and nominal size.

4.5. Battery energy storage systems

The following steps were taken to process the raw data for Li-ion battery energy storage systems:

1. Standardizing nominal size into energy storage capacity in kWh ($S_{BESS, st}$) according to Eq. (18).
2. Setting energy-to-power ratio ($h_{ch/dh}$) to 1 as this information is not given.

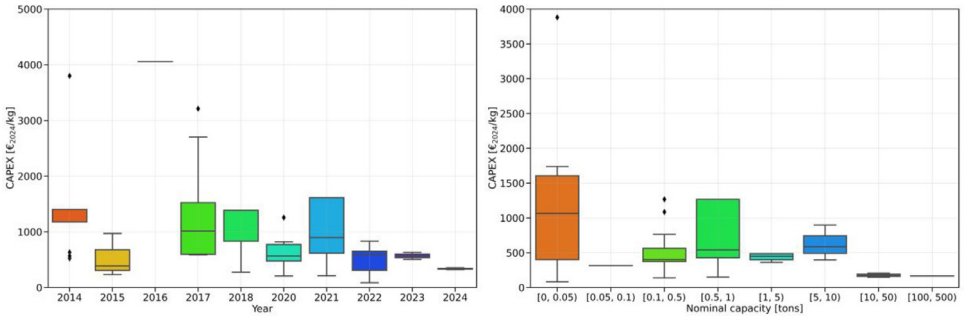


Fig. 6. Capital cost range over time (left) and capital cost as a function of nominal power range (right) for hydrogen storage.

3. Expressing CAPEX as currency per unit of storage capacity ($CAPEX_{st}$), as per Eq. (19).
4. Adjusting CAPEX data to euros 2024 by applying the inflation rate ($CAPEX_{actualized, 2024}$) and currency-to-euro conversion factors ($CAPEX_{EUR}$) based on Eqs. (8) and (9).
5. Standardizing round-trip-efficiency, according to Eq. (20).

$$\begin{cases} S_{BESS, st} = S_{BESS} \text{ if } S_{BESS} = kWh \\ S_{BESS, st} = S_{BESS} \cdot h_{ch, dh} \text{ if } S_{BESS} = kW \end{cases} \quad (18)$$

$$\begin{cases} CAPEX_{st} = CAPEX \text{ if } CAPEX = \frac{\text{currency}}{kWh} \\ CAPEX_{st} = \frac{CAPEX}{h_{ch, dh}} \text{ if } CAPEX = \frac{\text{currency}}{kW} \end{cases} \quad (19)$$

$$\begin{cases} \eta_{R-T} = \eta \text{ if } \eta = \eta_{ch} \cdot \eta_{dh} \\ \eta_{R-T} = \eta^2 \text{ if } \eta = \eta_{ch} \end{cases} \quad (20)$$

The cost function equation, as detailed in Eq. (21), considers both the energy storage capacity (S_{energy}) and nominal power (S_{power}).

$$CAPEX_{cost \text{ function}} = \frac{C_{ref1} S_{ref1} \left(\frac{S_{energy}}{S_{ref1}} \right)^{exp1}}{S_{energy}} + \frac{C_{ref2} S_{ref2} \left(\frac{S_{power}}{S_{ref2}} \right)^{exp2}}{S_{power}} \quad (21)$$

Fig. 7 depicts the trend in capital costs for battery energy storage systems over time and across different nominal sizes.

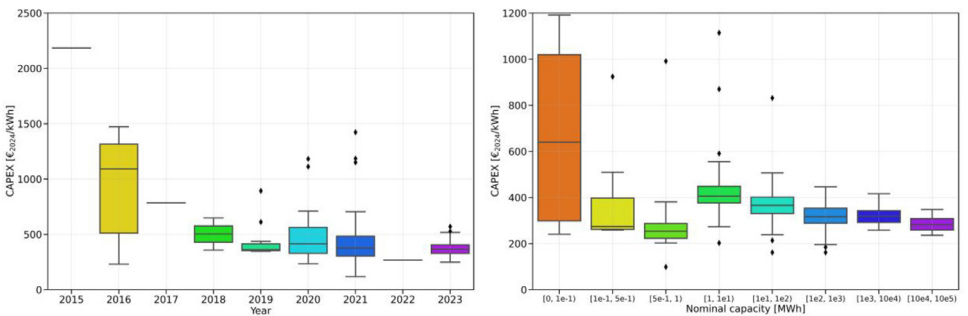


Fig. 7. Capital cost range over time (left) and capital cost as a function of nominal power range (right) for BESS.

Limitations

A review of relevant literature on investment costs for power-to-gas appliances has revealed significant variability in cost estimations, influenced by factors such as technology, system size, and year of installation. Additionally, comparing available data is challenging due to the frequent omissions of critical information, such as system size, included peripherals (e.g., gas conditioning), and capacity reference (electric input, lower heating value (LHV) output, higher heating value (HHV) output).

Ethics Statement

The authors declare that they did not conduct human or animal studies. The authors declare that they did not collect social media data and did not need permission to use the primary data.

Data Availability

[Techno-Economic Data for Hydrogen Storage-Based Microgrids \(Reference data\)](#) (Zenodo)

CRediT Author Statement

Elena Rozzi: Conceptualization, Methodology, Formal analysis, Investigation, Data curation, Writing – original draft, Visualization; **Francesco D. Minuto:** Conceptualization, Methodology, Writing – review & editing, Supervision, Project administration; **Andrea Lanzini:** Conceptualization, Methodology, Writing – review & editing, Supervision, Project administration, Funding acquisition.

Acknowledgments

F.D. Minuto carried out this study within Ministerial Decree no. 1062/2021 and received funding from the FSE REACT-EU - PON Ricerca e Innovazione 2014–2020.

A. Lanzini and **E. Rozzi** carried out this study within the National Recovery and Resilience Plan (PNRR) and received funding by the Italian Ministry of the Environment and Energy Security, project “Novel Materials for Hydrogen storage (NoMaH)”, ID RSH2A_000035, CUP: F27G22000180006.

The authors also acknowledge the contribution from the project “Idrogeno nei modelli di ottimizzazione del sistema energetico italiano”, supported by ENEA within the National Recovery and Resilience Plan, CUP:183C22001170006.

This manuscript reflects only the authors' views and opinions, neither the European Union nor the European Commission can be considered responsible for them.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

References

- [1] E. Rozzi, F.D. Minuto, A. Lanzini, Techno-economic data for hydrogen storage-based microgrids (1.0.0), Zenodo (2024), doi:[10.5281/zenodo.12784515](https://doi.org/10.5281/zenodo.12784515).

- [2] S.M. Saba, M. Müller, M. Robinius, D. Stolten, The investment costs of electrolysis – A comparison of cost studies from the past 30 years, *Int. J. Hydrogen Energy* 43 (2018) 1209–1223, doi:[10.1016/j.ijhydene.2017.11.115](https://doi.org/10.1016/j.ijhydene.2017.11.115).
- [3] L. Bertuccioli, A. Chan, D. Hart, F. Lehner, B. Madden, E. Standen, Development of water electrolysis in the European Union, Hydrogen Knowledge Centre, 2014. <https://www.h2knowledgecentre.com/content/researchpaper1120>.
- [4] C. Noack, F. Burggraf, S.S. Hosseiny, P. Lettenmeier, S. Kolb, S. Belz, J. Kallo, K.A. Friedrich, T. Pregger, K.-K. Cao, D. Heide, T. Naegler, F. Borggrefe, U. Bünger, J. Michalski, T. Raksha, C. Voglstätter, T. Smolinka, F. Crostogino, S. Donadei, P.-L. Horvath, G.-S. Schneider, Studie über die planung einer demonstrationsanlage zur wasserstoff-kraftstoffgewinnung durch elektrolyse mit zwischenspeicherung in salzkavernen unter druck, 2015. <https://elib.dlr.de/94979/>.
- [5] M. Felgenhauer, T. Hamacher, State-of-the-art of commercial electrolyzers and on-site hydrogen generation for logistic vehicles in South Carolina, *Int. J. Hydrogen Energy* 40 (2015) 2084–2090, doi:[10.1016/j.ijhydene.2014.12.043](https://doi.org/10.1016/j.ijhydene.2014.12.043).
- [6] A.H. Reksten, M.S. Thomassen, S. Møller-Holst, K. Sundseth, Projecting the future cost of PEM and alkaline water electrolyzers; a CAPEX model including electrolyser plant size and technology development, *Int. J. Hydrogen Energy* 47 (2022) 38106–38113, doi:[10.1016/j.ijhydene.2022.08.306](https://doi.org/10.1016/j.ijhydene.2022.08.306).
- [7] M. Sadiq, R.J. Alshehri, R.R. Urs, A.T. Mayyas, Techno-economic analysis of Green-H₂@Scale production, *Renew. Energy* 219 (2023) 119362, doi:[10.1016/j.renene.2023.119362](https://doi.org/10.1016/j.renene.2023.119362).
- [8] H. Böhm, S. Goers, A. Zauner, Estimating future costs of power-to-gas – a component-based approach for technological learning, *Int. J. Hydrogen Energy* 44 (2019) 30789–30805, doi:[10.1016/j.ijhydene.2019.09.230](https://doi.org/10.1016/j.ijhydene.2019.09.230).
- [9] O. Schmidt, A. Gambhir, I. Staffell, A. Hawkes, J. Nelson, S. Few, Future cost and performance of water electrolysis: an expert elicitation study, *Int. J. Hydrogen Energy* 42 (2017) 30470–30492, doi:[10.1016/j.ijhydene.2017.10.045](https://doi.org/10.1016/j.ijhydene.2017.10.045).
- [10] S.B. Walker, D. van Lanen, M. Fowler, U. Mukherjee, Economic analysis with respect to power-to-gas energy storage with consideration of various market mechanisms, *Int. J. Hydrogen Energy* 41 (2016) 7754–7765, doi:[10.1016/j.ijhydene.2015.12.214](https://doi.org/10.1016/j.ijhydene.2015.12.214).
- [11] B.D. James, D.A. DeSantis, G. Saur, Final Report: Hydrogen production Pathways Cost Analysis (2013–2016), Strategic Analysis Inc, Arlington, VA United States, 2016, doi:[10.2172/1346418](https://doi.org/10.2172/1346418).
- [12] H. Böhm, A. Zauner, D.C. Rosenfeld, R. Tichler, Projecting cost development for future large-scale power-to-gas implementations by scaling effects, *Appl. Energy* 264 (2020) 114780, doi:[10.1016/j.apenergy.2020.114780](https://doi.org/10.1016/j.apenergy.2020.114780).
- [13] Department For Business, Energy & Industrial Strategy, Hydrogen production Costs 2021, GOV.UK, 2021 <https://www.gov.uk/government/publications/hydrogen-production-costs-2021>.
- [14] C. van Leeuwen, A. Zauner, Innovative large-scale energy storage technologies and Power-to-Gas concepts after optimisation: report on the costs involved with PtG technologies and their potentials across the EU, 2018. <https://www.gov.uk/government/publications/hydrogen-production-costs-2021>.
- [15] IEAGlobal Hydrogen Review 2023, IEA, Paris, 2023 <https://www.iea.org/reports/global-hydrogen-review-2023>.
- [16] M.H. Ali Khan, R. Daiyan, Z. Han, M. Hablutzel, N. Haque, R. Amal, I. MacGill, Designing optimal integrated electricity supply configurations for renewable hydrogen generation in Australia, *iScience* 24 (2021) 102539, doi:[10.1016/j.isci.2021.102539](https://doi.org/10.1016/j.isci.2021.102539).
- [17] IEAThe Future of hydrogen: Seizing today's Opportunities, OECD, Paris Cedex, 2019 16 https://www.oecd.org/en/publications/2019/06/the-future-of-hydrogen_2d59d5dd.html.
- [18] A. Patonia, R. Poudineh, Cost-competitive Green hydrogen: How to Lower the Cost of Electrolyzers?, Oxford Institute for Energy Studies, 2022 <https://www.oxfordenergy.org/publications/cost-competitive-green-hydrogen-how-to-lower-the-cost-of-electrolyzers/>.
- [19] IEATechnology roadmaps: Hydrogen and Fuel Cells, OECD Publishing, Paris, 2015, doi:[10.1787/9789264239760-en](https://doi.org/10.1787/9789264239760-en).
- [20] J. Hinkley, J. Hayward, R. McNaughton, R. Gillespie, A. Matsumoto, M. Watt, K. Lovegrove, Cost Assessment of Hydrogen Production from PV and Electrolysis, CSIRO, Australia, 2016 <https://arena.gov.au/assets/2016/05/Assessment-of-the-cost-of-hydrogen-from-PV.pdf>.
- [21] M. Holst, S. Aschbrenner, T. Smolinka, C. Voglstätter, G. Grimm, Cost Forecast for Low Temperature Electrolysis - Technology driven Bottom-up Prognosis for PEM and Alkaline Water Electrolysis Systems, Fraunhofer Institute for Solar Energy Systems ISE, Freiburg, 2021 <https://www.ise.fraunhofer.de/en/publications/studies/catf.html>.
- [22] D. Peterson, J. Vickers, D. DeSantis, Hydrogen production cost from PEM electrolysis - 2019, DOE Hydrogen and Fuel Cells Program Record, 2020. https://www.hydrogen.energy.gov/docs/hydrogenprogramlibraries/pdfs/19009_h2-production_cost_pem_electrolysis_2019.pdf.
- [23] IRENAMaking the breakthrough: Green hydrogen Policies and Technology Costs, International Renewable Energy Agency, Abu Dhabi, 2021 www.irena.org/publications.
- [24] A. Buttler, H. Spliethoff, Current status of water electrolysis for energy storage, grid balancing and sector coupling via power-to-gas and power-to-liquids: a review, *Renew. Sustain. Energy Rev.* 82 (2018) 2440–2454, doi:[10.1016/j.rser.2017.09.003](https://doi.org/10.1016/j.rser.2017.09.003).
- [25] IRENAMaking the breakthrough: Green hydrogen Policies and Technology Costs, International Renewable Energy Agency, Abu Dhabi, 2018 <https://www.irena.org/publications/2018/sep/hydrogen-from-renewable-power>.
- [26] H. Tebibel, Methodology for multi-objective optimization of wind turbine/battery/electrolyzer system for decentralized clean hydrogen production using an adapted power management strategy for low wind speed conditions, *Energy Convers. Manag.* 238 (2021) 114125, doi:[10.1016/j.enconman.2021.114125](https://doi.org/10.1016/j.enconman.2021.114125).
- [27] K. Mongird, V. Viswanathan, J. Alam, C. Vartanian, V. Sprenkle, R. Baxter, 2020 Grid Energy Storage Technology Cost and Performance Assessment, Pacific Northwest National Laboratory, United States, 2020 <https://www.pnnl.gov/sites/default/files/media/file/Final%20-%20ESGC%20Cost%20Performance%20Report%2012-11-2020.pdf>.
- [28] IEAGlobal Hydrogen Review 2023: Assumption Annex, IEA, Paris, 2023 https://iea.blob.core.windows.net/assets/101dd112-b72b-4a74-82f1-de7fea6ae48e/GlobalHydrogenReview2023_AssumptionsAnnex.pdf.
- [29] IEAGlobal Hydrogen Review 2021: Assumption Annex, IEA, Paris, 2021 https://iea.blob.core.windows.net/assets/2ceb17b8-474f-4154-aab5-4d898f735c17/IEAGHRassumptions_final.pdf.

- [30] C.A. Hunter, M.M. Penev, E.P. Reznicek, J. Eichman, N. Rustagi, S.F. Baldwin, Techno-economic analysis of long-duration energy storage and flexible power generation technologies to support high-variable renewable energy grids, *Joule* 5 (2021) 2077–2101, doi:[10.1016/j.joule.2021.06.018](https://doi.org/10.1016/j.joule.2021.06.018).
- [31] N. Ibagón, P. Muñoz, G. Correa, Techno economic analysis tool for the sizing and optimization of an off-grid hydrogen hub, *J. Energy Storage* 73 (2023) 108787, doi:[10.1016/j.est.2023.108787](https://doi.org/10.1016/j.est.2023.108787).
- [32] M. Yue, H. Lambert, E. Pahon, R. Roche, S. Jemei, D. Hissel, Hydrogen energy systems: a critical review of technologies, applications, trends and challenges, *Renew. Sustain. Energy Rev.* 146 (2021) 111180, doi:[10.1016/j.rser.2021.111180](https://doi.org/10.1016/j.rser.2021.111180).
- [33] M. Robinus, S. Cerniauskas, R. Madlener, C. Kockel, A. Praktiknjo, D. Stolten, Economics of hydrogen, in: M. Hafner, G. Luciani (Eds.), *Palgrave Handbook, Int. Energy Econ.*, Palgrave Macmillan, Cham, 2022, pp. 75–102, doi:[10.1007/978-3-030-86884-0_4](https://doi.org/10.1007/978-3-030-86884-0_4).
- [34] E.D. Sherwin, Electrofuel synthesis from variable renewable electricity: an optimization-based techno-economic analysis, *Environ. Sci. Technol.* 55 (2021) 7583–7594, doi:[10.1021/acs.est.0c07955](https://doi.org/10.1021/acs.est.0c07955).
- [35] G. Flis, G. Wakim, Solid oxide electrolysis: a technology status assessment, *Clean Air Task Force*, 2023. <https://www.catf.us/resource/solid-oxide-electrolysis-technology-status-assessment/>.
- [36] BloomEnergy, The role of solid oxide technology in the hydrogen economy: a primer, 2021. <https://www.greenbiz.com/report/role-of-solid-oxide-technology-hydrogen-economy-primer>.
- [37] Y. Acevedo, J. Huyva-Kouadio, J. Prosser, K. McNamara, B. James, Techno-economic analysis on near-term and future projections of levelized cost of hydrogen for low-temperature water electrolysis technologies, *ECS Trans.* 111 (2023) 51, doi:[10.1149/11104.0051ecst](https://doi.org/10.1149/11104.0051ecst).
- [38] C. Chardonnet, L. De Vos, F. Geneseo, G. Roig, F. Bart, T. De Lacroix, T. Ha, B. Van Genabet, Study on Early Business Cases for H2 in Energy Storage and more Broadly Power to H2 Applications, Tractebel and Hincio, Belgium, 2017 https://hsweb.hs.uni-hamburg.de/projects/star-formation/hydrogen/P2H_Full_Study_FCHJU.pdf.
- [39] M. Hubert, D. Peterson, E. Miller, J. Vickers, R. Mow, H. Campbell, Clean Hydrogen Production Cost Scenarios with PEM Electrolyzer Technology, DOE Hydrogen Program Record, United States, 2024 https://www.hydrogen.energy.gov/docs/hydrogenprogramlibraries/pdfs/24005-clean-hydrogen-production-cost-pem-electrolyzer.pdf?svrns=8cb10889_1.
- [40] PNNL, Energy storage cost and performance database, (2024). <https://www.pnnl.gov/ESGC-cost-performance>.
- [41] F. Gutiérrez-Martín, A. Ochoa-Mendoza, L.M. Rodríguez-Antón, Pre-investigation of water electrolysis for flexible energy storage at large scales: the case of the Spanish power system, *Int. J. Hydrogen Energy* 40 (2015) 5544–5551, doi:[10.1016/j.ijhydene.2015.01.184](https://doi.org/10.1016/j.ijhydene.2015.01.184).
- [42] J. Gorre, F. Ruoss, H. Karjunen, J. Schaffert, T. Tynjälä, Cost benefits of optimizing hydrogen storage and methanation capacities for Power-to-Gas plants in dynamic operation, *Appl. Energy* 257 (2020) 113967, doi:[10.1016/j.apenergy.2019.113967](https://doi.org/10.1016/j.apenergy.2019.113967).
- [43] C. van Leeuwen, M. Mulder, Power-to-gas in electricity markets dominated by renewables, *Appl. Energy* 232 (2018) 258–272, doi:[10.1016/j.apenergy.2018.09.217](https://doi.org/10.1016/j.apenergy.2018.09.217).
- [44] Y. Zhang, Z. Wang, Z. Du, Y. Li, M. Qian, J. Van herle, L. Wang, Techno-economic analysis of solar hydrogen production via PV power/concentrated solar heat driven solid oxide electrolysis with electrical/thermal energy storage, *J. Energy Storage* 72 (2023) 107986, doi:[10.1016/j.est.2023.107986](https://doi.org/10.1016/j.est.2023.107986).
- [45] D. Peterson, E. Miller, Hydrogen Production Cost from Solid Oxide Electrolysis, DOE Hydrogen and Fuel Cells Program Record, United States, 2016 https://www.hydrogen.energy.gov/docs/hydrogenprogramlibraries/pdfs/16014_h2_production_cost_solid_oxide_electrolysis.pdf.
- [46] J.S.G. Myrdal, P.V. Hendriksen, C.R. Graves, S.H. Jensen, E.R. Nielsen, Predicting the Price of Solid Oxide Electrolyzers (SOECs), Technical University of Denmark, 2016 https://backend.orbit.dtu.dk/ws/portalfiles/portal/214019468/Predicting_the_price_of_solid_oxide_electrolyzers_October2016.pdf.
- [47] H. Nami, O.B. Rizvandi, C. Chatzichristodoulou, P.V. Hendriksen, H.L. Frandsen, Techno-economic analysis of current and emerging electrolysis technologies for green hydrogen production, *Energy Convers. Manag.* 269 (2022) 116162, doi:[10.1016/j.enconman.2022.116162](https://doi.org/10.1016/j.enconman.2022.116162).
- [48] M. Seitz, H. von Storch, A. Nechache, D. Bauer, Techno economic design of a solid oxide electrolysis system with solar thermal steam supply and thermal energy storage for the generation of renewable hydrogen, *Int. J. Hydrogen Energy* 42 (2017) 26192–26202, doi:[10.1016/j.ijhydene.2017.08.192](https://doi.org/10.1016/j.ijhydene.2017.08.192).
- [49] M. Thema, F. Bauer, M. Sterner, Power-to-Gas: electrolysis and methanation status review, *Renew. Sustain. Energy Rev.* 112 (2019) 775–787, doi:[10.1016/j.rser.2019.06.030](https://doi.org/10.1016/j.rser.2019.06.030).
- [50] M. Kim, D. Lee, M. Qi, J. Kim, Techno-economic analysis of anion exchange membrane electrolysis process for green hydrogen production under uncertainty, *Energy Convers. Manag.* 302 (2024) 118134, doi:[10.1016/j.enconman.2024.118134](https://doi.org/10.1016/j.enconman.2024.118134).
- [51] T. Nguyen, B. Haberlin, White Paper - Hydrogen Production Cost by Anion-Exchange Membrane Water Electrolysis, Ionomr Innovations Inc, 2020 <https://ionomr.com/wp-content/uploads/2020/06/Hydrogen-Production-Cost-by-AEM-White-Paper-2.pdf>.
- [52] L.J. Titheridge, A.T. Marshall, Techno-economic modelling of AEM electrolysis systems to identify ideal current density and aspects requiring further research, *Int. J. Hydrogen Energy* 49 (2024) 518–532, doi:[10.1016/j.ijhydene.2023.08.181](https://doi.org/10.1016/j.ijhydene.2023.08.181).
- [53] FCH 2 JUMulti-annual work plan 2014–2020, Fuel Cells and Hydrogen Joint Undertaking, 2014 https://ec.europa.eu/research/participants/data/ref/h2020/other/legal/jtis/fch-multi-workplan_en.pdf.
- [54] F. Cappa, A.L. Facci, S. Ubertini, Proton exchange membrane fuel cell for cooperating households: a convenient combined heat and power solution for residential applications, *Energy* 90 (2015) 1229–1238, doi:[10.1016/j.energy.2015.06.092](https://doi.org/10.1016/j.energy.2015.06.092).
- [55] N. Saggiolato, M. Wei, T. Lipman, A. Mayyas, S. Chan, H. Breunig, T. McKone, P. Beattie, P. Chong, W. Colella, B. James, A Total Cost of Ownership Model for Low Temperature PEM Fuel Cells in Combined Heat and Power and Backup Power Applications, Lawrence Berkeley National Laboratory, United States, 2014, doi:[10.2172/1163271](https://doi.org/10.2172/1163271).

- [56] Battelle Manufacturing Cost Analysis of 100 and 250 kW Fuel Cell Systems for Primary Power and Combined Heat and Power Applications, Battelle Memorial Institute, United States, 2017 https://www.energy.gov/sites/prod/files/2018/02/f49/cto_battelle_mfg_cost_analysis_100_250kw_pp_chp_fc_systems_jan2017.pdf.
- [57] Battelle Manufacturing Cost Analysis of 1, 5, 10 and 25 kW Fuel Cell Systems for Primary Power and Combined Heat and Power Applications, Battelle Memorial Institute, United States, 2017 https://www.energy.gov/sites/prod/files/2018/02/f49/cto_battelle_mfg_cost_analysis_1%20to_25kw_pp_chp_fc_systems_jan2017_0.pdf.
- [58] Battelle Manufacturing Cost Analysis of PEM Fuel Cell Systems for 5- and 10-kW Backup Power Applications, Battelle Memorial Institute, United States, 2016 https://www.energy.gov/sites/prod/files/2016/12/f34/cto_cost_analysis_pem_fc_5-10kw_backup_power_0.pdf.
- [59] Battelle Manufacturing Cost Analysis of 100 and 250 kW Fuel Cell Systems for Primary Power and Combined Heat and Power Applications, Battelle Memorial Institute, United States, 2016 https://www.energy.gov/sites/prod/files/2016/07/f33/cto_battelle_mfg_cost_analysis_pp_chp_fc_systems.pdf.
- [60] V. Cigolotti, M. Genovese, Stationary fuel cell applications: current and future technologies - Costs, performance, and potential, IEA Technology Collaboration Programme, 2021. https://www.ieafuelcell.com/fileadmin/publications/2021/2021_AFCTCP_Stationary_Application_Performance.pdf.
- [61] M.M. Whiston, I.M. Lima Azevedo, S. Litster, C. Samaras, K.S. Whitefoot, J.F. Whitacre, Paths to market for stationary solid oxide fuel cells: expert elicitation and a cost of electricity model, *Appl. Energy* 304 (2021) 117641, doi:10.1016/j.apenergy.2021.117641.
- [62] M.M. Whiston, I.M.L. Azevedo, S. Litster, C. Samaras, K.S. Whitefoot, J.F. Whitacre, Meeting U.S. solid oxide fuel cell targets, *Joule* 3 (2019) 2060–2065, doi:10.1016/j.joule.2019.07.018.
- [63] S. Samanta, D. Roy, S. Roy, A. Smallbone, A.P. Roskilly, Techno-economic analysis of a fuel-cell driven integrated energy hub for decarbonising transportation, *Renew. Sustain. Energy Rev.* 179 (2023) 113278, doi:10.1016/j.rser.2023.113278.
- [64] K. Darrow, R. Tidball, J. Wang, A. Hampson, Catalog of CHP technologies, U.S. Environmental Protection Agency Combined Heat and Power Partnership, 2017 <https://www.regulations.gov/document/EPA-HQ-OAR-2021-0668-0186>.
- [65] S. Sadeghi, I. Baniasad Askari, Performance and economic investigation of a combined phosphoric acid fuel cell/organic Rankine cycle/electrolyzer system for sulfuric acid production; Energy-based organic fluid selection, *Int. J. Energy Res.* 44 (2020) 2704–2725, doi:10.1002/er.5073.
- [66] S. Oh, T. Kim, S. Kim, S. Kang, Energetic, exergetic, economic, and exergoeconomic analysis of a phosphoric acid fuel cell-organic rankine cycle hybrid system, *Energy Convers. Manag.* 284 (2023) 116993, doi:10.1016/j.enconman.2023.116993.
- [67] A.H. Mamaghani, B. Najafi, A. Shirazi, F. Rinaldi, Exergetic, economic, and environmental evaluations and multi-objective optimization of a combined molten carbonate fuel cell-gas turbine system, *Appl. Therm. Eng.* 77 (2015) 1–11, doi:10.1016/j.applthermaleng.2014.12.016.
- [68] J.P. Pérez-Trujillo, F. Elizalde-Blancas, M.D. Pietra, D.M. Silva-Mosqueda, J.M. García Guendulain, S.J. McPhail, Thermo-economic comparison of a molten carbonate fuel cell and a solid oxide fuel cell system coupled with a micro gas turbine as hybrid plants, *Energy Convers. Manag.* 276 (2023) 116533, doi:10.1016/j.enconman.2022.116533.
- [69] S. Chen, N. Zhou, M. Wu, S. Chen, W. Xiang, Integration of molten carbonate fuel cell and chemical looping air separation for high-efficient power generation and CO₂ capture, *Energy* 254 (2022) 124184, doi:10.1016/j.energy.2022.124184.
- [70] I. Staffell, D. Scamman, A.V. Abad, P. Balcombe, P.E. Dodds, P. Ekins, N. Shah, K.R. Ward, The role of hydrogen and fuel cells in the global energy system, *Energy Environ. Sci.* 12 (2019) 463–491, doi:10.1039/C8EE01157E.
- [71] J.D. Slater, T. Chronopoulos, R.S. Panesar, F.D. Fitzgerald, M. Garcia, Review and techno-economic assessment of fuel cell technologies with CO₂ capture, *Int. J. Greenh. Gas Control* 91 (2019) 102818, doi:10.1016/j.ijggc.2019.102818.
- [72] S. Ahmed, R. Ahluwalia, D. Papadias, T. Hua, H.-S. Roh, IX4 Performance and Cost Analysis for a 300 kW Tri-Generation Molten Carbonate Fuel Cell System, DOE Hydrogen and Fuel Cells Program, United States, 2015 https://www.hydrogen.energy.gov/docs/hydrogenprogramlibraries/pdfs/progress15/ix_4_ahmed_2015.pdf.
- [73] G. Parks, R. Boyd, J. Cornish, R. Remick, Hydrogen station compression, storage, and dispensing, NREL, 2014 Technical status and costs, doi:10.2172/1130621.
- [74] A. Christensen, Assessment of hydrogen production costs from electrolysis: United States and Europe, Three Seas Consulting, 2020. <https://theicct.org/publication/assessment-of-hydrogen-production-costs-from-electrolysis-united-states-and-europe/>.
- [75] S. Baral, J. Šebo, Techno-economic assessment of green hydrogen production integrated with hybrid and organic Rankine cycle (ORC) systems, *Heliyon* 10 (2024) e25742, doi:10.1016/j.heliyon.2024.e25742.
- [76] K. Ram, S.S. Chand, R. Prasad, A. Mohammadi, M. Cirrincione, Microgrids for green hydrogen production for fuel cell buses – A techno-economic analysis for Fiji, *Energy Convers. Manag.* 300 (2024) 117928, doi:10.1016/j.enconman.2023.117928.
- [77] J. de Bucy, The Potential of power-to-gas: Technology review and Economic Potential Assessment, ENEA consulting, Paris, 2016 <https://www.enea-consulting.com/en/publication/the-potential-of-power-to-gas/>.
- [78] S.P. Katikaneni, F. Al-Muhaihs, A. Harale, T.V. Pham, On-site hydrogen production from transportation fuels: an overview and techno-economic assessment, *Int. J. Hydrogen Energy* 39 (2014) 4331–4350, doi:10.1016/j.ijhydene.2013.12.172.
- [79] X. Xu, B. Xu, J. Dong, X. Liu, Near-term analysis of a roll-out strategy to introduce fuel cell vehicles and hydrogen stations in Shenzhen China, *Appl. Energy* 196 (2017) 229–237, doi:10.1016/j.apenergy.2016.11.048.
- [80] J. Cihlar, A. Villar Lejarreta, A. Wang, F. Melgar, J. Jens, P. Rio, K. van der Leun, Hydrogen Generation in Europe: Overview of Costs and Key Benefits, European Commission, Directorate-General for Energy, 2020 <https://data.europa.eu/doi/10.2833/122757>.
- [81] P. Lucchese, C. Mansilla, O. Tilli, J. Prost, S. Samsatli, J. Leaver, R. Dickinson, L. Grand-Clement, C. Funez, Power-to-Hydrogen and Hydrogen-to-X: System Analysis of the Techno-economic, Legal, and Regu-

- latory Conditions, IEA Hydrogen Technology Programme, Paris, 2020 <https://www.researchbank.ac.nz/items/ba3b0311-a378-42b1-8a49-47e984386f9f>.
- [82] E.S. Hecht, J. Pratt, S.N. Laboratories, Comparison of Conventional vs. Modular Hydrogen Refueling stations, and On-Site Production vs. Delivery, Sandia National Laboratories, United States, 2017 <https://www.energy.gov/eere/fuelcells/articles/comparison-conventional-vs-modular-hydrogen-refueling-stations-and-site>.
- [83] D. Fujita, T. Miyazaki, Techno-economic analysis on the balance of plant (BOP) equipment due to switching fuel from natural gas to hydrogen in gas turbine power plants, *AIMS Energy* 12 (2024) 464–480, doi:10.3934/energy.2024021.
- [84] D. Wu, D. Wang, T. Ramachandran, J. Holladay, A techno-economic assessment framework for hydrogen energy storage toward multiple energy delivery pathways and grid services, *Energy* 249 (2022) 123638, doi:10.1016/j.energy.2022.123638.
- [85] S. Carr, G.C. Premier, A.J. Guwy, R.M. Dinsdale, J. Maddy, Hydrogen storage and demand to increase wind power onto electricity distribution networks, *Int. J. Hydrogen Energy* 39 (2014) 10195–10207, doi:10.1016/j.ijhydene.2014.04.145.
- [86] Z. Xu, N. Zhao, S. Hillmansen, C. Roberts, Y. Yan, Techno-economic analysis of hydrogen storage technologies for railway engineering: a review, *Energies* 15 (2022) 6467, doi:10.3390/en15176467.
- [87] P. Ralon, M. Taylor, A. Ilas, H. Diaz-Bone, K.-P. Kairies, Electricity Storage and Renewables: Costs and Markets to 2030, IRENA, 2017 https://www.irena.org/-/media/Files/IRENA/Agency/Publication/2017/Oct/IRENA_Electricity_Storage_Costs_2017.pdf.
- [88] EIA, Battery storage in the United States: an update on market trends, U.S. Energy Information Administration, 2020. https://www.eia.gov/analysis/studies/electricity/batterystorage/pdf/battery_storage.pdf.
- [89] NREL, Annual technology baseline: 2023 Electricity ATB technologies, (2023). <https://atb.nrel.gov/electricity/2023/data>.
- [90] O. Schmidt, S. Melchior, A. Hawkes, I. Staffell, Projecting the future levelized cost of electricity storage technologies, *Joule* 3 (2019) 81–100, doi:10.1016/j.joule.2018.12.008.
- [91] IEABatteries and Secure Energy Transitions – Analysis, IEA, Paris, 2024 <https://www.iea.org/reports/batteries-and-secure-energy-transitions>.
- [92] E. Minear, M. Simpson, D. Long, Program 94: Energy storage and Distributed Generation, Electric Power Research Institute (EPRI), United States, 2020 <https://www.epri.com/research/programs/053125/results/3002020048>.
- [93] L. Hatton, N. Johnson, L. Dixon, B. Mosongo, S. De Kock, A. Marquard, M. Howells, I. Staffell, The global and national energy systems techno-economic (GNESTE) database: cost and performance data for electricity generation and storage technologies, *Data Br.* 55 (2024) 110669, doi:10.1016/j.dib.2024.110669.
- [94] European Union Inflation Rate 1960–2024, (2024). <https://www.macrotrends.net/global-metrics/countries/EUU/european-union/inflation-rate-cpi> (accessed July 17, 2024).
- [95] European Commission, Exchange rate (InforEuro), (2024). https://commission.europa.eu/funding-tenders/procedures-guidelines-tenders/information-contractors-and-beneficiaries/exchange-rate-inforeuro_en (accessed 17 July 2024).