

A Digital Twin for PI-Store Automated Warehouses

Original

A Digital Twin for PI-Store Automated Warehouses / Rebuglio, Massimo; Ferrari, Andrea; Zenezini, Giovanni; Carlin, Antonio; Rafele, Carlo. - (2023). [10.13140/RG.2.2.13469.49127]

Availability:

This version is available at: 11583/2992518 since: 2024-09-16T15:42:23Z

Publisher:

Published

DOI:10.13140/RG.2.2.13469.49127

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/372539046>

A Digital Twin for PI-Store Automated Warehouses

Poster · July 2023
DOI: 10.13140/RG.2.2.13403.49127

CITATIONS
0


5 authors, including:

 Massimo Rebuglio
Politecnico di Torino
7 PUBLICATIONS 0 CITATIONS
[SEE PROFILE](#)

 Giovanni Zenezini
Politecnico di Torino
44 PUBLICATIONS 615 CITATIONS
[SEE PROFILE](#)

READS
31

 Andrea Ferrari
Politecnico di Torino
12 PUBLICATIONS 37 CITATIONS
[SEE PROFILE](#)

 Antonio Carlin
Politecnico di Torino
23 PUBLICATIONS 107 CITATIONS
[SEE PROFILE](#)

A DIGITAL TWIN FOR PI-STORE AUTOMATED WAREHOUSES

IPIC 2023

9th International Physical Internet Conference

June 13-15, 2023
Athens, Greece

Massimo Rebuglio, Andrea Ferrari, Giovanni Zenezini,
Antonio Carlin, Carlo Rafele



Politecnico di Torino

CONTEXT


Automated storage and retrieval systems (AS/RSs) are instrumental in achieving efficiency and quickness of logistics processes

RESEARCH GAP

AS/RS studies focus on optimization and analytical models. However, analytical evaluation often consider deterministic and stable input parameters which are not necessarily found in real-life AS/RS systems. Cyber-physical systems such as **Digital Twins** represent a way to generate better predictive performance measures for a given system configuration.

PROPOSAL

We propose a **Digital Twin (DT) architecture** of an AS/RS specifically designed for smaller containers such as plastic totes. This system can thus recreate the condition of a PI-store holding modular P-containers.

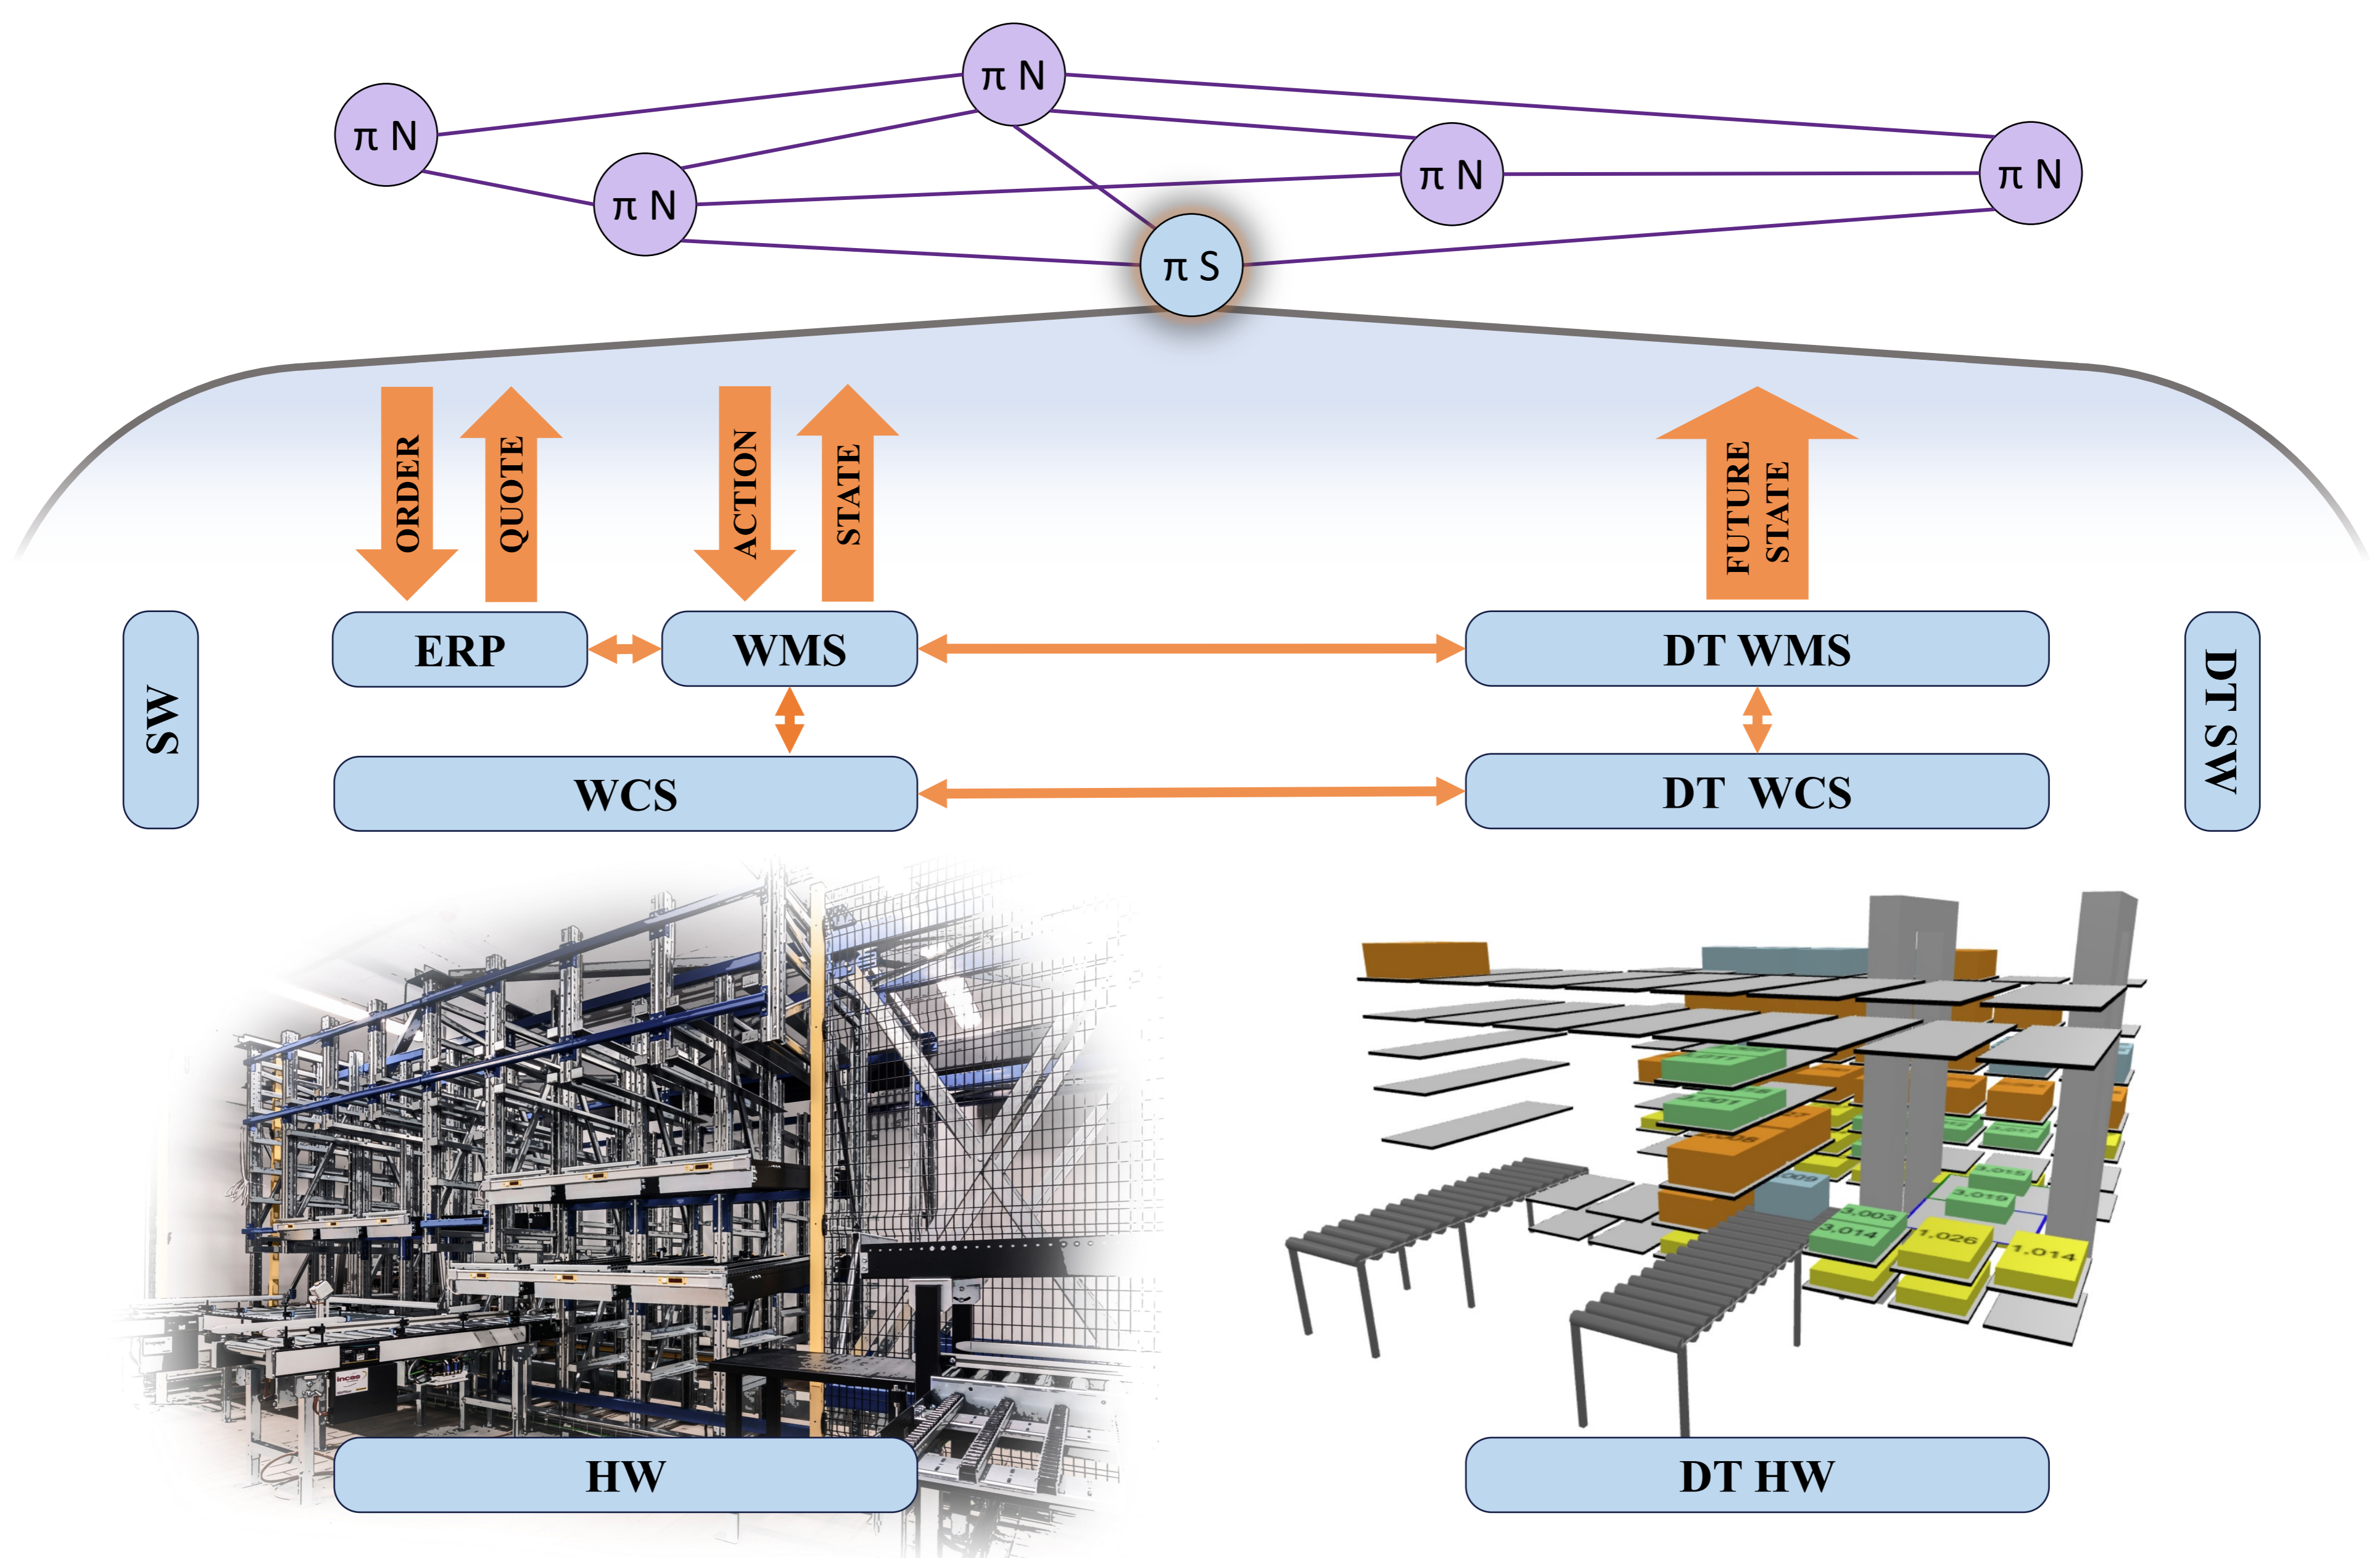

VALUE OF THE PROPOSED DT FOR PI APPLICATIONS

The proposed DT allows for:

- **Real time monitoring of the PI-store operations to improve synchronization with PI-movers**
- Adjusting the operational parameters of the AS/RS to **fit with real-time demand** from the PI network
- **Assessing the efficiency** of higher protocols established by the PI network stakeholders