

POLITECNICO DI TORINO
Repository ISTITUZIONALE

Self-extinguishing epoxy nanocomposites containing industrial biowastes as flame retardant additives

Original

Self-extinguishing epoxy nanocomposites containing industrial biowastes as flame retardant additives / Aronne, A., Imparato, C., Di Lauro, F., Climaco, I., Passaro, J., Balsamo, M., Russo, P., Vahabi, H., Malucelli, G., Montagnaro, F., Bifulco, A.. - ELETTRONICO. - (2024), pp. 250-251. (14th EASN International Conference Tesseloniki (GRC) 8-11 October 2024).

Availability:

This version is available at: 11583/2993262 since: 2024-10-10T10:12:30Z

Publisher:

EASN

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

14th **EASN** International Conference

*on "Innovation in Aviation and Space
towards sustainability today & tomorrow"*

**8-11 October
2024**

**Concert Hall, Thessaloniki
Greece**



Book of Abstracts



analysis and multi-objective approaches to take into account all the aspects of interest at the same time.

Role of carbides in grain growth mitigation in additive manufacturing of Inconel 718

Efthymios Polatidis¹, Konrad Gruber^{2,3,4}, Wojciech Stopyra², Karol Kobiela², Philipp Kohlwes³, Jan Čapek⁴, Markus Strobl⁴, Ingomar Kelbassa³

¹ Laboratory of Technology and Strength of Materials, Department of Mechanical Engineering & Aeronautics, University of Patras

² Centre for Advanced Manufacturing Technologies – Fraunhofer Project Centre (CAMT-FPC), Faculty of Mechanical Engineering, Wrocław University of Science and Technology, Poland

³ Fraunhofer Research Institute for Additive Manufacturing Technologies IAPT, Germany

⁴ Laboratory for Neutron Scattering and Imaging, Paul Scherrer Institut, Switzerland

Abstract: The integration of additive manufacturing (AM) for the production of aeronautical components often presents a trade-off between porosity in the as-built state and microstructural characteristics. The use of hot isostatic pressing (HIP) is a standard procedure for improving the part density. However, HIP erases the as-built microstructure and results in grain growth. Current research indicates that the incorporation of carbides can mitigate grain coarsening during powder bed fusion laser beam melting (PBF-LB/M) of Inconel 718, but at the expense of ductility. The objective of this study is to develop a method for controlling the grain size of Inconel 718 after PBF-LB/M processing and subsequent thermal treatments, including HIP, without compromising ductility and also achieving excellent fatigue properties. This was achieved by introducing micron-scale powder modifiers (NbC, TiC, and B₄C) at minimal weight fractions. The research shows the effect of these modifiers on Inconel 718 powder properties, PBF-LB/M processability, microstructure and mechanical properties. The technological aspects of powder preparation and post-processing that affect the final properties of carbide-modified Inconel 718 are also examined. The results show that careful processing can control homogenization during HIP and result in higher tensile strength while maintaining the ductility of non-carbide-modified alloys.

Self-extinguishing epoxy nanocomposites containing industrial biowastes as flame retardant additives

Antonio Aronne¹, Claudio Imparato¹, Francesca Di Lauro¹, Immacolata Climaco¹, Jessica Passaro², Marco Balsamo³, Pietro Russo², Henri Vahabi⁴, Giulio Malucelli⁵, Fabio Montagnaro³, Aurelio Bifulco¹

¹ Department of Chemical, Materials and Production Engineering, University of Naples Federico II, Italy

² Institute for Polymers, Composites and Biomaterials, National Council of Research, Italy

³ Department of Chemical Sciences, University of Naples Federico II, Italy

⁴ University of Lorraine, France

⁵ Department of Applied Science and Technology, Politecnico di Torino, Italy

Abstract: Polymeric wastes can be found everywhere around the world. The improper treatment and recycling of such materials is causing irreversible damage to both human health and the environment. Therefore, it is getting urgent the development of more waste-to-wealth routes, enabling the preparation of polymer-based products containing small amounts of synthetic and toxic components (e.g., flame retardants (FRs)). Owing to their excellent physico-chemical properties, flame retarded aliphatic epoxy resins are widely employed in the aerospace industry.



However, these resins usually contain halogen-based compounds or high concentrations of phosphorus (P) in the epoxy matrix, which makes the recycling of final products even more complicated and fosters the depletion of natural resources. To overcome these drawbacks, the scientific community is proposing the exploitation of industrial biowastes as sustainable FRs in epoxy-based composites, allowing for the use of very low loadings of P and other functional additives. Herein, we discuss two feasible applications (Figure 1), where biochars, one derived from the pyrolysis of spent coffee grounds and another obtained from the hydrothermal liquefaction (HTL) of civil sludges, are employed as green FRs in aliphatic epoxy-based composites. These biochars can be crucial for the obtainment of self-extinguishing (i.e., no dripping V-0 rating in UL 94 tests) hybrid epoxy materials showing a significant decrease (up to ~65%) in the peak heat release rate, especially in combination with other synergists and sol-gel-derived nanostructures. Part of the research activities concerning the use of biochar from HTL were carried out in the framework of two ongoing projects.

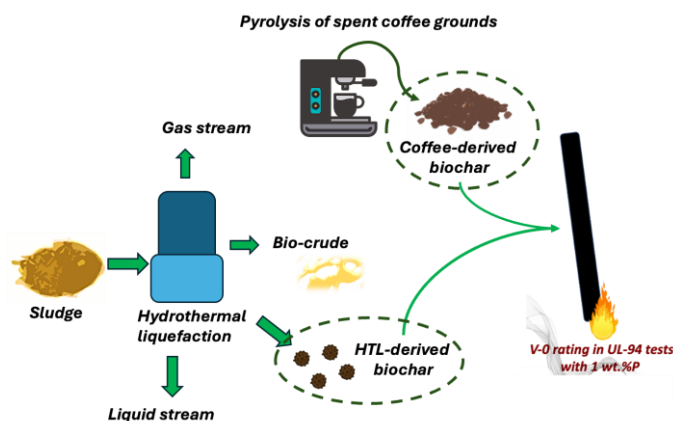


Figure 1: Sol-gel approaches for the preparation of self-extinguishing hybrid epoxy composites

Solution space analysis for robust conceptual design solutions in aeronautics

Vladislav T. Todorov¹, Dmitry Rakov², Andreas Bardenhagen¹

¹ Technical University of Berlin, Germany

² Blagonravov Institute of Engineering Science, Russian Academy of Sciences, Russia

Abstract: The use of novel technologies for low-emission and more efficient aviation requires not only the achievement of a given technology readiness level, but also their integration into potentially new aircraft concepts. This also involves ensuring the concept robustness in various flight phases and changing flight conditions. Furthermore, the assessment of a wider spectrum of different and unconventional concepts requires robustness considerations already in the conceptual aircraft design phase. In this context, the present work introduces configuration assessment for various flight conditions or environments, incorporated in the Advanced Morphological Approach (AMA). Currently, the AMA integrates Morphological Analysis and Structured Expert Judgment Elicitation for the purpose of obtaining relevant solution subspaces of aircraft concepts for a given mission. This implies the decomposition of a system into functional or characteristic attributes and their corresponding technological implementation alternatives. These are then evaluated by a selected expert panel, allowing to generate an extensive solution space, which exhibits the concepts' quality for a single flight condition (e.g. cruise flight). The system modeling and evaluation in the AMA can be qualitative or semi-quantitative by using Bayesian inference under uncertainty consideration. The novelty of the approach allows the creation of additional solution spaces reflecting other flight