

How cognitive distraction affects motorway short-term work zone safety along curves: A driving simulation study

Original

How cognitive distraction affects motorway short-term work zone safety along curves: A driving simulation study / Lioi, A., Portera, A., Tefa, L., Karimi, A., Bassani, M.. - In: JOURNAL OF TRANSPORTATION SAFETY & SECURITY. - ISSN 1943-9962. - (2025), pp. 1-18. [10.1080/19439962.2025.2462804]

Availability:

This version is available at: 11583/2998004 since: 2025-03-03T09:33:19Z

Publisher:

Taylor and Francis Ltd.

Published

DOI:10.1080/19439962.2025.2462804

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

Taylor and Francis postprint/Author's Accepted Manuscript

This is an Accepted Manuscript of an article published by Taylor & Francis in JOURNAL OF TRANSPORTATION SAFETY & SECURITY on 2025, available at <http://www.tandfonline.com/10.1080/19439962.2025.2462804>

(Article begins on next page)



Taylor & Francis
Taylor & Francis Group

Journal of Transportation Safety & Security

How Cognitive Distraction Affects Motorway Short-term Work Zone Safety along Curves: A Driving Simulation Study

Submission ID	245423863
Article Type	Research Article
Keywords	cognitive distraction, short-term work zone, safety, available sight distance, driving simulation, gaze analysis
Authors	Alessandra Lioi, Alberto Portera, Luca Tefa, Arastoo Karimi, Marco Bassani

For any queries please contact:

journalshelpdesk@taylorandfrancis.com

Note for Reviewers:

To submit your review please visit <https://mc.manuscriptcentral.com/UTSS>

1
2
3
4
5 **How Cognitive Distraction Affects Motorway Short-term Work Zone**
6 **Safety along Curves: A Driving Simulation Study**
7
8

9
10 Alessandra Lioi^{a*}, A. Portera^a, L. Tefa^a, A. Karimi^a, and M. Bassani^a

11
12 ^a *Department of Environment, Land and Infrastructure Engineering, Politecnico di*
13 *Torino, Torino, Italy,*
14

15
16 alessandra.lioi@polito.it *corresponding author
17
18

19
20
21 ORCID id:

22
23
24 Alessandra Lioi: [0000-0003-0812-4094](https://orcid.org/0000-0003-0812-4094)

25
26 Alberto Portera: [0000-0002-6685-4805](https://orcid.org/0000-0002-6685-4805)

27
28 Luca Tefa: [0000-0003-4988-4882](https://orcid.org/0000-0003-4988-4882)

29
30 Arastoo Karimi: [0000-0001-5095-0512](https://orcid.org/0000-0001-5095-0512)

31
32 Marco Bassani: [0000-0003-2560-1497](https://orcid.org/0000-0003-2560-1497)
33
34

35
36
37
38
39 Word count: 5861
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4 **How Cognitive Distraction Affects Motorway Short-term Work Zone**
5 **Safety along Curves: A Driving Simulation Study**
6
7

8
9 **Abstract.** This study investigates how cognitive distraction affects driver
10 behaviour on a two-lane motorway reduced to one lane (the left) in a short-term
11 work zone along a left-hand curve. Forty-two participants were divided into two
12 groups: undistracted and cognitively distracted drivers – with the latter required
13 to perform mental calculations. Drivers had to react to the sudden and unexpected
14 appearance of stationary vehicles in a queue. Distracted drivers started braking at
15 higher speeds and released the accelerator later than undistracted ones. Their
16 reaction times were significantly longer, and five of them could not avoid a
17 collision with the last vehicle in the queue. Heat maps of eye fixations show that
18 distracted drivers focused their gaze on a few elements of the road section,
19 predominantly on the inside of the carriageway, while undistracted drivers looked
20 at a wider area of the road scenario. Distracted drivers exhibited delayed
21 responses to unexpected events, highlighting the importance of addressing
22 cognitive distraction in road work zones. Given the high frequency of roadworks
23 on motorways, specific safety countermeasures are needed to compensate for the
24 objective risk posed by unexpected events in scenarios where distracted drivers
25 operate with limited available sight distance.
26
27

28 **Keywords:** cognitive distraction; short-term work zone; safety; available sight
29 distance; driving simulation; gaze analysis.
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Introduction

Even though they accommodate a considerable volume of traffic including a wide variety of vehicles like cars, lorries, buses, etc. (Romanowska *et al.*, 2019), motorways guarantee higher safety standards than other types of roads (Albalate & Bel, 2012; Elvik, 2010). They are high-capacity roads designed for fast-moving traffic, with smooth curves, low grades, unidirectional carriageways, multiple lanes, controlled accesses, and built and maintained with high-quality materials, with the aim of reducing crash risks compared to rural or urban roads. In 2022, the number of fatalities on motorways (9.1%) was lower than on urban (38.2%) and rural roads (52.7%) in Europe (Eurostat, 2024).

Given the high safety, the comfort requirements and the age of the motorway network in many countries, roadworks on motorways are frequent (European Commission, 2019; Walker & Calvert, 2015; World Road Association, 2014). The resulting work zones cause traffic instability due to temporary lane width reduction, the imposition of shoulder restrictions, the closure of one or more lanes (Bakaba & Ortlepp, 2016; Rashid *et al.*, 2019; Yousif *et al.*, 2017), and a reduction in the available sight distance (Vignali *et al.*, 2019). Several studies have shown that the incidence and severity of road crashes increase in construction work zones (Khattak *et al.*, 2002; Li & Bai, 2008; Theofilatos *et al.*, 2017; Wang *et al.* 2024), with a notable increase in rear-end collisions (Meng & Weng, 2011; Zheng *et al.*, 2010). When motorways are not congested, the driving task is relatively simple, and the driver's mental workload is usually low (Patten *et al.*, 2004; Tejero & Choliz, 2002). In contrast, when approaching work zones, drivers must make complex decisions to adjust speed and lane position, often resulting in potential conflicts between vehicle paths (La Torre *et al.*, 2017; Shahin *et al.*, 2023, Shakouri *et al.*, 2014). In these circumstances, the driver's mental

1
2
3
4 workload increases and any distraction from the driving task could lead to a collision
5
6 (Valdés-Díaz *et al.*, 2021; Yang *et al.*, 2023).
7

8
9
10 Distracted driving is one of the most influential factors in road safety, and the
11 number of crashes resulting from distraction is increasing worldwide (Sajid Hasan *et*
12 *al.*, 2022). When drivers divert their attention from the driving task to competing
13 activities, driving performance deteriorates and the risk of a crash increases (Choudhary
14 *et al.*, 2020; Horberry *et al.*, 2006; Regan *et al.*, 2011). Klauer *et al.* (2006) found that
15 almost 80% of crashes and 65% of near-crash events were preceded by driver
16 inattention. Mobile phone use and texting while driving are currently the most common
17 sources of driving distraction, and involve the simultaneous performance of visual,
18 physical, and cognitive secondary tasks (Lipovac *et al.*, 2017; Valdes *et al.*, 2019;
19 World Health Organization, 2011).
20
21
22
23
24
25
26
27
28

29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
Physiological measures play a crucial role in understanding driving behaviour
(de Waard, 1996), even under distracted conditions. Eye-tracking is used to detect eye
movements and determine where drivers focus their attention on the road. Cognitive
distraction is known to affect gaze behaviour and the ability to focus on critical
elements of the driving environment (Itoh *et al.*, 2006; Marquart *et al.*, 2015). Measures
like gaze duration, fixation locations, blink rates and saccadic movements can be
employed to interpret drivers' visual patterns and cognitive processes while driving
(Niezgoda *et al.*, 2015; Savage *et al.*, 2020; Yahoodik *et al.*, 2020; Yang *et al.*, 2018).

The performance of relevant cognitive tasks leads to an increase in blink rates (Recrate
et al., 2008). Kummetha *et al.* (2020) demonstrated that changes in mental workload
and situational awareness led to variations in longitudinal control and gaze behaviour.

The average speed decreased as the mental workload increased, and the standard

1
2
3
4 deviation of horizontal gaze position was observed to decrease as the mental workload
5
6 increased.
7

8 As roads age, the frequency of work zones for maintenance and upgrades
9
10 inevitably increases. Silverstein *et al.* (2016) analysed a dataset with detailed
11 information on fatal collisions in the United States and found that distracted driving
12 significantly contributes to the risk of crashes in work zones, specifically rear-end and
13 sideswipe collisions. Since cognitive factors play a critical role in safety-related driving
14 behaviours in work-zone areas (Rangaswamy *et al.*, 2024), it crucial to study driving
15 distraction in this context. However, the behaviour of distracted drivers near work zones
16 remains insufficiently explored, leaving a gap in our understanding of the implications
17 for the safety of workers and drivers (Silveira *et al.*, 2023).
18
19
20
21
22
23
24
25
26

27 In this driving simulation study, we investigated the influence of cognitive
28 distraction on driver behaviour along motorways in the proximity of short-term work
29 zones. Forty-two participants were involved, divided into two groups: undistracted
30 drivers who drove normally, and distracted drivers who had to solve simple
31 mathematical operations in their head while driving, thus requiring them to perform a
32 secondary cognitive (and auditory) task. The simulated scenario consisted of a two-lane
33 motorway with a work zone located on a curved section with an available sight distance
34 limited to 175 m. Drivers had to identify and brake before reaching a queue of vehicles
35 in the sole available lane on this stretch of road.
36
37
38
39
40
41
42
43
44
45
46
47

48 **Method**

49 ***Experimental design and equipment***

50
51 To avoid any learning effect, a between-subjects experimental design was considered,
52
53 with different test drivers assigned to each scenario. The two different levels of
54
55
56
57
58
59
60

1
2
3
4 distraction investigated included (i) undistracted (baseline) and (ii) intentionally
5
6 distracted drivers. Experiments were carried out at the Road Safety and Driving
7
8 Simulation (RSDS) laboratory at the Politecnico di Torino (Italy) by using a fixed-base
9
10 driving simulator (AV Simulation, CDS 650) equipped with SCANeRStudio® software
11
12 (Figure 1). Three 32-inch full HD screens (1920 × 1080 pixels each) guaranteed a field
13
14 of view of 130° horizontally and 30° vertically. The simulator hardware included a
15
16 cockpit with a force feedback steering wheel and pedals, gearbox, and dashboard. To
17
18 ensure a realistic driving scenario, environmental and vehicular sound effects were
19
20 generated and emitted by five speakers located behind the screens and a subwoofer
21
22 under the driver's seat. The driving simulator has been validated for both longitudinal
23
24 and lateral driving behaviour (Bassani *et al.*, 2018; Catani & Bassani, 2019). An eye-
25
26 tracking system was used to study the drivers' gaze behaviour during the experiment
27
28 (Figure 1). This device had two internal cameras positioned close to the user's eyes and
29
30 an external front camera. This setup allowed the system to capture eye movements with
31
32 accuracy and detail and ensured minimal interference with the driver's field of view.
33
34

35
36 [Figure 1 near here]

37 38 39 ***Road scenario, participants, and experimental protocol***

40
41
42 Distraction is more likely to occur when the simplicity of the driving task and the
43
44 monotony of the road cause the driver to reduce attention to the primary task
45
46 (Farahmand & Boroujerdian, 2018; Zhao & Rong, 2012). Hence, a motorway scenario
47
48 was developed with two 4 km tangents connected by a curve (1200 m in radius, 2000 m
49
50 in length). The cross-section was 25 m wide, with two lanes (3.75 m in width) in each
51
52 travelled way and a 3 m wide emergency lane, according to category A of the Italian
53
54 technical standards (Ministero delle Infrastrutture e dei Trasporti, 2001). The posted
55
56 speed limit was set at 130 km/h along straights and 110 km/h along curves and indicated
57
58
59
60

1
2
3
4 through vertical signs. Horizontal markings and vertical signs were designed in
5
6 accordance with the Italian Highway Code specifications (Ministero delle Infrastrutture
7
8 e dei Trasporti, 1992). Free-flow traffic conditions were simulated in both directions to
9
10 enhance the realism of the scenario. The scenario was set to daylight weather and
11
12 optimal visibility conditions. After the second tangent, a second left-hand curve with a
13
14 radius of 1200 m was included. At the start of the curve, a short-term work zone was
15
16 defined along the right lane. Temporary signage, including a 60 km/h speed limit and
17
18 traffic cones according to Italian rules (Ministero delle Infrastrutture e dei Trasporti,
19
20 2002) was used to restrict the travelled way to a single lane, i.e., the left lane close to
21
22 the median barrier (see Figure 2). By definition, a short-term work zone is a temporary
23
24 area set up to accommodate construction or maintenance activities from a few hours to a
25
26 few days. Because of its limited duration, it represents an unexpected event for many
27
28 drivers. A few seconds after entering the restricted lane, drivers encountered stationary
29
30 vehicles in a queue ahead.
31
32

33
34 Along the left lane, the presence of the median guardrail (Figure 2) restricted the
35
36 available sight distance to 175 m. This distance was sufficient for drivers travelling at
37
38 60 km/h to bring their vehicle to a safe stop before the line of stationary traffic ahead.
39
40 Before entering the work zone, distracted drivers started to perform a secondary task
41
42 consisting of solving and answering some arithmetic operations (addition, subtraction,
43
44 multiplication, and division without regrouping) and providing the solution verbally.
45
46 The literature indicates that the performance of mathematical operations impairs driving
47
48 performance significantly more than the distraction due to conversation (Shinar *et al.*,
49
50 2005). All test drivers were given mathematical operations of the same level of
51
52 difficulty to avoid additional effects from the secondary task.
53
54

55 [Figure 2 near here]
56
57
58
59
60

1
2
3
4 Forty-two participants (Table 1) aged between 23 and 63 years (fifteen females,
5
6 $M = 43.4$ y, $SD = 12.5$ y) were involved in the experiment. To capture the effect of
7
8 distraction along the work zone, we established an unbalanced number of drivers in the
9
10 two groups, with fourteen undistracted drivers (five females) and twenty-eight
11
12 distracted drivers (ten females). None of the participants was aware of the specific
13
14 hypothesis being tested during the experiment. The experiment followed the ethical
15
16 guidelines of the World Medical Association (2018). The test drivers were randomly
17
18 selected from a list of volunteers who had previously participated in simulation
19
20 experiments to ensure that they did not suffer from simulation sickness. They all
21
22 volunteered for the experiment without receiving any compensation. Participants with at
23
24 least three years of driving experience were considered for this study. People with
25
26 serious medical conditions or disabilities were not included.
27
28

29 [Table 1 near here]
30

31 The experimental protocol included a pre-drive questionnaire to collect
32
33 information on each participant's driving experience, health status, and familiarity with
34
35 the driving simulation. Following the pre-drive, but prior to the start of the simulation,
36
37 the eye-tracker was worn and calibrated. Then, the participants were asked to drive the
38
39 experimental scenario. The driving task started with a merging manoeuvre to gain
40
41 access to the motorway via a direct ramp. A written message displayed on the screen
42
43 announced the start of the secondary task 500 m before encountering the queue.
44
45

46 47 **Data Analysis** 48

49 The station where the queue ahead first came into view was considered to measure the
50
51 speed (S), as well as the distance travelled to assess the extent to which cognitive
52
53 distraction influences the driver's reaction to the queue (Strayer, 2015). According to
54
55 Figure 3, the stopping distance (d_{Stop}), which includes the perception and reaction
56
57
58
59
60

1
2
3
4 distance as well as the braking distance, was estimated together with the distance from
5
6 the station where the queue was visible to the station where the throttle was fully
7
8 released (d_{TR}), and the distance from the station where the throttle was fully released to
9
10 the station where the driver started to press on the brake pedal (d_{AB}). In addition to the
11
12 above distances, the average deceleration rate (D_R) was measured every 0.1 s from the
13
14 point where the queue was visible to the stopping point, i.e., along the stopping distance
15
16 shown in Figure 3. In the simulation, some D_R values could be significantly higher than
17
18 those measured in the field under the same driving conditions. In the context of the
19
20 simulation, D_R better reflects the intensity of the driver's braking effort rather than a
21
22 vehicle dynamic parameter. In this study, D_R indicates how hard the driver tried to stop
23
24 the vehicle before reaching the queue.
25
26

27
28 The Welch's t-test was used to compare the results between the two levels of
29
30 distraction. It is a variant of the t-test used to compare the means of two independent
31
32 samples when their variances and sample sizes are different. Welch's t-tests were
33
34 performed using R software (R Core Team, 2024) with a significance level of .05. In
35
36 addition, a gaze behaviour analysis was conducted by extracting and manipulating the
37
38 raw data recorded by the eye-tracker. The number of blinks and fixations (mean and
39
40 standard deviation) was assessed and compared between undistracted and distracted
41
42 drivers from 500 m before the section where the queue was visible until the driver
43
44 stopped the vehicle, with distracted drivers performing the secondary task. A qualitative
45
46 analysis using heat maps was conducted to assess the visual patterns of the drivers and
47
48 to identify trends and differences in gaze behaviour between the two groups.
49
50

51 [Figure 3 near here]
52
53
54
55
56
57
58
59
60

Results

Driving behaviour

A speed profile analysis allowed to classify the longitudinal behaviour of the drivers during braking. As shown in Figure 4, three profiles were identified:

- (1) Profile 1 was followed by those who released the accelerator quickly when they reached the section where the queue was visible, and then braked just as quickly; this rapid reaction was followed by a period of slow deceleration before the vehicle came to a complete stop behind the queue;
- (2) Profile 2 was followed by those who did not react quickly and, once they realised the danger, braked abruptly to avoid a collision with the vehicle in front;
- (3) Profile 3 was followed by those who did not stop in time to avoid the collision.

As shown in Table 2, 12 of the 14 undistracted drivers stopped their vehicle according to Profile 1, while only 2 of them reacted late according to Profile 2. All undistracted drivers avoided a collision. In contrast, only 13 out of 28 distracted drivers followed Profile 1, 10 out of 28 followed Profile 2, and five failed to avoid a collision (Profile 3).

[Figure 4 near here]

Table 2 also shows the descriptive statistics of the dependent variables analysed for both undistracted and distracted drivers. Box plots of the data are presented in Figure 5, together with the results of Welch's t-tests. The average speed of distracted drivers at the station where they were first able to see the queue was significantly higher than the speed of undistracted drivers, $t(19) = -3.71, p = .001$ (Figure 5a). Among the undistracted drivers, 8 out of 14 passed that station without pressing the throttle and, together with those who did use the throttle (6 out of 14), they all released it within a

1
2
3
4 shorter distance than distracted drivers (Figure 5f). The Welch's t-test showed that the
5
6 difference in d_{TR} between the two groups was statistically significant, $t(38) = -3.13$,
7
8 $p = .003$. However, no significant differences were found between d_{AB} averages,
9
10 $t(22) = 0.26$, $p = .800$. Distracted drivers had shorter stopping distances than
11
12 undistracted drivers, $t(17) = -1.61$, $p = .125$, suggesting that they had to compensate for
13
14 their delayed braking response. The deceleration rate (D_R) was strongly influenced by
15
16 the speed profiles shown in Figure 4, with the lowest rates for Profile 1 and the highest
17
18 for Profile 3. According to Figure 5b, D_R was significantly lower for undistracted
19
20 drivers than distracted ones, $t(30) = -3.65$, $p = .001$.

21
22 [Table 2 near here]

23
24 [Figure 5 near here]

25 26 27 28 ***Eye-tracking analysis***

29
30
31 An analysis of the eye-tracking data is shown in Figure 6. Data recording started at the
32
33 point where the distracted drivers were asked to perform the secondary task. The box
34
35 plots show the number of blinks (Figure 6a) and fixations (Figure 6b) from 500 m
36
37 before the section where the queue was visible, when the secondary task for distracted
38
39 drivers had started. Blinks and eye fixations are both important indicators for
40
41 understanding driver behaviour, but they serve different purposes. Blinks, which
42
43 involve the rapid opening and closing of the eyelids, are often used to monitor alertness
44
45 and fatigue (Shekari Soleimanloo *et al.*, 2019; Stern *et al.*, 1994), while fixations,
46
47 defined as the act of maintaining the gaze on a specific object or area, help to evaluate
48
49 visual attention and cognitive processes during driving (Crundall & Underwood, 2011),
50
51 determining whether the driver is focusing on critical information. The number of blinks
52
53 for distracted drivers ($M = 2.8$; $SD = 3.5$) was higher than that for undistracted ones
54
55 ($M = 1.0$; $SD = 1.4$), albeit this difference was marginally significant, $t(25) = 1.96$,
56
57
58
59
60

1
2
3
4 $p = .060$). The box plots also show a wider dispersal of data for distracted drivers,
5
6 although this result is somewhat distorted by the excessive blinking of only two
7
8 participants. The number of fixations attributable to distracted drivers ($M = 6.3$,
9
10 $SD = 2.4$) was significantly lower, $t(25) = 2.16$, $p = .040$, than that for undistracted
11
12 drivers ($M = 7.8$, $SD = 1.4$).
13

14 [Figure 6 near here]

15
16 The heat maps shown in Figure 7 and Figure 8 are the result of a fixation point
17
18 analysis and show two different types of gaze behaviour. Some drivers focused their
19
20 gaze on multiple points in the scene, giving them a wider view of the road environment.
21
22 Others tended to focus their gaze on a limited part of the road scene in front of them. A
23
24 qualitative analysis of the distribution of fixations shows that about 80% of the
25
26 undistracted drivers adopted the first type of behaviour (Figure 7). In contrast, about
27
28 77% of the distracted drivers narrowed their field of vision. About half of them focused
29
30 their gaze on the inner edge of the road (Figure 8). It was therefore possible to
31
32 distinguish different gaze behaviours for the two levels of distraction.
33
34

35 [Figure 7 near here]

36 [Figure 8 near here]

37 38 39 40 41 **Discussion**

42
43 This driving simulation study investigated the influence of cognitive distraction on
44
45 driver behaviour on a motorway section in the presence of a short-term work zone. In
46
47 particular, the case of a curved motorway section was analysed, where visibility was
48
49 restricted by the presence of the median guardrail. The experiment involved forty-two
50
51 participants divided into two groups. In the distracted group, cognitive distraction was
52
53 induced by asking the drivers to perform simple mathematical operations. The
54
55 undistracted group of drivers represented the baseline of the experiment.
56
57
58
59
60

1
2
3
4 There was a noticeable difference in driving behaviour between the two groups
5
6 of participants. The undistracted drivers approached the section of road adjacent to the
7
8 work zone at a significantly lower speed than the distracted participants. Despite being
9
10 alerted by advance warning signs and being aware of the narrowing of the road,
11
12 distracted drivers approached the work zone with less caution, leading five of them to
13
14 make the mistake of braking too late to avoid a collision with the queue of vehicles
15
16 ahead. These findings contrast with the naturalistic study of Tymvios and Oosthuysen
17
18 (2016), who found no difference in speed between undistracted and distracted drivers, a
19
20 fact that be partly attributed to the difference in risk perception between driving in a
21
22 simulator and driving on the real road.
23
24

25 Undistracted drivers released their foot from the throttle earlier than distracted
26
27 participants, giving them more time to reduce their speed before stopping in front of the
28
29 queue. In contrast, distracted drivers exhibited delayed braking responses but shorter
30
31 overall stopping distances. Cognitively distracted drivers had to compensate for their
32
33 excessive speed and delay in initiating braking action by drastically reducing their speed
34
35 so as to avoid a collision. However, the abrupt braking action did not always prevent the
36
37 distracted participants from colliding with the last vehicle in the queue. In fact, five of
38
39 them misjudged the risky situation and collided with the last vehicle in the queue. Our
40
41 observations corroborate and extend the conclusions of Domenichini *et al.* (2017), as it
42
43 is evident that speed remains one of the main causes of crashes in the vicinity of
44
45 roadworks. However, the delayed action on the part of cognitively distracted drivers
46
47 with regard to their controls could also increase the likelihood of collisions.
48
49

50 Undistracted drivers brake earlier, giving them more space and time to gradually adjust
51
52 their speed. Cognitively distracted drivers, who brake later and at shorter distances,
53
54
55
56
57
58
59
60

1
2
3
4 have less time to react to unexpected events. While both categories of drivers can avoid
5
6 a collision, the overall risk is lower for the undistracted driver.
7

8 Eye-tracking analysis revealed that most of distracted drivers focused their gaze
9
10 on a few closely related points, in most cases towards the tangent point (Land & Lee,
11
12 1994). The dispersion of their fixation points is significantly reduced compared to that
13
14 of undistracted drivers. The results obtained are in line with the findings of Itoh *et al.*
15
16 (2006) regarding the effects of performing cognitive tasks on driving and gaze
17
18 behaviour. The distribution of fixations among undistracted drivers was broad and can
19
20 be defined as Type 1 of Itoh's classification (Itoh *et al.*, 2006). The secondary task led
21
22 to a reduction in the visual field and a high concentration of fixations for the cognitively
23
24 distracted drivers, which can be classified as Type 2 according to Itoh *et al.* (2006).
25
26

27 Distracted driving alters the visual attention. The changes in blink frequency and
28
29 fixation patterns can significantly affect the driver's ability to process the information
30
31 on the road. An increased number of blinks, such as those exhibited by distracted
32
33 drivers (Figure 6a), reduces the amount of time the eyes are on the road, resulting in
34
35 delayed detection of potentially dangerous events. Similarly, reduced fixations limit
36
37 peripheral awareness and narrow the driver's field of vision. Visual information
38
39 processing is impaired, leading to delayed reactions, risky manoeuvres and increased
40
41 crash likelihood (Castro, 2008), especially in complex environments such as work
42
43 zones.
44
45

46 The results highlight the significant risks associated with the presence of short-
47
48 term work zones along motorways. Visibility conditions along left-hand curves limit the
49
50 ability of distracted drivers to see, understand, and react to hazardous situations, such as
51
52 those that occur when there is severe traffic congestion along motorway sections. This
53
54 study also highlights the need to adopt specific countermeasures for short-term work
55
56
57
58
59
60

1
2
3
4 zones which tend to feature the use of temporary signs (road signs and traffic cones).
5
6 On sections with limited sight distance, more effective measures are needed to force
7
8 cognitively distracted drivers to slow down according to the requirements of temporary
9
10 signs and to warn users of the risks associated with distracted driving (Nahed *et al.*,
11
12 2023).
13

14
15 Considering the frequent presence of roadworks on motorways, the adoption of
16
17 countermeasures to mitigate the risks associated with unforeseen events should be a
18
19 priority. Our results also confirm the importance of including cognitive factors in safety
20
21 design for work zones along motorways, especially in situations where visual distance is
22
23 limited. However, this study and the conclusions achieved must be seen in the light of
24
25 some limitations. The study considered ideal driving conditions for visibility (daytime
26
27 driving and with excellent visibility) and free-flow traffic conditions. These
28
29 simplifications partly limit the external validity of our results, so further studies that
30
31 account for adverse visibility conditions and higher traffic levels should address our
32
33 research hypothesis in a more ecological way. In addition, gender and age differences
34
35 among participants may influence driving performance and the responses to unexpected
36
37 events. Future research should account for these demographic variables to provide more
38
39 comprehensive results.
40
41

42 43 **Acknowledgment**

44
45 We thank Mr. Adem Hoxha, Dr. Lorenzo Catani, and the participants for their
46
47 contributions to this study.
48
49

50 51 **Disclosure of interest**

52
53
54 The authors report there are no competing interests to declare.
55
56
57
58
59
60

REFERENCES

- Albalade, D. & Bel, G. (2012). Motorways, tolls and road safety: evidence from Europe. *SERIEs*, 3, 457–473.
- Bakaba, J. E., & Ortlepp, J. (2016). Safety of characteristic subsections of roadwork zones on motorways. *Transportation Research Procedia*, 15, 283-294.
- Bassani, M., Catani, L., Ignazzi, A., & Piras, M. (2018). Validation of a fixed-base driving simulator to assess behavioural effects of road geometrics. In *Proceedings of the DSC2018 Europe* (pp. 101-108). Andras Kemeny, Florent Colombet, Frédéric Mérienne, Stephan Espié.
- Castro, C. (2008). *Human factors of visual and cognitive performance in driving*. CRC Press.
- Catani, L., & Bassani, M. (2019). Anticipatory distance, curvature, and curvature change rate in compound curve negotiation: a comparison between real and simulated driving. In *98th Annual Meeting of the Transportation Research Board*, Washington, DC.
- Choudhary, P., Pawar, N. M., Velaga, N. R., & Pawar, D. S. (2020). Overall performance impairment and crash risk due to distracted driving: A comprehensive analysis using structural equation modelling. *Transportation Research Part F: Traffic Psychology and Behaviour*, 74, 120-138.
- Crundall, D., & Underwood, G. (2011). Visual attention while driving: measures of eye movements used in driving research. In *Handbook of Traffic Psychology* (pp. 137-148). Academic Press.
- de Waard, D. (1996). *The measurement of drivers' mental workload*. PhD thesis, University of Groningen, Groningen, NL.
- Domenichini, L., La Torre, F., Branzi, V., & Nocentini, A. (2017). Speed behaviour in work zone crossovers. A driving simulator study. *Accident Analysis & Prevention*, 98, 10-24.
- Elvik, R. (2010). Why some road safety problems are more difficult to solve than others. *Accident Analysis & Prevention*, 42, 1089–1096.
- European Commission (2019). *State of infrastructure maintenance*. Directorate-General for Internal Market, Industry, Entrepreneurship and SMEs, Brussels, Belgium.
- Eurostat (2024). *Road safety statistics in the EU*. Eurostat - Statistic Explained.

- 1
2
3
4 Farahmand, B., & Boroujerdian, A. M. (2018). Effect of road geometry on driver
5 fatigue in monotonous environments: A simulator study. *Transportation*
6 *Research Part F: Traffic Psychology and Behaviour*, 58, 640-651.
7
8
9
10 Horberry, T., Anderson, J., Regan, M. A., Triggs, T. J., & Brown, J. (2006). Driver
11 distraction: The effects of concurrent in-vehicle tasks, road environment
12 complexity and age on driving performance. *Accident Analysis & Prevention*,
13 38(1), 185-191.
14
15 Itoh, M., Akiyama, T., & Inagaki, T. (2006). Driver behavior monitoring. Part II.
16 Detection of driver's inattentiveness under distracting conditions. *Proceedings*
17 *DSC Asia/Pacific 2006*.
18
19
20 Khattak, A. J., Khattak, A. J., & Council, F. M. (2002). Effects of work zone presence
21 on injury and non-injury crashes. *Accident Analysis & Prevention*, 34(1), 19-29.
22
23 Klauer, S.G., T.A. Dingus, V.L. Neale, J.D. Sudweeks, & Ramsey D.J. (2006). The
24 Impact of Driver Inattention On Near-Crash/Crash Risk: An Analysis Using the
25 100-Car Naturalistic Driving Study Data. Virginia Tech Transportation Institute
26 and National Highway Traffic Safety Administration, Report No.: DOT HS 810
27 594, Blacksburg, Virginia, USA.
28
29
30
31 Kummetha, V. C., Kondyli, A., Chrysikou, E. G., & Schrock, S. D. (2020). Safety
32 analysis of work zone complexity with respect to driver characteristics—A
33 simulator study employing performance and gaze measures. *Accident Analysis*
34 *& Prevention*, 142, 105566.
35
36
37 La Torre, F., L. Domenichini, & Nocentini, A. (2017). Effects of stationary work zones
38 on motorway crashes. *Safety Science*, 92, 148–159.
39
40 Land, M.F. & Lee, D.N. (1994). Where we look when we steer. *Nature*, 369, 742–744.
41
42 Li, Y. & Bai, Y. (2008). Development of crash-severity-index models for the
43 measurement of work zone risk levels. *Accident Analysis & Prevention*, 40,
44 1724–1731.
45
46
47 Lipovac, K., M. Đerić, M. Tešić, Z. Andrić, & Marić, B. (2017). Mobile phone use
48 while driving-literary review. *Transportation Research Part F: Traffic*
49 *Psychology and Behaviour*, 47, 132–142.
50
51 Marquart, G., Cabrall, C., & De Winter, J. (2015). Review of eye-related measures of
52 drivers' mental workload. *Procedia Manufacturing*, 3, 2854-2861.
53
54 Meng, Q., & Weng, J. (2011). Evaluation of rear-end crash risk at work zone using
55 work zone traffic data. *Accident Analysis & Prevention*, 43, 1291–1300.
56
57
58
59
60

- 1
2
3
4 Ministero delle Infrastrutture e dei Trasporti (1992). *Nuovo Codice della Strada* (in
5 Italian). Decreto Legislativo 30 aprile 1992, n. 285.
6
7 Ministero delle Infrastrutture e dei Trasporti (2001). *Norme Funzionali e Geometriche*
8 *per la Costruzione delle Strade* (in Italian). Decreto Ministeriale 5 novembre
9 2001, n. 6792.
10
11 Ministero delle Infrastrutture e dei Trasporti (2002). *Disciplinare tecnico relativo agli*
12 *schemi segnaletici, differenziati per categoria di strada, da adottare per il*
13 *segnalamento temporaneo* (in Italian). Decreto Legislativo 10 luglio 2002.
14
15 Nahed, R., Nassar, E., Khoury, J., & Arnaout, J. P. (2023). Assessing the effects of
16 geometric layout and signing on drivers' behavior through work zones.
17 *Transportation Research Interdisciplinary Perspectives*, 21, 100901.
18
19 Niezgoda, M., Tarnowski, A., Kruszewski, M., & Kamiński, T. (2015). Towards testing
20 auditory–vocal interfaces and detecting distraction while driving: A comparison
21 of eye-movement measures in the assessment of cognitive workload.
22 *Transportation Research Part F: Traffic Psychology and Behaviour*, 32, 23-34.
23
24 Patten, C. J., Kircher, A., Östlund, J., & Nilsson, L. (2004). Using mobile telephones:
25 cognitive workload and attention resource allocation. *Accident Analysis &*
26 *Prevention*, 36(3), 341-350.
27
28 R Core Team (2024). *R: A language and environment for statistical computing*. R
29 Foundation for Statistical Computing, Vienna, Austria. Available from:
30 <https://www.R-project.org/>.
31
32 Rangaswamy, R., Alnawmasi, N., Wang, Z., & Lin, P. S. (2024). Exploring contributing
33 factors to improper driving actions in single-vehicle work zone crashes: A mixed
34 logit analysis considering heterogeneity in means and variances, and temporal
35 instability. *Journal of Transportation Safety & Security*, 16(7), 768-797.
36
37 Rashid, H. M., Ahmed, A., Wali, B., & Qureshi, N. A. (2019). An analysis of highway
38 work zone safety practices in Pakistan. *International Journal of Injury Control*
39 *and Safety Promotion*, 26(1), 37-44.
40
41 Recarte, M. Á., Pérez, E., Conchillo, Á., & Nunes, L. M. (2008). Mental workload and
42 visual impairment: Differences between pupil, blink, and subjective rating. *The*
43 *Spanish Journal of Psychology*, 11(2), 374-385.
44
45 Regan, M. A., Hallett, C., & Gordon, C. P. (2011). Driver distraction and driver
46 inattention: Definition, relationship and taxonomy. *Accident Analysis &*
47 *Prevention*, 43(5), 1771-1781.
48
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4 Romanowska, A., Jamroz, K., & Olszewski, P. (2019). Review of methods for assessing
5 traffic conditions on basic motorway and expressway sections. *Archives of*
6 *Transport*, 52, 7-25.
- 7
8
9 Sajid Hasan, A., Jalayer, M., Heitmann, E., & Weiss, J. (2022). Distracted driving
10 crashes: a review on data collection, analysis, and crash prevention methods.
11 *Transportation Research Record*, 2676(8), 423-434.
- 12
13
14 Savage, S. W., Potter, D. D., & Tatler, B. W. (2020). The effects of cognitive distraction
15 on behavioural, oculomotor and electrophysiological metrics during a driving
16 hazard perception task. *Accident Analysis & Prevention*, 138, 105469.
- 17
18
19 Shahin, F., Elias, W., & Toledo, T. (2023). Drivers' perception of highway work zone
20 risks. *Transportation Engineering*, 14, 100213.
- 21
22
23 Shakouri, M., Ikuma, L. H., Aghazadeh, F., Punniaraj, K., & Ishak, S. (2014). Effects of
24 work zone configurations and traffic density on performance variables and
25 subjective workload. *Accident Analysis & Prevention*, 71, 166-176.
- 26
27
28 Shekari Soleimanloo, S., Wilkinson, V. E., Cori, J. M., Westlake, J., Stevens, B.,
29 Downey, L. A., Shiferaw, B. A., Rajaratnam, S. M. W., & Howard, M. E.
30 (2019). Eye-blink parameters detect on-road track-driving impairment following
31 severe sleep deprivation. *Journal of Clinical Sleep Medicine*, 15(9), 1271-1284.
- 32
33
34 Shinar, D., Tractinsky, N., & Compton, R. (2005). Effects of practice, age, and task
35 demands, on interference from a phone task while driving. *Accident Analysis &*
36 *Prevention*, 37(2), 315-326.
- 37
38
39 Silveira, R., Ferreira, S., Cunha, L., & Rebelo, M. (2023). Driver behavior on road work
40 zones: a systematic review. *Transportation Research Procedia*, 72, 1318-1325.
- 41
42
43 Silverstein, C., Schorr, J., & Hamdar, S. H. (2016). Work zones versus nonwork zones:
44 Risk factors leading to rear-end and sideswipe collisions. *Journal of*
45 *Transportation Safety & Security*, 8(4), 310-326.
- 46
47
48 Stern, J. A., Boyer, D., & Schroeder, D. (1994). Blink rate: a possible measure of
49 fatigue. *Human Factors*(2), 285-297.
- 50
51
52 Strayer, D. L., Turrill, J., Cooper, J. M., Coleman, J. R., Medeiros-Ward, N., & Biondi,
53 F. (2015). Assessing cognitive distraction in the automobile. *Human Factors*,
54 57(8), 1300-1324.
- 55
56
57 Tejero, P., & Cholz, M. (2002). Driving on the motorway: The effect of alternating
58 speed on driver's activation level and mental effort. *Ergonomics*, 45(9), 605-618.
- 59
60

- 1
2
3
4 Theofilatos, A., Ziakopoulos, A., Papadimitriou, E., Yannis, G., & Diamandouros, K.
5 (2017). Meta-analysis of the effect of road work zones on crash occurrence.
6 *Accident Analysis & Prevention*, *108*, 1-8.
7
8
9 Tymvios, N., & Oosthuysen, S. (2016). Distracted driver speeds around work zones. In
10 *Construction Research Congress 2016* (pp. 2811-2820).
11
12 Valdes, D., Lopez del Puerto, C., Colucci, B., Figueroa, A., Rosario, R. G., Torres, E.
13 C., & Ibarra, M. X. R. (2019). Comparative analysis between distracted driving
14 texting laws and driver's behavior in construction work zones. *Journal of Legal*
15 *Affairs and Dispute Resolution in Engineering and Construction*, *11*(4),
16 04519026.
17
18 Valdés-Díaz, D. M., López del Puerto, C., Colucci-Ríos, B., Figueroa-Medina, A. M.,
19 Concepción-Carrasco, E., Sierra-Betancur, L., & Taveras-Canela, Y. (2021).
20 Driver compliance in work zones: Two-lane rural roads versus freeways.
21 *Journal of Legal Affairs and Dispute Resolution in Engineering and*
22 *Construction*, *13*(4), 04521036.
23
24 Vignali, V., Bichicchi, A., Simone, A., Lantieri, C., Dondi, G., & Costa, M. (2019).
25 Road sign vision and driver behaviour in work zones. *Transportation Research*
26 *Part F: Traffic Psychology and Behaviour*, *60*, 474-484.
27
28 Walker, G., & Calvert, M. (2015). Driver behaviour at roadworks. *Applied Ergonomics*,
29 *51*, 18-29.
30
31 Wang, B., Chen, T., Zhang, C., Wong, Y. D., Zhang, H., & Zhou, Y. (2024). Toward
32 safer highway work zones: an empirical analysis of crash risks using improved
33 safety potential field and machine learning techniques. *Accident Analysis &*
34 *Prevention*, *194*, 107361.
35
36 World Health Organization (2011). *Mobile phone use: a growing problem of driver*
37 *distraction*. WHO Library Cataloguing-in-Publication Data, Geneva,
38 Switzerland.
39
40 World Medical Association (2018). *WMA Declaration of Helsinki - Ethical Principles*
41 *for Medical Research Involving Human Subjects*. [https://www.wma.net/policies-](https://www.wma.net/policies-post/wma-declaration-of-helsinki/)
42 [post/wma-declaration-of-helsinki/](https://www.wma.net/policies-post/wma-declaration-of-helsinki/)
43
44 World Road Association (2014). *The importance of road maintenance*. Report No.:
45 2014R02EN, La Défense Cedex, France.
46
47 Yahoodik, S., Tahami, H., Unverricht, J., Yamani, Y., Handley, H., & Thompson, D.
48 (2020). Blink rate as a measure of driver workload during simulated driving. In
49
50
51
52
53
54
55
56
57
58
59
60

- 1
2
3
4 *Proceedings of the Human Factors and Ergonomics Society Annual Meeting*
5 (Vol. 64, No. 1, pp. 1825-1828). Sage Publications, Los Angeles, CA.
6
7 Yang, S., Kuo, J., & Lenné, M. G. (2018). Analysis of gaze behavior to measure
8 cognitive distraction in real-world driving. In *Proceedings of the Human Factors*
9 *and Ergonomics Society Annual Meeting* (Vol. 62, No. 1, pp. 1944-1948). Sage
10 Publications, Los Angeles, CA.
11
12 Yang, Y., Ye, Z., Easa, S. M., Feng, Y., & Zheng, X. (2023). Effect of driving
13 distractions on driver mental workload in work zone's warning area.
14 *Transportation Research Part F: Traffic Psychology and Behaviour*, 95, 112-
15 128.
16
17 Yousif, S., Nassrullah, Z., & Norgate, S. H. (2017). Narrow lanes and their effect on
18 drivers' behaviour at motorway roadworks. *Transportation Research Part F:*
19 *Traffic Psychology and Behaviour*, 47, 86-100.
20
21 Zhao, X., & Rong, J. (2012). The relationship between driver fatigue and monotonous
22 road environment. In *Computational intelligence for traffic and mobility* (pp. 19-
23 36). Paris: Atlantis Press.
24
25 Zheng, Z., Ahn, S., & Monsere, C. M. (2010). Impact of traffic oscillations on freeway
26 crash occurrences. *Accident Analysis & Prevention*, 42(2), 626-636.
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

Table 1: Mean (and standard deviation) of participant traits. Notes: F = females.

Group	No. of drivers	Age (years)	Years licence held	Km driven by year (km/year)	No. of crashes
Undistracted	14 (F = 5)	43.8 (11.9)	25.1 (11.9)	14857 (10516)	1.1 (1.6)
Distracted	28 (F = 10)	43.2 (13.1)	23.4 (12.6)	13018 (11278)	1.3 (1.7)
Total	42 (F = 15)	43.4 (12.5)	24.0 (12.2)	13631 (10936)	1.2 (1.6)

Table 2: Descriptive statistics of the dependent variables (mean and standard deviation between brackets).

Groups	Speed profile type	No.	S (km/h)	d_{TR} (m)	d_{AB} (m)	d_{Stop} (m)	D_R (m/s ²)
Undistracted	1	12	73.1 (22.2)	5.9 (10.5)	18.8 (23.5)	147.0 (22.8)	4.4 (2.3)
	2	2	106.0 (7.6)	6.3 (7.1)	4.6 (6.5)	164.0 (3.6)	11.7 (0.8)
	3	0	-	-	-	-	-
Distracted	1	13	96.2 (12.8)	9.2 (13.9)	11.8 (14.5)	157.0 (6.6)	6.9 (2.3)
	2	10	109.0 (15.3)	31.3 (24.1)	18.0 (26.8)	154.0 (11.1)	11.6 (3.8)
	3	5	113.0 (17.2)	44.3 (35.4)	17.4 (9.5)	177.0 (7.0)	13.2 (2.8)

1
2
3
4 **Figure captions list:**
5

6 Figure 1: The driving simulator at RSDS Laboratory and the eye-tracking system (Pupil
7 Labs).
8
9

10 Figure 2: Road scenario with (a) the work zone and (b) station from which the queue
11 ahead was visible.
12
13

14 Figure 3: Throttle release (d_{TR}), action on the brake (d_{AB}), and braking (d_{Stop}) distances
15 in the stretch of curve where the queue of vehicles was visible to the driver.
16
17

18 Figure 4: Speed profiles of test drivers when approaching the queue of vehicles.
19
20

21 Figure 5: Box plots of the data and Welch's t-test results for (a) speed at the reference
22 station, (b) mean deceleration, (c) the throttle release distance, (d) the brake action
23 distance, and (e) the stopping distance.
24
25
26

27 Figure 6: Box plots of the data and results of the Welch's t-test for (a) number of blinks,
28 and (b) number of fixations measured 500 m before the section where the queue was
29 visible until the driver stopped the vehicle (see Figure 3).
30
31

32 Figure 7: Heat maps of drivers who oriented their gaze on a wider area of the road
33 environment (Note: the red colour indicates a high number of gaze fixations).
34
35

36 Figure 8: Heat maps of drivers who concentrated their gaze on a limited area, mostly on
37 the inner edge of the road (Note: the red colour indicates a high number of gaze
38 fixations).
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60




1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60




1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60




1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

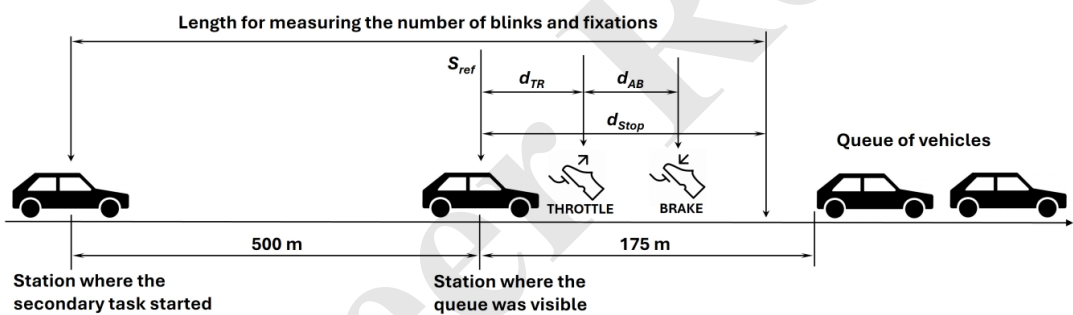


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

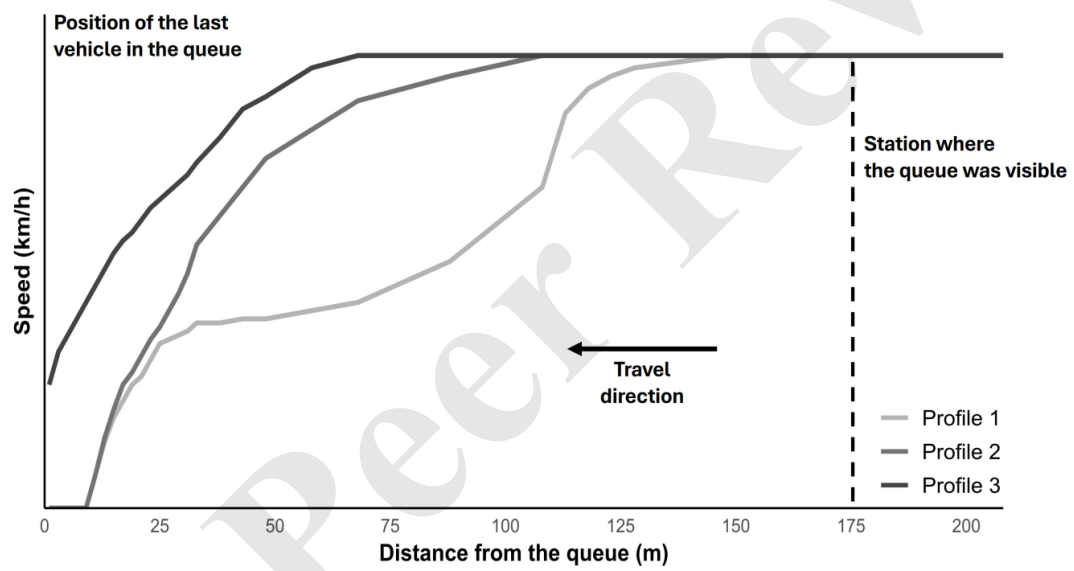


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

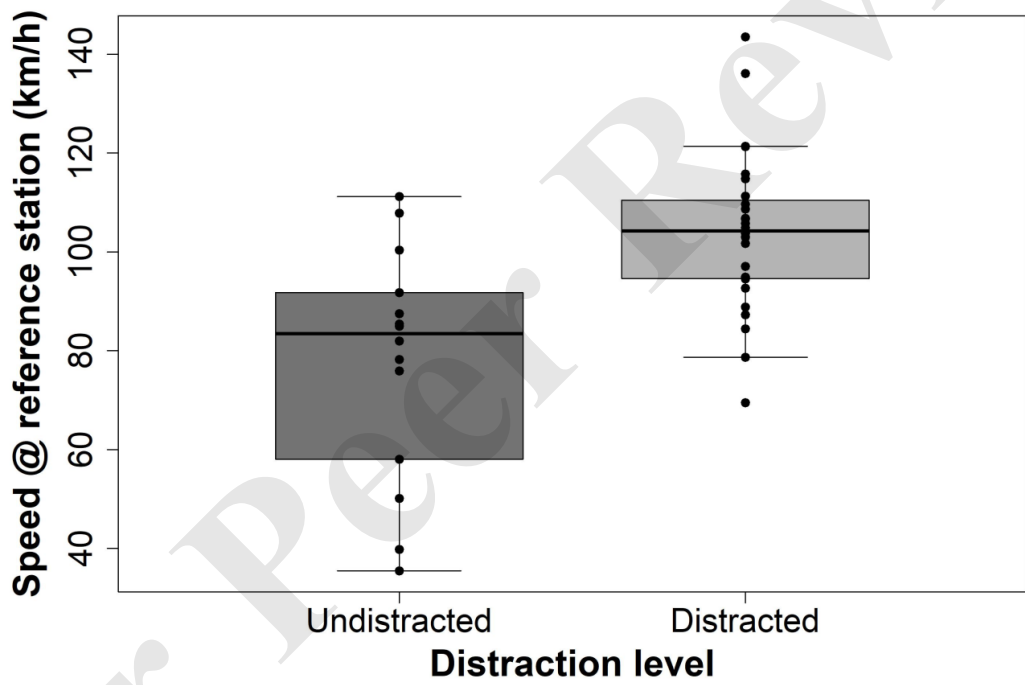


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

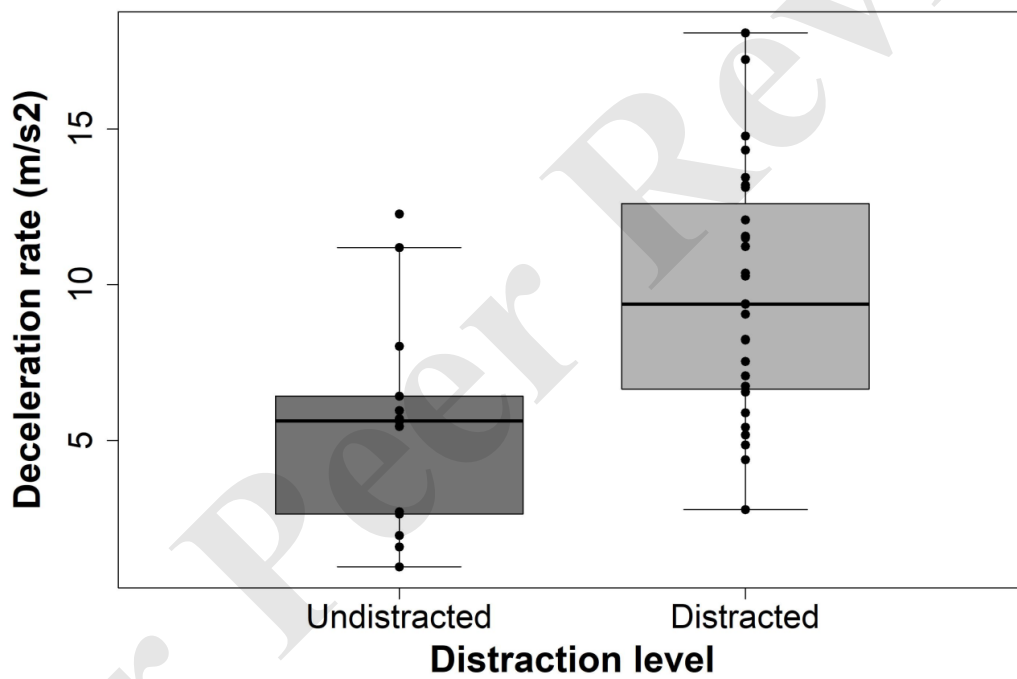


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

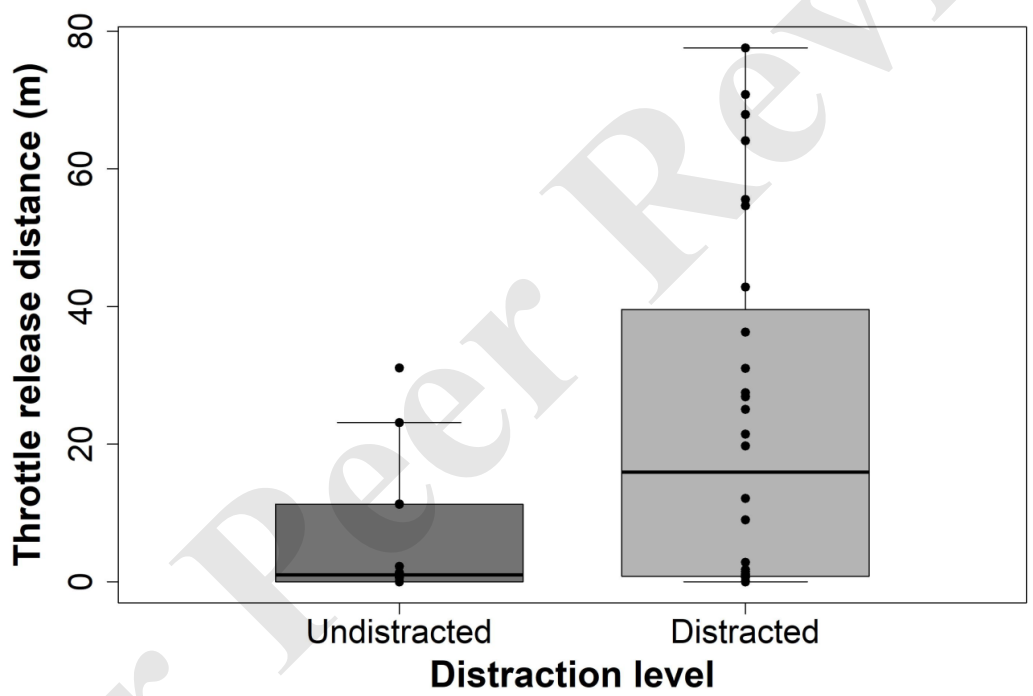


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

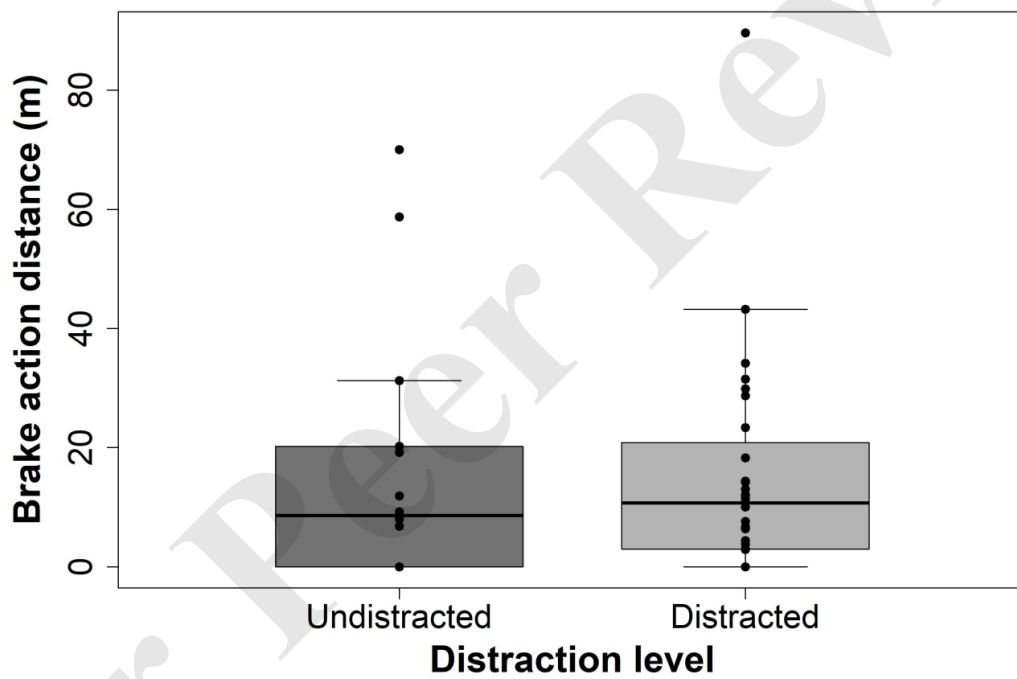


1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

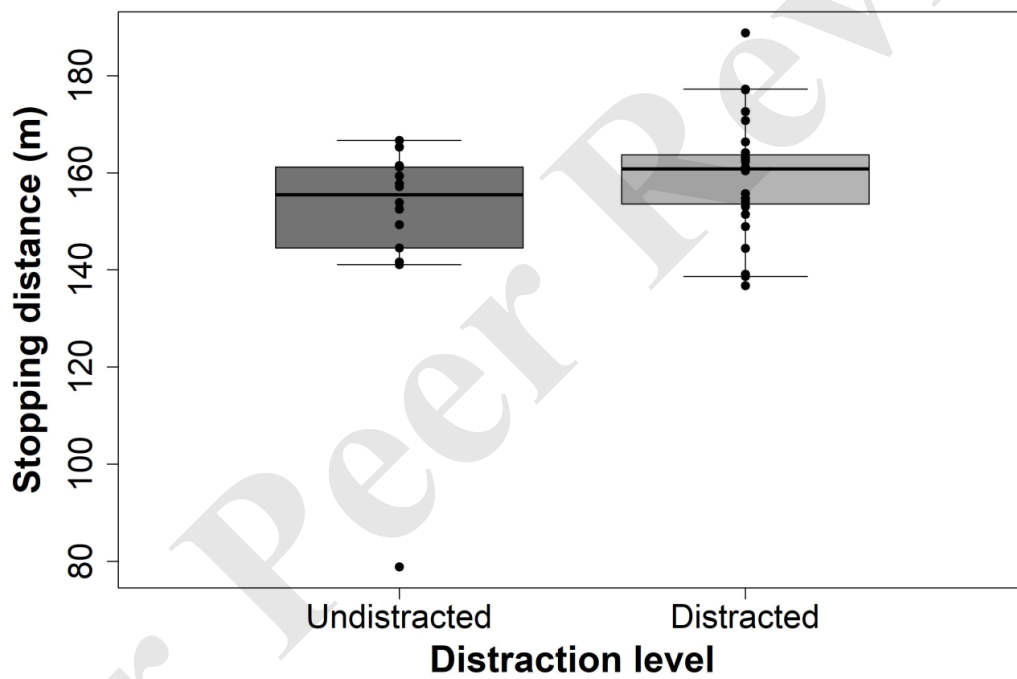

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

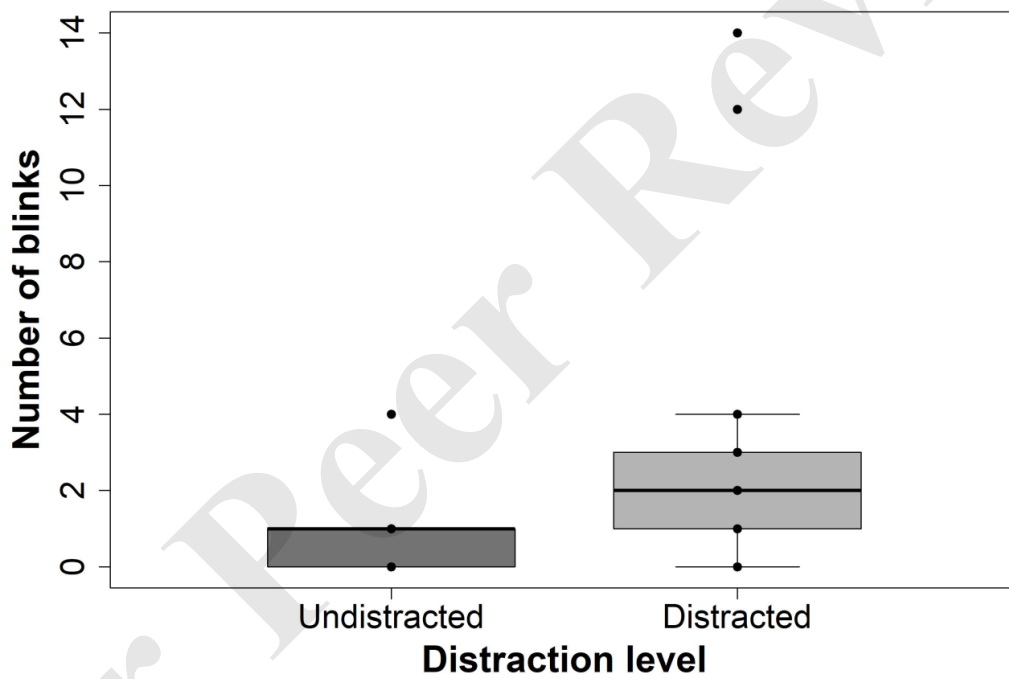

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

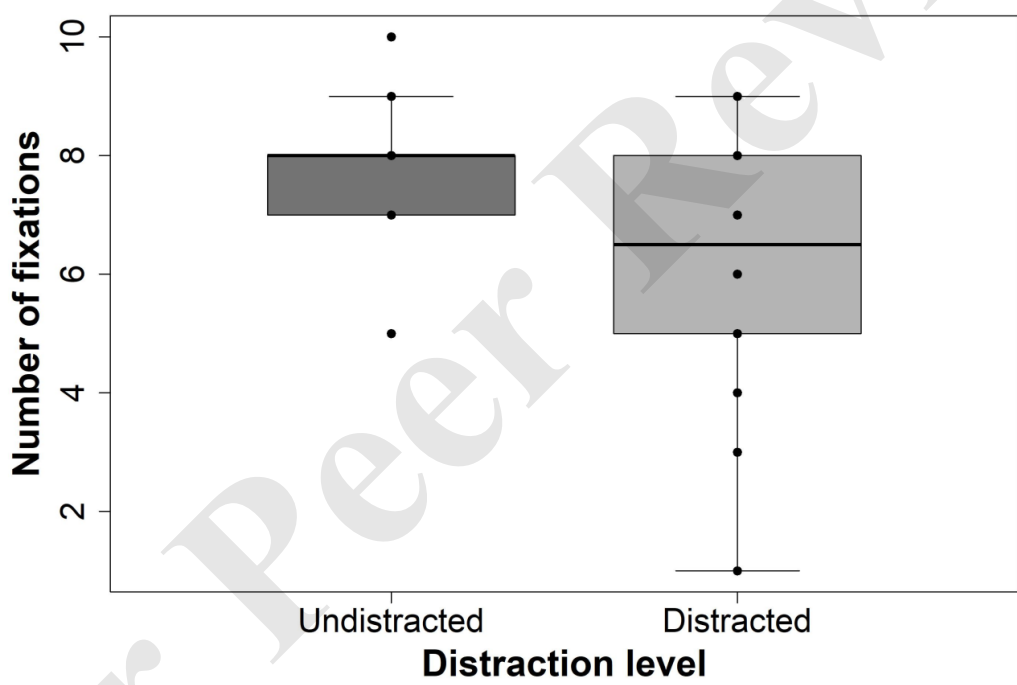

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60



1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60

