

Numerical analysis of allsteel sandwich panel with drilled lcore subjected to air blast scenarios

*Original*

Numerical analysis of allsteel sandwich panel with drilled lcore subjected to air blast scenarios / Kiakojouri, Foad; Tavakoli, Hamid Reza; Sheidaii, Mohammad Reza; De Biagi, Valerio. - In: INNOVATIVE INFRASTRUCTURE SOLUTIONS. - ISSN 2364-4176. - 7:(2022), p. 320. [10.1007/s41062-022-00912-x]

*Availability:*

This version is available at: 11583/2972113 since: 2022-10-06T08:40:22Z

*Publisher:*

Springer

*Published*

DOI:10.1007/s41062-022-00912-x

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)



# Numerical analysis of all-steel sandwich panel with drilled I-core subjected to air blast scenarios

Foad Kiakojouri<sup>1</sup> · Hamid Reza Tavakoli<sup>2</sup> · Mohammad Reza Sheidaii<sup>3</sup> · Valerio De Biagi<sup>1</sup>

Received: 23 April 2022 / Accepted: 7 August 2022 / Published online: 5 September 2022  
© The Author(s) 2022

## Abstract

This paper reports a numerical study carried out with the aim of quantifying nonlinear dynamic response of drilled I-core steel sandwich panel when subjected to air blast loading. Several parameters, i.e., boundary conditions, explosive charge weight and asymmetrical loading, that can affect structural response under blast loads, are considered. The material and geometric nonlinearities and strain-rate effects are also taken into account in the modeling. Obtained results are compared with available experimental data to verify the developed finite element model and good agreement is observed. According to the results, sandwich panels with drilled I-core allow more plastic deformation and energy dissipation and less midpoint displacement compared with equivalent structures, i.e., conventional I-core sandwich panels and also solid plate with same weight and material.

**Keywords** Blast · Sandwich structures · Strain rate · Plastic dissipation

## Introduction

Metallic sandwich panels are extensively used in various infrastructure, such as bridges, marine, offshore, protective structures and transportation systems. They are especially effective when subjected to extreme dynamic loads due to their inherent energy dissipation capacity. Sandwich panels can be constructed with various core configurations. In recent years, innovative structural configurations for core elements have been proposed in order to change certain structural properties or improve overall response under specific circumstances including I-core [1–3], corrugated-core [4–6], Y-core [7, 8], tube-core [9, 10], honeycomb core [11, 12] and auxetic core [13]. Aforesaid configuration can also be used in foam-filled [6, 14] or multilayers forms [15, 16].

Many researchers have focused on the dynamic response of sandwich structures under blast loads particularly in the

recent decades. These studies can be categorized as experimental [5, 17], numerical [1, 8, 18] and analytical [19, 20] studies. In the most of published numerical studies, commercial nonlinear FEA packages are used, namely Abaqus [1, 18], NASTRAN [21], LS-DYNA [2, 22] and AUTODYN [4, 6].

Depend on the goals of the study and level of simplification, numerical blast simulations are performed either by triangular equivalent load [23–25] or by ConWep function [1, 18, 26], or by modeling the explosive as a material [2, 6, 27]. When explosive is modeled as material, Jones–Wilkins–Lee (JWL) equation of state is mainly adopted. The Arbitrary Lagrangian–Eulerian method (ALE) was frequently used in the numerical analysis of blast loaded sandwich panels.

Some researchers have also considered complicated or multi-hazards scenarios including underwater explosion [28, 29], effects of extreme temperatures on blast response [30, 31], combined shock and projectile impact [32], combined blast and fragment loading [2], multiple blasts [18, 33] and dynamic response under buried explosives [34].

Outperformance of metallic sandwich panels compared with monolithic plates has been frequently reported. According to the current literature, sandwich structures perform better under blast loads in term of energy dissipation, deflection and damage in comparison to solid plates with same density and material [1, 2, 18, 28, 33]. Although large

✉ Foad Kiakojouri  
foad.kiakojouri@polito.it

<sup>1</sup> Department of Structural, Geotechnical and Building Engineering (DISEG), Politecnico di Torino, Turin, Italy

<sup>2</sup> Department of Civil Engineering, Babol Noshirvani University of Technology, Babol, Iran

<sup>3</sup> Department of Civil Engineering, Urmia University, Urmia, Iran

number of steel I-core sandwich panels were designed and constructed, the effects of adopted details on the structural response are not always well-understood and there is still room for further studies.

Energy absorption in blast loaded structures is one of the most important parameters that determine their overall dynamics, therefore, current study seeks to numerically investigate the validity of soft core hypothesis by using drilled I-core, instead of conventional intact web elements. This simple, straightforward and economical novel configuration, i.e., drilling the I-core element, potentially allows more plastic deformation and less midpoint displacements. To this end, drilled holes were considered in the I-core elements of conventional I-core panels and the potential impact of this innovative modification on structural response was studied by finite element analysis. Several parameters that can affect structural response under blast loads, are considered and comprehensively discussed. Most notably, the influence of asymmetrical blast loading and boundary conditions are deeply discussed, that usually are not taken into account in the current literature. Obtained results provide comprehensive insight into the dynamic response of steel drilled I-core sandwich panels under air blast loading.

## Methodology


Details of FE modeling, blast loading and analysis techniques are provided in this section.

### Geometry of panels


The dimensions of numerical model are  $1500 \times 1500 \text{ mm}^2$ . The overall assembly of model structure is shown in Fig. 1. Thickness of cover plates and I-core are 6 mm and 1 mm, respectively. The core plates of sandwich structures were assumed drilled. The size of the drilled hole is 10 mm. Geometry of drilled core is shown in Fig. 1b.

### Material property

An elastic-plastic material model was used in numerical modeling. While for extreme loading on structures, more advanced material models accounting for material damage, e.g., Johnson–Cook or different ductile damage models are preferred, the selected model is suitable for the scope of the current study, as illustrated in the “Appendix 1”. It should be noted that the main purpose of the current study is to investigate the dynamic response of the novel proposed configuration, and compare it to alternative solutions. To this aim, adopted models are sufficient. The elastic part is defined by Young’s modulus and Poisson’s ratio. The plastic part is defined as the true stress versus plastic

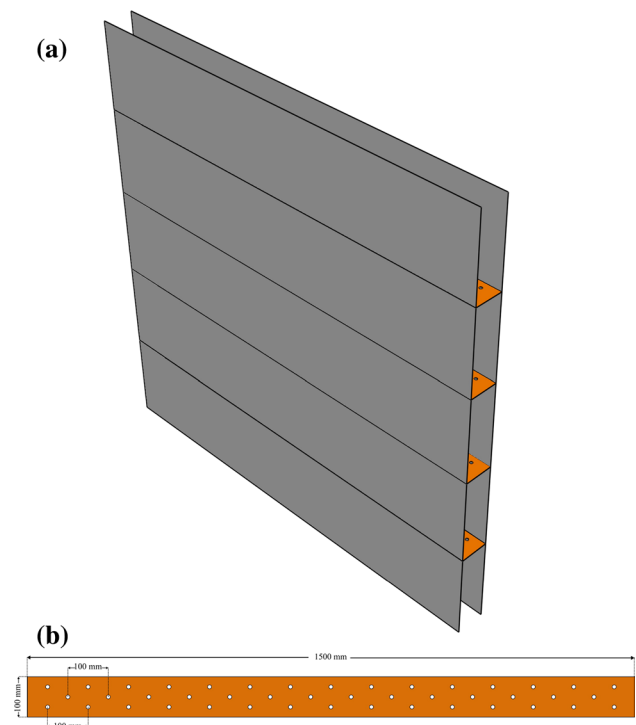

**Fig. 1** Geometry of the panel; **a** general assembly of numerical model and **b** details of core elements

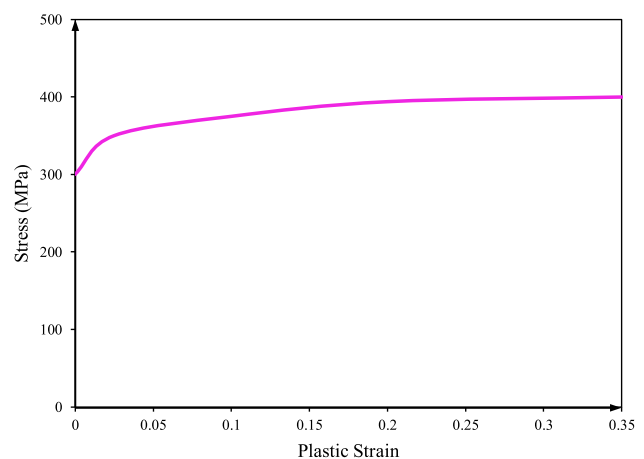

**Fig. 2** Plastic Property of steel material

strain. The material behaves as elastic material up to the yield stress and after this stage; it goes into the hardening stage until reaching the ultimate stress [35]. The yield stress of all panels is 300 MPa, Young’s modulus is 210 GPa and Poisson’s ratio is 0.3. The plastic part is defined using the curve shown in Fig. 2. In the case of high-rate loading such as blast and high-speed impact, strain-rate dependency is important. Therefore, strain-rate are included by adjusting the dynamic yield stress according to Eq. 1, i.e., Cowper-Symonds equation [36]:

$$\frac{\sigma_{yd}}{\sigma_y} = 1 + \left(\frac{\dot{\epsilon}}{c}\right)^{\frac{1}{q}} \tag{1}$$

where  $\sigma_{yd}$  and  $\sigma_y$  are dynamic and static yield stresses, respectively.  $c$  and  $q$  are experimentally defined material constants and  $\dot{\epsilon}$  is the strain rate. On the basis of this equation, static and dynamic yield stress ratio is related to the deformation speed. In the numerical study, three sets of values for  $c$  and  $q$  were adopted: (1)  $c = 40 \text{ s}^{-1}$  and  $q = 5$ ; (2)  $c = 240 \text{ s}^{-1}$  and  $q = 4.74$ ; (3)  $c = 6844 \text{ s}^{-1}$  and  $q = 3.91$  [24, 37].

### Boundary conditions

In a real construction, based on the configurations of the construction site, topology of the structure and application of the panels, different boundary conditions are applied to the panels. However, usually this situation is ignored in the literature and perfectly clamped boundary conditions is preferred. To study the boundary effects, different boundary conditions are adopted in the numerical modeling. Figure 3 shows these boundary conditions. These boundary conditions are applied to both cover plates except for BC1 in which two state were considered; BC1-1 where perfectly fix boundary conditions were applied to both cover plates and BC1-2 where these conditions were applied only to back plate. The connections of the cover plates with the core material are guaranteed via the “tie” command from Abaqus library.

### Blast loading


The threat of a conventional bomb can be defined by two basic parameters; explosive charge weight and standoff distance. As shown in Fig. 4, blast pressure time-history is divided into a positive phase and a negative phase. In the positive phase, maximum over-pressure,  $P_s^+$ , is developed promptly and decreases to ambient pressure,  $P_0$ , in the time  $T^+$ . For the negative phase, the maximum negative pressure,  $P_s^-$ , has lower amplitude and longer duration ( $T^-$ ) than the positive phase. Therefore, in the numerical study of blast loaded structures using just the positive phase is recommended. The pressure time-history in Fig. 4 can be approximated by the exponential Equation (Eq. 2) [38]:

$$P(t) = P_s^+ \left(1 - \frac{t}{T^+}\right) e^{-\frac{bt}{T^+}} \tag{2}$$


where  $P(t)$  is overpressure at time  $t$ ,  $P_s^+$  is maximum over pressure and  $b$  is experimental constant.

Abaqus/Explicit provides the ConWep model which can be utilized for air blast loading on structures. The ConWep model uses the scaled distance based on the distance of the target surfaces from the source of the explosion and the amount of the explosive charge based on equivalent weight of Trinitrotoluene (TNT). In ConWep, the total pressure on a surface due to the blast wave is a function of the incident pressure, the reflected pressure and the angle of incidence. The total pressure is defined as Eq. 3 [35]:

Fig. 3 Adopted boundary conditions for numerical studies

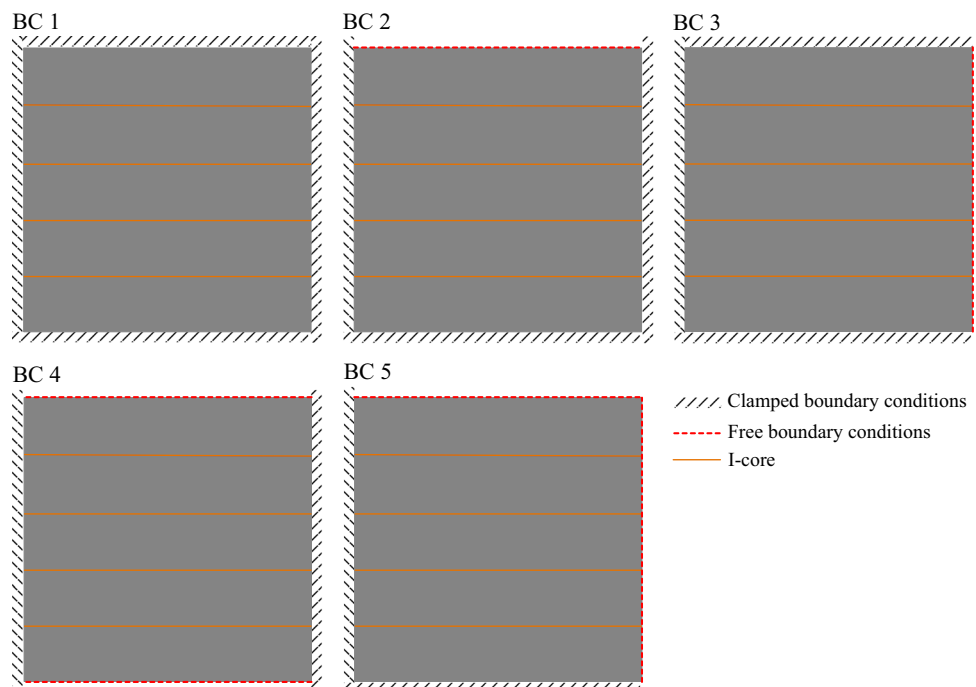

**Fig. 4** Typical blast pressure time-history. ConWep pressure time history is shown in the inset

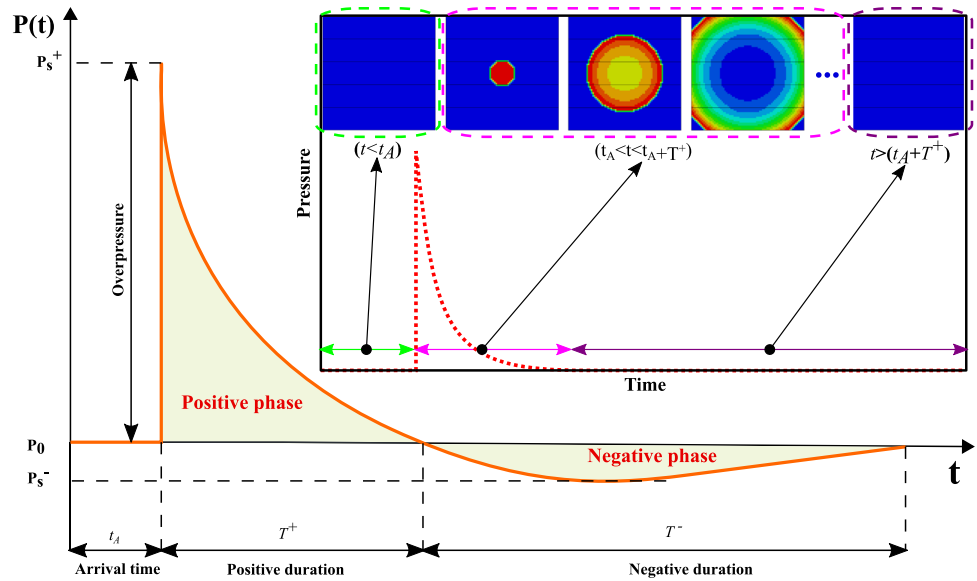


$$P(t) = P_{incident}(t) [1 + \cos(\theta) - 2 \cos^2(\theta)] + P_{reflect}(t) \cos^2(\theta) \tag{3}$$

where  $P(t)$  is total pressure,  $P_{incident}(t)$  and  $P_{reflect}(t)$  are incident pressure and reflected pressure, respectively, and  $\theta$  is angle between the normal of the loading surface and the vector that points from the surface to the blast source.

In this study, 1, 2 and 3 kg TNT are adopted as explosive charges in the numerical analysis. The standoff distance is 500 mm for all models and charges. In order to study the influences of asymmetrical blast loading, in addition to symmetrical blast loads, four sets of asymmetrical blast scenarios are also considered. The positions of hypocenter are shown in Fig. 5. The blast sources in these cases are also 500 mm above the selected points. The ConWep model produces time-dependent non-uniform distribution of blast pressure on the target surface. Figure 6, as an example, shows blast pressure distribution over time for symmetrical blast when 1 kg explosive charge is applied.


**Finite elements modeling and numerical analysis approach**

Abaqus/Explicit solver was adopted for finite element analyses. The fourth noded doubly curved shell element, S4R, was used to model both cover plates and core’s elements. This element is a 4-node general-purpose shell, quadrilateral, stress/displacement shell element with reduced integration and a large-strain formulation [35]. While using reduced integration, S4R is very robust element and suitable for a wide range of applications and have successfully used in structures under extreme loading conditions as reported in [13, 18, 39]. Hourglass

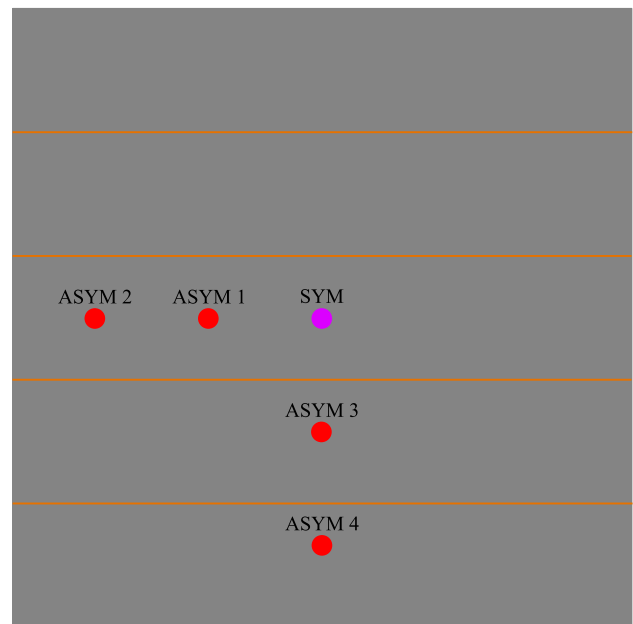


**Fig. 5** Asymmetrical blast loading scenarios

control was employed even though there is no evidence that hourglassing is a considerable issue in such analyses. The effects of damping are not considered in this study because damping has little importance in controlling the maximum response of common structures subjected to blast loads as discussed by [23]. The influence of mesh size has been studied and the size is sufficiently fine to ensure the accuracy of developed FE model. More details are provided in the “Appendix 1”.

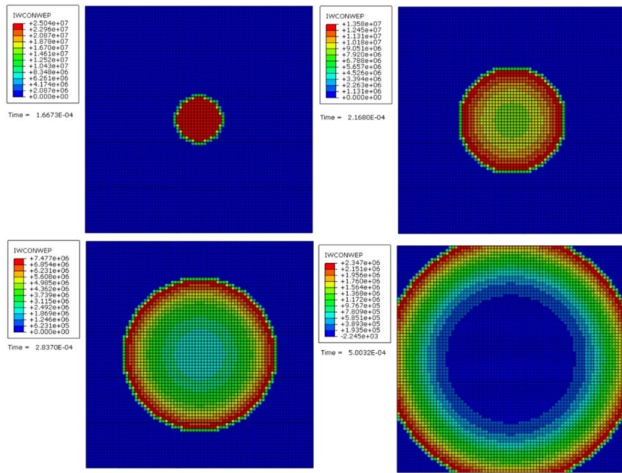

**Fig. 6** Blast pressure distribution over time for symmetrical blast under 1 kg TNT

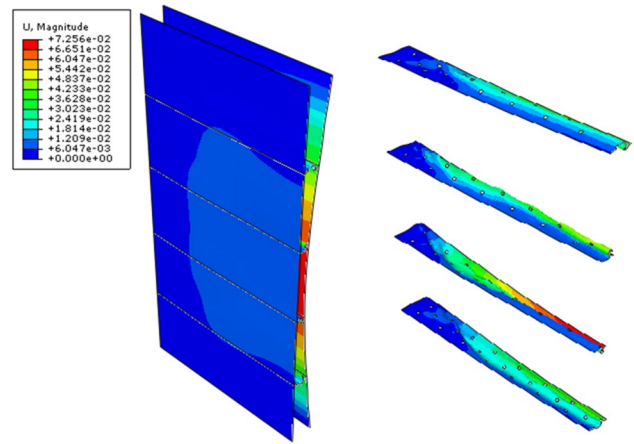

**Fig. 8** Displacement contour and deformed cross section of drilled I-core sandwich panel under 3 kg explosive charge

### Results and discussion


Unless otherwise specified in relevant sections, all results are obtained based on perfect clamped boundary conditions (BC1-1) and symmetrical loading on drilled I-core model.

#### Dynamic response under blast loading scenarios

Figure 7 shows the midpoint displacement time-histories of sandwich panels’ front face and back face under three explosive charges including 1, 2 and 3 kg TNT. As expected, front faces have more deflections than back plates due to energy dissipation in the core elements. The differences between displacements of two face plates increase as explosive charge increases. When 1 kg TNT is applied, midpoint node vibrated and reached a peak

deflection of 31 mm for front face and 26 mm for back face (see Fig. 7). In this case, the difference between deflections of front face and back face is not considerable, because explosive charge is not strong enough to use complete plastic dissipation capacity of such a panel. For 3 kg TNT, midpoint node vibrated and reached a peak deflection of 76 mm for front face and 30 mm for back face. In this case, the differences between deflection of front face and back face is quite considerable.

The performance of blast loaded sandwich panels is a function of blast intensity and therefore, design of the panels is extremely dependent to the expected threat. Figure 8 shows deformed cross sections of blast loaded sandwich panels under 3 kg explosive charge. It is evident that the deflections of the midpoint of the back faces do not change considerably for all applied charges, because only for the

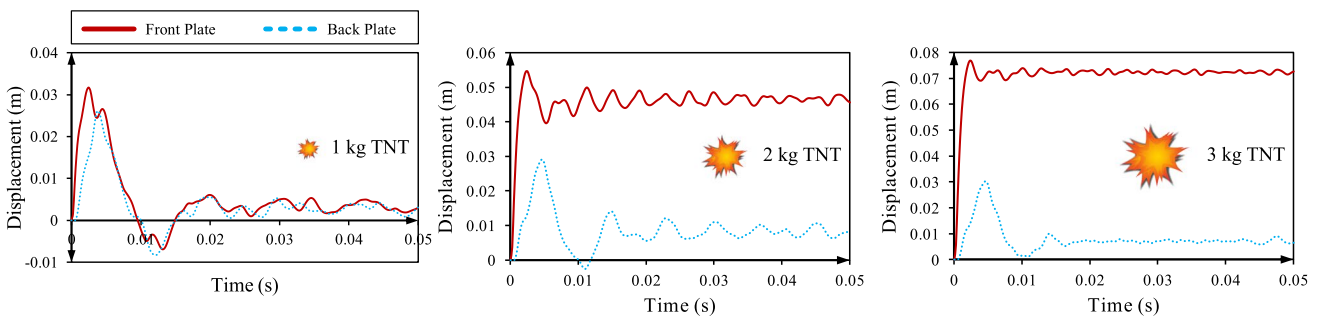

**Fig. 7** Time-history of midpoint displacement under different explosive charges

largest explosive charge, i.e., 3 kg TNT, almost complete densification of the middle web elements is occurred.

Comparison of the total work and the total plastic dissipation of the models shows that most of the work done by the blast loads is dissipated by plastic deformation. With the increase in explosive charge weight, this effect is intensified. Figure 9 shows a comparison of total work and plastic energy time-history for 2 kg explosive charge. Same results also observed for other charges. Figure 10 compares plastic dissipation in core and face plates; for 1 kg explosive charge, most of the energy dissipation occurred in I-core. In this case, face plates remain almost elastic. For 2 kg TNT, energy dissipation in I-core and cover plates are almost equal, that means face plates start to inelastic deformation. For largest blast load (i.e., 3 kg TNT), plastic dissipation in face plates meaningfully exceeds the energy dissipation in I-core, because in this case cover plates start to plastic deformation.

### Comparison with equivalent structures

To evaluate the influence of drilled I-core on dynamic response of sandwich panel, a solid plate and also a sandwich panel without holes in the web elements (conventional I-core sandwich panel) subjected to the same blast scenarios were modeled and analyzed. The results were compared with those of proposed drilled I-core configuration. It should be noticed that these sandwich structures are completely similar in weight, material and boundary conditions and the only difference is in core element; while conventional panel has intact core elements, the proposed innovative panel utilized with drilled core elements.

Figure 11 shows the midpoint displacements of the equivalent structures under 1 kg explosive charge. The benefits of a sandwich structures over a solid plate to withstand blast loads are clearly evident by the lower back face displacement. At low impulse levels (i.e., 1 kg TNT), the maximum

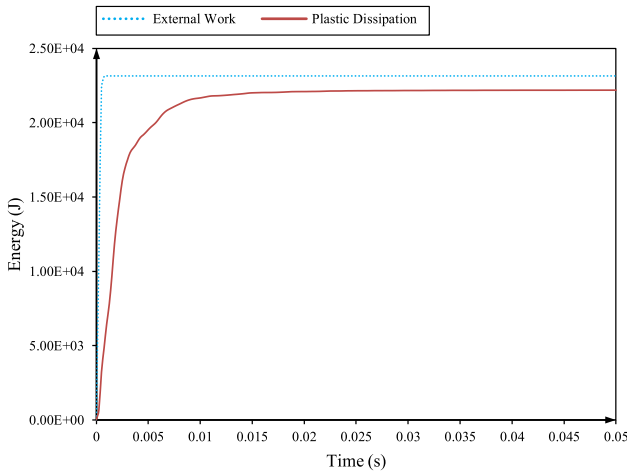


Fig. 9 Total work and plastic dissipation energy time-history (2 kg TNT)

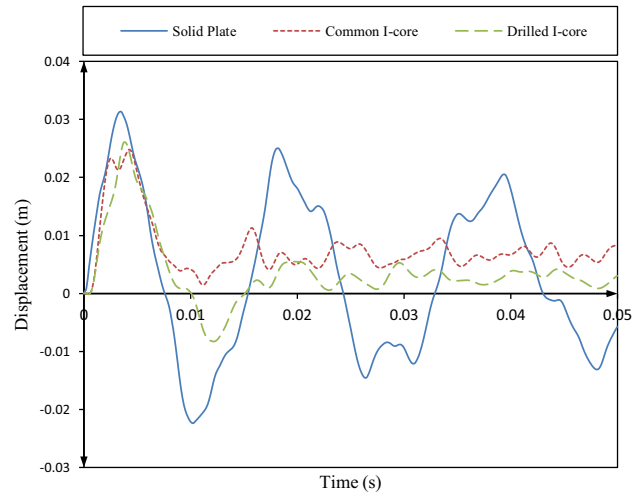


Fig. 11 Time-history of midpoint displacement under 1 kg TNT

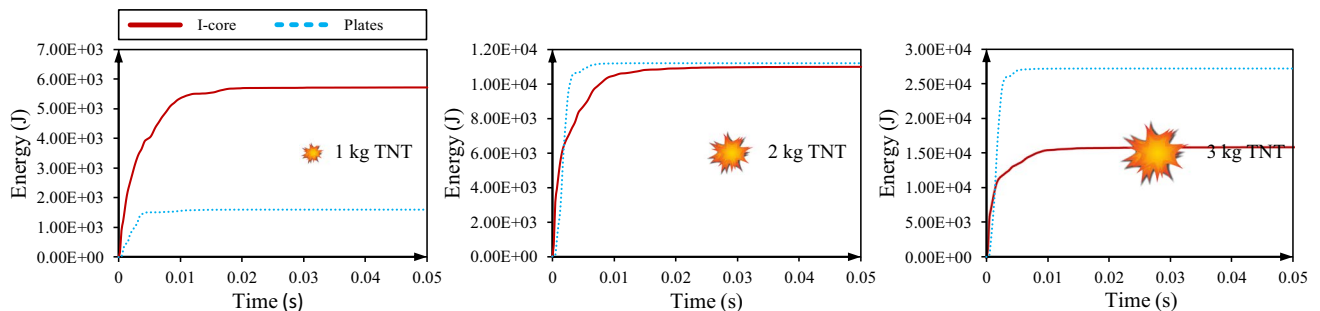



Fig. 10 Energy dissipation in cover plates and I-core under different explosive charges

displacements of the drilled sandwich panel are about 83 percent of the solid plate and the maximum midpoint displacements of two panels, with or without drilled I-core, are almost equal. On the other hand, at high explosive charge (i.e., 3 kg TNT) the maximum displacements of the drilled sandwich panels is about 80 percent of the conventional I-core panel and 57 percent of the equivalent solid plate. In addition to maximum deflection, drilled I-core panel obviously shows a better performance in free vibration phase in the term of deflection. As presented in Fig. 12, the benefits of such structure are particularly important at high impulse loads. Therefore, the panels should be designed according to possible blast loads to achieve its maximum benefits. It could be concluded that the weakening the core elements by drilling, improve plastic dissipation capacity. This improvement could also be due to altering the folding patterns and yield lines of core elements during blast loading. In Table 1, maximum midpoint displacements of these numerical specimens are presented.

**Asymmetrical blast scenarios**

To study the effects of asymmetrical blast loads, numerical models were analyzed under 2 kg explosive charge with the four asymmetrical blast scenarios as presented in Fig. 5. The standoff distances also considered 500 mm directly above the selected points. Figure 13 shows displacement time-history for asymmetrical Case 4 under 2 kg explosive charge.


According to results, for all front faces, maximum displacements in hypocenter exceed the displacement in the center of the cover plate due to localized nature of blast loads and subsequently more applied pressure to hypocenter. On the other hand, for the back face plates, the deflection in the center is more than hypocenter, because, plastic deformation in the core elements dissipates most of the blast energy,

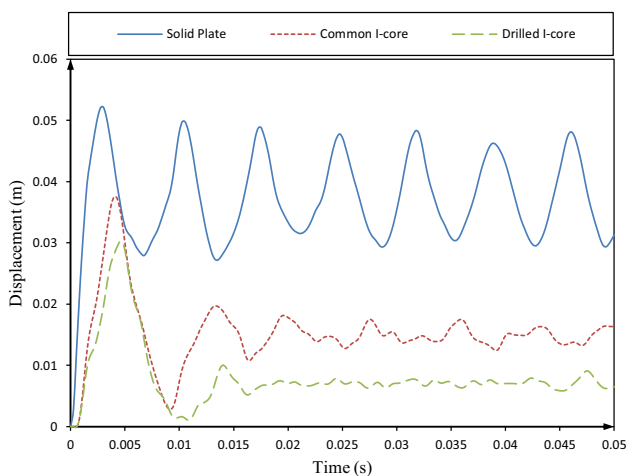


**Fig. 12** Time-history of midpoint displacement under 3 kg TNT

**Table 1** Maximum midpoint deflection (mm) under blast loading

	Common I-core		Drilled I-core		Solid plate
	Front face	Back face	Front face	Back face	
1 kg TNT	31.0	24.8	31.6	26.0	31.3
2 kg TNT	51.0	35.7	54.5	28.9	43.1
3 kg TNT	73.0	37.5	76.5	30.1	52.1

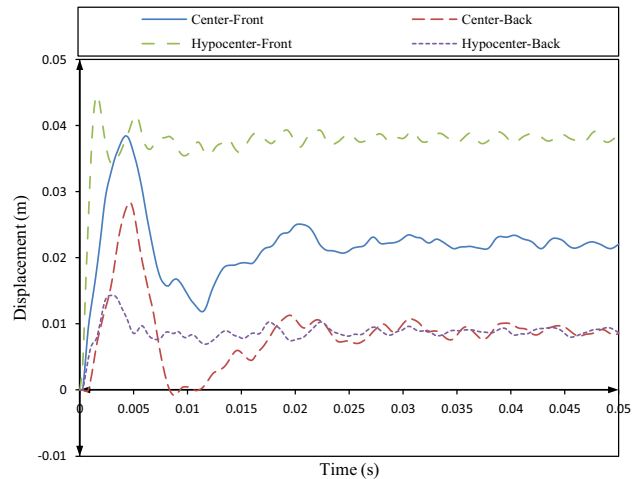

**Fig. 13** Displacement time-history for asymmetrical blast loaded sandwich panel (Case 4, 2 kg TNT)

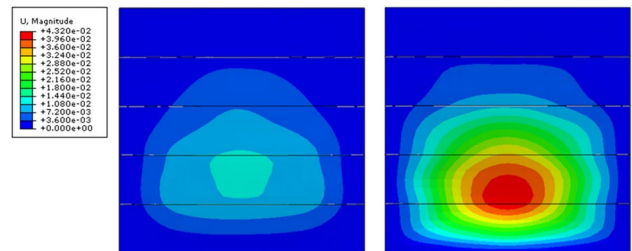

**Fig. 14** Displacement contour for asymmetrical load Case 4

and therefore, back faces' responses is much smoother. This phenomenon is partially function of the distance from clamped boundary conditions; the center of the plate has the maximum distance from the clamped boundary conditions and therefore its response is smoother. Asymmetrical blast loads not only change the overall response of panels as discussed above, but also affect the stress distribution pattern. Figure 14 shows deformed shape and displacement distribution at time associated with the maximum displacement in the front plate when subjected to asymmetrical blast loads (Case 4). As presented in this figure, deflection concentrated in the hypocenter of blast loads and nearby core elements.



**Table 2** Maximum midpoint deflection (mm) under 2 kg TNT asymmetrical blast loading scenario

Load cases	Center-front	Center-back	Hypo-center-front	Hypo-center-back
ASY 1	49.3	30.5	55.2	24.7
ASY 2	37.9	28.1	42.4	12.3
ASY 3	48.6	30.5	54.3	25.5
ASY 4	38.4	28.2	44.5	14.2

The results of asymmetrical blast analyses are summarized in Table 2


**Influence of boundary conditions**

In this study, five different boundary conditions were adopted for the numerical analyses. These boundary conditions applied to both cover plates except for BC 1 (see the section related to boundary conditions). According to the results, the boundary conditions of cover plates have a major influence on the dynamic response of sandwich panels under air blast loading. Free edges increase midpoint displacement meaningfully. Table 3 summarizes these numerical results.


Figures 15 and 16 show the displacement time-history of center of the panel and also middle of free edges for BC4 and BC5. As presented in Fig. 15, while for front plates, displacement of center is always larger than the displacement in center of the free edges, for the back plate displacement of free edges can exceed the center. If clamped boundary conditions apply only on one cover plate (BC 1-2), complete densification of the web elements occurs. In this case, increasing the thickness of core elements can be useful. Figure 17 shows the time-history of midpoint displacements of the model with 1.5 mm thick core elements. With the increase in the core’s thickness, complete densification does not occur in the web of the panel.

**Strain rate dependency**

Current results (see Fig. 18) show that when rate dependency is included in numerical modeling of blast loaded sandwich

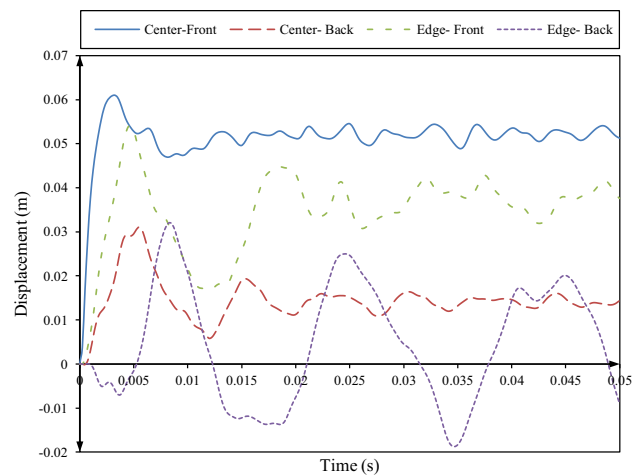

**Fig. 15** Displacement time-history under 2 kg TNT (BC 4)

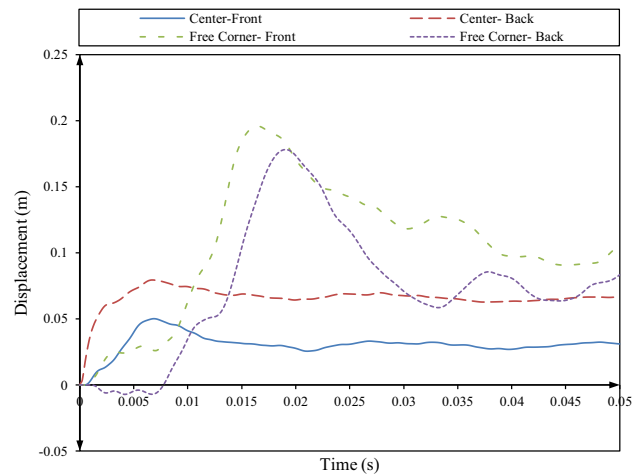


**Fig. 16** Displacement time-history under 2 kg TNT (BC 5)

panels, a stiffer response is achieved and less deflection is recorded. The rate of decrease in midpoint deflections depends mainly on the charge weight and results are sensitive to the values of adopted material constants. Therefore, precise data would be required for design purposes.

**Table 3** Maximum deflection (mm) for different boundary conditions under 2 kg TNT

Displacement (mm)	BC 1-1	BC 1-2	BC 2	BC 3	BC 4	BC 5
Center						
Front face	54.5	117.1	57.9	57.4	60.9	79.3
Back face	28.9	37.2	30.5	36.3	31.0	49.9
Free edge						
Front face	–	–	58.2	43.5	54.0	196.0*
Back face	–	–	33.6	45.7	31.9	177.9*

\*Displacements in free corner

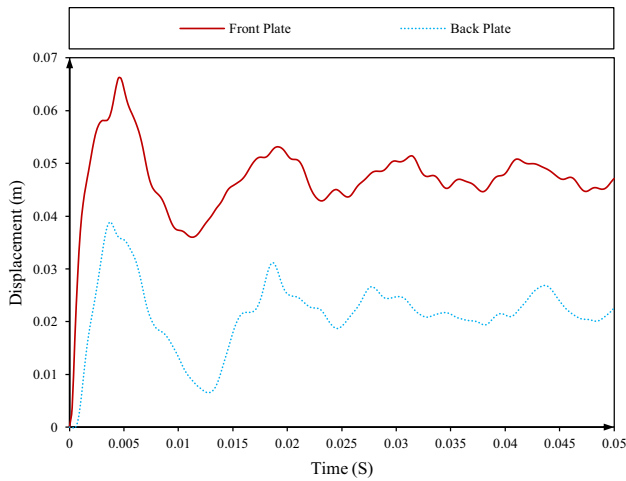

**Fig. 17** Model with strengthened core subjected to 2 kg explosive charge (BC 1-2)

Time-histories of the midpoint displacements of the model 1 under 1, 2 and 3 kg explosive charges have shown in Fig. 18.

### Conclusion


A novel configuration, i.e., drilled I-core elements, is suggested for the steel sandwich panels under blast scenarios. The nonlinear dynamic response of an innovative steel I-core sandwich panel with drilled core under blast loading scenarios is numerically investigated. Several parameters such as different boundary conditions and asymmetrical loading that can affect structural dynamics under blast loads were considered. Obtained results are compared with available experimental data to verify the developed finite element model and good agreement is achieved (see “Appendix 1”). The results confirm that this slight and economical modification in the conventional I-core sandwich panel leads to major performance improvement under blast loads. The main results of this study can be summarized as follows:

Proposed model with drilled I-core allows more plastic deformation, energy absorption and less midpoint deflection than equivalent structures, i.e., conventional I-core sandwich panel and solid plate with same weight and material. The dynamic response of the sandwich panel is drastically dependent on explosive weight. The differences between deflection of the front face and the back face are dependent on blast intensity; while for lowest blast load this differences are negligible, for the largest this differences are quite considerable. Performance of blast loaded sandwich panels is a function of blast intensity and therefore, design of panel should be performed according to specific expected blast risk on the target infrastructures to achieve maximum energy absorption capacity.

In asymmetrical loading, for all front faces, maximum displacements in hypocenter exceed the displacement in the center of the cover plates due to localized nature of blast loads. On the other hand, for the back face plates, the deflection in the center is more than hypocenter, because plastic deformation in core element dissipates most of the blast energy. Therefore, back faces’ responses are always smoother.

Boundary conditions have a significant influence on the dynamic response of sandwich panels under blast loading. Freedom of the edges increases the midpoint displacement. While for front plates, the displacement of the center is always larger than the center of the free edges, for the back plates deflection of free edges may exceed the center. Therefore, in the design and construction of infrastructures using sandwich panels with free edges, such a phenomenon should be carefully considered.

This study reports a comprehensive numerical study of blast response of the steel I-core sandwich panels. Indeed, there is still room for improvement. Size, pattern and distribution of the holes on the I-core elements affect the structural response and energy dissipation capacity of the sandwich panel. Focusing on this issue in the future researches is recommended.

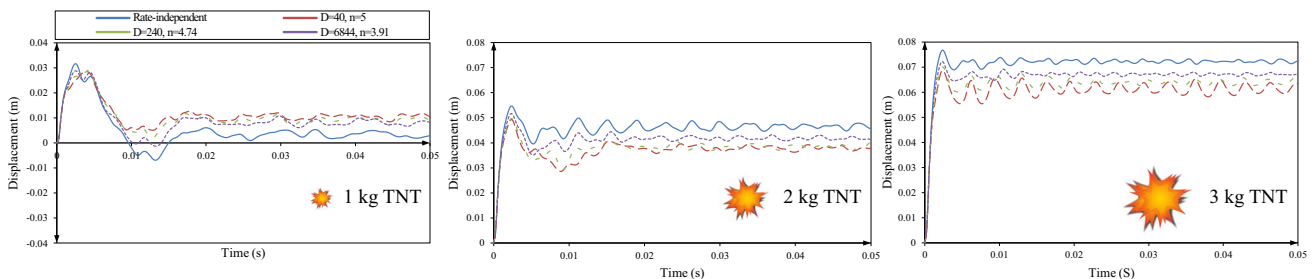

**Fig. 18** Influence of strain rate on panels’ dynamic response when subjected to different explosive charges

### Appendix 1: Verification and validation

The validation was performed in three phases. At first, structural model including loading, boundary conditions and numerical modeling techniques was examined by comparison between available experimental data of a blast loaded sandwich structure and obtained numerical results. Since the material used in the first phase was different to that used in the core of paper, as second level, the material model was validated with blast loaded plate with same material model. At the end, the mesh dependency was investigated to ensure the accuracy of developed FE model. However, the best way for the complete validation of the numerical models is to perform the experiments on the model with the exact same material, geometry and loading, that is out of the scope in


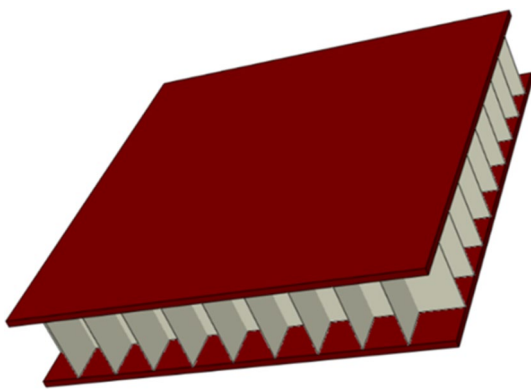


Fig. 19 Square honeycomb steel sandwich panel

Fig. 20 Comparison of experimental and numerical results; **a** displacement at different charge weights and **b** deformed shapes under different explosive charges

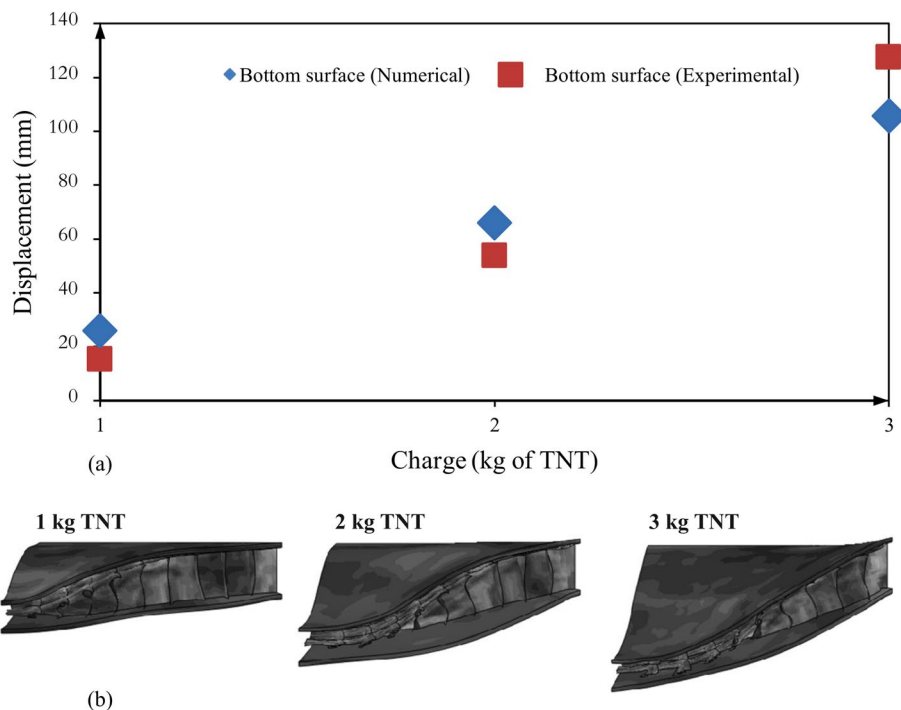

the current work. Required material data and finite element modeling parameter are presented in each subsection of “Appendix 1” and should not be mixed-up with the core of the manuscript in which the results are presented according to the data provided in the methodology section.

### Structural model and loading

The sandwich panel described by [40] was used for validation of developed finite element model. As shown in Fig. 19, this sandwich panel consists of a square honeycomb core with cover plates. The overall dimensions of panel are  $610 \times 610 \times 61 \text{ mm}^3$ . The top and bottom plates are 5 mm thick, and the honeycomb webs has 0.76 mm thickness. All part of the sandwich panel is made of a steel alloy as described in [41]. The source of the blast is at a standoff distance of 100 mm vertically above the center of the top cover plate. All edges of the structure are clamped. The property of the blast load is specified using the ConWep. The center displacements after 1.5 millisecond were used to compare with the experimental results reported by [40]. The obtained results are presented in Fig. 20a. The results compare within acceptable error with the experimental results. Figure 20b shows deformed shapes of sandwich panels under different explosive charges.

### Material validation

The panels reported in [40] and the panels presented in this study were made of different material models. Although

**Table 4** Comparison with experimental and numerical results


S	$t$ (m)	$D$ (m)	$W$ (kg)	$R$ (m)	$\delta/t$ (Experimental-Neuberger et al.)	$\delta/t$ (Numerical-current study)
2	0.02	1	3.75	0.2	2.70	2.50
4	0.01	0.5	0.468	0.1	2.60	2.46
2	0.02	1	8.75	0.2	5.35	5.83

the results show good correlation between the presented numerical models and the experiments, this does not validate the whole FE model. In order to validate the material model used in the current study, a circular plate subject to blast loading as a result of blast of 50 kg of TNT, 0.5 m directly above the center of the plate, as described in [42], was considered. In this part, this blast loaded plate numerically investigated in order to verify the material model. The plate has a radius of 1 m and a thickness of 0.05 m. Blast loading is applied on the top surface of the plate. The density of the plate material is 7850 kg/m<sup>3</sup>, Young’s modulus is 210 GPa and Poisson’s ratio is 0.28. The plastic property is modeled with an isotropic hardening model, with yield stress of 1000 MPa. A nonlinear dynamic analysis is performed for a period of 4 milliseconds. The explosive test was performed for two scale factor  $S = 2$  and  $S = 4$  [42].

Table 4 shows a comparison between experimental results presented in [42] and obtained numerical results. In this table S is scale factor and t, D, W and  $\delta$  are thickness of plate, diameter of model, weight of explosive charge and maximum midpoint deflection under blast loads, respectively. Numerical models show a good agreement with measured test results for maximum displacement, so the multi-linear elastic-plastic model that used in current study have sufficient accuracy for numerical modeling of blast loaded structures. Figure 21 shows displacement contour for 3.75 kg TNT and 0.2 m standoff distance ( $S = 2$ ).

**Mesh size dependency**


It is a well-known fact that the explicit analysis on blast loaded structures highly depends on mesh configuration. On the other hand, the mesh size is limited by the available computational capacity and the size of the numerical model. One of the major features in any numerical simulation of structures under extreme loads is the use of an adequate mesh size. In this study, three sets of mesh sizes including 10 mm, 12.5 mm and 20 mm was considered for core elements with the constant mesh size of 20 mm for cover plates. According to result, refining the mesh

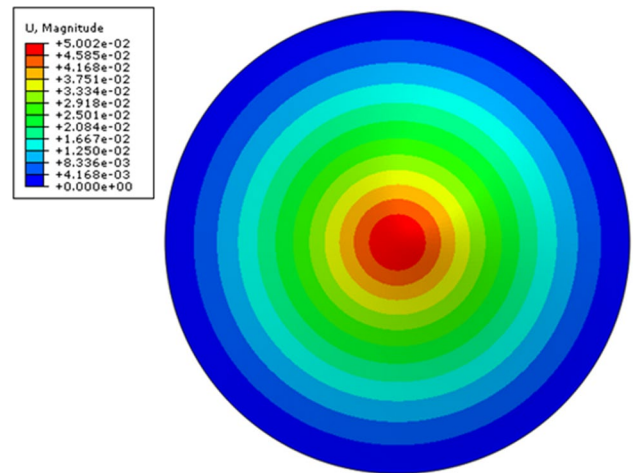

**Fig. 21** Displacement contour for 3.75 kg TNT and 0.2 m standoff distance ( $S = 2$ )

leads to changes in the response of the panel under blast loads, but results do not change considerably using meshes finer than 12.5 mm for web elements, which indicates this mesh size is adequate and model has sufficient accuracy with this size. Figure 22 shows influence of mesh size on dynamic response of I-core panel subjected to 2 kg TNT for front and back face, respectively. In this study, all other comparisons are made with reference to this validated mesh size to ensure the accuracy of proposed numerical models.

Refining the mesh usually leads to larger displacements and coarse mesh usually develops a stiffer response. An interesting observation as side result of this study demonstrate the cases in which finer mesh leads to smaller displacement. As shown in Fig. 22b, the deflection of the back plate is larger with coarse mesh size. This is due to the fact that finer mesh allows more plastic dissipation in the core element, and therefore, back plate response is smaller. Therefore, aforementioned statement regarding the mesh size should be used carefully and generalization should be avoided.

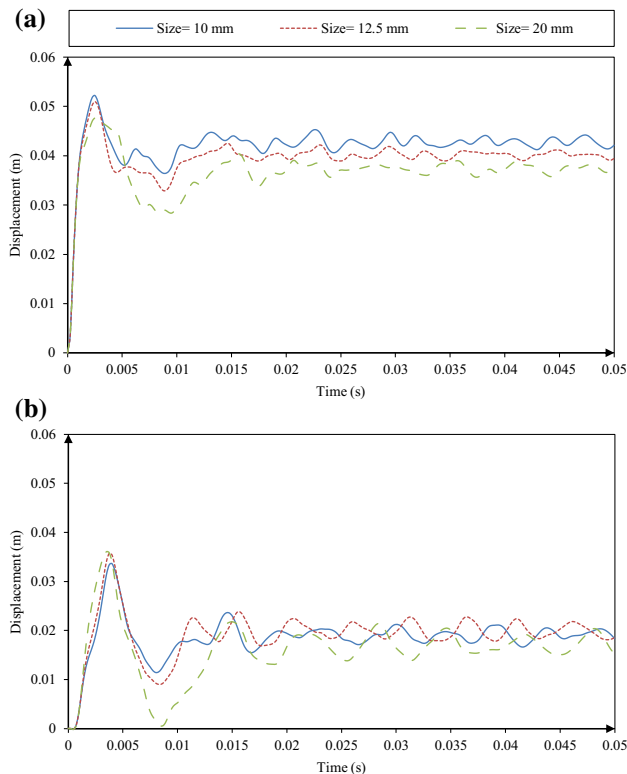

**Fig. 22** Influence of mesh size on dynamic response under 2 kg TNT charge; **a** front face displacement and **b** back face displacement

**Funding** Open access funding provided by Politecnico di Torino within the CRUI-CARE Agreement.

## Declarations

**Conflict of interest** The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

**Ethical approval** This paper does not contain any studies with human participants or animals performed by any of the authors.

**Informed consent** For this type of study formal consent is not required.

**Open Access** This article is licensed under a Creative Commons Attribution 4.0 International License, which permits use, sharing, adaptation, distribution and reproduction in any medium or format, as long as you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons licence, and indicate if changes were made. The images or other third party material in this article are included in the article's Creative Commons licence, unless indicated otherwise in a credit line to the material. If material is not included in the article's Creative Commons licence and your intended use is not permitted by statutory regulation or exceeds the permitted use, you will need to obtain permission directly from the copyright holder. To view a copy of this licence, visit <http://creativecommons.org/licenses/by/4.0/>.

## References

- Vatani Oskoueï A, Kiakojouri F (2015) Non-linear dynamic analysis of steel hollow i-core sandwich panel under air blast loading. *Civ Eng Infrastruct J* 48(2):323–344. <https://doi.org/10.7508/cej.2015.02.008>
- Zhang C, Cheng Y, Zhang P, Duan X, Liu J, Li Y (2017) Numerical investigation of the response of i-core sandwich panels subjected to combined blast and fragment loading. *Eng Struct* 151:459–471. <https://doi.org/10.1016/j.engstruct.2017.08.039>
- Tavakoli H, Hasani A, Kiakojouri F (2022) Blast resistance and energy absorption of slotted i-core steel sandwich panel: a numerical study. *Iran J Sci Technol Trans Civ Eng*. <https://doi.org/10.1007/s40996-022-00913-x>
- Li X, Wang Z, Zhu F, Wu G, Zhao L (2014) Response of aluminium corrugated sandwich panels under air blast loadings: experiment and numerical simulation. *Int J Impact Eng* 65:79–88. <https://doi.org/10.1016/j.ijimpeng.2013.11.002>
- Zhang P, Liu J, Cheng Y, Hou H, Wang C, Li Y (2015) Dynamic response of metallic trapezoidal corrugated-core sandwich panels subjected to air blast loading—an experimental study. *Mater Des* 1980–2015(65):221–230. <https://doi.org/10.1016/j.matdes.2014.08.071>
- Cheng Y, Zhou T, Wang H, Li Y, Liu J, Zhang P (2019) Numerical investigation on the dynamic response of foam-filled corrugated core sandwich panels subjected to air blast loading. *J Sandwich Struct Mater* 21(3):838–864. <https://doi.org/10.1177/1099636217700350>
- Rubino V, Deshpande V, Fleck N (2009) The dynamic response of clamped rectangular y-frame and corrugated core sandwich plates. *Eur J Mech-A/Solids* 28(1):14–24. <https://doi.org/10.1016/j.euromechsol.2008.06.001>
- St-Pierre L, Fleck N, Deshpande V (2015) The dynamic indentation response of sandwich panels with a corrugated or y-frame core. *Int J Mech Sci* 92:279–289. <https://doi.org/10.1016/j.ijmecsci.2014.11.021>
- Xiang X, Lu G, Ma G, Li X, Shu D (2016) Blast response of sandwich beams with thin-walled tubes as core. *Eng Struct* 127:40–48. <https://doi.org/10.1016/j.engstruct.2016.08.034>
- de Lemos Coutinho L, Abada M, Ibrahim A, Jung S (2022) Energy absorption of cfrp composite thin-walled tubes with pvc foam-filled cores. *Innov Infrast Solut* 7(2):1–12. <https://doi.org/10.1007/s41062-022-00765-4>
- Li X, Zhang P, Wang Z, Wu G, Zhao L (2014) Dynamic behavior of aluminum honeycomb sandwich panels under air blast: experiment and numerical analysis. *Compos Struct* 108:1001–1008. <https://doi.org/10.1016/j.compstruct.2013.10.034>
- Li S, Li X, Wang Z, Wu G, Lu G, Zhao L (2017) Sandwich panels with layered graded aluminum honeycomb cores under blast loading. *Compos Struct* 173:242–254. <https://doi.org/10.1016/j.compstruct.2017.04.037>
- Imbalzano G, Linforth S, Ngo TD, Lee PVS, Tran P (2018) Blast resistance of auxetic and honeycomb sandwich panels: comparisons and parametric designs. *Compos Struct* 183:242–261. <https://doi.org/10.1016/j.compstruct.2017.03.018>
- Khan M, Baqi A, Sadique M (2021) Structural behavior of ferro cellular insulated wall panel. *Innov Infrast Solut* 6(4):1–16. <https://doi.org/10.1007/s41062-021-00596-9>
- Chen G, Cheng Y, Zhang P, Cai S, Liu J (2021) Blast resistance of metallic double arrowhead honeycomb sandwich panels with different core configurations under the paper tube-guided air blast loading. *Int J Mech Sci* 201:106457. <https://doi.org/10.1016/j.ijmecsci.2021.106457>

16. Al-Rifaie H, Studziński R, Gajewski T, Malendowski M, Sumelka W, Sielicki PW (2021) A new blast absorbing sandwich panel with unconnected corrugated layers-numerical study. *Energies* 14(1):214. <https://doi.org/10.3390/en14010214>
17. Nurick G, Langdon G, Chi Y, Jacob N (2009) Behaviour of sandwich panels subjected to intense air blast-part 1: experiments. *Compos Struct* 91(4):433–441. <https://doi.org/10.1016/j.compstruct.2009.04.009>
18. Kiakojoouri F, Sheidaii M (2019) Numerical analysis of steel i-core sandwich panels subjected to multiple consecutive blast scenarios. *Iran J Sci Technol Trans Civ Eng* 43(1):371–382. <https://doi.org/10.1007/s40996-018-0171-7>
19. Li R, Kardomateas GA, Simitse GJ (2008) Nonlinear response of a shallow sandwich shell with compressible core to blast loading. *J Appl Mech*. doi 10(1115/1):2937154
20. Hoo Fatt MS, Palla L (2009) Analytical modeling of composite sandwich panels under blast loads. *J Sandwich Struct Mater* 11(4):357–380. <https://doi.org/10.1177/1099636209104515>
21. Cheng QH, Lee HP, Lu C (2006) A numerical analysis approach for evaluating elastic constants of sandwich structures with various cores. *Compos Struct* 74(2):226–236. <https://doi.org/10.1016/j.compstruct.2005.04.007>
22. Zhu F, Zhao L, Lu G, Gad E (2009) A numerical simulation of the blast impact of square metallic sandwich panels. *Int J Impact Eng* 36(5):687–699. <https://doi.org/10.1016/j.ijimpeng.2008.12.004>
23. Vatani OA, Kiakojoouri F (2012) Steel plates subjected to uniform blast loading. *Appl Mech Mater* 108:35–40. <https://doi.org/10.4028/www.scientific.net/AMM.108.35>
24. Tavakoli H, Kiakojoouri F (2014) Numerical dynamic analysis of stiffened plates under blast loading. *Latin Am J Solids Struct* 11(2):185–199. <https://doi.org/10.1590/S1679-7825201400020003>
25. Sinha AK, Kanaujia S, Kumar M, Sachdeva A, Kumar S, Singh S (2022) Effect of positional eccentricity of blast source on beam-column joint response of framed systems. *Innov Infrastruct Solut* 7(2):1–13. <https://doi.org/10.1007/s41062-022-00775-2>
26. Shukla PJ, Desai AK, Modhera CD (2021) Dynamic response of cut and cover tunnel section under blast loading. *Innov Infrastruct Solut* 6(1):1–23. <https://doi.org/10.1007/s41062-020-00391-y>
27. Zaid M, Sadique M, Alam M (2021) Blast analysis of tunnels in manhattan-schist and quartz-schist using coupled-eulerian-lagrangian method. *Innov Infrastruct Solut* 6(2):1–10. <https://doi.org/10.1007/s41062-020-00446-0>
28. Mori L, Queheillalt D, Wadley H, Espinosa H (2009) Deformation and failure modes of i-core sandwich structures subjected to underwater impulsive loads. *Exp Mech* 49(2):257–275. <https://doi.org/10.1007/s11340-008-9166-9>
29. Chen G, Cheng Y, Zhang P, Liu J, Chen C, Zhao Y, Wang H (2020) Contact underwater explosion response of metallic sandwich panels with different face-sheet configurations and core materials. *Thin-Walled Struct* 157:107126. <https://doi.org/10.1016/j.tws.2020.107126>
30. Tasdemirci A, Kara A, Turan K, Sahin S, Guden M (2016) Effect of heat treatment on the blast loading response of combined geometry shell core sandwich structures. *Thin-Walled Struct* 100:180–191. <https://doi.org/10.1016/j.tws.2015.12.012>
31. Fahr P, Yazici M, Shukla A (2018) Shock response of filled corrugated sandwich structures under extreme temperatures. *J Sandwich Struct Mater* 20(1):130–149. <https://doi.org/10.1177/1099636216650987>
32. Ebrahimi H, Ghosh R, Mahdi E, Nayeb-Hashemi H, Vaziri A (2016) Honeycomb sandwich panels subjected to combined shock and projectile impact. *Int J Impact Eng* 95:1–11. <https://doi.org/10.1016/j.ijimpeng.2016.04.009>
33. Ebrahimi H, Vaziri A (2013) Metallic sandwich panels subjected to multiple intense shocks. *Int J Solids Struct* 50(7–8):1164–1176. <https://doi.org/10.1016/j.ijsolstr.2012.12.013>
34. Zhang D, Zhao Z, Du S, Chen W, Yang F, Ni C, Yang Z, Lu T (2021) Dynamic response of ultralight all-metallic sandwich panel with 3d tube cellular core to shallow-buried explosives. *Sci China Technol Sci*. <https://doi.org/10.1007/s11431-020-1774-1>
35. Hibbitt H, Karlsson B, Sorensen P (2016) Abaqus analysis user's manual version 2016. Dassault Systèmes Simulia Corp, Rhode Island
36. Jones N (1990) Structural impact. Cambridge University Press, Cambridge
37. Boh J, Louca L, Choo Y (2004) Strain rate effects on the response of stainless steel corrugated firewalls subjected to hydrocarbon explosions. *J Construct Steel Res* 60(1):1–29. <https://doi.org/10.1016/j.jcsr.2003.08.005>
38. Ngo T, Mendis P, Gupta A, Ramsay J (2007) Blast loading and blast effects on structures-an overview. *Electron J Struct Eng* 7(S1):76–91
39. Kiakojoouri F, Sheidaii MR, De Biagi V, Chiaia B (2021) Blast-induced progressive collapse of steel moment-resisting frames: numerical studies and a framework for updating the alternate load path method. *Eng Struct* 242:112541. <https://doi.org/10.1016/j.engstruct.2021.112541>
40. Dharmasena KP, Wadley HN, Xue Z, Hutchinson JW (2008) Mechanical response of metallic honeycomb sandwich panel structures to high-intensity dynamic loading. *Int J Impact Eng* 35(9):1063–1074. <https://doi.org/10.1016/j.ijimpeng.2007.06.008>
41. Nahshon K, Pontin M, Evans A, Hutchinson J, Zok F (2007) Dynamic shear rupture of steel plates. *J Mech Mater Struct* 2(10):2049–2066. <https://doi.org/10.2140/jomms.2007.2.2049>
42. Neuberger A, Peles S, Rittel D (2007) Scaling the response of circular plates subjected to large and close-range spherical explosions. Part i: air-blast loading. *Int J Impact Eng* 34(5):859–873. <https://doi.org/10.1016/j.ijimpeng.2006.04.001>