

Tunable topological edge modes in Su-Schrieffer-Heeger arrays

Original

Tunable topological edge modes in Su-Schrieffer-Heeger arrays / Chaplain, G. J.; Gliozzi, A. S.; Davies, B.; Urban, D.; Descrovi, E.; Bosia, F.; Craster, R. V.. - In: APPLIED PHYSICS LETTERS. - ISSN 0003-6951. - 122:22(2023).
[10.1063/5.0152172]

Availability:

This version is available at: 11583/2979592 since: 2023-06-26T13:22:41Z

Publisher:

American Institute of Physics AIP

Published

DOI:10.1063/5.0152172

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

RESEARCH ARTICLE | MAY 31 2023

Tunable topological edge modes in Su–Schrieffer–Heeger arrays

Special Collection: [Fundamentals and Applications of Metamaterials: Breaking the Limits](#)

G. J. Chaplain ; A. S. Gliozzi ; B. Davies ; D. Urban ; E. Descrovi ; F. Bosia  ; R. V. Craster  




Appl. Phys. Lett. 122, 221703 (2023)
<https://doi.org/10.1063/5.0152172>




CrossMark



 QBLOX

Integrates all Instrumentation + Software for Control and Readout of

Superconducting Qubits
NV-Centers
Spin Qubits

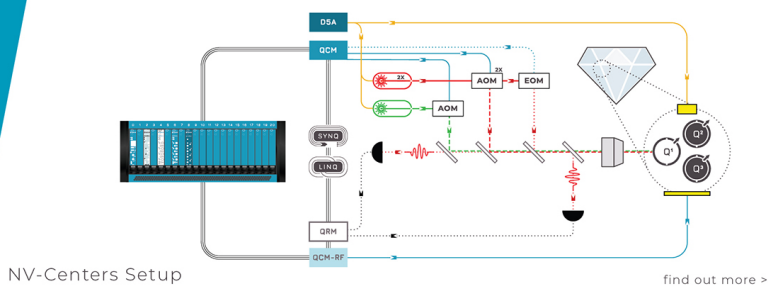

Tunable topological edge modes in Su-Schrieffer-Heeger arrays

Cite as: Appl. Phys. Lett. **122**, 221703 (2023); doi: [10.1063/5.0152172](https://doi.org/10.1063/5.0152172)

Submitted: 28 March 2023 · Accepted: 12 May 2023 ·

Published Online: 31 May 2023



View Online



Export Citation



CrossMark

G. J. Chaplain,¹  A. S. Gliozzi,²  B. Davies,³  D. Urban,⁴  E. Descrovi,²  F. Bosia,^{2,a)}  and R. V. Craster^{3,a)} 

AFFILIATIONS

¹Centre for Metamaterial Research and Innovation, Department of Physics and Astronomy, University of Exeter, Exeter EX4 4QL, United Kingdom

²Department of Applied Science and Technology, Politecnico di Torino, Torino 10129, Italy

³Department of Mathematics, Imperial College London, London SW7 2AZ, United Kingdom

⁴Department of Electronic Systems, Norwegian University of Science and Technology, Trondheim 7491, Norway

Note: This paper is part of the APL Special Collection on Fundamentals and Applications of Metamaterials: Breaking the Limits.

a) Authors to whom correspondence should be addressed: federico.bosia@polito.it and r.craster@imperial.ac.uk

ABSTRACT

A potential weakness of topological waveguides is that they act on a fixed narrow band of frequencies. However, by 3D printing samples from a photo-responsive polymer, we can obtain a device whose operating frequency can be fine-tuned dynamically using laser excitation. This greatly enhances existing static tunability strategies, typically based on modifying the geometry. We use a version of the classical Su-Schrieffer-Heeger model to demonstrate our approach.

Published under an exclusive license by AIP Publishing. <https://doi.org/10.1063/5.0152172>

Topological edge modes perform robust wave localization at specific frequencies. This makes them an appealing starting point for designing wave control devices. A topological edge mode is formed when symmetries are broken in a periodic system that has a topologically non-trivial bandgap, creating an interface along which waves of specific frequencies travel. Due to the underlying bandgap material, the waves are unable to propagate away from the interface into the bulk, giving a strong waveguide. The original “topological insulators” were developed in quantum mechanics,^{1–3} but the principle has spread across classical wave physics, including electromagnetism, acoustics, elasticity, and mechanics.^{4–7}

An important feature of topological waveguides is that they are frequency specific. This is either a strength or a weakness (depending on perspective), but it means that it is important that the operating frequency can be tuned to suit the application. There are a variety of tunability strategies in the literature, which often rely on geometric manipulation, achieved, for example, by manufacturing new samples^{8,9} or physically moving meta-atoms.¹⁰ Tunability can also be achieved by modulating active elements.¹¹ Building on these ideas, we have developed a simple approach for tuning the eigenfrequency of the topological edge mode dynamically and remotely by using a laser to locally alter the material mechanical parameters.

We will study a one-dimensional topological system, based on the well-known Su-Schrieffer-Heeger (SSH) model,¹² realized with

periodically spaced rods on an elastic beam (Fig. 1). The SSH model is often regarded as the simplest configuration supporting a topologically non-trivial bandgap. One-dimensional topological models are not only convenient toy models but also have important applications, for example in energy harvesting¹³ and lasing.¹⁴ The basic principle of the SSH model is arranging elements in pairs with alternating “strong” and “weak” coupling strengths (in many classical wave settings, this is realized by alternating “short” and “long” separation distances). In this one-dimensional case, the relevant topological index is the Zak phase¹⁵ and edge modes can be created by making a perturbation that creates an interface with different associated Zak phases on either side.

Our approach to tunability has two steps. The first step is to select a geometry that yields an edge mode with the desired eigenfrequency. In the context of the SSH model, this can be done straightforwardly by altering the separation length at the interface, as depicted in Fig. 1. Tunable topological edge modes based on this principle have been studied theoretically in both one-dimensional¹⁶ and three-dimensional¹⁷ models. It was shown that varying the separation length causes the eigenfrequency of the topological edge mode to move across the bandgap (Fig. 1). This idea was motivated by related notions of spectral flow that have been studied in elastic¹⁸ and quantum¹⁹ systems.

The dynamic part of our tunability strategy relies on using photo-responsive polymers for fabrication.²⁰ Azobenzene-containing dyes are very common molecular photo-switches capable of

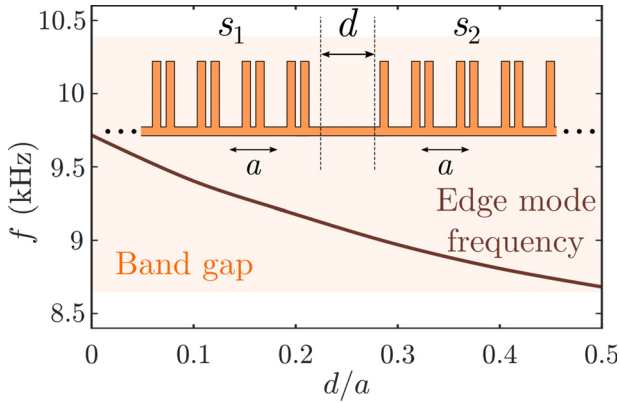


FIG. 1. Tunable edge mode by dislocation: Frequency domain FEM simulations showing change in edge mode frequency with dislocation length d between two SSH chains s_1 and s_2 , with unit cell width a . We supplement this with dynamic tunability through the use of a photo-responsive material.

undergoing a conformational change between two isomeric states upon light absorption.²¹ When the two isomer absorption bands have some overlaps, as in this case, photo-isomerization can be cyclic and continuously triggered by single wavelength radiation.²² In such a disordered arrangement of azo-dyes, the photo-thermal effect is then enhanced by photo-isomerization, leading to fast light-induced changes in the polymer mechanical properties.²³ As detailed below, our samples are 3D printed from a commercial elastic resin that is impregnated with a dispersed azo-dye, producing significant variations of Young’s modulus upon laser illumination. This presents a mechanism for altering the eigenfrequency of topological edge modes. This is valuable, first, for correcting some of the effects of any manufacturing imperfections that may undermine our geometric tunability strategy. However, the photo-responsivity is stronger than this as it augments our tunability strategy by adding the possibility for the eigenfrequency to be tuned dynamically.

We first briefly outline the design of the SSH interface in an elastic wave system consisting of periodically spaced rods on an elastic beam. Such systems have been theoretically shown to support edge modes, with applications in elastic energy harvesting.¹³ A schematic of the full structure and experimental setup are shown in Fig. 2(a) with the SSH interface marked by a vertical white dashed line. The structure comprises a horizontal elastic beam of thickness $t = 1.5$ mm and width $a = 7$ mm. A periodic array of elastic rods is formed, comprising of a unit cell of width a , with two rods of height $h = 20$ mm and radius $r = 0.5$ mm, separated by a distance s_i about the cell center that mediates the strong and weak couplings [Fig. 2(b)]. The total length of the support beam is then dictated by the number of unit cells included in the array. We denote the rod separation distance, from the center of each unit cell, s_i , where $i = 1, 2$ to distinguish between the two sides of the interface. Due to the non-uniqueness of the unit cell, a periodic array with chosen $s_1 = a/3.9$ reproduces the same array as one with a separation $s_2 = a - s_1$, as shown in Fig. 2(b). The unit cells are related by a mere translation of $a/2$; they have identical dispersion curves and share a common bandgap. The dispersion relations of each cell are shown in Fig. 2(c) (evaluated by an eigenfrequency simulation employing the finite element method (FEM), using COMSOL Multiphysics²⁴—see the supplementary material). We form an interface between two arrays (comprising nine cells) of each configuration, that is, one with central separation s_1 and the other with s_2 . We are guaranteed that this interface supports a topologically protected interface mode by virtue of each configuration sharing a common bandgap in addition to the distinct Zak phase associated with the bands of each geometry.^{25,26} Leveraging the notation of quantum mechanics, the Zak phase for each dispersion curve, φ , is defined as

$$\varphi = i \int_{BZ} \langle u_k | \partial_k | u_k \rangle dk, \tag{1}$$

where $|u_k\rangle$ is the wavefunction (eigensolution) of the elastic field at a wavevector k within the first Brillouin zone (BZ). Several efficient schemes exist to calculate such invariants.²⁷ We numerically confirm

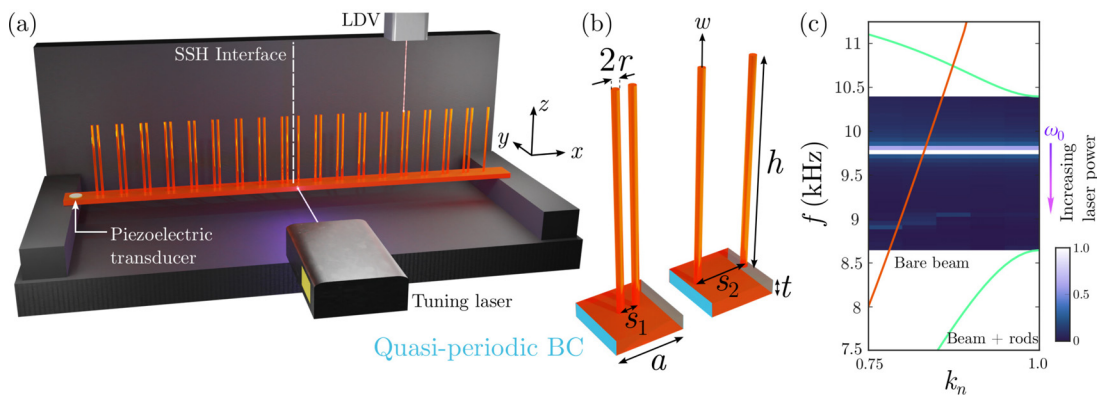


FIG. 2. (a) Schematic of experimental setup. (b) Unit cell geometries. (c) Dispersion curves for bare elastic beam (orange) and for the unit cells shown in (b) (green), plotted against normalized wavevector such that $k_n = 1 \equiv k = \pi/a$. Floquet–Bloch quasi-periodic conditions are employed in the FE eigenfrequency model, shown by the blue surfaces in (b). The out-of-plane displacement (w) in the z -direction (measured in experiments) is also shown. The colorscale in (c) shows normalized Fourier spectra, obtained via time-domain FE simulation (supplementary material) and shows the expected edge mode of frequency ω_0 within bandgap. This frequency ω_0 can be shifted down by increasing the power of the exciting laser.

the existence of this edge mode via a time domain simulation of the experimental setup, shown by the Fourier spectra in Fig. 2(c), where the edge mode is labeled ω_0 . The introduction of a local defect by altering the material parameter at the interface can fine-tune the frequency of the edge mode. This is achieved by decreasing Young's modulus, locally, at the interface position on the supporting beam by increasing the control (blue) laser power.

A more precise estimation of the effect of laser illumination on the edge mode properties can be derived from frequency domain FEM simulations, again performed using COMSOL Multiphysics. A detailed description of the numerical methods is provided in the supplementary material. The sample geometry illustrated in Fig. 2(a) is considered, with an overall beam length of 196 mm, corresponding to 28 unit cells of lattice parameter a . A harmonic boundary load is applied on the underside of the fourth unit cell from the edge, corresponding to the location of the piezoelectric transducer in Fig. 2(a)—shown in Fig. 3(c). The corresponding transmission loss (calculated as the ratio between the transmitted and input power for out-of-plane vibrations) is then evaluated at various points along the sample, on top of the rods, in the 5–13 kHz range. The adopted material properties are Young's modulus $E = 1$ GPa, Poisson's ratio $\nu = 0.4$, and density $\rho = 1100$ kg/m³. Damping is accounted for by introducing an isotropic loss factor of $\eta = 0.02$. The resulting spectra are shown in Fig. 3(a). Despite being in a bandgap (shaded in orange), the localized mode is detected (occurring at approximately 9.5 kHz) and visualized as an isolated peak. We are numerically (and experimentally) able to detect the edge mode with this excitation configuration due to the finite length of the sample coupled with the length of the decay of the mode within the bandgap; the decay lengths of frequencies within the gap (which

can be predicted through high frequency homogenization^{16,28}) reach the interface and ignite the edge mode. In contrast, in Fig. 1(c), we excite in the time domain (as in the experiment) at the interface position (supplementary material). In Fig. 3(a), curves of different colors, representing measurements at different spatial locations, indicate an exponential amplitude decay of the mode when moving from the central defect region ("Pos. 0") to the edge of the sample ("Pos. 3"), as illustrated in Fig. 3(c). The effect of laser illumination on the transmission loss spectrum is shown in Fig. 3(b): A Young's modulus reduction of up to 0.3 GPa ("100%") occurs in the central region of the photo-responsive sample for the maximum laser power, and this leads to a frequency downshift of the localized mode of approximately 600 Hz, demonstrating that the tunability of the edge mode can, theoretically, occur over a significant fraction of the width of the bandgap (approximately 35%).

Experimental samples were fabricated using a commercial 3D digital light processing printer (SolFlex SF650, W2P Engineering GmbH) with a SolFlex Tech polymeric resin (material properties given above). Polymerization was induced with a 385 nm wavelength UV-LED with a power density of 8 ± 0.5 mW/cm². The nominal lateral resolution is 50 μ m, and printing was performed in layers of 50 μ m, each exposed for 1.5 s, leading to a dose of 12 mJ/cm² per layer. After printing, the sample was washed with isopropyl alcohol (IPA), sonicated in IPA, and dried thoroughly. It was then soaked for 10 min in an acetone bath containing 0.25 mg/ml photo-responsive azo-dye Disperse Red 1 methacrylate (DR1m), swelling the pre-cured structure, and thus permitting homogeneous dye dispersion. Finally, the swollen structure was dried for 1 hour until the pristine shape was recovered before being UV-post-cured for 1 h under all-around illumination in the wavelength range of 320–450 nm.

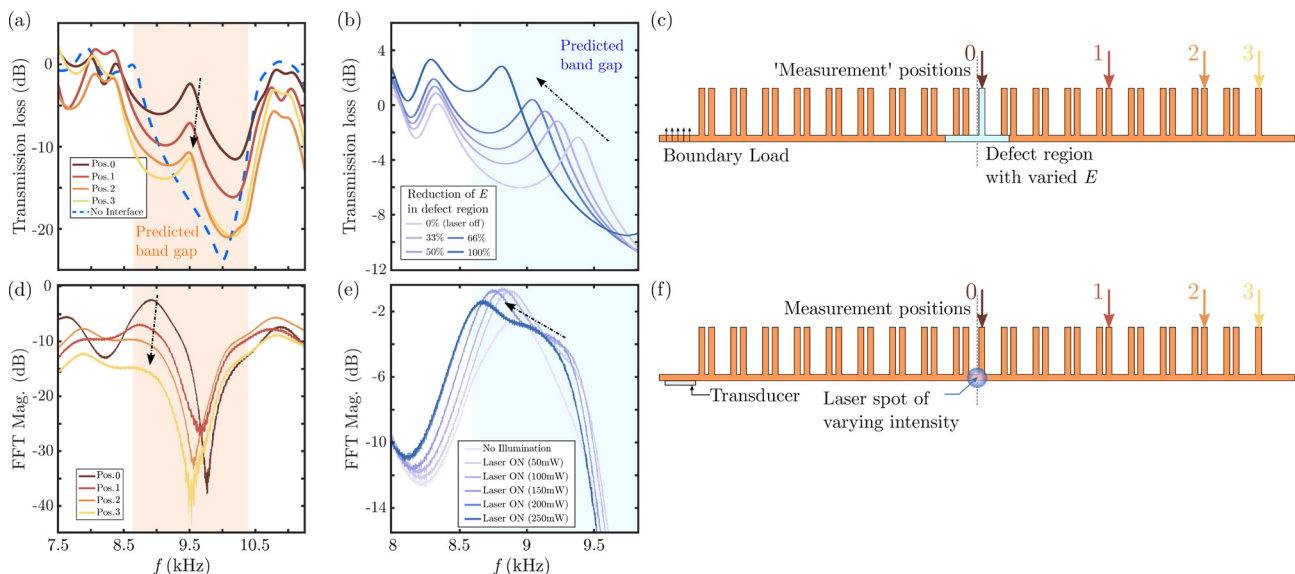


FIG. 3. Frequency domain FEM simulations and experimental results: existence and tunability of protected edge mode. (a) Numerical confirmation of edge mode shown by the transmission loss as a function of frequency, evaluated at different positions along the sample. Exponential decay with position of the edge mode amplitude is observed away from the interface, as expected. (b) Tuning the frequency of the edge mode by introducing a defect (altered Young's modulus, E). (c) Schematic with "measurement" positions (pos. 1–3), defect region shown in blue, and boundary load excitation. (d) Experimental confirmation of edge mode shown by the magnitude of the Fourier spectrum, measured at different positions along the sample. Exponential decay with position of the edge mode amplitude is observed, as expected. (e) Tuning the frequency of the edge mode by introducing a defect with increasing laser power (altering Young's modulus, E). (f) Schematic with measurement positions (pos. 1–3), defect region shown by laser spot blue, and transducer position shown.

The experimental setup is shown in Fig. 2(a): A 20 mm diameter piezoelectric transducer was glued to the sample at one end, and a frequency sweep between 5 and 13 kHz (with a duration of 1 s) was injected into the sample using an Agilent 33500 function generator, amplified by a linear amplifier (FLC Electronics, A400DI). The transducer was glued to the underside of the sample, but is shown on top side of Fig. 2(a) for clarity. The out-of-plane (z -direction in Fig. 2) vibration velocity amplitude was measured at various points along the sample, on top of the rods, using a Polytec OFV-505 laser vibrometer. Using an additional 405 nm-wavelength laser beam impinging laterally on the central region of the sample [see Fig. 2(a)], the material's Young's modulus can be reduced locally by light stimulation. The laser has a maximum power output of 250 mW and can be focused on an approximately 30 mm² area.

The fast Fourier transform (FFT) of the acquired signals is plotted in Fig. 3(d), which clearly shows the bandgap region and an isolated peak corresponding to the localized mode near 9 kHz. As the signal detection point moves from the central position 0 to the lateral position 3 [Fig. 3(f)], the FFT peak amplitude drops exponentially, as predicted theoretically and in simulations, while other spectral features remain relatively unchanged. The experimental peak widths appear larger than those in simulations, due to an oversimplified viscoelastic model that neglects significant damping. Illumination of the central defect region with the laser, for increasing values of output power, is shown in Fig. 3(e), demonstrating that the peak relative to the localized mode shifts to lower frequencies, approaching the band edge while reaching a maximum variation of approximately 300 Hz for 250 mW, compared to the original frequency. The variation is qualitatively similar to the predictions by theory and simulation, but less drastic due to the fact that the adopted laser power is not sufficient to generate a full photo-isomerization of the azo-units in the polymeric material. The peak shift is fully reversible when removing illumination or decreasing illumination power in any number of cycles. Similar results were obtained on a second specimen with different geometric parameters (see the supplementary material).

In summary, we have demonstrated experimentally the possibility of dynamically fine-tuning the frequency of topological edge modes in SSH arrays consisting of appropriately spaced rods on a beam, realized in a 3D-printed photo-responsive polymer. The frequency shift due to the local illumination of the sample is linearly dependent on the laser power, can reach the bandgap edge, and is fully reversible when illumination is removed. Measurements have been performed on two different sample geometries and provide similar results, demonstrating flexibility in design possibilities.

This work shows the potential to use photo-responsive materials to create topological edge modes with dynamic tunability. This builds on existing strategies for tunability through geometric manipulation. This principle could be developed to multi-dimensional topological systems, to add dynamic tunability to topological waveguides and energy splitters. By providing a means to dynamically alter the operating frequency, this would greatly increase the versatility of these devices.

See the supplementary material for the details of the FE modeling, along with an additional sample geometry.

A.S.G., F.B., and R.V.C. are supported by the European Commission H2020 FET Open "Boheme" Grant No. 863179. B.D.

is supported by the Engineering and Physical Sciences Research Council through a Research Fellowship with Grant No. EP/X027422/1. G.J.C. gratefully acknowledges financial support from the Royal Commission for the Exhibition of 1851 in the form of a Research Fellowship.

AUTHOR DECLARATIONS

Conflict of Interest

The authors have no conflicts to disclose.

Author Contributions

Gregory James Chaplain: Conceptualization (equal); Data curation (equal); Investigation (equal); Validation (equal); Writing – original draft (equal); Writing – review & editing (equal). **Antonio Salvador Gliozi:** Investigation (equal); Validation (equal). **Bryn Davies:** Conceptualization (equal); Formal analysis (equal); Investigation (equal); Validation (equal); Writing – original draft (equal); Writing – review & editing (equal). **David Urban:** Investigation (equal). **Emiliano Descrovi:** Resources (equal); Supervision (equal). **Federico Bosia:** Funding acquisition (equal); Investigation (equal); Writing – original draft (equal); Writing – review & editing (equal). **Richard V. Craster:** Conceptualization (equal); Funding acquisition (equal); Supervision (equal); Writing – review & editing (equal).

DATA AVAILABILITY

The data that support the findings of this study are available from the corresponding authors upon reasonable request.

REFERENCES

- ¹J. E. Moore, "The birth of topological insulators," *Nature* **464**, 194–198 (2010).
- ²M. Z. Hasan and C. L. Kane, "Colloquium: Topological insulators," *Rev. Mod. Phys.* **82**, 3045 (2010).
- ³T. Ozawa, H. M. Price, A. Amo, N. Goldman, M. Hafezi, L. Lu, M. C. Rechtsman, D. Schuster, J. Simon, O. Zeitlinger *et al.*, "Topological photonics," *Rev. Mod. Phys.* **91**, 015006 (2019).
- ⁴Z. Yang, F. Gao, X. Shi, X. Lin, Z. Gao, Y. Chong, and B. Zhang, "Topological acoustics," *Phys. Rev. Lett.* **114**, 114301 (2015).
- ⁵M. C. Rechtsman, J. M. Zeuner, Y. Plotnik, Y. Lumer, D. Podolsky, F. Dreisow, S. Nolte, M. Segev, and A. Szameit, "Photonic Floquet topological insulators," *Nature* **496**, 196–200 (2013).
- ⁶A. B. Khanikaev, S. H. Mousavi, W.-K. Tse, M. Kargarian, A. H. MacDonald, and G. Shvets, "Photonic topological insulators," *Nat. Mater.* **12**, 233–239 (2013).
- ⁷A. O. Krushynska, D. Torrent, A. M. Aragón, R. Ardito, O. R. Bilal, B. Bonello, F. Bosia, Y. Chen, J. Christensen, A. Colombi, S. A. Cummer, B. Djafari-Rouhani, F. Fraternali, P. I. Galich, P. D. Garcia, J. P. Groby, S. Guenneau, M. R. Haberman, M. I. Hussein, S. Janbaz, N. Jiménez, A. Khelif, V. Laude, M. J. Mirzaali, P. Packo, A. Palermo, Y. Pennec, R. Picó, M. R. López, S. Rudykh, M. Serra-Garcia, C. M. Sotomayor Torres, T. A. Starkey, V. Tournat, and O. B. Wright, "Emerging topics in nanophononics and elastic, acoustic, and mechanical metamaterials: An overview," *Nanophotonics* **12**, 659–686 (2023).
- ⁸Z.-G. Chen and Y. Wu, "Tunable topological phononic crystals," *Phys. Rev. Appl.* **5**, 054021 (2016).
- ⁹S. Qu and P. Sheng, "Minimizing indoor sound energy with tunable metamaterial surfaces," *Phys. Rev. Appl.* **14**, 034060 (2020).
- ¹⁰H. J. Putley, S. Guenneau, R. Porter, and R. V. Craster, "A tunable electromagnetic metagrating," *Proc. R. Soc. A* **478**, 20220454 (2022).
- ¹¹A. D. Boardman, V. V. Grimalsky, Y. S. Kivshar, S. V. Koshevaya, M. Lapine, N. M. Litchinitser, V. N. Malnev, M. Noginov, Y. G. Rapoport, and V. M. Shalaev, "Active and tunable metamaterials," *Laser Photonics Rev.* **5**, 287–307 (2011).

- ¹²W. P. Su, J. R. Schrieffer, and A. J. Heeger, "Solitons in polyacetylene," *Phys. Rev. Lett.* **42**, 1698–1701 (1979).
- ¹³G. J. Chaplain, J. M. De Ponti, G. Aguzzi, A. Colombi, and R. V. Craster, "Topological rainbow trapping for elastic energy harvesting in graded Su-Schrieffer-Heeger systems," *Phys. Rev. Appl.* **14**, 054035 (2020).
- ¹⁴M. Parto, S. Wittek, H. Hodaie, G. Harari, M. A. Bandres, J. Ren, M. C. Rechtsman, M. Segev, D. N. Christodoulides, and M. Khajavikhan, "Edge-mode lasing in 1D topological active arrays," *Phys. Rev. Lett.* **120**, 113901 (2018).
- ¹⁵J. Zak, "Berry's phase for energy bands in solids," *Phys. Rev. Lett.* **62**, 2747 (1989).
- ¹⁶R. V. Craster and B. Davies, "Asymptotic characterisation of localised defect modes: Su-Schrieffer-Heeger and related models," [arXiv:2202.07324](https://arxiv.org/abs/2202.07324) (2023).
- ¹⁷H. Ammari, B. Davies, and E. O. Hiltunen, "Robust edge modes in dislocated systems of subwavelength resonators," *J. London Math. Soc.* **106**, 2075–2135 (2022).
- ¹⁸M. Miniaci, F. Allein, and R. K. Pal, "Spectral flow of a localized mode in elastic media," [arXiv:2111.09021](https://arxiv.org/abs/2111.09021) (2021).
- ¹⁹A. Drouot, C. L. Fefferman, and M. I. Weinstein, "Defect modes for dislocated periodic media," *Commun. Math. Phys.* **377**, 1637–1680 (2020).
- ²⁰A. S. Gliozzi, M. Miniaci, A. Chiappone, A. Bergamini, B. Morin, and E. Descrovi, "Tunable photo-responsive elastic metamaterials," *Nat. Commun.* **11**, 2576 (2020).
- ²¹J. Vapaavuori, C. G. Bazuin, and A. Priimagi, "Supramolecular design principles for efficient photoresponsive polymer–azobenzene complexes," *J. Mater. Chem. C* **6**, 2168–2188 (2018).
- ²²M. Poutanen, O. Ikkala, and A. Priimagi, "Structurally controlled dynamics in azobenzene-based supramolecular self-assemblies in solid state," *Macromolecules* **49**, 4095–4101 (2016).
- ²³E. Descrovi, F. Pirani, V. P. Rajamanickam, S. Licheri, and C. Liberale, "Photo-responsive suspended micro-membranes," *J. Mater. Chem. C* **6**, 10428–10434 (2018).
- ²⁴COMSOL. *Solid Mechanics Module User's Guide* (Stockholm, Sweden, 2021).
- ²⁵M. Atala, M. Aidelsburger, J. T. Barreiro, D. Abanin, T. Kitagawa, E. Demler, and I. Bloch, "Direct measurement of the Zak phase in topological Bloch bands," *Nat. Phys.* **9**, 795–800 (2013).
- ²⁶M. Xiao, Z. Zhang, and C. Chan, "Surface impedance and bulk band geometric phases in one-dimensional systems," *Phys. Rev. X* **4**, 021017 (2014).
- ²⁷A. A. Soluyanov and D. Vanderbilt, "Computing topological invariants without inversion symmetry," *Phys. Rev. B* **83**, 235401 (2011).
- ²⁸R. V. Craster, J. Kaplunov, and A. V. Pichugin, "High-frequency homogenization for periodic media," *Proc. R. Soc. A* **466**, 2341–2362 (2010).