

CO2 storage: threshold capillary pressure estimate in a remoulded caprock specimen

Original

CO2 storage: threshold capillary pressure estimate in a remoulded caprock specimen / Vespo, Vincenzo Sergio; Stavropoulou, Eleni; Volonté, Giorgio; Messori, Alessandro; Ferrari, Alessio; Musso, Guido; Laloui, Lyesse. - ELETTRONICO. - 1:(2023), pp. 1-2. (Intervento presentato al convegno Symposium on Energy Geotechnics (SEG23) tenutosi a Delft (NL) nel 03.10.23 - 05.10.23) [10.59490/seg.2023.566].

Availability:

This version is available at: 11583/2982852 since: 2024-11-08T10:29:27Z

Publisher:

TU Delft Open

Published

DOI:10.59490/seg.2023.566

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Peer-reviewed Conference Contribution

CO₂ storage: threshold capillary pressure estimate in a remoulded caprock specimen

Vincenzo Sergio Vespo^{1,*}, Eleni Stavropoulou², Giorgio Volonté³, Alessandro Messori³, Alessio Ferrari^{2,4}, Guido Musso¹ and Lyesse Laloui²¹Department of Structural, Building and Geotechnical Engineering, Politecnico di Torino, Turin, Italy²Swiss Federal Institute of Technology Lausanne (EPFL), Laboratory of Soil Mechanics, Lausanne, Switzerland³ENI S.p.A., Petroleum Engineering Laboratories (LAIP, Geomechanics), Milan, Italy⁴Università degli Studi di Palermo, Department of Engineering, Palermo, Italy* Corresponding author: vincenzosergio.vespo@polito.it

The underground permanent storage of CO₂ is one of the actions promoted by the European Union to achieve neutrality in terms of carbon emissions by 2050. It is the only readily available option for so-called hard-to-abate sectors such as cement, steel, chemical plants, where a significant proportion of carbon dioxide emissions are linked to the industrial process and therefore cannot be avoided by means of electrification or renewables [1].

Ideal geological storage should be able to store CO₂ for millions of years and maintain 99% of stored CO₂ for at least a thousand years. A necessary condition for not having leakage is that the caprock has an adequate sealing capacity, ensured only if the threshold capillary pressure of caprock p_c^* is larger than the capillary pressure p_c due to the CO₂ injection. The threshold capillary pressure is experimentally determined through tests in which the non-wetting fluid is forced to penetrate into water-saturated specimen [2].

This work reports the results of two threshold tests performed on remoulded caprock specimens using CO₂ in supercritical conditions (scCO₂) and air as non-wetting fluid.

The tested material is a non-plastic silty clay with liquid limit $w_L = 50\%$ and plastic limit $w_P = 25\%$. It comes from a disturbed core extracted from a deep formation in the Po Valley (Italy). The material was mixed with distilled water at $w = 1.2 w_L$ and then consolidated in oedometric conditions up to a vertical effective stress of 1.1 MPa. The porosity at this stress state is equal to 0.43.

Direct determination of the threshold capillary pressure in the laboratory is achieved by a step-by-step increase of the non-wetting fluid pressure at the inlet of a water-saturated sample, while the water pressure is kept constant at the outlet. When the difference between the non-wetting fluid pressure and the water one is higher than the threshold capillary pressure, water drainage occurs, and the non-wetting fluid can break through the sample [3]. Depending on the permeability, several days might be required for one measurement of p_c^* for a tight rock. The magnitude of non-wetting pressure steps plays a key role in this methodology, since small pressure increments result in long test times, while large pressure increments result in lower accuracy of the threshold capillary pressure estimation. To be able to perform the test using scCO₂ as a non-wetting fluid, it is necessary to set the CO₂ pressure greater than 7.4 MPa and maintain the temperature T of the entire experimental apparatus greater than 31.1 °C.

A high-pressure oedometric cell [4] is used to perform the step-by-step tests. This device allows the study of specimens with a diameter of 35 mm and a height of 12.5 mm. Water can be injected at both sides of the sample, two different pumps are used to control pressure up to 16 MPa. A third pump connected to the upstream side is used to inject the non-wetting fluid with a range up to 25 MPa. The axial stress is applied with a hydraulic jack that allows the application of a maximum total vertical stress equal to 100 MPa. The vertical displacements are measured by three LVDTs, which measure the relative displacement of the cell with respect to the piston.

Two tests were performed to determine the threshold capillary pressure of the remoulded caprock specimen in relation to the following fluid systems: scCO₂/H₂O and air/H₂O. Each threshold test consisted of the following stages: at the beginning the sample

was saturated with water (under constant volume) after which a total axial load was applied. After the consolidation was completed, the intrinsic water permeability was assessed ($k = 5.2 \cdot 10^{-18} \text{ m}^2$). Then followed the injection stage of non-wetting fluid. In both tests the effective vertical stress was set equal to 1.1 MPa. The water backpressure and the initial value of non-wetting pressure were set equal to 10 MPa in the scCO₂ test and 1 MPa in the air test. The former test was conducted at $T = 35 \text{ }^\circ\text{C}$, the latter at $T = 25 \text{ }^\circ\text{C}$.

Figure 1(a) and Figure 1(b) show the trend of capillary pressure p_c and outgoing volume V_{out} during the scCO₂ and air injection stage, respectively. The capillary pressure range for which there was a net increase in the outgoing volume was $500 \div 600 \text{ kPa}$ in the scCO₂ test and $570 \div 670 \text{ kPa}$ in the air one. The magnitude of outgoing volume implies the overcoming of the threshold capillary pressure p_c^* and the establishment of a convective flow of non-wetting fluid through the sample. In both tests, no deformation of the specimens occurred during the injection stage.

Therefore the difference between the threshold capillary pressure values determined for the two tests, carried out at an effective vertical stress of 1.1 MPa, is about 70 kPa. Instead, using the tangent method to indirectly estimate the threshold capillary pressure, through the pore size distribution of the remoulded caprock (Figure 1 (c)) and the Washburn-Laplace equation, the difference for the two fluid systems would be equal to about 170 kPa (≈ 2.5 times the real experimental value). This would suggest that the tangent method can only be used for a rough estimate and the threshold capillary pressure is not only a function of the pore size distribution, but also largely depends on the actual pore interconnectivity. For a deeper analysis, further experimental tests are in progress.

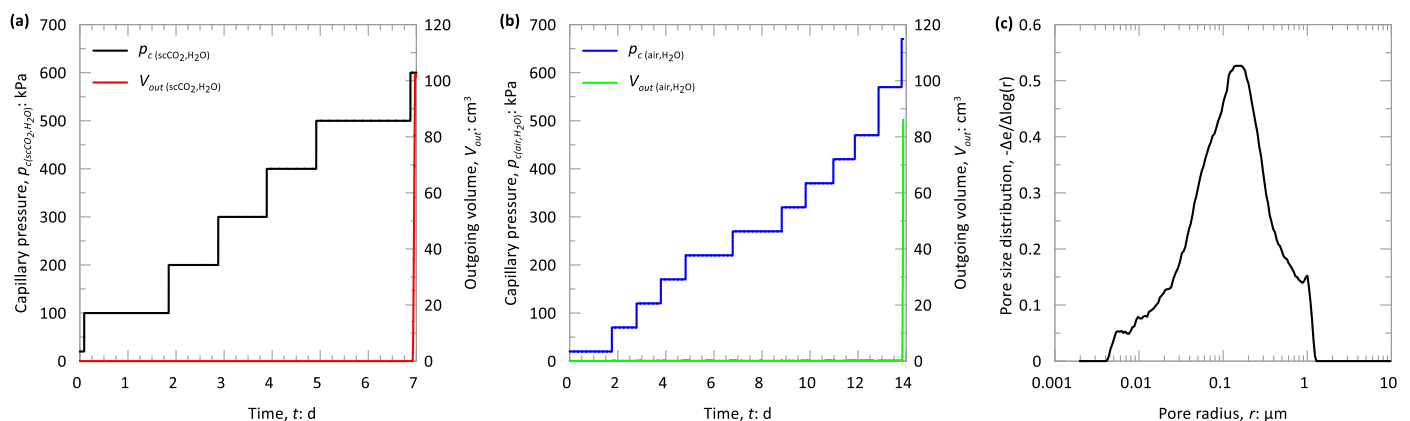


Figure 1: (a) and (b) trend of p_c and V_{out} during the injection phase of non-wetting fluid, (c) pore size distribution.

Contributor statement

Writing original draft, review & editing: V. S. Vespo, E. Stavropoulou, G. Volonté, A. Messori, A. Ferrari, G. Musso, L. Laloui; Conceptualization: V. S. Vespo, E. Stavropoulou, A. Ferrari, G. Musso; Investigation, visualization: V. S. Vespo; Supervision: A. Ferrari, G. Musso, L. Laloui.

References

- [4] Ferrari, A., Favero, V., & Laloui, L. (2016). One-dimensional compression and consolidation of shales. *International Journal of Rock Mechanics and Mining Sciences*, 88, 286-300
- [1] IPCC (2022). *Climate Change 2022 - Mitigation of Climate Change*. Retrieved from <https://www.ipcc.ch/report/ar6/wg3/>
- [5] Schlömer, S., & Krooss, B. M. (1997). Experimental characterisation of the hydrocarbon sealing efficiency of cap rocks. *Marine and Petroleum Geology*, 14(5), 565-580
- [2] Stavropoulou, E., & Laloui, L. (2022). Evaluating CO₂ breakthrough in a shaly caprock material: a multi-scale experimental approach. *Scientific Reports*, 12(1), 10706
- [3] Thomas, L. K., Katz, D. L. V., & Tek, M. R. (1968). Threshold pressure phenomena in porous media. *Society of Petroleum Engineers Journal*, 8, 174-184.