

POLITECNICO DI TORINO
Repository ISTITUZIONALE

A semi-automatic approach for roof-top extraction and classification from airborne lidar

Original

A semi-automatic approach for roof-top extraction and classification from airborne lidar / Sunni Kanta Prasad, Kushwaha; Yogender, Yogender; Raghavendra, Sara. - 11174:(2019), p. 7. (Intervento presentato al convegno Seventh International Conference on Remote Sensing and Geoinformation of the Environment (RSCy)2019 tenutosi a Paphos, Cypurs nel 18-21 March 2019) [10.1117/12.2532044].

Availability:

This version is available at: 11583/2978070 since: 2023-04-20T10:23:59Z

Publisher:

SPIE

Published

DOI:10.1117/12.2532044

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

PROCEEDINGS OF SPIE

SPIDigitalLibrary.org/conference-proceedings-of-spie

A semi-automatic approach for roof-top extraction and classification from airborne lidar

S. K. P. Kushwaha, Yogender, Raghavendra S.

S. K. P. Kushwaha, Yogender, Raghavendra S., "A semi-automatic approach for roof-top extraction and classification from airborne lidar," Proc. SPIE 11174, Seventh International Conference on Remote Sensing and Geoinformation of the Environment (RSCy2019), 111740K (27 June 2019); doi: 10.1117/12.2532044

SPIE.

Event: Seventh International Conference on Remote Sensing and Geoinformation of the Environment (RSCy2019), 2019, Paphos, Cyprus

A Semi-Automatic Approach for Roof-Top Extraction and Classification from Airborne LiDAR

S.K.P.Kushwaha ^a, Yogender ^{b*}, Raghavendra S ^a

^a Photogrammetry and Remote Sensing Department, Indian Institute of Remote Sensing, Dehradun, Uttarakhand, INDIA, 248001.

^{b*} Department of Civil Engineering, National Institute of Technology, Kurukshetra, Haryana, INDIA, 136119.

ABSTRACT

Airborne LiDAR provides us point cloud of the topographic features of an area. Point cloud classification is important to recognize which points corresponds to which target. Researches has been carried out for the extraction of building, trees, electric lines. But only few researches have been carried out for classification of different types of roof like flat, inclined and dome shaped. This research is aimed to achieve a semi-automatic approach to classify buildings and further classify the roof top type into flat, or inclined. Four subsets were taken from the LiDAR dataset, depending on the roof type. Initially, all the ground points are removed and non-ground points are segmented out. Later, the roof points of the buildings are classified on the basis of inclination into flat, inclined or dome type roof. A tool was generated in the Arc scene software using model builder. In which the subsets were used as the input and the different types of roof were classified. The accuracy assessment was done to calculate how accurately the classified points obtained belongs to the flat, inclined or dome roof tops. For all the four subsets, the overall accuracy for the flat, inclined and dome type roof obtained were 78.26%, 89.62% and 72.94%. This semi-automatic approach for the roof top classification is limited to categorize into flat, inclined or dome roof top only. Further, this research can be extended for the automatic classification of roof types and increase the accuracy.

Keywords: Airborne LiDAR, Roof Top Extraction, Roof Top Classification, Accuracy Assessment.

1. INTRODUCTION

LiDAR (Light Detection and Ranging) is a very advancing field of remote sensing. Its ability to provide dense point cloud with greater geometry accuracy helps us in many application. In this research airborne LiDAR dataset is used for building roof type extraction and classification. Many researches have been carried out for extracting building footprint but few approaches have been made to classify the roof types of the building like flat, incline or dome shaped roof structure. A similar type of research is done to classify roof types as either pitched or flat, by integrating already available vector-based data with the LiDAR elevation data [1]. A research was done to generate models of 3D buildings from LiDAR point cloud automatically using a skew error distribution function [2]. Points corresponding to the terrain can be filtered out using height variation from the actual LiDAR dataset. Morphological filters were used to separate ground and non-ground points. Ground and building detection were done using differential morphological profiles on points residual [3]. A work has been done for the reconstruction and segmentation of polyhedral building roofs from aerial LiDAR data. In which surface normal were generated for each point to classify it into planar and nonplanar ones, further, clustering planar points with fuzzy k-means algorithm and segmenting coplanar and parallel segments depending on connectivity and distances [4]. Building measurements are done with the help of region growing algorithm based on plane fitting technique[5]. Further the edge points are used to extract the building footprint [6]. Precise building boundary extraction is achieved by integrating high resolution imagery and LiDAR data. Precise boundary position was obtained from the imagery. Accurate boundary lines were segmented with the help algorithm developed on the basis of Kmeans clustering and lidar point density analysis [7]. With the help of 2D and 3D contextual information of the scene a stochastic image interpretation model is developed. Markov Random Field (MRF) model is used to provide hierarchy of the dependency using contour based grouping [8]. An analytical comparison of RANSAC algorithm and Hough-transform automatic detection of roof planes is done in which RANSAC algorithm was more efficient [9]. Automatic building extraction from high resolution space image is done by removing non-building portions by image classification.

* yogender105@gmail.com; phone +91-9467644918;

Seventh International Conference on Remote Sensing and Geoinformation of the Environment (RSCy2019), K. Themistocleous, G. Papadavid, S. Michaelides, V. Ambrosia, D. G. Hadjimitsis, Eds., Proc. of SPIE Vol. 11174, 111740K · © 2019 SPIE · CCC code: 0277-786X/19/\$21 · doi: 10.1117/12.2532044

Further trees were separated by using Normalized Difference Vegetation Index (NDVI) [10]. Boundary of the largest part describes the building footprint considering area, height and number of stories attribute. spectral data is used to remove vegetation and possibly to classify the roof type material of the buildings [11]. An approach is made to extract building roof by integrating LiDAR and multispectral orthoimagery. In which the non-ground points are segmented using image line guide segmentation to extract the roof planes [12]. Depending upon the cluster of points, the points may correspond to the building or a tree. But to filter out tree points the coplanarity of points and their locality is considered [13]. In this research, a tool is developed for classifying roof tops and further specifying the type of the roof based on the inclination angle. The height and the slope parameters are considered to classify non-ground points and further to classify their roof type. The overall accuracy obtained in this research is sufficient to determine which type of roof it is.

2. STUDY AREA AND DATASET

LiDAR data under consideration: Niagara Region, Ontario, Canada. Coordinate System: UTM, Zone: 17N. Extent of the Study Area: -78.9164W to -78.9047W 43.0944N to 43.1029N.

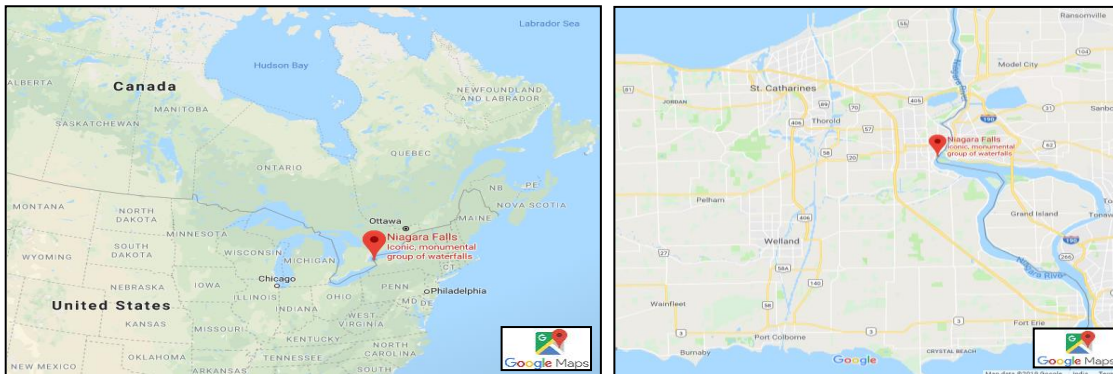


Figure 1: Study Area

3. METHODOLOGY

A semi-automatic approach for classification of rooftop is aimed to achieve in this research. The primary idea is to remove the outlier points on the basis of slope tolerance and height criteria and segment out the required data. A tool is built in the model-builder (ArcScene). The LiDAR dataset is converted into .txt format which is taken as the input for the tool developed. Triangulated Irregular Network (TIN) is generated to classify ground and non-ground points. The height criteria is used to filter out ground points and the slope criteria is to classify the roof types. From the overall Lidar dataset, 4 subsets were generated depending upon the roof type and its complications. The model developed is used to classify different rooftypes on the 4 subsets. Accuracy assessment of classified rooftops is done on the basis of the number of actual points present on the roof and the number of points classified according to the roof type, carried out in Cloud Compare software.

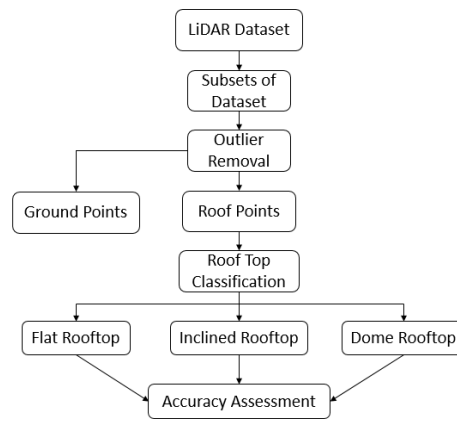
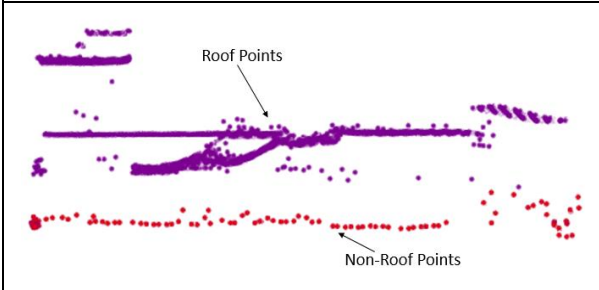
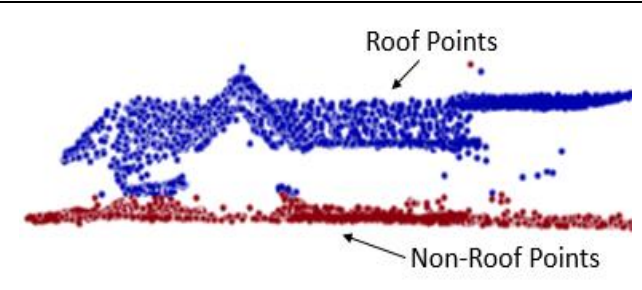
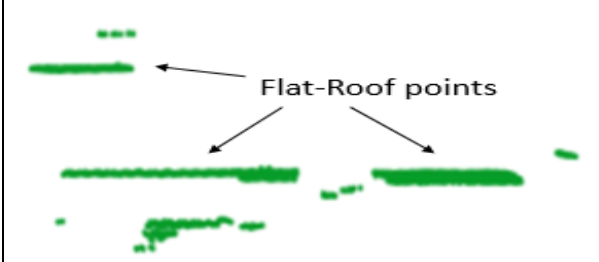
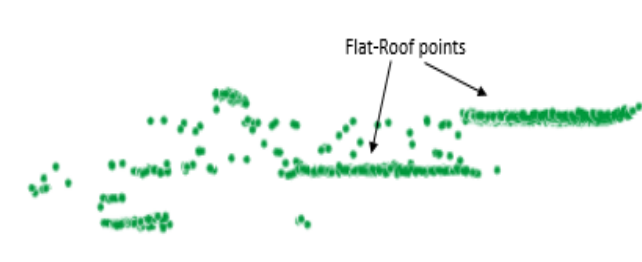
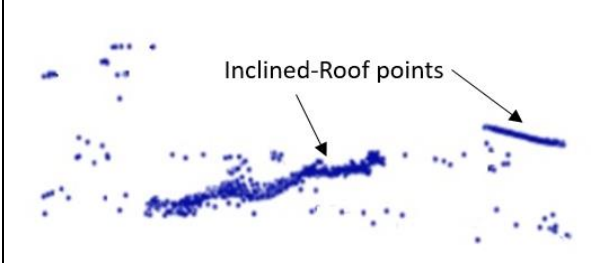
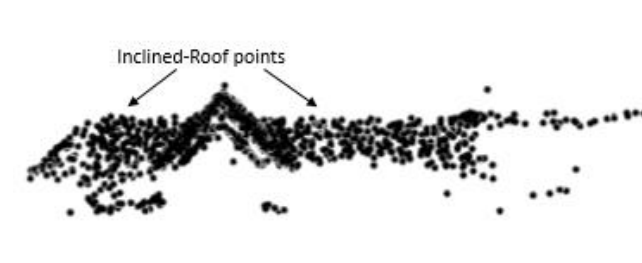
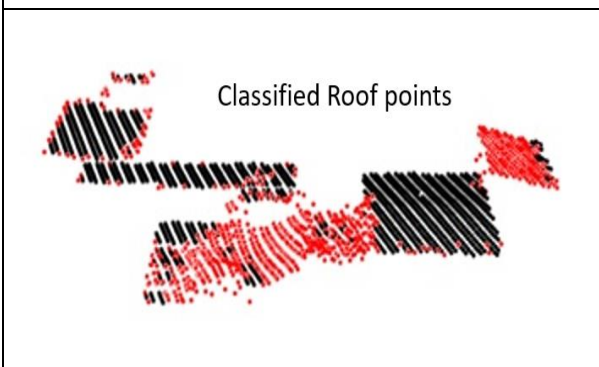
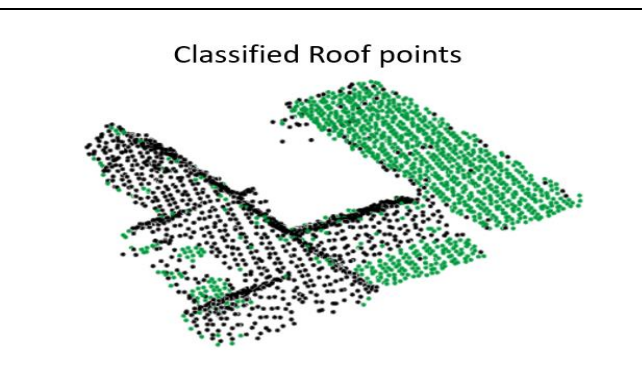


Figure 2: Methodology

4. RESULTS AND DISCUSSIONS

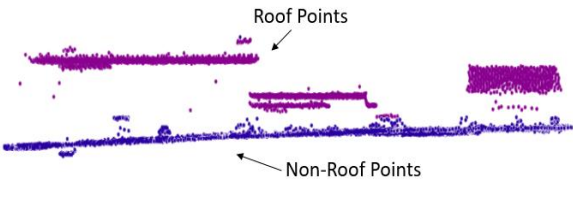
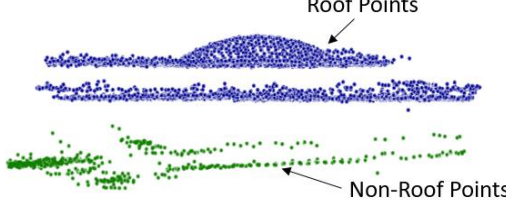
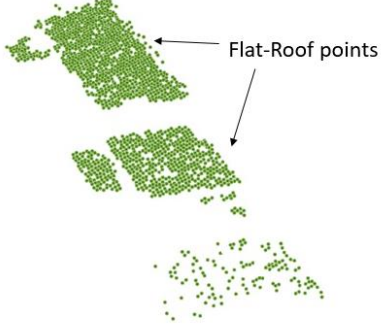

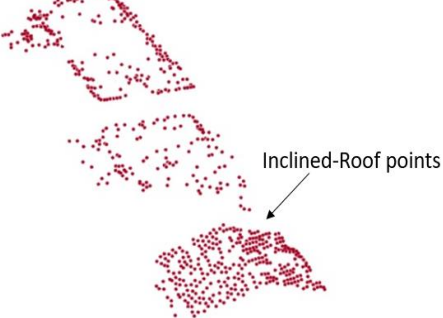
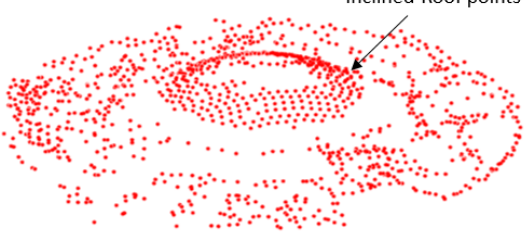

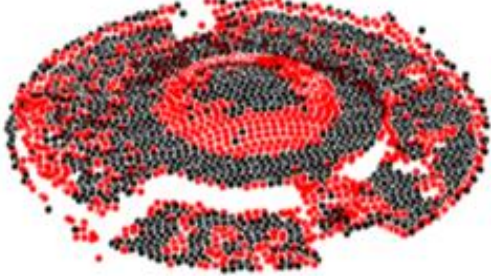
By varying the height and slope parameters the datasets were classified and the roof top classification was done. The results are tabulated and shown in the table 1 and table 2. Fourth dataset was chosen in such a way that it had dome shaped roof.

Table 1: The roof points, non-roof points, flat roof points, inclined roof points and classified roof points corresponding to dataset 1 and dataset 2.

Dataset 1	Dataset 2
 <p>Roof Points</p> <p>Non-Roof Points</p>	 <p>Roof Points</p> <p>Non-Roof Points</p>
 <p>Flat-Roof points</p>	 <p>Flat-Roof points</p>
 <p>Inclined-Roof points</p>	 <p>Inclined-Roof points</p>
 <p>Classified Roof points</p>	 <p>Classified Roof points</p>

There were few misclassification of the points which were present on the edges of the roof and due to surface roughness change. The roof points classified depending on the roof type are shown with different colours for visualization purpose in table 1 and table 2 for all the 4 datasets.

Table 2: The roof points, non-roof points, flat roof points, inclined roof points and classified roof points corresponding to dataset 3 and dataset 4.

Dataset 3	Dataset 4
 <p>Roof Points</p> <p>Non-Roof Points</p>	 <p>Roof Points</p> <p>Non-Roof Points</p>
 <p>Flat-Roof points</p>	 <p>Flat-Roof points</p>
 <p>Inclined-Roof points</p>	 <p>Inclined-Roof points</p>
<p>Classified Roof points</p> 	<p>Classified Roof points</p> 

For dataset 4 which had dome type roof, the accuracy obtained was less but this accuracy is sufficient to identify which type of roof it is.

4.1 Accuracy Assessment:

The accuracy assessment was done to calculate the percentage of error obtained by this method of roof type. The percentage of accuracy is equivalent to the roof points classified by the tool developed to the actual points corresponding to the roof type multiplied by 100.

$$\text{Percentage of Accuracy} = \frac{\text{Classified points of the roof type}}{\text{Actual points of the roof type}} \times 100 \text{ -----(1)}$$

The classification accuracy obtained for different roof types corresponding to different subsets are showed in the table 3, table 4, table 5 and table 6.

Table 3: Accuracy for Dataset 1

Roof Types	No. of points in Classified Roof Top	No. of points in Original Dataset	Accuracy (%)
Slant Roof	201	215	93.48
Flat Roof	294	340	86.47

Table 4: Accuracy for Dataset 2

Roof Types	No. of points in Classified Roof Top	No. of points in Original Dataset	Accuracy (%)
Slant Roof	226	251	93.44
Flat Roof	770	824	90.013

Table 5: Accuracy for Dataset 3

Roof Types	No. of points in Classified Roof Top	No. of points in Original Dataset	Accuracy (%)
Slant Roof	422	515	81.94
Flat Roof	201	305	75.59

Table 6: Accuracy for Dataset 4

Roof Types	No. of points in Classified Roof Top	No. of points in Original Dataset	Accuracy (%)
Dome Roof	425	310	72.94
Flat Roof	282	172	60.99

The accuracy assessment is done with CloudCompare software. A small portion of the each dataset is clipped on different roof types and compare with the number of points classified in that portion of the dataset. With this methodology different roof types were classified on the basis of slope criteria. For dataset 4, the accuracy obtained for flat type roof is comparatively less with other datasets due to the change in the slope angle the points corresponding to the flat surface were misclassifying into dome.

5. CONCLUSION

Airborne LiDAR Point cloud classification has different needs of categorization like, buildings, forest cover, water bodies, agricultural land, and roads. Building footprint extraction helps to identify urban built-up space. Roof top extraction is very much important to measure the roof area exposed to the sky. This even contribute to install solar panels which can be used as a renewable source of energy. Percentage of energy generated from the solar panels depend upon the amount of solar energy received by the panels. The efficiency of the solar panels can be increased depending on the angle of the roof. Proper direction of the roof can be classified depending on the slope of the roof. Flat, inclined and dome roof classification helps us to decide the location of installation of the solar panels and further increasing the percentage of energy generation by solar panels. The energy generation depends mainly on the angle of incidence of sunlight. So, there is need for roof top classification. In this research the overall accuracy obtained were 78.26% for flat roof type, 89.62% for slant roof type and 72.94% for dome roof type. The accuracy is sufficiently enough to determine the type of roof structure.

ACKNOWLEDGMENTS

Authors are thankful to the Canadian resource personnel for making the dataset open source. We are thankful to the Indian Institute of Remote Sensing, IIRS-ISRO, Dehradun, India for providing the infrastructural and resource support. We are thankful to the Google Maps team for using their platform to show our study area. Authors really appreciate the CloudCompare team for making the software open source. We are equally thankful to Department of Civil Engineering, National Institute of Technology, Kurukshetra, for providing the permission to the presenter to attend the conference.

REFERENCES

- [1] C. Alexander, S. Smith-Voysey, C. Jarvis, and K. Tansey, "Integrating building footprints and LiDAR elevation data to classify roof structures and visualise buildings," *Comput. Environ. Urban Syst.*, vol. 33, no. 4, pp. 285–292, 2009.
- [2] F. Rottensteiner and C. Briese, "A new method for building extraction in urban areas from high-resolution LIDAR data," *Int. Arch. Photogramm. Remote Sens. Spat. Inf. Sci.*, vol. 34, no. 3/A, pp. 295–301, 2002.
- [3] D. Mongus, N. Lukač, and B. Žalik, "Ground and building extraction from LiDAR data based on differential morphological profiles and locally fitted surfaces," *ISPRS J. Photogramm. Remote Sens.*, vol. 93, pp. 145–156, 2014.
- [4] A. Sampath and J. Shan, "Segmentation and reconstruction of polyhedral building roofs from aerial lidar point clouds," *IEEE Trans. Geosci. Remote Sens.*, vol. 48, no. 3 PART2, pp. 1554–1567, 2010.
- [5] D. Chen, L. Zhang, J. Li, and R. Liu, "Urban building roof segmentation from airborne lidar point clouds," *Int. J. Remote Sens.*, vol. 33, no. 20, pp. 6497–6515, 2012.
- [6] K. Zhang, J. Yan, and S.-C. Chen, "Automatic Construction of Building Footprints From Airborne LIDAR Data," *IEEE Trans. Geosci. Remote Sens.*, vol. 44, no. 9, pp. 2523–2533, 2006.
- [7] L. Cheng, J. Gong, X. Chen and P. Han, "Building Boundary Extraction from High Resloution Imagery and LiDAR data," *The International Archives of the photogrammetry, Remote Sensing and Spacial Information Sciences. Vol XXXVII. part B3b. Beijing 2008.*
- [8] A. Katartzis and H. Sahli, "A stochastic framework for the identification of building rooftops using a single remote sensing image," *IEEE Trans. Geosci. Remote Sens.*, vol. 46, no. 1, pp. 259–271, 2008.
- [9] F. Tarsha-Kurdi, T. Landes, and P. Grussenmeyer, "Hough-Transform and Extended RANSAC Algorithms for Automatic Detection of 3D Building Roof Planes from Lidar Data," *ISPRS Work. Laser Scanning 2007 SilviLaser 2007*, vol. XXXVI, pp. 407–412, 2007.
- [10] D. San and M. Turker, "Automatic Building Detection and Delineation from High Resolution Space Images Using Model Based Approach," *... ISPRS Work. Topogr. Mapp. from Sp. ...*, 2006.
- [11] T. T. Vu, F. Yamazaki, and M. Matsuoka, "Multi-scale solution for building extraction from LiDAR and image data," *Int. J. Appl. Earth Obs. Geoinf.*, vol. 11, no. 4, pp. 281–289, 2009.
- [12] M. Awrangjeb, C. Zhang, and C. S. Fraser, "Automatic extraction of building roofs using LIDAR data and multispectral imagery," *ISPRS J. Photogramm. Remote Sens.*, vol. 83, pp. 1–18, 2013.
- [13] M. Awrangjeb and C. S. Fraser, "Automatic segmentation of raw LIDAR data for extraction of building roofs," *Remote Sens.*, vol. 6, no. 5, pp. 3716–3751, 2014.