

Behavior of a simple beam grillage structure on damaged supports

*Original*

Behavior of a simple beam grillage structure on damaged supports / De Biagi, Valerio. - In: ACTA MECHANICA. - ISSN 0001-5970. - (2023). [10.1007/s00707-023-03491-9]

*Availability:*

This version is available at: 11583/2974798 since: 2023-01-28T15:28:29Z

*Publisher:*

Springer

*Published*

DOI:10.1007/s00707-023-03491-9

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Springer postprint/Author's Accepted Manuscript

This version of the article has been accepted for publication, after peer review (when applicable) and is subject to Springer Nature's AM terms of use, but is not the Version of Record and does not reflect post-acceptance improvements, or any corrections. The Version of Record is available online at: <http://dx.doi.org/10.1007/s00707-023-03491-9>

(Article begins on next page)

# Acta Mechanica

## Behavior of a simple beam grillage structure on damaged supports

--Manuscript Draft--

<b>Manuscript Number:</b>	
<b>Full Title:</b>	Behavior of a simple beam grillage structure on damaged supports
<b>Article Type:</b>	Original Paper
<b>Keywords:</b>	Beam grillage; dimensional analysis; damage; spring support; robustness
<b>Corresponding Author:</b>	Valerio De Biagi Politecnico di Torino Torino, Piemonte ITALY
<b>Corresponding Author Secondary Information:</b>	
<b>Corresponding Author's Institution:</b>	Politecnico di Torino
<b>Corresponding Author's Secondary Institution:</b>	
<b>First Author:</b>	Valerio De Biagi
<b>First Author Secondary Information:</b>	
<b>Order of Authors:</b>	Valerio De Biagi
<b>Order of Authors Secondary Information:</b>	
<b>Funding Information:</b>	
<b>Abstract:</b>	<p>Beam grillage structures are extensively adopted in various civil, mechanical and marine engineering. Although several studies deals with the tolerance of such systems to direct damages on beams, almost no literature exists on the effects on the whole grillage of damages on the supports. To this aim, the present study details the response of a simple grillage structure lying on non-rigid supports. A dimensionless analysis is proposed to address all the possible mechanical and geometrical configurations. Simulating a local damage, a variation of a single support vertical stiffness is introduced to highlight the behavior of the system. It is found that the behavior of the grillage on spring supports does not depend on the structural arrangement of the grillage itself, but also on the stiffness of the supports. In particular, the response of the structure is largely affected by the stiffness of the intact supports rather than the stiffness of the damaged support. Completely different structural responses are found, involving a local or a global compliance towards the weak support, the twisting of the grillage or a folding-like behavior depending on the location of the damaged support. The evolution of the effects of the damage on the support suggests that, in certain configurations, the grillage behaves as a complex structure, while in others as a simple structure.</p>
<b>Suggested Reviewers:</b>	<p>Rita Greco, PhD Professor, Politecnico di Bari rita.greco@poliba.it Expert in structural mechanics</p> <p>Fulvio Parisi, PhD Professor, Università degli Studi di Napoli Federico II: Università degli Studi di Napoli Federico II fulvio.parusi@unina.it Expert in structural mechanics and in damaged structures</p> <p>Jose Adam, PhD Professor joadmar@upv.es Expert in damaged structures and in robustness evaluations</p>



[Click here to view linked References](#)

# Behavior of a simple beam grillage structure on damaged supports

Valerio De Biagi<sup>1\*</sup>

<sup>1\*</sup>Department of Structural, Geotechnical and Building Engineering, Politecnico di Torino, Corso Duca degli Abruzzi, 24, Torino, 10129, Italy.

Corresponding author(s). E-mail(s): [valerio.debiagi@polito.it](mailto:valerio.debiagi@polito.it);

## Abstract

Beam grillage structures are extensively adopted in various civil, mechanical and marine engineering. Although several studies deal with the tolerance of such systems to direct damages on beams, almost no literature exists on the effects on the whole grillage of damages on the supports. To this aim, the present study details the response of a simple grillage structure lying on non-rigid supports. A dimensionless analysis is proposed to address all the possible mechanical and geometrical configurations. Simulating a local damage, a variation of a single support vertical stiffness is introduced to highlight the behavior of the system. It is found that the behavior of the grillage on spring supports does not depend on the structural arrangement of the grillage itself, but also on the stiffness of the supports. In particular, the response of the structure is largely affected by the stiffness of the intact supports rather than the stiffness of the damaged support. Completely different structural responses are found, involving a local or a global compliance towards the weak support, the twisting of the grillage or a folding-like behavior depending on the location of the damaged support. The evolution of the effects of the damage on the support suggests that, in certain configurations, the grillage behaves as a complex structure, while in others as a simple structure.

**Keywords:** Beam grillage, dimensional analysis, damage, spring support, robustness

# 1 Introduction

A beam grillage is a structure made of a planar network of connected beams loaded normally to their plane. The geometrical configuration and the mutual moment-resisting connection between elements allow flexural and torsional resisting mechanisms to develop within the grillage, with general small displacements and a great ability in load redistribution. For this reason, this type of structure is widely used in civil constructions, such as in bridges, and in marine structures [1]. Even in small grillage structures, the number of degrees of freedom is large enough that simple mathematical expressions for displacement and forces are difficult to formulate. Although the studies on the behavior of structures loaded with out-of-plane forces date back to the 19th Century [2], in the Sixties and the Seventies the major improvements on the design of grillage structures are found. Holmes and Ray-Chaudhuri [3] propose a limit analysis for determining the ultimate load of grillages, while minimum weight and optimization studies were first proposed by Rozvany [4]. More recent studies focus on the dynamic behavior [5] or on the optimization of foundation grillages [6].

The so called “grillage analogy” is a widely adopted strategy for solving structures with out-of-plane loads, such as in bridge superstructures analysis [7]. The validity of such approach has been validated by comparing numerical analyses and experimental data, such as in [8]. Grillage structural schemes have been also introduced for modeling elastic continua [9]. With reference to the numerical methods for solving the structures, before the introduction of FEM, matrix analysis was the usual mathematical tool for studying beam grillage [10]. As largely diffused in civil and mechanical engineering, beam grillage structures can be made of various materials: concrete, steel, timber or composite material and can be subjected to various types of loading, including moving forces [11] or impacts and blasts [12]. It is worth to be mentioned that, although made of a planar network of beams, load transfer in grillage of reciprocal beams is related only to the flexural mechanisms, as the elements are supported one each other [13].

From a topological point of view, the network of beams is a statically indeterminate structure. Such structural schemes are characterized by a complex behavior [14], in which the distribution of stresses is driven by preferential force paths, which emerge when the structure is damaged. As reported in previous works, the study of the final damaged configuration is consistent with the structural degradation process and simplifies some evaluations on damage tolerance and robustness [15]. Besides general considerations on systems of beams, the redistribution capacity of grillage structures is influenced by the support conditions. Such dependency has been highlighted in the studies by Rozvany [16], where the optimal beam layouts depends on the boundary conditions of the grillage.

As already mentioned, grillage structures are widely adopted in civil engineering works, in particular in bridge decks. In particular cases, say in Gerber girders, the span is suspended over two cantilevers, which act as supports [17].

Half-joint beams are adopted not to modify the total beam depth. Relevant failures in the past, e.g., the collapse of Annone SS36 overpass bridge in October 2016 in Italy [18] due to an anomalous load configuration, construction and maintenance issues, suggest that the integrity of Gerber girder supports is a primary requirement for the robustness of the suspended span. To this aim, several studies concentrated on the failure mechanisms of the main beams at the support [19, 20], but disregarded the specific analysis of the failure of the support itself, which requires a detailed design and maintenance during the service life of the structure [21]. For concrete structures, the behavior of half-joints depends on the arrangement and amount of reinforcements, and the quality of the concrete [22, 23]. The forensic analysis of the failure of Annone overpass highlighted that cracking and corrosion on the reinforcement bars caused a reduction of the bearing capacity of one support that initially failed [18]. Meanwhile, the investigations showed that, in the decades preceding the failure, the reduction of reinforcement area caused a progressive settlement of the supporting half-joint. This result is in perfect agreement with the results of Desnerck and colleagues [20, 22], who pointed out an evidence of a reduction of the vertical stiffness of damaged supports, which are fragile components that have not to fail in a capacity design.


The literature analysis highlights that several researches attempting to study the robustness of grillage structures with damaged beams are present, e.g., [24, 25]: in such analyses, the main focus is on the structure itself and its failure, under the hypothesis of perfect supports. On the contrary, limited attention has been devoted to the effects on the grillage of the modification of the capacity of the supports. Considering that half-joint components are hard to inspect [26], the understanding of the effects on the grillage of a change in the supporting condition would help in the structural health monitoring of the supporting structure. To this aim, the present paper deals with the behavior of a beam grillage structure with non-rigid supports, which are here modeled with elastic springs. In particular, the attention is put towards a local reduction of the stiffness of one support and the resulting effects on the structure, with the focus on the support displacement and reaction forces. The results of the study are of primary interest for the design of grillage structures on non-uniform supporting conditions and for the design and data interpretation issued from structural health monitoring of existing structures subjected to ageing phenomena and degradation.

## 2 Method

The analysis of beam grillage structures accounts both the flexural and the torsional characteristics of the elements. In the present analysis, a simple rectangular structure made of three main beams of length  $\ell$  and orthogonal transverse beams of length  $w$  at both ends is considered, as shown in Figure 1 where the main and transverse beams are named as M and T, respectively. The grillage is subjected to a vertical uniform load  $q$  distributed along the

## 4 Behavior of a simple beam grillage structure on damaged supports

88 main beams, only. The system is supported on vertical springs, to simulate the  
 89 axial stiffness of the ground (if the grillage is part of a foundation system) or  
 90 of a substructure (to simulate supported floors and bridge decks). The system  
 is horizontally constrained at each node, as illustrated in the box of Figure 1.

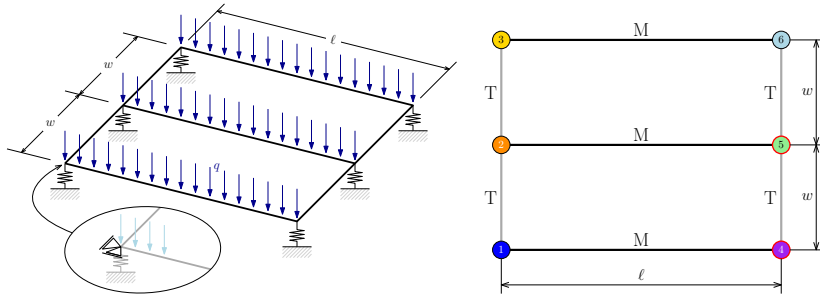

**Fig. 1** Sketch of the reference grillage.

92 The behavior the system depends on the mechanical properties of the  
 elements, the supports, and on the geometry of the grillage. In the present  
 94 analysis, the main beams are identical. Similar consideration holds for the  
 transverse beams. The flexural and the torsional rigidities of the main beams  
 96 are named as  $EI^m$  and  $GJ^m$ , where  $E$  and  $G = E/[2(1 + \nu)]$  are the elastic  
 and tangential elastic moduli, respectively,  $I^m$  and  $J^m$  are the flexural and  
 98 torsional inertias of the cross-section of the main beam. Similar consideration  
 holds for the transverse beams, which are characterized by superscript  $t$ , i.e.,  
 100  $EI^t$  and  $GJ^t$ . The vertical stiffness of the  $i$ -th support is named as  $k_i$ .

In a dimensional analysis framework, only two physical dimensions are  
 present in the problem: the length  $[L]$  and the force  $[F]$ . Flexural and torsional  
 rigidities have the physical dimensions of  $[FL^2]$ , the vertical stiffness and  
 the distributed load of  $[FL^{-1}]$ . Following Buckingham's  $\Pi$ -theorem [27], two  
 quantities can be chosen as repeated quantities and serve for the creating  
 dimensionless quantities. In the present analysis, the length of the main beam  
 $\ell$  and the flexural rigidity of the main beam,  $EI^m$ , are chosen as repeating  
 terms. Thus, the following dimensionless parameters can be formulated:

$$\begin{aligned} \rho &= \frac{w}{\ell} & \eta &= \frac{EI^t}{EI^m} \\ \mu^\bullet &= \frac{GJ^\bullet}{EI^\bullet} & \omega &= \frac{q\ell^3}{EI^m}, \end{aligned} \quad (1)$$

where the bullet stands for either the main or the transverse beam ( $\bullet = m, t$ ).  
 If the beams are rectangular, one can draw a relationship between torsional  
 and flexural inertias, in such a way that  $\mu^\bullet$  can be rewritten as

$$\mu^\bullet = \frac{6\beta(\lambda_\bullet)}{\lambda_\bullet^2(1 + \nu)}, \quad (2)$$

where  $\lambda_{\bullet}$  is the slenderness of the cross-section of the beam, i.e., the ratio between beam depth and beam width. Following Timoshenko [28], the term  $\beta(\lambda_{\bullet})$  represents the numerical factor for computing torsional rigidity ( $\beta = 1/3$  when  $\lambda \rightarrow \infty$ ). Table 1 reports the values of  $\mu^{\bullet}$  for various rectangular beams for  $\nu = 0.3$ .

$\lambda_{\bullet}$	$\beta$	$\nu$	$\mu^{\bullet}$
$\infty$	0.333	0.3	$\rightarrow 0$
10	0.312	0.3	0.0144
3	0.263	0.3	0.1348
2	0.229	0.3	0.2642
1.5	0.196	0.3	0.4020
1	0.141	0.3	0.6507

**Table 1** Values of  $\mu^{\bullet}$  for various depth-to-width ratios for rectangular beams.

Using the same repeating terms, the vertical stiffness  $k_i$  of the  $i$ -th support can be rewritten as

$$\xi_i = \frac{k_i \ell^3}{EI^m}. \quad (3)$$

The study herein performed intends to model the behavior of the grillage when the stiffness of one of the supports differs from the one of the others. As a limit case, considering that the vertical stiffness of one support is null corresponds to the complete removal of the support. One can rethink the stiffness reduction of this model as either a local lack of capacity in soft soils for foundation grillages, a reduction of the rigidity of the elastomeric support of dapped-end beams or a degradation of the half-joint connection in Gerber suspended spans, etc.

To fully investigate the effects of modifications on the vertical stiffnesses of the supports on the grillage, several configurations are considered, as listed below.

1. The damage occurs on a corner support. In this case, a non-symmetric damage configuration is studied. Figure 1 depicts, on the right-hand side, a plan view of the grillage. Five nodes, i.e.,  $i = 1/3, 5, 6$  are supported by intact springs with stiffness  $k$  (i.e.,  $k_1 = k$  and so forth), while the node 4 is supported by a defective spring with stiffness  $k_4 = k/10$ . Consequently, it results that  $\xi_4 = \xi/10$ , where  $\xi$  is the dimensionless support stiffness of nodes 1, 2, 3, 5 and 6. The results are reported in Section 3.1.
2. The damage occurs on a central support. In this case, a symmetric damage configuration is analyzed. With reference to Figure 1, node 5 is supported by a defective spring with stiffness  $k_5 = k/10$ , while nodes 1/3, 4 and 6 are supported by intact springs with stiffness  $k$ . As in the previous case,  $\xi_5 = \xi/10$ , where  $\xi$  is the dimensionless support stiffness of nodes 1, 2, 3, 4 and 6. The results are reported in Section 3.2.
3. An additional transverse beam is added to the grillage. In this case, the new transverse beam connects the midpoints of the main beams. The properties

6 *Behavior of a simple beam grillage structure on damaged supports*

of the transverse beam as equal to those of the transverse beams at the ends. The results are reported in Section 3.3.

4. The stiffness of the defective support changes between  $0.9k$  and  $0.1k$ . To study the evolution of the behavior of the grillage with the increment of the damage, i.e., the reduction of support stiffness, several damage steps are considered. The analysis is performed considering that the defective support is on node 4. Thus, various stiffnesses are considered:  $\xi_4 = (0.9 \rightarrow 0.1)\xi$ , where  $\xi$  is intact spring dimensionless stiffness. The results are reported in Section 3.4.

The numerical analyses were performed on Matlab coupled with OpenSees [29] routines varying the geometry of the grillage, i.e., parameter  $\rho$  in the range  $[0.05; 1]$ , transverse-to-main beam flexural rigidities, i.e., parameter  $\eta$  in the range  $[0.2; 1]$ , and intact spring dimensionless stiffness  $\xi$  in the range  $[10^{-2}; 10^6]$ , considering different beam cross-section geometries (square and rectangular).

### 3 Results

The vertical displacement of the supports  $v_i$  and the reaction forces  $R_i$  can be written in a dimensionless form. To highlight the behavior of the structure subjected to a local support stiffness reduction, support reactions are compared with the forces that an intact structure would experience. Applying Buckingham's  $\Pi$ -theorem, a dummy variable  $\tilde{\psi}_i$  is formulated:

$$\tilde{\psi}_i = \frac{R_i \ell^2}{EI^m}. \quad (4)$$

Considering that the reactions in an intact grillage are identical and equal to  $q\ell/2$ , the normalized dimensionless reaction  $\psi_i$  is equal to  $\psi_i = 2\tilde{\psi}_i/\omega$ .

The vertical nodal displacements,  $v_i$ , are normalized with respect to the displacements that would be observed in a structure if the supports would have equal stiffness  $k$ . The normalized dimensionless displacement  $\delta_i$  is equal to


$$\delta_i = \frac{2v_i k}{q\ell} = \left(\frac{v_i}{\ell}\right) \frac{2\xi}{\omega} \quad (5)$$

where the term in the round brackets is the dimensionless displacement according to Buckingham's  $\Pi$ -theorem. Downwards displacements are positive.

#### 3.1 Non-symmetric damage configuration

Figure 3.4 shows the values of the normalized reactions and displacements for both square ( $\lambda_\bullet = 1$ , with continuous lines) and rectangular ( $\lambda_\bullet = 10$ , with dashed lines) cross-sections. The non-symmetric damage configuration accounts for the damage on the corner support (node 4). The results are related to the geometrical configuration with  $\eta = 0.1$  and  $\rho = 0.5$ . It clearly emerges



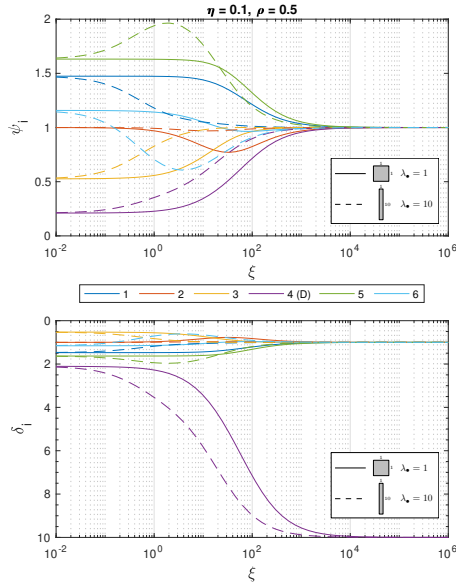


**Fig. 2** Damage on support no.4. Normalized reactions (top) and support displacements (bottom) in a grillage with  $\eta = 0.1$  and  $\rho = 0.5$  in a range  $\xi = [10^{-2}; 10^6]$ . Continuous curves relate to a grillage with square ( $\lambda_{\bullet} = 1$ ) elements, while dashed lines to a structure with rectangular ( $\lambda_{\bullet} = 10$ ) elements.

158 that the value of  $\xi$  influences the values of reactions and displacements. In par-  
 160 ticular, three regimes are individuated. For stiffnesses smaller than a threshold  
 162 value, say  $\xi = 1$  for square cross-section structure, approximately constant  
 164 values are reported. Similarly, for large  $\xi$ , say  $\xi > 10^4$ , all the normalized  
 166 reactions are similar and close to 1, while all the normalized displacements  
 168 are unitary, except the one of node 4 with the defective spring for which a  
 value 10 (equal to  $\xi/\xi_4$ ) is observed. In between, a transition regime between  
 the two limit situations is observed, with reactions reaching local maxima or  
 minima, clearly evident in the reactions of nodes 5 and 6 of the rectangular  
 cross-section structure. Similar considerations can be drawn for displacements.  
 The case proposed in Figure 3.4 is just an example of what it is observed for  
 other  $\eta$  and  $\rho$  values.

170 The trends show the intimate dependency between springs stiffness and  
 grillage behavior and how the stiffness of the supports, once locally damaged,  
 172 can influence force redistributions in the grillage. To identify the displace-  
 174 ment regimes within the grillage, a critical analysis of the displacements is  
 performed. Figure 3 depicts the normalized displacements for a structure with  
 square cross-sections having  $\eta = 0.5$ ,  $\rho = 0.5$ . Three different behaviors are  
 176 observed. Starting from the right-hand side, i.e., large  $\xi$ , a drop-like response  
 (named as Dr) emerges, with node 4 experiencing the largest displacements,  
 178 only. The sketch below depicts this structural response which is observed for  
 a large range of  $\xi$ -values, for  $\xi \geq 2.2 \cdot 10^4$ . For smaller  $\xi$ -values, a twist-like  
 180 behavior (Tw) is observed: the vertical displacement of node 2 is smaller than

## 8 Behavior of a simple beam grillage structure on damaged supports

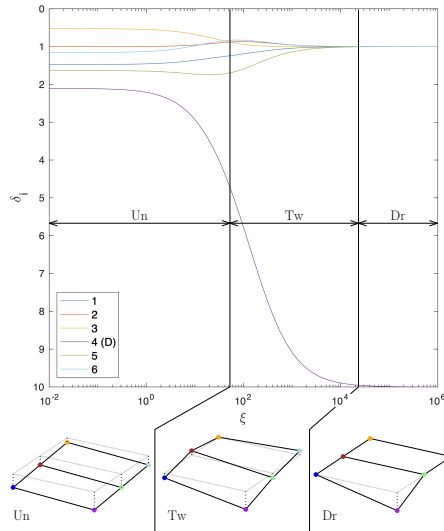


**Fig. 3** Normalized displacements for a grillage with  $\eta = 0.1$ ,  $\rho = 0.5$  and  $\lambda_{\bullet} = 1$  (square cross-section). Three displacement regimes are individuated: uniform rotation (Un), twist (Tw) and drop (Dr). Note that y-axis scale is in a reverse order; for the colors of the supports refer to Figure 1.

the one of node 3, with  $\delta_2 < 1$ , meaning that, apparently, the node goes up. In an opposite way, the vertical displacement of node 6 is smaller than the one of node 5, with  $\delta_6 < 1$ . It clearly emerges that a part of the grillage undergoes twisting, as sketched in the bottom of Figure 3. This structural response occurs for  $5.1 \cdot 10^1 \leq \xi < 2.2 \cdot 10^4$ . For smaller values, it results that  $\delta_2 < \delta_3$  and the structural response of the grillage tends to a uniform rotated configuration (Un), as reported in the bottom-left sketch of Figure 3.

### 3.2 Symmetric damage configuration

Figure 4 depicts the values of the normalized reactions and displacements for both square ( $\lambda_{\bullet} = 1$ , with continuous lines) and rectangular ( $\lambda_{\bullet} = 10$ , with dashed lines) cross-sections. The symmetric damage configuration accounts for the damage on the support of the central node (node 5). The results are related to the geometrical configuration with  $\eta = 0.1$  and  $\rho = 0.5$ . As expected from the previous analysis related to corner damage, the results are affected by the value of  $\xi$ . Three regimes can be individuated. For  $\xi < 1$ , the values of support displacement and reactions are constant and almost independent from  $\xi$ . The normalized reactions in nodes 4 and 6 compensate the drop on node 5 drops to roughly  $\psi_5 = 0.15$ , while the effects on the opposite nodes are completely negligible, i.e.,  $\psi_i \approx 1$  for  $i = 1, 2, 3$ . Similar trends are observed for  $\xi > 10^4$ , where all the reaction forces are equal and all the displacement, except the one of node 5, are unaffected by the defective support. In between, i.e.,  $1 < \xi < 10^4$ , a transition is observed. The central support on the opposite

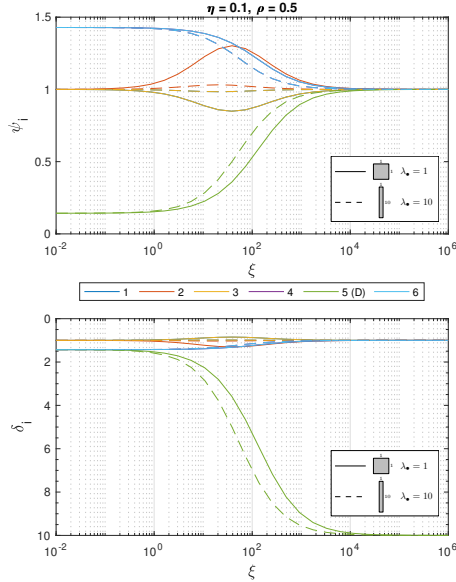


**Fig. 4** Damage on support no.5. Normalized reactions (top) and support displacements (bottom) in a grillage with  $\eta = 0.1$  and  $\rho = 0.5$  in a range  $\xi = [10^{-2}; 10^6]$ . Continuous curves relate to a grillage with square ( $\lambda_{\bullet} = 1$ ) elements, while dashed lines to a structure with rectangular ( $\lambda_{\bullet} = 10$ ) elements. The curves related to nodes/reactions 4 and 6 are superposed; similarly, the curves related to nodes/reactions 1 and 3 are superposed.

side is pushed down with a larger reaction force, while the corner supports (nodes 1 and 3) raises, resulting in a reduction of the reaction.

Observing the displacement regimes reported in Figure 5, a folding-like (Fl) regime is observed since nodes 1 and 3 moves upwards, while node 2 goes down with respect to the undamaged position, for which  $\delta_i = 1$ . A similar trend, shifted downwards is observed for nodes 4, 5 and 6. This regime is observed in the interval  $1 < \xi < 10^4$ . For lower  $\xi$  a uniform tilting (Un) emerges, while for larger  $\xi$  a drop (Dr) of node 5 is noted. As expected, the reaction forces and displacement regimes are symmetrical with respect to the longitudinal axis of the grillage (i.e., the line passing through nodes 2 and 5).


### 3.3 Effects of additional transverse beams

The effect of additional transverse beams are highlighted by comparing reaction forces and nodal displacements with and without an additional transverse beam. The damaged configuration accounts for a reduction of vertical stiffness on node 4, namely  $\xi_4 = \xi/10$ . Figure 6 shows the results of the analysis: thin curves refer to a grillage structure without the transverse beams, while thick curves to a structure with transverse beams. It is noted that the observed trends are not affected by the presence of the additional elements: considering that the threshold between uniform (Un) and twisting-like (Tw) behaviors corresponds to the  $\xi$  for which  $\delta_2 = \delta_3$ , or alternatively,  $\psi_2 = \psi_3$ , the presence of

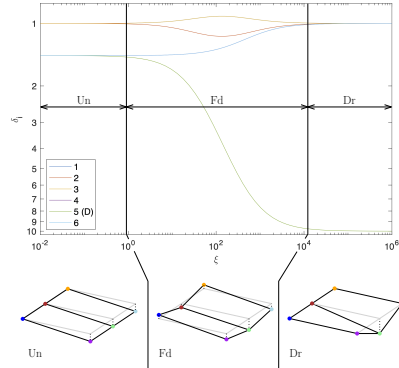

**Fig. 5** Normalized displacements for a grillage with  $\eta = 0.1$ ,  $\rho = 0.5$  and  $\lambda_{\bullet} = 1$  (square cross-section). Three displacement regimes are individuated: uniform tilting (Un), folding (Fl) and drop (Dr). Note that y-axis scale is in a reverse order; for the colors of the supports refer to Figure 1.


the additional transverse beams moves rightwards the threshold point. In fact, thin yellow-red curves of Figure 6 intercept at  $\xi \approx 15$ , while thick yellow-red curves at  $\xi \approx 24$ .

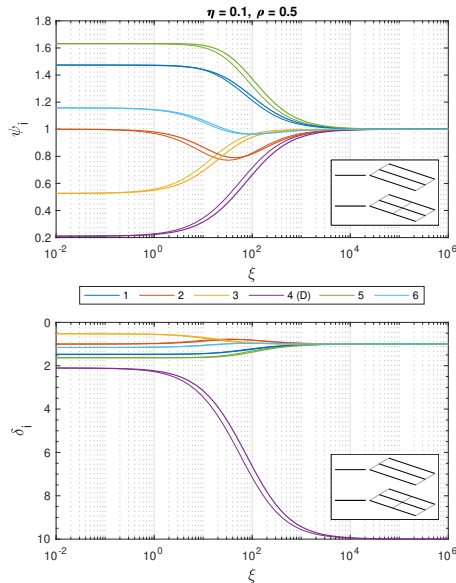

**Fig. 6** Damage on support no.4. Normalized reactions (top) and support displacements (bottom) in a grillage with  $\eta = 0.1$ ,  $\rho = 0.5$  and  $\lambda_{\bullet} = 1$  (square cross-section) in a range  $\xi = [10^{-2}; 10^6]$ . Thick curves relate to the grillage with additional transverse beams.

### 226 3.4 Evolution of the effects with increasing damage

228 Figure 7 plots the vertical displacements of the six nodes on a grillage subjected to a vertical stiffness reduction on support no.4. Various damaged-to-non damaged stiffness ratios, namely  $\Xi = \xi_4/\xi$ , are considered in the range  $[0.1; 1]$ .  
 230 For  $\xi_4/\xi = 1$ , thick continuous black line, the support is not damaged: it clearly emerges that the structural behavior of the grillage is not affected by the stiffness of the supports (which, in this case, are equal). For  $\xi_4/\xi = 0.1$ ,  
 232 i.e.,  $\xi_4 = \xi/10$ , thick dashed black line, the curves are identical to the ones depicted in the bottom plot of Figure . Intermediate curves refer to intermediate damaged stiffnesses. An identical behavior is observed in each support:  
 236 the intermediate curves have the same trend of the thick dashed black curves and the values of the displacements  $\delta_i$  are scaled. This shows that the magnitude of the damage does not affect the observed trends, but it magnifies the effects, only.  
 238

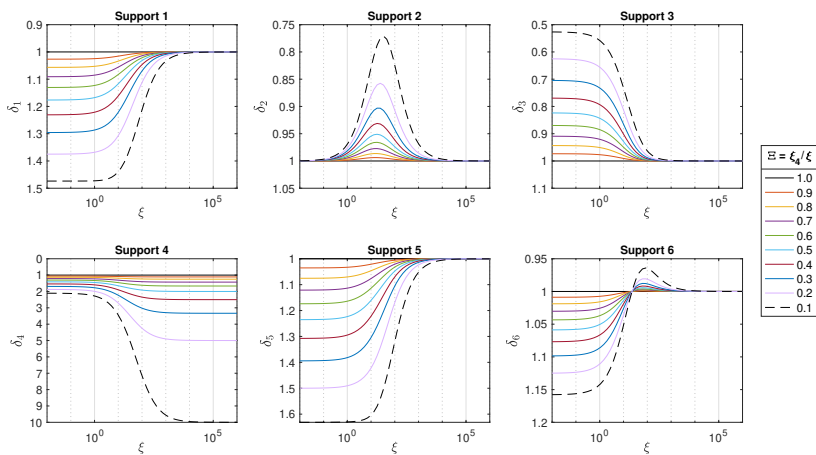

**Fig. 7** Damage on support no.4. Normalized support displacements in a grillage with  $\eta = 0.1$  and  $\rho = 0.5$  with square cross-section ( $\lambda_{\bullet} = 1$ ) in a range  $\xi = [10^{-2}; 10^6]$ . Each curve corresponds to a damaged-to-non damaged stiffness ratio,  $\xi_4/\xi$ . Note that  $y$ -axis is in reverse order.

## 240 4 Discussion


242 The results presented in the previous section (Sec. 3) show that the response of the grillage to the local damage is affected by the properties of the grillage itself (flexural and torsional rigidities of main and transverse beams and the size of the grillage) and by the stiffnesses of the supports, either intact or damaged. Although simple, the considered grillage is able to highlight several basic behaviors that emerge when the supports are damaged (the results  
 244  
 246 herein presented can be extended to other geometrical arrangements, involving

248 more than three main beams). With the tentative of interpreting the different  
 250 responses of the non-symmetric damage configuration, the drop-like response  
 (Dr) emerges as the stiffness of the supports, either intact or defective, is  
 252 larger than the rigidity of the grillage. In this situation, the grillage results  
 flexible and accommodates the damage by perfectly redistributing the loads.  
 254 This means that the structure is tolerant with respect to the damage, i.e., the  
 reduction of stiffness of one support, as the effects are confined to the node  
 in which the reduction is acting. In the twist-like behavior (Tw), the flexural  
 256 stiffness of the transverse beams redistributes the forces to nodes 5 and 6. The  
 former is pushed down and a greater reaction occurs, the latter experiences  
 258 a reduction in the reaction force. The response on nodes 4, 5 and 6 has the  
 effect of reducing the reactions on the opposite side of the grillage: the central  
 260 support (node 2) tends to be unloaded and moves up. Observing Figure 3.4,  
 it can be noted that this behavior is observed both in square and in rectan-  
 262 gular cross-sections structures. The uniform behavior (Un) emerges when the  
 rigidity of the grillage is larger than than the stiffness of the supports. In this  
 264 regime the structure keeps its integrity by tilting in a rigid way. With reference  
 to the symmetric damage configuration, similar considerations can be drawn.  
 266 It must be noted that a sort of equilibrium emerges on the main beams in the  
 folding (Fd) regime. In other words, the reaction force in node 4 increases and  
 268 the reaction force in node 1 decreases, similarly it occurs in nodes 3/6. This  
 behavior, which can be observed in Figure 5, can be easily identified in the  
 270 twisting-like regime in Figure 3 in nodes 2/5 and 3/6. The transition regimes  
 (Tw and Fd) represent a good match in terms of grillage and support stiffness  
 272 as the whole system acts in redistributing the effects of local damage.

The analysis of the evolution of the effects on the grillage with the increase  
 of the damage, i.e., the increment of parameter  $\Xi$ , illustrates interesting trends  
 on the complexity of the coupled system made by the grillage and supports. To  
 highlight the trends, differences between nodal displacements in the damaged  
 and undamaged configurations were computed and their ratio was averaged  
 over all the supports, as

$$\Omega = \frac{1}{6} \sum_i \frac{\delta_i^{\Xi} - 1}{\delta_i^{0.1} - 1}, \quad (6)$$

274 where  $\delta_i^{0.1}$  corresponds to the vertical displacement of the  $i$ -th node for  $\Xi = 0.1$ ,  
 i.e.,  $\xi_4 = \xi/10$ , and  $\delta_i^{\Xi}$  is the vertical displacement of the  $i$ -th node for a generic  
 276  $\Xi$  value. This represents a measure of the scaling between each curve of Figure 7  
 and the corresponding curve for  $\Xi = 0.1$ . Figure 8 shows the values of  $\Omega$  for  
 various  $\xi$  on a grillage structure with damaged support no.4. It clearly emerges  
 278 that the increase in damage, i.e., the reduction from  $\Xi = 1 \rightarrow 0.1$  does not  
 presupposes a perfectly linear effect on the displacements. This is a result of the  
 280 mutual interaction between the elements and the supports and is a common  
 trend in statically indeterminate structures [30, 31]. Different evolutions are  
 282 observed for different values of  $\xi$ . For low  $\xi$  a quasi-linear trend between the  
 ends of the curve is observed, while a pronounced nonlinear trend is noted  
 284 for high  $\xi$ . The observed results agree with the previous findings on statically

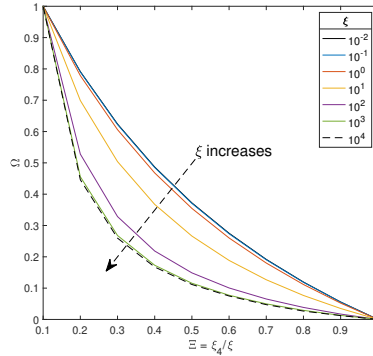

**Fig. 8** Values of the ratio  $\Omega$  computed with Eqn. (6) for a grillage with  $\eta = 0.1$ ,  $\rho = 0.5$  and square cross-section ( $\lambda_{\bullet} = 1$ ), damaged on support no.4.

indeterminate structures: with reference to the previous works by the Author,  
 286 a linear evolution in the effects of the damage refers to a structure which is  
 not complex, while a nonlinear trend is a evidence of structural complexity  
 288 [30, 31]. In this sense, for high  $\xi$ , the grillage tends to behave as “complex”,  
 following the definition provided by De Biagi and Chiaia [14]. As a matter of  
 290 fact, the three beams are independent one with respect to the others, as the  
 transverse beams are not able to redistribute the loads and a variation in the  
 292 stiffness of one support affects the corresponding beam, only. Half beam and  
 the corresponding support constitute the load path. On the contrary, for low  
 294  $\xi$ , a redistribution of the effects of the damage occurs as all the elements (and  
 non-damaged supports) participate to load transfer and bearing capacity of  
 296 the system. Here, the behavior is ruled by the equivalent stiffness of all the  
 supports as the grillage behaves as a quasi rigid-like body. In this sense, the  
 298 linear reduction of the stiffness of support no.4 implies a linear reduction of the  
 equivalent stiffness of all the supports, with a consequent quasi linear evolution  
 300 of the effects.

## 5 Conclusions

302 The present study is devoted to the analysis of the response of a simple grillage  
 structure lying on spring supports. Several important considerations can be  
 304 drawn. First, the behavior of the grillage on spring supports does not depend  
 on the structural arrangement of the grillage itself, but also on the stiffness  
 306 of the supports. In particular, the response of the structure is largely affected  
 by the stiffness of the intact supports rather than the stiffness of the damaged  
 308 support. Two ultimate responses are observed: a drop-like behavior when the  
 grillage accommodates the damage showing robust properties and a uniform-  
 310 like behavior when the rigidity of the grillage is larger compared to the stiffness  
 of the supports, either intact or damaged. Intermediate behaviors are found

312 with twist-like and folding-like displacement patterns depending on the loca-  
 314 tion of the damaged support. The robustness considerations are supported by  
 the analysis of the evolution of the effects of the damage on the response of the  
 316 structure following an approach already proposed by the Author. Evidences  
 of structural complexity and damage tolerance are shown when the support is  
 more rigid than the structure.

318 The outputs of the present research are the bases for future studies  
 for assessing the robustness of grillage structures towards unexpected dama-  
 320 ge scenarios. Moreover, the results are of relevant importance in structural  
 health monitoring of civil engineering structures. A detailed knowledge of the  
 322 expected displacements and of the mutual effects between components, not  
 only related to the grillage, would provide a better awareness in the design of  
 324 a monitoring system and in the interpretation of the data.

## References

- 326 [1] Molland, A.F.: *The Maritime Engineering Reference Book: a Guide to  
 Ship Design, Construction and Operation*. Elsevier, ??? (2011)
- 328 [2] Grashof, F.: *Theorie der Elasticität und Festigkeit: Mit Bezug Auf Ihre  
 Anwendungen in der Technik*. R. Gaertner, ??? (1878)
- 330 [3] Holmes, M., Ray-Chaudhuri, P.: The ultimate load of beam grillages.  
*International Journal of Mechanical Sciences* **7**(9), 603–611 (1965)
- 332 [4] Rozvany, G.: Grillages of maximum strength and maximum stiffness.  
*International Journal of Mechanical Sciences* **14**(10), 651–666 (1972)
- 334 [5] Langley, R., Bardell, N., Ruivo, H.: The response of two-dimensional peri-  
 odic structures to harmonic point loading: a theoretical and experimental  
 336 study of a beam grillage. *Journal of Sound and Vibration* **207**(4), 521–535  
 (1997)
- 338 [6] Fuchs, M.B., Ryvkin, M., Grosu, E.: Topological alternatives and struc-  
 tural modeling of infinite grillages on elastic foundations. *Structural and  
 340 Multidisciplinary Optimization* **26**(5), 346–356 (2004)
- [7] Jaeger, L.G., Bakht, B.: The grillage analogy in bridge analysis. *Canadian  
 342 journal of civil engineering* **9**(2), 224–235 (1982)
- [8] McElwain, B.A., Laman, J.A.: Experimental verification of horizontally  
 344 curved i-girder bridge behavior. *Journal of Bridge Engineering* **5**(4), 284–  
 292 (2000)
- 346 [9] Griffiths, D., Mustoe, G.G.: Modelling of elastic continua using a grillage  
 of structural elements based on discrete element concepts. *International  
 348 Journal for Numerical Methods in Engineering* **50**(7), 1759–1775 (2001)



- 350 [10] Timoshenko, S.P., Young, D.H.: Theory of structures. New York: McGraw-Hill (1965)
- 352 [11] Huang, D., Wang, T.-L., Shahawy, M.: Impact analysis of continuous multigirder bridges due to moving vehicles. *Journal of Structural Engineering* **118**(12), 3427–3443 (1992)
- 354 [12] Huang, Z., Liu, J.: Rigid-plastic analysis of beam grillages under blast type loading. *International Journal of Impact Engineering* **3**(3), 179–190 (1985)
- 356 [13] Piekarski, M.: Planar grillages made of short steel reciprocal beams. In: IOP Conference Series: Materials Science and Engineering, vol. 471, p. 052079 (2019). IOP Publishing
- 358 [14] De Biagi, V., Chiaia, B.: Complexity and robustness of frame structures. *International Journal of Solids and Structures* **50**(22-23), 3723–3741 (2013)
- 360 [15] De Biagi, V.: Energy redistribution patterns in damaged elastic frames. *International Journal of Mechanical Sciences* **194**, 106216 (2021)
- 362 [16] Rozvany, G.: Topological optimization of grillages: past controversies and new directions. *International journal of mechanical sciences* **36**(6), 495–512 (1994)
- 364 [17] Chen, W.-F., Duan, L.: *Bridge Engineering Handbook: Construction and Maintenance*. CRC press, NY (2014)
- 366 [18] di Prisco, M., Colombo, M., Martinelli, P., Coronelli, D.: The technical causes of the collapse of Annone overpass on SS. 36. In: *Italian Concrete Days 2018*, pp. 1–16 (2018)
- 368 [19] Mata-Falcón, J., Pallarés, L., Miguel, P.F.: Proposal and experimental validation of simplified strut-and-tie models on dapped-end beams. *Engineering Structures* **183**, 594–609 (2019)
- 370 [20] Desnerck, P., Lees, J.M., Morley, C.T.: Strut-and-tie models for deteriorated reinforced concrete half-joints. *Engineering Structures* **161**, 41–54 (2018)
- 372 [21] Santarsiero, G., Masi, A., Picciano, V.: Durability of Gerber saddles in RC bridges: Analyses and applications (Musmeci Bridge, Italy). *Infrastructures* **6**, 25 (2021)
- 374 [22] Desnerck, P., Lees, J.M., Morley, C.T.: The effect of local reinforcing bar reductions and anchorage zone cracking on the load capacity of rc

- 384 half-joints. *Engineering Structures* **152**, 865–877 (2017)
- [23] Don, W., Suryanto, B., Tambusay, A., Suprobo, P.: Forensic assessments of the influence of reinforcement detailing in reinforced concrete half-joints: A nonlinear finite element study. *Structures* **38**, 689–703 (2022). <https://doi.org/10.1016/j.istruc.2022.02.029>
- 390 [24] Underwood, J.M., Sobey, A.J., Blake, J.I., Sheno, R.A.: Ultimate collapse strength assessment of damaged steel plated grillages. *Engineering Structures* **99**, 517–535 (2015)
- 392 [25] Sobey, A., Blake, J., Sheno, R.: Implications of failure criteria choices on the rapid concept design of composite grillage structures using multiobjective optimisation. *Structural and Multidisciplinary Optimization* **47**(5), 735–747 (2013)
- 396 [26] Desnerck, P., Lees, J.M., Valerio, P., Loudon, N., Morley, C.T.: Inspection of rc half-joint bridges in england: analysis of current practice. In: *Proceedings of the Institution of Civil Engineers-Bridge Engineering*, vol. 171, pp. 290–302 (2018). Thomas Telford Ltd
- 400 [27] Barenblatt, G.I.: *Scaling, Self-similarity, and Intermediate Asymptotics: Dimensional Analysis and Intermediate Asymptotics*. 14. Cambridge University Press, Cambridge, UK (1996)
- 402 [28] Timoshenko, S.P.: *Strength of Materials – Part 1*, pp. 1–359. Van Nostrand, ??? (1955)
- 406 [29] Mazzoni, S., McKenna, F., Scott, M.H., Fenves, G.L., *et al.*: *OpenSees command language manual*. Pacific Earthquake Engineering Research (PEER) Center **264**, 137–158 (2006)
- 408 [30] De Biagi, V., Chiaia, B.M.: Damage tolerance in parallel systems. *International Journal of Damage Mechanics* **25**(7), 1040–1059 (2016)
- 410 [31] De Biagi, V.: Structural behavior of a metallic truss under progressive damage. *International Journal of Solids and Structures* **82**, 56–64 (2016)