

Enhanced Modulation Bandwidth in CCIG lasers

*Original*

Enhanced Modulation Bandwidth in CCIG lasers / Vallone, MARCO ERNESTO; Bardella, Paolo; Montrosset, Ivo. - ELETTRONICO. - (2010), pp. 55-56. (Intervento presentato al convegno HSSL High Speed Semiconductor Laser Workshop tenutosi a Wroclaw, Poland nel 7-8 October 2010).

*Availability:*

This version is available at: 11583/2501527 since:

*Publisher:*

*Published*

DOI:

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)



Wrocław University of Technology

Institute of Physics

Centre for Advanced Materials and Nanotechnology



International workshop on high  
speed semiconductor lasers

# HSSL

7-8 OCTOBER 2010

## **Book of Abstracts**

[www.delightproject.eu/hssl/](http://www.delightproject.eu/hssl/)

# Enhanced Modulation Bandwidth in CCIG lasers

M. Vallone, P. Bardella and I. Montrosset

*Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy*

We investigated the extended modulation bandwidth (EMB) conditions in a Coupled Cavity Injection Grating (CCIG) laser (see inset in Fig. 1c) combining the results of a static and a dynamic analysis. The static laser threshold conditions allow determining in the CCIG parameters space the values required to have two adjacent cavity longitudinal modes with small spectral separation, while the Finite Difference Time Domain (FDTD) program verifies the existence of EMB due to photon-photon resonance (PPR) between the lasing and the adjacent mode.

Exploiting coupled modes equations and transfer matrix formalism, we end up with a round trip gain function such as  $G(\lambda) = |G|e^{i\varphi}$ , where  $|G|$  is the round trip gain and  $\varphi$  is the phase function. The lasing mode is found solving the resonance conditions  $|G| = 1$ ,  $\varphi_m = 2m\pi$  where  $m$  is an integer, whereas all other modes, at the same carrier density, have  $|G| < 1$ ,  $\varphi_n = 2n\pi$ ,  $n \neq m$ . Refractive index dispersion and variation with injection, sections losses and gain are all taken into account. When the lasing mode is near enough in frequency to a deep minimum of the reflectivity function, a second non-lasing mode, with an acceptable gain margin, may eventually lye beside it, below the free-spectral-range (FSR), significantly en-hancing the modulation bandwidth by PPR. From investigating these conditions we pointed out a method to obtain such an occurrence with considerations on ratios among section lengths  $L_A$ ,  $L_G$  and  $L_P$  defined in Fig.(1c, inset). To explore this occurrence, variation of one FSR in mode position is obtained varying by injection the effective index  $\Delta\bar{n}_{A,P}$  in active and phase sections of a quantity given by  $\Delta\bar{n}_{A,P} = (2L_{A,P} / \lambda_{Bragg})x_{A,P}$ , where the normalized effective index variations  $x_{A,P}$  vary in the interval  $[-0.5, 0.5]$ . Frequency separation  $\Delta f$  between the lasing and the first competing mode is reported in color-maps as in

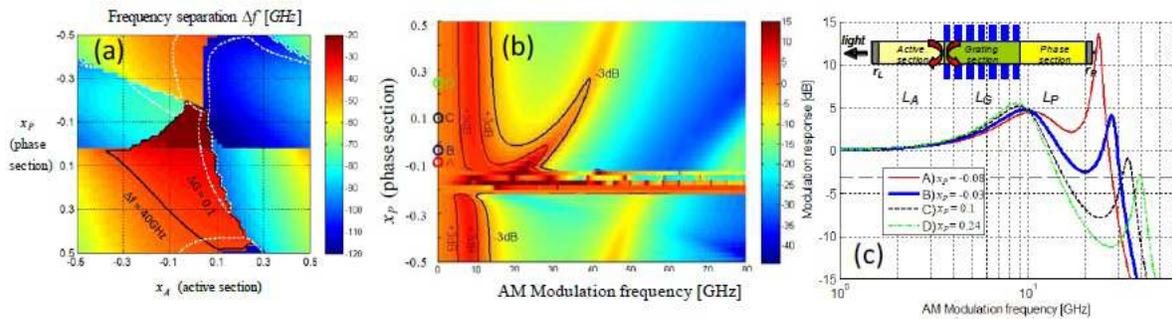


Fig.1.(a) Frequency separation map and (b) intensity modulation responses map, calculated for  $x_A = 0$  and values of the normalized parameter  $x_P$  ranging from -0.5 and 0.5, for an as-cleaved CCIG with  $L_A/L_G/L_P = 200/600/10 \mu\text{m}$ . (c) Cuts of the map reporting the IM responses for several values of  $x_P$ . In the inset, a scheme of CCIG is reported.

Fig. 1(a); then, with the FDTD program, the intensity modulation responses are calculated for different values of one of the normalized parameters as in Fig. 1(b) where the PPR peak can be seen approaching the photon-carrier resonance peak when  $x_p$  reduces. Cuts of Fig.1b are reported in Fig. 1(c).

The method applies to other multiple cavity lasers, e.g. DFB with external feedback [1].

The research leading to these results has received funding from the European Community's Seventh Framework Programme under grant agreement n° 224366 (Delight project).

[1] M. Radziunas, A. Glitzky, U. Bandelow, M. Wolfrum, U. Troppenz, J. Kreissl, and W. Rehbein, *IEEE J. of Sel. Topics in Quantum Electron.* **13**, 136 (2007).