

Impact and Detection of GNSS Jammers on Consumer Grade Satellite Navigation Receivers

Original

Impact and Detection of GNSS Jammers on Consumer Grade Satellite Navigation Receivers / Borio, Daniele; Dovic, Fabio; Kuusniemi, Heidi; LO PRESTI, Letizia. - In: PROCEEDINGS OF THE IEEE. - ISSN 0018-9219. - ELETTRONICO. - 104:6(2016), pp. 1233-1245. [10.1109/JPROC.2016.2543266]

Availability:

This version is available at: 11583/2646380 since: 2016-08-26T14:21:03Z

Publisher:

Institute of Electrical and Electronics Engineers Inc.

Published

DOI:10.1109/JPROC.2016.2543266

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

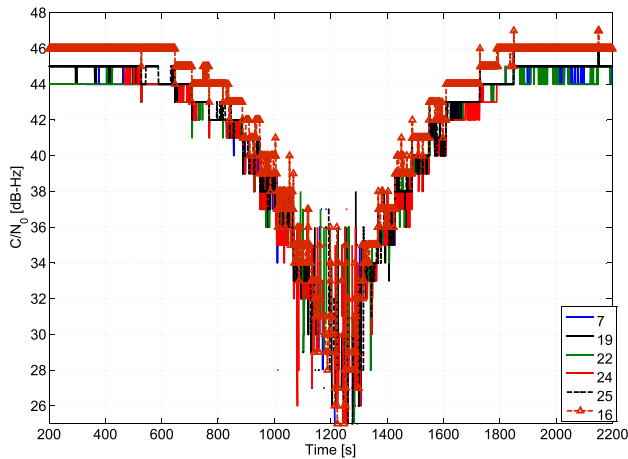


Fig. 11. C/N_0 values of the individual GPS C/A signals tracked during the experiment considered in Fig. 3. The C/N_0 values are affected in a similar way by the jamming signal.

detection. In particular, the following detection statistic was suggested:

$$\Lambda = \sum_{k=0}^{N-1} \left[\sum_{i=0}^{I-1} \left(\frac{C_i}{N_0} [n-k] - h_{LP}[n] * \frac{C_i}{N_0} [n-k] \right) \right]^2 \quad (13)$$

where N is the number of time epochs considered and I is the number of satellites available. $h_{LP}[n]$ is the impulse response of a low-pass filter with unit gain at direct current (dc) and symbol “*” denotes convolution. $(C_i/N_0)[n]$ is C/N_0 from the i th satellite at instant n expressed in logarithmic scale (dB-Hz). A decision is taken by comparing Λ with a decision threshold.

Although this method mitigates the C/N_0 ambiguity problem and can, for example, be used in dynamic scenarios [53], it can become unreliable when most of the signals are strongly attenuated such as indoors. In this case, additional information from other sources has to be adopted. A possible solution is considered in [32] which suggested a joint detection scheme combining C/N_0 values with AGC readings. Indeed the two time series provide complementary information. Additional

detection approaches can be designed using the output of the digital tracking loops used to process each satellite signal. Bhuiyan *et al.* [25] considered the discriminator outputs of a noncoherent DLL and of a Costas PLL. Then an analysis window was used to select N consecutive samples and compute the sample variance of the discriminator outputs. If the sample variance passes a decision threshold, then the presence of jamming is declared.

In this case, a single decision is taken for each signal tracked. Then a combining rule, such as the Bernoulli scheme described in [56], has to be adopted for taking a final decision.

A similar approach can be adopted where the sample variance is computed using GNSS observables such as pseudoranges and Doppler measurements. In this case, the time-varying nature of such observables has to be accounted for. For example, N should be small enough to limit the time variations of these observables. Alternatively, measurements can be at first high-pass filtered.

V. CONCLUSION

In this paper, the characteristics of jamming signals and their impact on GNSS receivers have been reviewed. A survey on the state-of-the-art methods for jamming detection was also provided. It was shown that jamming can practically impact all receiver stages, from the front-end to the navigation solution. Specific emphasis was given to intermediate power jamming attacks when jamming signals are sufficiently powerful to significantly degrade receiver performance without interrupting receiver operations. This case is considered the most dangerous since jamming may be undetected and GNSS users may continue their operations without realizing the degradation of performance experienced by their receivers. In this respect, detection is the first line of defense against a jamming attack. Several detection approaches were discussed and it is shown that detection can be implemented at almost any receiver stage. Interference detection units are becoming common accessories in new GNSS receivers and the constantly growing computational capabilities of GNSS chipsets are enabling new and more sensitive detection strategies. ■

REFERENCES

- [1] R. H. Mitch *et al.*, “Signal characteristics of civil GPS jammers,” in *Proc. 24th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Portland, OR, USA, Sep. 2011, pp. 1907–1919.
- [2] S. Pullen and G. X. Gao, “GNSS jamming in the name of privacy,” *Inside GNSS*, pp. 34–43, Mar./Apr. 2012.
- [3] “No jam tomorrow,” *The Economist*, Mar. 10 2011. [Online]. Available: <http://www.economist.com/node/18304246>
- [4] J. A. Volpe, “Vulnerability assessment of the transportation infrastructure relying on the Global Position System,” *Nat. Transp. Syst.*, Aug. 2001. [Online]. Available: http://www.navcen.uscg.gov/pdf/vulnerability_assess_2001.pdf
- [5] T. Buck and G. Sellick, “GPS RF interference via a TV video signal,” in *Proc. 10th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Kansas City, MO, USA, Sep. 1997, pp. 1497–1501.
- [6] F. Bastide, D. Akos, C. Macabiau, and B. Roturier, “Automatic gain control (AGC) as an interference assessment tool,” in *Proc. 16th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Portland, OR, USA, Sep. 2003, pp. 2042–2053.
- [7] F. Butsch, “Radio-frequency interference and GPS,” *GPS World*, pp. 40–46, Oct. 2002.
- [8] B. Motella, M. Pini, and F. Dovis, “Investigation on the effect of strong out-of-band signals on Global Navigation Satellite Systems receivers,” *GPS Solutions*, vol. 12, no. 2, pp. 77–86, Mar. 2008.
- [9] P. F. De Bakker, J. Samson, M. Spelat, M. Hoolreiser, and B. Ambrosius, “Effect of radio frequency interference on GNSS

- receiver output,” in *Proc. ESA Workshop Satellite Navig. User Equip. Technol.*, Dec. 2006, pp. 1–9.
- [10] A. T. Balaei, B. Motella, and A. G. Dempster, “GPS interference detected in Sydney-Australia,” in *Proc. IGSS Conf.*, Sydney, Australia, Dec. 2007. [Online]. Available: <http://unsworks.unsw.edu.au/fapi/datastream/unsworks:7698/SOURCE01?view=true>
- [11] P. Fenton, “Can GPS and LightSquared coexist?” presented at the Panel Discussion—ON GNSS, Portland, OR, USA, Sep. 19–23, 2011.
- [12] P. Boulton, R. Borsato, B. Butler, and K. Judge, “GPS interference testing. Lab, Live, LightSquared,” *Inside GNSS*, pp. 32–45, Jul.–Aug. 2011.
- [13] O. Izos, D. Akos, T. Lindgren, C. Sun, and S. Jan, “Assessment of GPS L1/Galileo E1 interference monitoring system for the airport environment,” in *Proc. 24th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Portland, OR, Sep. 2011, pp. 1920–1930.
- [14] B. Motella and L. Lo Presti, “Methods of goodness of fit for GNSS interference detection,” *IEEE Trans. Aerosp. Electron. Syst.*, vol. 50, no. 3, pp. 1690–1700, Jul. 2014.
- [15] F. Doyis, *GNSS Interference Threats and Countermeasures*. Norwood, MA, USA: Artech House, 2015.
- [16] E. D. Kaplan and C. Hegarty, *Understanding GPS: Principles and Applications*, Mobile Communications. Norwood, MA, USA: Artech House, 2006.
- [17] J. B. Tsui, *Fundamentals of Global Positioning System Receivers. A Software Approach*, 2nd ed. New York, NY, USA: Wiley, 2005.
- [18] T. Kraus, R. Bauernfeind, and B. Eissfeller, “Survey of in-car jammers—Analysis and modeling of the RF signals and IF samples (suitable for active signal cancellation),” in *Proc. 24th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Portland, OR, Sep. 2011, pp. 430–435.
- [19] R. H. Mitch, M. L. Psiaki, B. W. O’Hanlon, S. P. Powell, and J. A. Bhatti, “Civilian GPS jammer signal tracking and geolocation,” in *Proc. 25th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Nashville, TN, USA, Sep. 2012, pp. 20.
- [20] H. Kuusniemi, E. Airos, M. Z. H. Bhuiyan, and T. Kröger, “Effects of GNSS jammers on consumer grade satellite navigation receivers,” in *Proc. Eur. Navig. Conf.*, Gdansk, Poland, Apr. 2012, pp. 14.
- [21] D. Borio, J. Fortuny, and C. O’Driscoll, “Spectral and spatial characterization of GNSS jammers,” in *Proc. 7th GNSS Vulnerabilities Solutions Conf.*, Baska, Croatia, Apr. 2013, pp. 1–17.
- [22] D. Borio, C. O’Driscoll, and J. Fortuny, “GNSS jammers: Effects and countermeasures,” in *Proc. 6th ESA Workshop Satellite Navig. Technol./Eur. Workshop GNSS Signals Signal Process.*, Dec. 2012, pp. 1–7.
- [23] G. D. Rash, “GPS jamming in a laboratory environment,” in *Proc. 53rd Annu. Meeting Inst. Navig.*, Albuquerque, NM, USA, Jun. 1997, pp. 389–398.
- [24] u-blox A.G., “u-blox 6 Receiver Description Including Protocol Specification,” Apr. 2013. [Online]. Available: https://www2.u-blox.com/images/downloads/Product_Docs/u-blox6_ReceiverDescriptionProtocolSpec_28GPS.G6-SW-10018%29.pdf
- [25] M. Z. H. Bhuiyan, H. Kuusniemi, S. Söderholm, and E. Airos, “The impact of interference on GNSS receiver observables—A running digital sum based simple jammer detector,” *Radioengineering*, vol. 23, no. 3, pp. 898–906, Sep. 2014.
- [26] M. Wildemeersch, E. C. Pons, A. Rabbachin, and J. F. Guasch, “Impact study of unintentional interference on GNSS receivers,” European Commission, Joint Research Centre, JRC Scientific and Technical Reports, 2010. [Online]. Available: <http://publications.jrc.ec.europa.eu/repository/bitstream/JRC62607/lbna24742enc.pdf>
- [27] P. Misra and P. Enge, *Global Positioning System—Signals, Measurements and Performance*, 2nd ed. Lincoln, MA, USA: Ganga-Jamuna Press, 2001.
- [28] D. Borio, “GNSS acquisition in the presence of continuous wave interference,” *IEEE Trans. Aerosp. Electron. Syst.*, vol. 46, no. 1, pp. 47–60, Jan. 2010.
- [29] S. M. Kay, *Fundamentals of Statistical Signal Processing: Detection Theory*, ser. Signal Processing. Englewood Cliffs, NJ, USA: Prentice-Hall, 1993, vol. II.
- [30] A. Wald, *Sequential Analysis*. New York, NY, USA: Dover, Jan. 2015.
- [31] D. Egea-Roca, G. Seco-Granados, and J. Lopez-Salcedo, “On the use of quickest detection theory for signal integrity monitoring in single-antenna GNSS receivers,” in *Proc. Int. Conf. Localization GNSS*, Jun. 2015, pp. 1–6.
- [32] E. Vallés, C. Yu, and R. Elasmr, “Interference detection algorithms for GNSS-enabled android devices,” in *Proc. 28th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Tampa, FL, USA, Sep. 2015, pp. 1–8.
- [33] K. Sheridan, Y. Ying, and T. Whitworth, “Pre- and post-correlation GNSS interference detection within software defined radio,” in *Proc. 25th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Nashville, TN, USA, 2012, pp. 3542–3548.
- [34] E. Axell, F. M. Eklöf, M. Alexandersson, P. Johansson, and D. M. Akos, “Jamming detection in GNSS receivers: Performance evaluation of field trials,” *NAVIGATION, J. Inst. Navig.*, vol. 61, no. 1, pp. 73–82, Spring, 2015.
- [35] J. Lindstrom, D. M. Akos, O. Izos, and M. Junered, “GNSS interference detection and localization using a network of low cost front-end modules,” in *Proc. 20th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Fort Worth, TX, USA, Sep. 2007, pp. 1165–1172.
- [36] G. R. Arce, *Nonlinear Signal Processing: A Statistical Approach*. Hoboken, NJ, USA: Wiley, Sep. 2004.
- [37] O. Izos, A. T. Balaei, and D. Akos, “Interference detection and localization in GPS L1 band,” in *Proc. Int. Tech. Meeting Inst. Navig.*, San Diego, CA, USA, Jan. 2010, pp. 925–929.
- [38] J. H. Yang, C. H. Kang, S. Y. Kim, and C. G. Park, “Intentional GNSS interference detection and characterization algorithm using AGC and adaptive IIR notch filter,” *Int. J. Aeronaut. Space Sci.*, vol. 13, no. 4, pp. 491–498, Dec. 2012.
- [39] L. Scott, “J911: The case for fast jammer detection and location using crowdsourcing approaches,” in *Proc. 24th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Portland, OR, USA, Sep. 2011, pp. 1931–1940.
- [40] A. Tani and R. Fantacci, “Performance evaluation of a precorrelation interference detection algorithm for the GNSS based on nonparametrical spectral estimation,” *IEEE Syst. J.*, vol. 2, no. 1, pp. 20–26, Mar. 2008.
- [41] K. Wallis, “Chi-squared tests of interval and density forecasts, the Bank of England’s fan charts,” *Int. J. Forecast.*, vol. 19, no. 2, pp. 165–175, Apr. 2003.
- [42] C. S. Gouriéroux and C. Tenreiro, “Local power properties of kernel based goodness of fit tests,” *J. Multivariate Anal.*, vol. 78, no. 2, pp. 161–190, Aug. 2001.
- [43] M. L. Rizzo, “New goodness-of-fit tests for Pareto distributions,” *ASTIN Bull.*, vol. 39, no. 2, pp. 691–715, Nov. 2009.
- [44] R. Parker, *Introductory Statistics for Biology*, 2nd ed. Cambridge, U.K.: Cambridge Univ. Press, 1991.
- [45] L. Marti and F. van Graas, “Interference detection by means of the software defined radio,” in *Proc. 17th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Long Beach, CA, USA, Sep. 2004, pp. 99–109.
- [46] W. R. Pestman, *Mathematical Statistics*, 2nd ed. Berlin, Germany: Walter de Gruyter, Jan. 2009.
- [47] S. S. Wilks, *Mathematical Statistics*. New York, NY, USA: Wiley, 1962.
- [48] M. T. Gamba, B. Motella, and M. Pini, “Statistical test applied to detect distortions of GNSS signals,” in *Proc. Int. Conf. Localizat. GNSS*, Jun. 25–27, 2013, pp. 1–6.
- [49] M. Pini, B. Motella, and M. T. Gamba, “Detection of correlation distortions through application of statistical methods,” in *Proc. 26th Int. Tech. Meeting Satellite Div. Inst. Navig.*, Sep. 2013, pp. 3279–3289.
- [50] D. Borio, L. Camoriano, S. Savasta, and L. Lo Presti, “Time-frequency excision for GNSS applications,” *IEEE Syst. J.*, vol. 2, no. 1, pp. 27–37, Mar. 2008.
- [51] M. Paonni et al., “Wavelets and notch filtering. Innovative techniques for mitigating RF interference,” *Inside GNSS*, vol. 6, no. 1, pp. 54–62, Jan.–Feb. 2011.
- [52] L. Musumeci and F. Doyis, “Use of the wavelet transform for interference detection and mitigation in global navigation satellite systems,” *Int. J. Navig. Observat.*, vol. 2014, pp. 1–14, Mar. 2014.
- [53] D. Borio and C. Gioia, “Real-time jamming detection using the sum-of-squares paradigm,” in *Proc. Int. Conf. Localizat. GNSS*, Gothenburg, Sweden, Jun. 2015, pp. 1–6.
- [54] J. W. Betz, “Effect of partial-band interference on receiver estimation of C/N_0 : Theory,” in *Proc. Nat. Tech. Meeting Inst. Navig.*, Long Beach, CA, USA, Jan. 2001, pp. 817–828.
- [55] E. Axell, “GNSS interference detection,” Swedish Defence Research Agency (FOI) Tech. Rep. FOI-R-3839-SE, Feb. 2014.
- [56] R. Calcagno, S. Fazio, S. Savasta, and F. Doyis, “An interference detection algorithm for COTS GNSS receivers,” in *Proc. 5th ESA Workshop Satellite Navig. Technol./Eur. Workshop GNSS Signals Signal Process.*, Noordwijk, The Netherlands, Dec. 2010, pp. 1–8.

ABOUT THE AUTHORS

Daniele Borio received the M.S. and Ph.D. degrees in communications engineering from Politecnico di Torino, Torino, Italy, in 2004 and 2008, respectively.

From January 2008 to September 2010, he was a Senior Research Associate in the PLAN group, University of Calgary, Calgary, AB, Canada. He is currently a Scientific and Policy Officer at the Joint Research Centre (JRC), European Commission, Ispra, Italy, in the fields of digital and wireless communications, location, and navigation.



Heidi Kuusniemi received the M.Sc. and D.Sc. (Tech.) degrees in digital and computer engineering from Tampere University of Technology, Tampere, Finland, in 2002 and 2005, respectively.

She is the Director of the Department of Navigation and Positioning, Finnish Geospatial Research Institute (FGI), National Land Survey, Masala, Finland. She is also an Adjunct Professor at the Department of Real Estate, Planning and Geoinformatics, Aalto University, Helsinki, Finland and at the Department of Electronics and Communications Engineering, Tampere University of Technology. She is the President of the Nordic Institute of Navigation. Her research interests cover various aspects of GNSS and sensor fusion for seamless outdoor/indoor positioning, especially reliability monitoring.



Fabio Dovis received the M.Sc. degree in electronics engineering and the Ph.D. degree in electronics and telecommunication engineering from Politecnico di Torino, Torino, Italy, in 1996 and 2000, respectively.

He is an Associate Professor at the Department of Electronics and Telecommunications, Politecnico di Torino. He contributed to the creation of the Navigation, Signal Analysis and Simulation (NavSAS) group. His research interests are focused on the design of architectures for GNSS receivers and on advanced signal processing algorithms for interference detection and multipath mitigation, considering for both current and modernized GNSS signals.



Letizia Lo Presti received the M.Sc. degree in electronics engineering from Politecnico di Torino, Torino, Italy, in 1971.

She is a full Professor with the Information Engineering Faculty, Politecnico di Torino, Torino, Italy, working in the Electronics and Communication Department. Her research activities cover the field of digital signal processing, simulation of telecommunication systems, and the technology of navigation and positioning systems. Her teaching activity is mainly focused on signal processing (from the fundamentals to advanced concepts, such as statistical signal analysis, time-frequency distribution, and estimation theory), and algorithms for GPS and Galileo receivers. She is the scientific coordinator of the Master on Navigation and Related Applications held by Politecnico di Torino (since 2003).

