



# GIMC-GMA 2016

XXI Convegno Italiano di Meccanica Computazionale  
e VIII Riunione del Gruppo Materiali AIMETA

Lucca 27-29 giugno 2016 – Scuola IMT Alti Studi Lucca

## ATTI DEL CONVEGNO

A cura di:

Marco Paggi, Andrea Bacigalupo, Stefano Bennati,  
Claudia Borri, Mauro Corrado, Alessio Gizzi, Paolo S. Valvo

Con il patrocinio di:



CONFINDUSTRIA TOSCANA NORD  
Lucca Pistoia Prato

## **Comitato Scientifico**

Lorenzo Bardella (Università di Brescia)  
Sonia Marfia (Università di Cassino)  
Roberta Massabò (Università di Genova)  
Anna Pandolfi (Politecnico di Milano)  
Alessandro Reali (Università di Pavia)  
Pasquale Vena (Politecnico di Milano)  
Giorgio Zavarise (Università del Salento)

## **Comitato Organizzatore**

Marco Paggi (IMT Scuola Alti Studi Lucca), Chairman  
Andrea Bacigalupo (IMT Scuola Alti Studi Lucca)  
Stefano Bennati (Università di Pisa)  
Claudia Borri (IMT Scuola Alti Studi Lucca)  
Mauro Corrado (Politecnico di Torino)  
Alessio Gizzi (Università Campus Bio-Medico di Roma)  
Paolo S. Valvo (Università di Pisa)

# A comparative SFEM- and IGA-based numerical prediction of the stress concentration factor in plates with discontinuities

Rossana Dimitri<sup>1</sup>, Nicholas Fantuzzi<sup>2</sup>, Francesco Tornabene<sup>2</sup>, Giorgio Zavarise<sup>1</sup>

<sup>1</sup>*Department of Innovation Engineering, University of Salento, Italy*  
*E-mail: rossana.dimitri@unisalento.it, giorgio.zavarise@unisalento.it*

<sup>2</sup>*DICAM Department, School of Engineering and Architecture, University of Bologna, Italy*  
*E-mail: nicholas.fantuzzi@unibo.it, francesco.tornabene@unibo.it*

*Keywords:* Generalized differential quadrature, Isogeometric Analysis, Stress concentration factor.

In this contribution we present a numerical analysis of the Stress Concentration Factor (SCF)  $K_T$  and the stress distribution around holes and discontinuities in plane state structures. The stress concentration in discontinuous zones is known to be a very significant issue in strength problems. Indeed, the presence of a discontinuity makes even a simple structure model complicated to analyze, regardless of the method being used. The Finite Element Method (FEM) is the most common tool in engineering for treating such problems. However, a very fine mesh is generally required for a realistic prediction of stresses around critical zones as cracks or discontinuities. Despite the large use of the FEM as numerical approach to predict stress concentrations, the problem is still open. Here two innovative numerical techniques are proposed as computationally more efficient alternatives to determine the SCFs with a limited number of degrees of freedom, which may significantly decrease the computation time. A limited number of degrees of freedom is due to a higher order scheme carried out by the SFEM. On the contrary, the standard FEM employs local low order polynomials for the approximation of solution, and special functions are generally implemented for stress concentration problems. More in detail, the local and global strong formulation finite element method (SFEM), and the isogeometric approach (IGA) based on quadratic Non-Uniform Rational B-Spline (NURBS) basis functions, are herein applied for the purpose, as proposed for other applications in [1,2] for the SFEM, and [3-5] for IGA, respectively.

In order to demonstrate the accuracy of the two proposed methodologies, some classical examples are studied, which consider rectangular plates with different discontinuities, e.g. circular holes, U-holes, or V-notches. All the numerical results obtained in terms of stress distribution and  $K_T$  are compared with the theoretical predictions from the literature as well as the numerical solutions provided by FEM. The numerical solutions for the  $K_T$  are based on a linear interpolation of the stresses near the discontinuities within a certain distance of interpolation, and agree very well with the exact computations available in the handbooks. A comparative evaluation of numerical results based on the IGA, SFEM and FEM approaches is illustrated in Figures 1 and 2, in terms of stress distributions and  $K_T$  for a U-notched plate subjected to a uniform loading and for different degrees of freedoms (DOFs). The numerical results provided by SFEM and IGA methods are very close to the ones found with FEM, thus confirming the potentials and accuracy of the two proposed methods to capture the stress concentrations in fracture mechanics, also for coarse mesh discretizations.

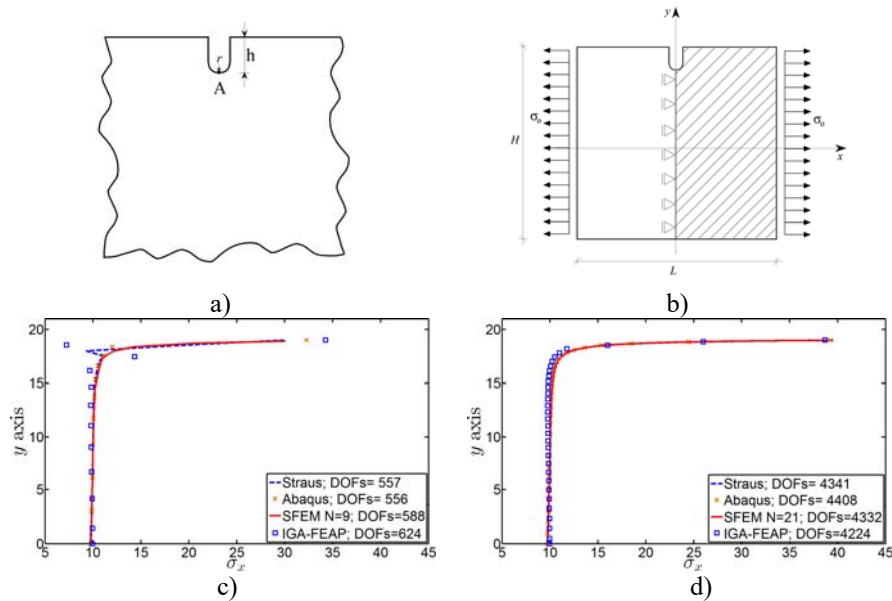


Figure 1: U-notched plate under a uniform loading: geometry (a-b) and  $\sigma_x$  distributions (c-d).

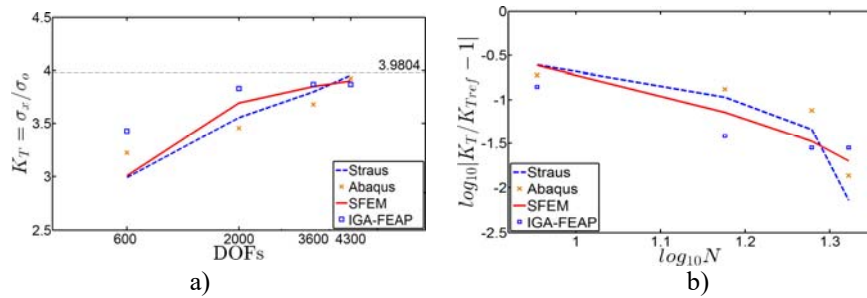


Figure 2: U-notched plate under a uniform loading:  $K_T$  (a) and error estimation (b).

## References

- [1] Tornabene, F., Fantuzzi, N., Ubertini, F., Viola, E., "Strong formulation finite element method based on differential quadrature: a survey", *Appl. Mech. Rev.*, **67**, 020801 (55 pages) (2015).
- [2] Fantuzzi, N., Dimitri, R., Tornabene, F., "A SFEM-based evaluation of mode-I Stress Intensity Factor in composite structures", *Compos. Struct.*, **145**, 162-185 (2016).
- [3] Dimitri, R., De Lorenzis, L., Wriggers, P., Zavarise, G., "NURBS- and T-spline-based isogeometric cohesive zone modeling of interface debonding", *Comput. Mech.*, **54**, 369-388 (2014).
- [4] Dimitri R., "Isogeometric treatment of large deformation contact and debonding problems with T-splines: a review", *Curved Layer. Struct.*, **2**, 59-90 (2015).
- [5] Dimitri R., Zavarise G. T-splines discretizations for large deformation contact problems. *PAMM Proc. Appl. Math. Mech.*, **15**:183-4 (2015).