

An optimization approach for flow simulations in poro-fractured media with complex geometries

Original

An optimization approach for flow simulations in poro-fractured media with complex geometries / Berrone, Stefano; D'Auria, Alessandro; Scialò, Stefano. - In: COMPUTATIONAL GEOSCIENCES. - ISSN 1420-0597. - ELETTRONICO. - 25:3(2021), pp. 897-910. [10.1007/s10596-020-10029-8]

Availability:

This version is available at: 11583/2810392 since: 2024-07-09T12:08:49Z

Publisher:

springer nature

Published

DOI:10.1007/s10596-020-10029-8

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

An optimization approach for flow simulations in poro-fractured media with complex geometries

Stefano Berrone · Alessandro D'Auria ·
Stefano Scialò

Received: date / Accepted: date

Abstract A new discretization approach is presented for the simulation of flow in complex poro-fractured media described by means of the Discrete Fracture and Matrix Model. The method is based on the numerical optimization of a properly defined cost-functional and allows to solve the problem without any constraint on mesh generation, thus overcoming one of the main complexities related to efficient and effective simulations in realistic DFMs.

Keywords 3D flows · Darcy flows · matrix-fracture coupled flows · optimization methods for elliptic problems · non conforming FEM meshes · 2D-3D flow coupling

Mathematics Subject Classification (2010) 65N30 · 65N50 · 68U20 · 86-08

1 Introduction

The present work deals with the simulation of the flow in the subsoil, modelled by means of the Discrete Fracture and Matrix (DFM) model. According to this model, underground fractures are represented as planar polygons arbitrarily oriented in a three dimensional porous matrix. The flows considered here are governed by the Darcy law in the three dimensional matrix and by an averaged Darcy law on each fracture plane, with suitable matching conditions at fracture-matrix interfaces and at fracture intersections. The quantity of interest is the hydraulic head, given by the sum of the pressure head and elevation. Single phase stationary flow is considered, with the assumption of continuity of the hydraulic head at both fracture-matrix interfaces and at fracture-fracture intersections and no longitudinal flow is allowed along fracture intersections. This is a simplified model with respect to other DFM approaches, described, for example in [28] or, more recently, in [14], but still representative of realistic configurations, characterized,

S. Berrone · A. D'Auria · S. Scialò
Dipartimento di Scienze Matematiche, Politecnico di Torino, Corso Duca degli Abruzzi 24,
10129 Torino, Italy
Members of the INdAM research group GNCS
E-mail: stefano.berrone@polito.it - alessandro.dauria@polito.it - stefano.scialo@polito.it

e.g., by highly permeable fractures. The main focus of the present work is on geometrical complexity aspects, proposing a problem formulation and a numerical approach suitable for complex and randomly generated networks. The described approach can however be extended to different flow models and different coupling conditions. The geometrical complexity of DFM models mainly arises from the multi-scale nature of the resulting domains and from the presence of multiple intersecting interfaces, where the solution displays an irregular behavior. DFM models are proposed as an alternative to homogenization techniques [33], dual and multi-porosity models [17], or embedded discrete fracture matrix (EDFM) models [26, 29, 23], and are characterized by the explicit representation of the underground fractures, dimensionally reduced to planar interfaces into the porous matrix. As a consequence of the random orientation, fractures usually form an intricate system of intersections, with the presence of fractures with very different sizes spanning several orders of magnitude that generate intersections with huge geometrical complexities as, for example, 2D and 3D geometrical objects with very different dimension and objects with enormous aspect ratios. The research on effective numerical tools for DFM simulations is particularly active, see e.g. [3, 1, 15, 32, 12, 31, 4, 18]. One of the key aspects is the meshing of the domain, with a mesh conforming to the interfaces, suitable for standard approaches for the imposition of interface conditions. The generation of a conforming mesh for realistic fracture networks might, in fact, result in an impossible task, for the extremely high number of geometrical constraints. The mesh conformity constraint at the interfaces can be relaxed by using extended finite elements as suggested, e.g., by [24, 21]. Different approaches are based on the Mimetic Finite Difference method (MFD) [27], as described, for example, in [2, 32], or on Hybrid High Order (HHO) methods as proposed by [16], where a partial non-conformity is allowed between the mesh of the porous medium and of the fractures, or also on Discontinuous Galerkin discretizations, as in [4]. Two or multi-point flux approximation based techniques are described in [34, 20] and gradient schemes in [15]. Virtual Element (VEM) based discretizations have also been recently investigated to ease the mesh generation process in complex DFMs, as in [6] where the VEM is coupled to the Boundary Element method, and in [22], in [19] for poro-elasticity problems, or in [5] where an arbitrary order mixed VEM formulation is proposed.

This work presents a development of an optimization-based approach, first proposed for Discrete Fracture Networks [10, 11, 7, 13, 8] and recently extended to DFM problems in [12]. This approach avoids any mesh conformity requirement for the imposition of interface conditions, which are instead enforced through the minimization of a properly defined cost functional. The computation of the quantities involved in functional definition does not require any constraint on the mesh. Further, the resolution of the optimization problem via a gradient-based scheme allows to de-couple the problems on each fracture and the problem on the porous matrix, thus paving the way for an efficient parallel implementation of the numerical scheme, similarly to what done in [13, 9]. The discretization scheme described in [12] relies on the Boundary Element Method for the discretization of the problem on three dimensional matrix blocks, thus requiring the splitting of the original three dimensional domain into sub-domains not crossing the fractures, and thus implying a partial mesh conformity at the fracture-matrix interfaces. Here, the three dimensional domain is not split into sub-domains and Finite Elements are used for the discretization of the matrix, on tetrahedral elements that can arbitrarily cross

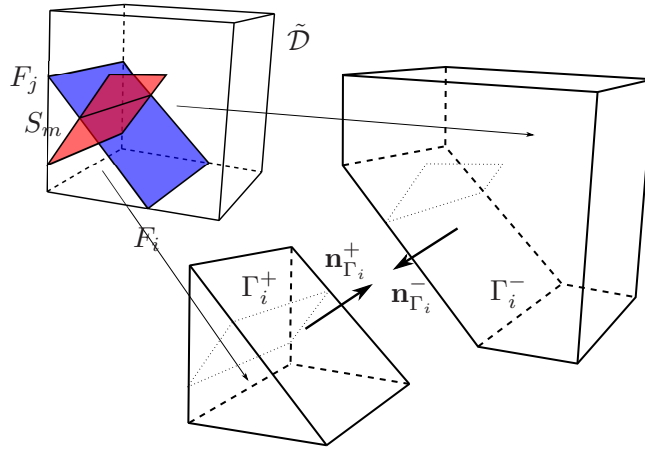


Fig. 1 Nomenclature exemplification

the fractures. Finite elements on triangular meshes are used for the fractures, with elements not conforming to the tetrahedral mesh and also arbitrarily placed with respect to fracture-fracture intersections. The proposed discretization approach thus greatly improves the usability of the method to general DFM geometries, allowing a trivial meshing process of extremely complex domains, thanks to the complete independence of the mesh from all the interfaces.

The structure of the manuscript is the following: Section 2 describes both the classical and the optimization based formulation of the flow problem in a DFM; the following Section 3 describes the derivation of the discrete problem and the proof of its well posedness; Section 4 shows how an equivalent unconstrained optimization problem is derived, and the gradient based scheme used for problem resolution; Section 5 reports some numerical results and finally some conclusions are proposed in Section 6.

2 Problem description

This section is devoted to a brief description of the problem of interest, referring to [12] for a more detailed exposition and well posedness results. Let us consider a polyhedral block of porous material, denoted as \mathcal{D} , crossed by a fracture network Ω given by the union of planar polygonal fractures F_i , $i = 1, \dots, N_F$ in the three-dimensional space, i.e. $\Omega = \bigcup_{i=1}^{N_F} F_i$. We further denote by \mathcal{F} the set of all fracture indexes. Fractures might intersect, and fracture intersections, also called traces, are indicated as S_m , $m = 1, \dots, N_S$. We assume, for simplicity, that each trace is given by the intersection of exactly two fractures, such that an injective map $\sigma : [1, \dots, N_S] \mapsto [1, \dots, N_F] \times [1, \dots, N_F]$ can be defined between a trace index and a couple of fracture indexes, as $\sigma(m) = \{i, j\}$ being $S_m = \bar{F}_i \cap \bar{F}_j$. Further, \mathcal{S}_i is the set of indexes of all the traces on fracture F_i and \mathcal{S} the set of indexes of all the traces in the network. Let us introduce the domain $\tilde{\mathcal{D}} = \mathcal{D} \setminus \bar{\Omega}$, thus given by the original block \mathcal{D} without the internal fractures. Calling $\partial\tilde{\mathcal{D}}$ the boundary of $\tilde{\mathcal{D}}$, let us denote by Γ_i^\pm the portion of $\partial\tilde{\mathcal{D}}$ that matches fracture F_i , for $i = 1, \dots, N_F$, the

superscript “+” or “−” referring to one of the two sides of the boundary “around” the fracture (see Figure 1); the unit normal vector to Γ_i^\pm is $\mathbf{n}_{\Gamma_i^\pm}$, always pointing outward from $\tilde{\mathcal{D}}$. A jump operator is introduced for any sufficiently regular vector function \mathbf{v} on $\tilde{\mathcal{D}}$, defined as the jump of \mathbf{v} along the normal direction to the faces Γ_i^\pm :

$$[\mathbf{v} \cdot \mathbf{n}]_{\Gamma_i} := \left(\mathbf{v}|_{\Gamma_i^+} \cdot \mathbf{n}_{\Gamma_i^+} \right) - \left(\mathbf{v}|_{\Gamma_i^-} \cdot \mathbf{n}_{\Gamma_i^+} \right).$$

Similarly, for $i = 1, \dots, N_F$ we denote by \tilde{F}_i the fracture F_i without traces, i.e. $\tilde{F}_i = F_i \setminus \bigcup_{m \in \mathcal{S}_i} S_m$, and for each trace S_m , $m \in \mathcal{S}_i$, for any sufficiently regular vector function \mathbf{w}_i on F_i , the jump of the normal component of \mathbf{w}_i across trace S_m on F_i is denoted as:

$$[\mathbf{w}_i \cdot \mathbf{n}]_{S_m} := \left(\mathbf{w}_i|_{S_m^+} \cdot \mathbf{n}_{S_m}^i \right) - \left(\mathbf{w}_i|_{S_m^-} \cdot \mathbf{n}_{S_m}^i \right),$$

with S_m^\pm the two sides of the portion of the boundary of \tilde{F}_i lying on S_m and $\mathbf{n}_{S_m}^i$ the normal unit vector to S_m with a fixed orientation on F_i . These jump operators are easily extended to functions defined on the whole 3D domain \mathcal{D} and on the whole fractures F_i , $i = 1, \dots, N_F$, with the \pm superscripts still denoting the two sides of the interface $\Gamma_i \equiv F_i$, $\forall i = 1, \dots, N_F$, or S_m , $\forall m = 1, \dots, N_S$.

The portion of $\partial\tilde{\mathcal{D}}$ not matching any fracture is split in a Dirichlet part Γ_D and a Neumann part Γ_N , $\Gamma_D \cap \Gamma_N = \emptyset$, where, for simplicity of exposition, we assume homogeneous Dirichlet and Neumann boundary conditions are enforced. Similarly, the boundary of each fracture ∂F_i , $i = 1, \dots, N_F$, is split in a Dirichlet and Neumann part, γ_{iD} and γ_{iN} , respectively. If fracture F_i lies in the interior of \mathcal{D} , then we set $\gamma_{iD} = \emptyset$, and homogeneous Neumann boundary conditions are prescribed on $\gamma_{iN} \equiv \partial F_i$. If $N_F = 1$, we assume that $|\gamma_{1D}| > 0$, whereas, if there is more than one fracture in the network, we allow $\gamma_{iD} = \emptyset$ for $i = 1, \dots, N_F$. The problem of the equilibrium distribution of the hydraulic head in \mathcal{D} can be then stated in strong formulation as:

$$-\nabla \cdot (\mathbf{K}_{\mathcal{D}} \nabla H_{\mathcal{D}}) = f \quad \text{in } \tilde{\mathcal{D}} \quad (1)$$

$$-\nabla_i \cdot (\mathbf{K}_i \nabla_i H_i) = -[\mathbf{K}_{\mathcal{D}} \nabla H_{\mathcal{D}} \cdot \mathbf{n}]_{\Gamma_i} \quad \text{in } \tilde{F}_i, \quad i = 1, \dots, N_F \quad (2)$$

$$(H_{\mathcal{D}})|_{\Gamma_i^\pm} = H_i, \quad i = 1, \dots, N_F \quad (3)$$

$$H_i = H_j, \quad \text{on } S_m, \quad m = 1, \dots, N_S, \quad i, j = \sigma(m) \quad (4)$$

$$[\mathbf{K}_i \nabla_i H_i \cdot \mathbf{n}]_{S_m} = -[\mathbf{K}_j \nabla_j H_j \cdot \mathbf{n}]_{S_m}, \quad m = 1, \dots, N_S, \quad i, j = \sigma(m) \quad (5)$$

$$H_{\mathcal{D}} = 0 \quad \text{on } \Gamma_D \quad (6)$$

$$\mathbf{K}_{\mathcal{D}} \nabla H_{\mathcal{D}} \cdot \mathbf{n}_{\Gamma_N} = 0 \quad \text{on } \Gamma_N \quad (7)$$

$$H_i = 0 \quad \text{on } \gamma_{iD}, \quad i = 1, \dots, N_F \quad (8)$$

$$\mathbf{K}_i \nabla_i H_i \cdot \mathbf{n}_{\gamma_{iN}} = 0 \quad \text{on } \gamma_{iN}, \quad i = 1, \dots, N_F \quad (9)$$

where $H_{\mathcal{D}}$ is the hydraulic head in $\tilde{\mathcal{D}}$, H_i the hydraulic head on F_i , $i = 1, \dots, N_F$ and f is a volumetric source term. The operator ∇ represents the three-dimensional gradient in $\tilde{\mathcal{D}}$, ∇_i is the two-dimensional gradient on the plane containing fracture F_i , whereas $\mathbf{K}_{\mathcal{D}}(\mathbf{x}) \in \mathbb{R}^{3 \times 3}$, for $\mathbf{x} \subset \tilde{\mathcal{D}}$ is a symmetric positive definite matrix representing the transmissivity of the porous matrix and $\mathbf{K}_i(\mathbf{x}) \in \mathbb{R}^{2 \times 2}$, $\mathbf{x} \subset F_i$ is a symmetric positive definite matrix representing the tangential transmissivity of the fracture F_i on its tangential plane. Finally, \mathbf{n}_{Γ_N} is the outward unit normal

vector to Γ_N , and for a given index $i = 1, \dots, N_F$, $\mathbf{n}_{\gamma_{iN}}$ the outward unit normal vector γ_{iN} on the plane of fracture F_i .

Here, for simplicity, we have considered only the source term on the fractures deriving from the exchange with the porous matrix and homogeneous boundary conditions, but the extension to a more general case is immediate. Conditions (3) and (4) express the continuity of the solution at fracture-matrix interfaces and at fracture intersections, respectively, whereas Equation (5) enforces the balance of fluxes at the traces.

Let us now introduce the following functional spaces: first, on each fracture F_i , $i = 1, \dots, N_F$, we define the function space V_i as $V_i = H_D^1(F_i) = \{v \in H^1(F_i) : v|_{\gamma_{iD}} = 0\}$; then on the whole three dimensional domain \mathcal{D} , the space $H_\Omega^1(\mathcal{D})$ is defined as the space of functions in $H_0^1(\mathcal{D})$ whose trace on each interface Γ_i^\pm $i = 1, \dots, N_F$ is a function in V_i , i.e.:

$$H_\Omega^1(\mathcal{D}) = \left\{ v \in H_0^1(\mathcal{D}) : v|_{\Gamma_D} = 0, v|_{\Gamma_i^\pm} \in V_i, i = 1, \dots, N_F \right\}.$$

Also, on each trace S_m , $m = 1, \dots, N_S$ we set the spaces $\mathcal{U}^m = H^{-\frac{1}{2}}(S_m)$ and $\mathcal{H}^m = H^{\frac{1}{2}}(S_m)$. We introduce the following variables: $U_i^m \in \mathcal{U}^m$ defined on trace S_m of fracture F_i as

$$U_i^m = [\mathbf{K}_i \nabla_i H_i \cdot \mathbf{n}]_{S_m} + \alpha H_i|_{S_m}, \quad \forall i = 1, \dots, N_F, \forall m \in \mathcal{S}_i, \quad (10)$$

thus representing a sort of internal Robin boundary condition on the traces; and, for all $i = 1, \dots, N_F$, $Q_i \in V_i'$, with

$$Q_i := [\mathbf{K}_D \nabla H_D \cdot \mathbf{n}]_{\Gamma_i} + \beta H_D|_{\Gamma_i}, \quad (11)$$

thus again being a linear combination of the jump of the co-normal derivative of H_D across interface Γ_i and the trace of H_D on Γ_i , and V_i' the dual of V_i . We remark that, as $H_D \in H_\Omega^1(\mathcal{D})$ the hydraulic head is continuous across interfaces $\Gamma_i \equiv F_i \subset \mathcal{D}$.

We also define the bilinear forms: $a_D : H_\Omega^1(\mathcal{D}) \times H_\Omega^1(\mathcal{D}) \mapsto \mathbb{R}$,

$$a_D(v, w) = \int_{\mathcal{D}} \mathbf{K}_D \nabla v \nabla w \, d\mathcal{D} + \beta \sum_{i=1}^{N_F} \int_{\Gamma_i} v|_{\Gamma_i} w|_{\Gamma_i} \, d\Gamma;$$

for all $i = 1, \dots, N_F$, bilinear forms $a_{F_i} : V_i \times V_i \mapsto \mathbb{R}$,

$$a_{F_i}(v_i, w_i) = \int_{F_i} \mathbf{K}_i \nabla_i v_i \nabla_i w_i \, dF_i + \alpha \sum_{m \in \mathcal{S}_i} \int_{S_m} v_i|_{S_m} w_i|_{S_m} \, dS;$$

$b_i : V_i' \times V_i \mapsto \mathbb{R}$

$$b_i(q, v) = \langle q, v \rangle_{V_i', V_i}$$

and, for $m = 1, \dots, N_S$, form $c^m : \mathcal{U}^m \times \mathcal{H}^m \mapsto \mathbb{R}$,

$$c^m(u^m, v) = \langle u^m, v \rangle_{\mathcal{U}^m, \mathcal{H}^m}.$$

Then, problem (1)-(9) can be written in weak formulation as: find $H_{\mathcal{D}} \in \mathbf{H}_{\Omega}^1(\mathcal{D})$, $H_i \in \mathbf{V}_i$, $Q_i \in \mathbf{V}'_i$, $U_i^m \in \mathcal{U}_i^m$, $m \in \mathcal{S}_i$, such that, for all $v \in \mathbf{H}_{\Omega}^1(\mathcal{D})$, for all $w_i \in \mathbf{V}_i$, $i = 1, \dots, N_F$:

$$a_{\mathcal{D}}(H_{\mathcal{D}}, v) - \sum_{i=1}^{N_F} b_i(Q_i, v|_{\Gamma_i}) = \langle f, v \rangle_{(\mathbf{H}_{\Omega}^1)' , \mathbf{H}_{\Omega}^1} \quad (12)$$

$$a_{F_i}(H_i, w_i) - \beta (H_{\mathcal{D}|F_i}, w_i)_{F_i} - \sum_{m \in \mathcal{S}_i} c^m(U_i^m, w_i|_{S_m}) = -b_i(Q_i, w_i), \quad (13)$$

being $(v, w)_{\omega}$ the scalar product in $L^2(\omega)$. The coupling conditions in weak form are given by: for all $i = 1, \dots, N_F$, and for all $m = 1, \dots, N_S$

$$b_i(H_{\mathcal{D}|F_i} - H_i, \mu_i) = 0, \quad \forall \mu_i \in \mathbf{V}'_i, \quad (14)$$

$$c^m(\eta^m, H_i|_{S_m} - H_j|_{S_m}) = 0, \quad \forall \eta^m \in \mathcal{U}^m, \quad i, j = \sigma(m) \quad (15)$$

$$c^m(U_i^m + U_j^m, \nu^m) = 0, \quad \forall \nu^m \in \mathcal{H}^m, \quad i, j = \sigma(m). \quad (16)$$

Parameters $\alpha > 0$ and $\beta > 0$ ensure stability of the problems written independently on each fracture and on the three dimensional domain. This is required to obtain a discrete formulation suitable for parallel computing. Moreover, the choice $\alpha > 0$ and $\beta > 0$ allows to have Dirichlet boundary conditions alternatively on the three dimensional domain or on the fracture network, i.e. we can have $\Gamma_D = \emptyset$ if $\gamma_{iD} \neq \emptyset$ for at least one fracture index $i = 1, \dots, N_F$, or $\gamma_{iD} = \emptyset$ for all the fractures if $\Gamma_D \neq \emptyset$.

Problem (12)-(16) is well posed. To show this, let us introduce the function space $\mathbf{H}_{\Omega^+}^1(\mathcal{D})$ defined as:

$$\mathbf{H}_{\Omega^+}^1(\mathcal{D}) = \left\{ v \in \mathbf{H}_0^1(\mathcal{D}) : v_i := v|_{F_i} \in \mathbf{V}_i, \quad \forall i = 1, \dots, N_F, \right. \\ \left. v_i|_{S_m} = v_j|_{S_m}, \quad \forall m = 1, \dots, N_S, \quad i, j = \sigma(m) \right\}$$

and thus incorporating the matching conditions at the interfaces. Let us then write the following problem: find $H \in \mathbf{H}_{\Omega^+}^1(\mathcal{D})$ such that, for all $v \in \mathbf{H}_{\Omega^+}^1(\mathcal{D})$

$$(\mathbf{K}\nabla H, \nabla v)_{\mathcal{D}} + \sum_{i=1}^{N_F} (\mathbf{K}_i \nabla_i H_i, \nabla_i v_i)_{F_i} = \langle q, v \rangle. \quad (17)$$

Problem (17) is well posed, as it can be easily seen that $\mathbf{H}_{\Omega^+}^1(\mathcal{D})$ is an Hilbert space with the scalar product, [12]:

$$(v, w)_{\mathbf{H}_{\Omega^+}^1} := (\mathbf{K}\nabla v, \nabla w)_{\mathcal{D}} + \sum_{i=1}^{N_F} (\mathbf{K}_i \nabla_i v_i, \nabla_i w_i)_{F_i}.$$

Problem (12)-(16) is equivalent to problem (17); indeed, recalling that, for $v \in \mathbf{H}_{\Omega^+}^1(\mathcal{D})$, conditions (14)-(15) are satisfied by construction. Moreover summing (13) for $i = 1, \dots, N_F$ and (12), using (16) and the definition of U_i^m and Q_i , for $i = 1, \dots, N_F$, $m \in \mathcal{S}_i$, we get (17). We propose a reformulation of problem (12)-(16) well suited for discretization on non conforming meshes and parallel computing, based on a PDE constrained optimization approach. To this end, we introduce a

Table 1 Labels used for the dimension of discrete variables

Label	Description	Definition
$\mathcal{N}_{h_{\mathcal{D}}}$	Number of dofs for $h_{\mathcal{D}}$	
\mathcal{N}_{h_i}	Number of dofs for h_i on $\mathcal{T}_{\delta F_i}^i$	
\mathcal{N}_{q_i}	Number of dofs for q_i on $\mathcal{T}_{\delta F_i}^i$	
$\mathcal{N}_{u_i}^m$	Number of dofs for u_i^m on $\mathcal{T}_{\delta S_m, i}^i$	
$\mathcal{N}_{h_{\mathcal{F}}}$	Number of dofs for $h_{\mathcal{F}}$	$\sum_{i=1}^{N_F} \mathcal{N}_{h_i}$
\mathcal{N}_q	Number of dofs for q	$\sum_{i=1}^{N_F} \mathcal{N}_{q_i}$
\mathcal{N}_{u_i}	Number of dofs for u_i	$\sum_{m \in \mathcal{S}_i} \mathcal{N}_{u_i}^m$
$\mathcal{N}_{u_i}^+$	Number of dofs for u^+	$\sum_{m \in \mathcal{S}_i} \sum_{k \in \sigma(m)} \mathcal{N}_{u_i}^m$
\mathcal{N}_u	Number of dofs for u	$\sum_{m=1}^{N_S} \sum_{k \in \sigma(m)} \mathcal{N}_{u_i}^m$
\mathcal{N}_h	Number of dofs for h	$\mathcal{N}_{h_{\mathcal{F}}} + \mathcal{N}_{h_{\mathcal{D}}}$

cost functional expressing the error in the fulfilment of the interface conditions as continuity and flux conservation:

$$J(H_{\mathcal{D}}, H_{\mathcal{F}}, U_S) := \sum_{i=1}^{N_F} \left(\|H_{\mathcal{D}|F_i} - H_i\|_{V_i}^2 \right) + \sum_{m=1}^{N_S} \left(\|H_{i|S_m} - H_{j|S_m}\|_{\mathcal{H}^m}^2 + \|U_i^m + U_j^m - \alpha (H_{i|S_m} + H_{j|S_m})\|_{U^m}^2 \right),$$

being $H_{\mathcal{F}} := \prod_{i=1}^{N_F} H_i$ and $U_S = \prod_{m=1}^{N_S} \prod_{i \in \sigma(m)} U_i^m$. Setting, finally, $Q_{\mathcal{F}} := \prod_{i=1}^{N_F} Q_i$, the solution to problem (12)-(16) is obtained as the minimum of functional $J(H_{\mathcal{D}}, H_{\mathcal{F}}, U_S)$ constrained by the PDE equations on the 3D domain and on the fractures:

$$\min_{Q_{\mathcal{F}}, U_S} J(H_{\mathcal{D}}, H_{\mathcal{F}}, U_S) \quad (18)$$

$$\text{constrained by (12)} \quad (19)$$

$$\text{and by (13)} \quad \forall i = 1, \dots, N_F. \quad (20)$$

3 Discrete formulation

The PDE constrained optimization formulation is specifically designed to allow for an easy discretization of the problem using non conforming meshes and to obtain a discrete problem suitable for effective resolution using parallel computing resources. The imposition of the interface constraints expressed by equations (14)-(16) with a standard approach requires some sort of mesh conformity at the interfaces: either a perfect matching of the nodes on the meshes to enforce conditions by means of degrees of freedom equality constraints, or the weaker condition of alignment of mesh edges with the interfaces, to use mortaring techniques. In contrast, the imposition of interface conditions through the functional only requires the computation of integrals on the traces, as shown below, and thus meshes can be arbitrarily placed with respect to the interfaces, see Figure 2 for an example of non-conforming meshes in the rock matrix and on the fractures. Further, the

minimization process allows to decouple the problems on the fractures and on the three-dimensional domain, for parallel computing.

The discretization strategy proposed in this work is based on the use of standard finite elements on tetrahedra for the three dimensional domain and finite elements on triangles for the fractures. Let us then denote by $\mathcal{T}_{\delta_{\mathcal{D}}}^{\mathcal{D}}$ the tetrahedral mesh on \mathcal{D} , characterized by a mesh parameter $\delta_{\mathcal{D}}$, by $\mathcal{T}_{\delta_{F_i}}^i$ a triangular mesh on F_i , $i = 1, \dots, N_F$, with mesh parameter δ_{F_i} , and by $\mathcal{T}_{\delta_{\Gamma_i}}^i$ a possibly different triangular mesh on F_i , with mesh parameter δ_{Γ_i} . We further introduce a discretization of the one-dimensional traces, different on each fracture, denoted by $\mathcal{T}_{\delta_{S_m,i}}^i$, with mesh parameter $\delta_{S_m,i}$, $i = 1, \dots, N_F$, $m \in \mathcal{S}_i$. We denote by $h_{\mathcal{D}}$ the finite dimensional approximation of $H_{\mathcal{D}}$ on $\mathcal{T}_{\delta_{\mathcal{D}}}^{\mathcal{D}}$, $h_{\mathcal{D}} = \sum_{k=1}^{\mathcal{N}_{h_{\mathcal{D}}}} h_{\mathcal{D},k} \phi_k$, with $\mathcal{N}_{h_{\mathcal{D}}}$ the number of degrees of freedom (dofs) and ϕ_k a finite element basis function in 3D; for $i = 1, \dots, N_F$, we further call h_i the approximation of H_i on $\mathcal{T}_{\delta_{F_i}}^i$, $h_i = \sum_{k=1}^{\mathcal{N}_{h_i}} h_{i,k} \psi_{i,k}$, with \mathcal{N}_{h_i} the number of dofs and $\psi_{i,k}$ a 2D basis function; q_i the approximation of Q_i on $\mathcal{T}_{\delta_{\Gamma_i}}^i$, $q_i = \sum_{k=1}^{\mathcal{N}_{q_i}} q_{i,k} \varphi_{i,k}$ having \mathcal{N}_{q_i} dofs, and $\varphi_{i,k}$ one basis function; u_i^m the approximation of U_i^m on $\mathcal{T}_{\delta_{S_m,i}}^i$, $u_i^m = \sum_{k=1}^{\mathcal{N}_{u_i^m}} u_{i,k}^m \varrho_{i,k}^m$, with $\mathcal{N}_{u_i^m}$ dofs and $\varrho_{i,k}^m$ a basis function. Tables 1-2 summarize the labels used for the dimensions of the discrete variables, the name used to denote the basis functions and the notation used, in the following, for the matrices collecting integrals of these basis functions. We build arrays of dofs by collecting column-wise the dofs of each discrete function and with abuse of notation we denote the dof array with the same symbol of the corresponding function, thus having arrays $h_{\mathcal{D}} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}}}$, $h_i \in \mathbb{R}^{\mathcal{N}_{h_i}}$, $q_i \in \mathbb{R}^{\mathcal{N}_{q_i}}$, $i = 1, \dots, N_F$, and $u_i^m \in \mathbb{R}^{\mathcal{N}_{u_i^m}}$, $m \in \mathcal{S}_i$. We define arrays u^m , $m = 1, \dots, N_S$, as $u^m = [(u_i^m)^T (u_j^m)^T]^T$ for $i, j = \sigma(m)$ with $i < j$, and we further collect column wise arrays h_i , q_i , u_i^m and u^m forming:

$$h_{\mathcal{F}} = \begin{bmatrix} h_1 \\ \vdots \\ h_{N_F} \end{bmatrix}, \quad q = \begin{bmatrix} q_1 \\ \vdots \\ q_{N_F} \end{bmatrix}, \quad u_i = \begin{bmatrix} u_i^{m_1} \\ \vdots \\ u_i^{m_{\#S_i}} \end{bmatrix}, \quad u_i^+ = \begin{bmatrix} u^{m_1} \\ \vdots \\ u^{m_{\#S_i}} \end{bmatrix}, \quad u = \begin{bmatrix} u^1 \\ \vdots \\ u^m \\ \vdots \\ u^{N_S} \end{bmatrix},$$

where $m_1, \dots, m_{\#S_i}$ are the indexes in \mathcal{S}_i ordered increasingly.

The discrete version of functional J is the following:

$$\begin{aligned} \mathcal{J}(h_{\mathcal{D}}, h_{\mathcal{F}}, u) &= \sum_{i=1}^{N_F} \|h_{\mathcal{D}|F_i} - h_i\|_{L^2(F_i)}^2 + \\ &\sum_{m=1}^{N_S} \left(\|h_i - h_j\|_{L^2(S_m)}^2 + \|u_i^m + u_j^m - \alpha(h_i + h_j)\|_{L^2(S_m)}^2 \right) \end{aligned} \quad (21)$$

obtained replacing the discretized variables and using L^2 norms. The discrete functional can be written in matrix form, computing the integrals of the basis functions and collecting the values into matrices. Considering the first norm in \mathcal{J} ,

Table 2 Summary of nomenclature used for the discrete matrices: involved discrete function names and basis functions

Matrix letter	function(s)	basis functions	Integration domain
$\mathbf{A}_{\mathcal{D}}$	$h_{\mathcal{D}}$	ϕ	\mathcal{D}
\mathbf{A}_i	h_i	ψ_i	F_i
\mathbf{B}_{ij}^m	h_i, u_i^m	ψ_i, ϱ_j^m	S_m
\mathbf{C}_{ij}^m	u_i^m, u_j^m	ϱ_i^m, ϱ_j^m	S_m
\mathbf{D}_i	h_i, q	ψ_i, φ_i	F_i
\mathbf{E}_i	$h_{\mathcal{D}}, q$	ϕ, φ_i	F_i
$\mathbf{G}_{\mathcal{D}}^i$	$h_{\mathcal{D}}$	ϕ	F_i
\mathbf{G}_F^i	h_i	ψ_i	F_i
$\mathbf{G}_{\mathcal{D}F}^i$	$h_{\mathcal{D}}, h_i$	ϕ, ψ_i	F_i
\mathbf{G}_{ij}^m	h_i, h_j	ψ_i, ψ_j	S_m

we have:

$$\|h_{\mathcal{D}|F_i} - h_i\|_{L^2(F_i)}^2 = \int_{F_i} \left(\sum_{k=1}^{\mathcal{N}_{h_{\mathcal{D}}}} h_{\mathcal{D},k} \phi_{k|F_i} - \sum_{j=1}^{\mathcal{N}_{h_i}} h_{i,j} \psi_{i,j} \right)^2 dF_i$$

and we can define three matrices as follows, for each $i = 1, \dots, N_F$, $\mathbf{G}_{\mathcal{D}}^i \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}} \times \mathcal{N}_{h_{\mathcal{D}}}}$, $\mathbf{G}_{\mathcal{D}F}^i \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}} \times \mathcal{N}_{h_i}}$, $\mathbf{G}_F^i \in \mathbb{R}^{\mathcal{N}_{h_i} \times \mathcal{N}_{h_i}}$:

$$(\mathbf{G}_{\mathcal{D}}^i)_{k,\ell} = \int_{F_i} \phi_{k|F_i} \phi_{\ell|F_i}, \quad (\mathbf{G}_{\mathcal{D}F}^i)_{k,\ell} = \int_{F_i} \phi_{k|F_i} \psi_{i,\ell}, \quad (\mathbf{G}_F^i)_{k,\ell} = \int_{F_i} \psi_{i,k} \psi_{i,\ell}$$

such that

$$\|h_{\mathcal{D}|F_i} - h_i\|_{L^2(F_i)}^2 = [h_{\mathcal{D}}^T \ h_i^T] \begin{bmatrix} \mathbf{G}_{\mathcal{D}}^i & -\mathbf{G}_{\mathcal{D}F}^i \\ -(\mathbf{G}_{\mathcal{D}F}^i)^T & \mathbf{G}_F^i \end{bmatrix} \begin{bmatrix} h_{\mathcal{D}} \\ h_i \end{bmatrix}.$$

The computation of matrix $\mathbf{G}_{\mathcal{D}F}^i$ is not straightforward, as the two involved variables are defined on different meshes. In particular, the intersection of the three dimensional tetrahedral mesh with the fracture plane needs to be computed. This operation defines a polygonal tessellation of F_i which is then sub-triangulated, thus generating a triangular interface mesh. This sub-triangulation process can be performed without any mesh quality requirement, as the resulting mesh is used only for quadrature purposes. The computation of the elements in $\mathbf{G}_{\mathcal{D}F}^i$ is finally performed first computing the intersection of the elements of the interface mesh with the elements in $\mathcal{T}_{\delta F_i}^i$, and subsequently the required integral on the intersection region. Element neighbourhood information is used to efficiently perform the task. The computation of the interface mesh is a quite complex and expensive task. Also in this case element neighbourhood information is used for efficiency, and further can be performed independently fracture by fracture and thus in parallel, which is of paramount importance for the applicability of the method to complex geometries.

We can proceed similarly with the remaining terms of the functional \mathcal{J} ; to this end, for $m = 1, \dots, N_S$, and all the possible couples of indexes i, j such that $i, j = \sigma(m)$, we define matrices $\mathbf{G}_{ij}^m \in \mathbb{R}^{\mathcal{N}_{h_i} \times \mathcal{N}_{F_j}}$, $\mathbf{B}_{ij}^m \in \mathbb{R}^{\mathcal{N}_{h_i} \times \mathcal{N}_j^m}$, $\mathbf{C}_{ij}^m \in \mathbb{R}^{\mathcal{N}_{u_i}^m \times \mathcal{N}_j^m}$:

$$(\mathbf{G}_{ij}^m)_{k,\ell} = \int_{S_m} \psi_{i,k|S_m} \psi_{j,\ell|S_m}, \quad (\mathbf{B}_{ij}^m)_{k,\ell} = \int_{S_m} \psi_{i,k|S_m} \varrho_{j,\ell}^m, \quad (\mathbf{C}_{ij}^m)_{k,\ell} = \int_{S_m} \varrho_{i,k}^m \varrho_{j,\ell}^m$$

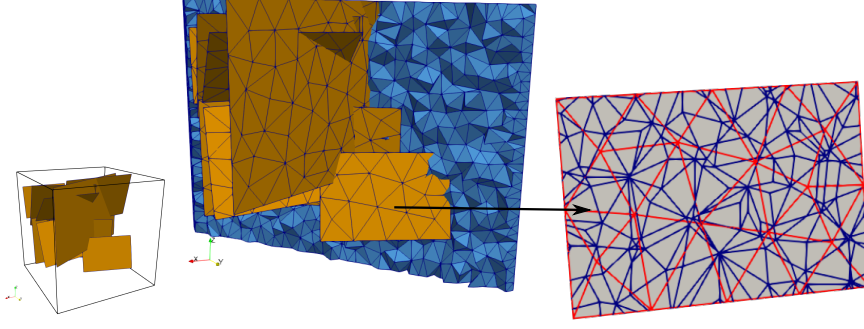


Fig. 2 Polygonal tessellation on a sample fracture given by the intersection of a tetrahedral mesh with the fracture plane (blue in the right panel) overlapped with the fracture triangular mesh (red in the right panel)

such that

$$\|h_i - h_j\|_{L^2(S_m)}^2 = [h_i^T \ h_j^T] \begin{bmatrix} \mathbf{G}_{ii}^m & -\mathbf{G}_{ij}^m \\ -\mathbf{G}_{ji}^m & \mathbf{G}_{jj}^m \end{bmatrix} \begin{bmatrix} h_i \\ h_j \end{bmatrix},$$

and

$$\begin{aligned} & \|u_i^m + u_j^m - \alpha(h_i + h_j)\|_{L^2(S_m)}^2 = \\ & \left([(u_i^m)^T \ (u_j^m)^T] \begin{bmatrix} \mathbf{C}_{ii}^m & \mathbf{C}_{ij}^m \\ \mathbf{C}_{ji}^m & \mathbf{C}_{jj}^m \end{bmatrix} - 2\alpha [h_i^T \ h_j^T] \begin{bmatrix} \mathbf{B}_{ii}^m & \mathbf{B}_{ij}^m \\ \mathbf{B}_{ji}^m & \mathbf{B}_{jj}^m \end{bmatrix} \right) \begin{bmatrix} u_i^m \\ u_j^m \end{bmatrix} \\ & + \alpha^2 [h_i^T \ h_j^T] \begin{bmatrix} \mathbf{G}_{ii}^m & \mathbf{G}_{ij}^m \\ \mathbf{G}_{ji}^m & \mathbf{G}_{jj}^m \end{bmatrix} \begin{bmatrix} h_i \\ h_j \end{bmatrix}. \end{aligned}$$

We can collect these matrices, defined locally at the various interfaces into global matrices to derive a compact form of the functional. Let us define matrix $\mathbf{G}^S \in \mathbb{R}^{\mathcal{N}_{h_F} \times \mathcal{N}_{h_F}}$, $\mathcal{N}_{h_F} = \sum_{i=1}^{N_F} \mathcal{N}_{h_i}$, as a $N_F \times N_F$ block matrix, with diagonal blocks in positions i - i are given by $(1 + \alpha^2) \sum_{m \in \mathcal{S}_i} \mathbf{G}_{ii}^m$, $i = 1, \dots, N_F$. Extra diagonal blocks in positions i - j ($i \neq j$) are instead equal to $(\alpha^2 - 1) \mathbf{G}_{ij}^m$, if $i, j = \sigma(m)$, or a zero block otherwise. Further let us define matrix $\mathbf{G}_D^F = \sum_{i=1}^{N_F} \mathbf{G}_D^i$, and matrices $\mathbf{G}_{DF}^F \in \mathbb{R}^{\mathcal{N}_{h_D} \times \mathcal{N}_{h_F}}$ and $\mathbf{G}_F^F \in \mathbb{R}^{\mathcal{N}_{h_F} \times \mathcal{N}_{h_F}}$ respectively as

$$\mathbf{G}_{DF}^F = [\mathbf{G}_{DF}^1 \cdots \mathbf{G}_{DF}^i \cdots \mathbf{G}_{DF}^{N_F}], \quad \mathbf{G}_F^F = \text{diag} \left(\mathbf{G}_F^1, \dots, \mathbf{G}_F^i, \dots, \mathbf{G}_F^{N_F} \right)$$

Matrix $\mathbf{G} \in \mathbb{R}^{\mathcal{N}_h \times \mathcal{N}_h}$, $\mathcal{N}_h = \mathcal{N}_{h_F} + \mathcal{N}_{h_D}$, is finally set as

$$\mathbf{G} = \begin{bmatrix} \mathbf{G}_D^F & \mathbf{G}_{DF}^F \\ ((\mathbf{G}_{DF}^F)^T \ \mathbf{G}_F^F + \mathbf{G}^S) \end{bmatrix}.$$

For all $i = 1, \dots, N_F$, let us assemble matrices $\mathbf{B}_i^+ \in \mathbb{R}^{\mathcal{N}_{h_i} \times \mathcal{N}_{u_i}^+}$, $\mathcal{N}_{u_i}^+ = \sum_{m \in \mathcal{S}_i} \sum_{k \in \sigma(m)} \mathcal{N}_k^m$, collecting row-wise matrices $[\mathbf{B}_{ij}^m \ \mathbf{B}_{ik}^m]$, for increasing values of $m \in \mathcal{S}_i$ and $j, k = \sigma(m)$, $j < k$, i.e.:

$$\mathbf{B}_i^+ = \begin{bmatrix} \mathbf{B}_{ij}^{m_1} & \mathbf{B}_{ik}^{m_1} & \cdots & \mathbf{B}_{ip}^{m_{\#\mathcal{S}_i}} & \mathbf{B}_{iz}^{m_{\#\mathcal{S}_i}} \end{bmatrix}$$

with $p, z = \sigma(m_{\#S_i})$, $p < z$. Let us introduce matrices $\mathbf{R}_i^+ \in \mathbb{R}^{\mathcal{N}_{u_i}^+ \times \mathcal{N}_u}$, with $\mathcal{N}_u = \sum_{m=1}^{N_S} \sum_{k \in \sigma(m)} \mathcal{N}_k^m$, defined such that $u_i^+ = \mathbf{R}_i^+ u$. Matrix $\mathbf{B}^+ \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{F}}} \times \mathcal{N}_u}$ is finally obtained collecting column wise matrices $\mathbf{B}_i^+ \mathbf{R}_i^+$. Matrix $\mathbf{C} \in \mathbb{R}^{\mathcal{N}_u \times \mathcal{N}_u}$, is a block diagonal matrix with $N_S \times N_S$ diagonal blocks, each diagonal block in position m - m being equal to

$$\begin{bmatrix} \mathbf{C}_{ii}^m & \mathbf{C}_{ij}^m \\ \mathbf{C}_{ji}^m & \mathbf{C}_{jj}^m \end{bmatrix}, \quad i, j = \sigma(m), \quad i < j$$

The matrix formulation of \mathcal{J} then reads as:

$$\mathcal{J} = \begin{bmatrix} h_{\mathcal{D}}^T & h_{\mathcal{F}}^T \end{bmatrix} \mathbf{G} \begin{bmatrix} h_{\mathcal{D}} \\ h_{\mathcal{F}} \end{bmatrix} + u^T \mathbf{C} u - \alpha h_{\mathcal{F}}^T \mathbf{B}^+ u - \alpha u^T \mathbf{B}^+ h_{\mathcal{F}}.$$

We can re-write also the discrete constraint equations in matrix form. We follow a standard procedure and we define matrix $\mathbf{A}_{\mathcal{D}} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}} \times \mathcal{N}_{h_{\mathcal{D}}}}$ as

$$(\mathbf{A}_{\mathcal{D}})_{k\ell} = \int_{\mathcal{D}} \mathbf{K}_{\mathcal{D}} \nabla \phi_k \nabla \phi_{\ell} + \beta \sum_{i=1}^{N_F} \int_{F_i} \phi_k|_{F_i} \phi_{\ell}|_{F_i},$$

where the integral on F_i is performed on the interface mesh, generated by the intersection of the tetrahedral mesh with each fracture. Matrices $\mathbf{A}_i \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{F}}} \times \mathcal{N}_{h_{\mathcal{F}}}}$, for $i = 1, \dots, N_F$ are defined by

$$(\mathbf{A}_i)_{k\ell} = \int_{F_i} \mathbf{K}_i \nabla_i \psi_{i,k} \nabla_i \psi_{i,\ell} + \alpha \sum_{m \in \mathcal{S}_i} \int_{S_m} \psi_{i,k}|_{S_m} \psi_{i,\ell}|_{S_m}$$

which form the diagonal blocks of block diagonal matrix $\mathbf{A}_{\mathcal{F}} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{F}}} \times \mathcal{N}_{h_{\mathcal{F}}}}$, $\mathbf{A}_{\mathcal{F}} = \text{diag}(\mathbf{A}_1, \dots, \mathbf{A}_{N_F})$. We introduce, for each fracture F_i , $i = 1, \dots, N_F$ matrices $\mathbf{R}_i \in \mathbb{R}^{\mathcal{N}_{u_i} \times \mathcal{N}_u}$, $\mathcal{N}_{u_i} = \sum_{m \in \mathcal{S}_i} \mathcal{N}_{u_i}^m$, defined such that $u_i = \mathbf{R}_i u$, and $\mathbf{B}_i \in \mathbb{R}^{\mathcal{N}_{h_i} \times \mathcal{N}_{u_i}}$ obtained collecting row-wise matrices $\mathbf{B}_{i_i}^m$ for all $m \in \mathcal{S}_i$. These matrices are used for the definition of matrix $\mathbf{B} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{F}}} \times \mathcal{N}_u}$, defined grouping column-wise matrices \mathbf{B}_i , for $i = 1, \dots, N_F$. Matrix $\mathbf{D} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{F}}} \times \mathcal{N}_q}$ is built as follows:

$$\mathbf{D} = [\mathbf{D}_1 \cdots \mathbf{D}_{N_F}], \quad (\mathbf{D}_i)_{k\ell} = \int_{F_i} \psi_{i,k} \varphi_{i,\ell}$$

with integrals computed on the intersection of the mesh $\mathcal{T}_{\delta_{F_i}}^i$ for variable q_i with the mesh $\mathcal{T}_{\delta_{F_i}}^i$ for h_i . We finally introduce matrix $\mathbf{E} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}} \times \mathcal{N}_q}$, $\mathcal{N}_q = \sum_{i=1}^{N_F} \mathcal{N}_{q_i}$ as

$$\mathbf{E} = [\mathbf{E}_1 \cdots \mathbf{E}_{N_F}], \quad (\mathbf{E}_i)_{k\ell} = \int_{F_i} \phi_k|_{F_i} \varphi_{i,\ell}.$$

where integrals are computed intersecting the mesh $\mathcal{T}_{\delta_{F_i}}^i$ for variable q_i with the triangulated interface mesh given by the intersection between the tetrahedral mesh with the fracture F_i .

Setting $h^T = [h_{\mathcal{D}}^T \ h_{\mathcal{F}}^T]$, the discrete formulation of the constrained minimization process is:

$$\min \left(h^T \mathbf{G}h + u^T \mathbf{C}u - \alpha h_{\mathcal{F}}^T \mathbf{B}^+ u - \alpha u^T \mathbf{B}^{+T} h_{\mathcal{F}} \right) \quad (22)$$

constrained by

$$\mathbf{A}_{\mathcal{D}} h_{\mathcal{D}} - \mathbf{E}q = b_{\mathcal{D}} \quad (23)$$

$$\mathbf{A}_{\mathcal{F}} h_{\mathcal{F}} - \beta (\mathbf{G}_{\mathcal{D}F}^{\mathcal{F}})^T h_{\mathcal{D}} - \mathbf{B}u + \mathbf{D}q = 0 \quad (24)$$

being $b_{\mathcal{D}} \in \mathbb{R}^{\mathcal{N}_{h_{\mathcal{D}}}}$ the array resulting from the forcing term.

Let us now introduce the following matrices:

$$\mathcal{A} = \begin{bmatrix} \mathbf{A}_{\mathcal{D}} & \mathbf{O} \\ -\beta (\mathbf{G}_{\mathcal{D}F}^{\mathcal{F}})^T & \mathbf{A}_{\mathcal{F}} \end{bmatrix}, \quad \mathcal{B} = \begin{bmatrix} \mathbf{E} & \mathbf{O} \\ -\mathbf{D} & \mathbf{B} \end{bmatrix}, \quad \mathcal{B}^+ = \begin{bmatrix} \mathbf{O} & \mathbf{O} \\ \mathbf{O} & -\alpha \mathbf{B}^+ \end{bmatrix}, \quad \mathcal{C} = \begin{bmatrix} \mathbf{O} & \mathbf{O} \\ \mathbf{O} & \mathbf{C} \end{bmatrix} \quad (25)$$

and let us collect column-wise variables q, u into variable w , then optimality conditions for problem (22)-(24) are given by the following linear system:

$$\mathcal{M} = \begin{bmatrix} \mathbf{G} & \mathcal{B}^+ & \mathcal{A}^T \\ \mathcal{B}^{+T} & \mathcal{C} & -\mathcal{B}^T \\ \mathcal{A} & -\mathcal{B} & \mathbf{O} \end{bmatrix}, \quad \mathcal{M} \begin{bmatrix} h \\ w \\ \lambda \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ b \end{bmatrix} \quad (26)$$

with $b^T = [b_{\mathcal{D}}^T \ \mathbf{O}^T]$. Well posedness of problem (22)-(24) derives from non singularity of the saddle point matrix \mathcal{M} .

Lemma 1 *Let matrices \mathcal{A}, \mathcal{B} be defined as in (25). Let \mathcal{A} be full rank, let $\mathcal{L} = [\mathcal{A} \ -\mathcal{B}]$, and let \mathbf{Z} be a matrix obtained collecting row-wise column vectors z_k , $k = 1, \dots, \mathcal{N}_w$, $\mathcal{N}_w = \mathcal{N}_u + \mathcal{N}_q$ forming a basis of $\ker(\mathcal{L})$, then matrix $\mathbf{Z}^T \mathbf{G} \mathbf{Z}$ is positive definite.*

Proof We start observing that matrix \mathcal{A} is full rank as both matrices $\mathbf{A}_{\mathcal{D}}$ and $\mathbf{A}_{\mathcal{F}}$ are full rank under the assumption that $\alpha, \beta > 0$. Then $\dim(\ker(\mathcal{L})) = \mathcal{N}_w$. To construct a basis of $\ker(\mathcal{L})$, let us take e_k , the k -th vector of the canonical basis of $\mathbb{R}^{\mathcal{N}_w}$, and let us set $z_k = (\mathcal{A}^{-1} \mathcal{B} e_k, e_k)$. According to the index k , e_k might correspond to a non-null function q_i for some $i = 1, \dots, N_F$ or a non-null function u_i^m for some $i = 1, \dots, N_F$, $m \in \mathcal{S}_i$. In both cases will show that $z_k^T \mathbf{G} z_k > 0$.

Non-null function q_i

Let us start considering the first case and in particular let us assume that $q_i = \varphi_{i,j}$ for a certain index $j = 1, \dots, \mathcal{N}_{q_i}$. Let us consider two different scenarios: the case $N_F = 1$, i.e. a porous medium with a single fracture and the more general case $N_F > 1$.

– $N_F = 1$

As $q_1 \neq 0$, for the non singularity of $\mathbf{A}_{\mathcal{D}}$, it is $h_{\mathcal{D}} \neq 0$, and in particular it can be either $h_{\mathcal{D}} = \text{const}$ or $h_{\mathcal{D}} \neq \text{const}$.

- $h_{\mathcal{D}} = \text{const} \neq 0$

As we assumed homogeneous Dirichlet conditions, $h_{\mathcal{D}} = \text{const} \neq 0$ is possible only if $\Gamma_{\mathcal{D}} = \emptyset$. In virtue of definition (11), for the consistency and conformity of the method, we have $\beta h_{\mathcal{D}|F_1} = q_1$, which is possible only if q_1 is constant on F_1 . By (13), being $|\gamma_{1D}| > 0$, it is:

$$a_{F_1}(h_1, \psi_{1,\ell}) = -b_1(q_1 - \beta h_{\mathcal{D}|F_1}, \psi_{1,\ell}) = 0, \quad \forall \ell = 1, \dots, \mathcal{N}_{h_1}$$

and thus $h_1 = 0$, and in particular $\|h_{\mathcal{D}|F_1} - h_1\|_{L^2(F_1)} > 0$.

- $h_{\mathcal{D}} \neq \text{const}$

Let us set $s_1 := q_1 - \beta h_{\mathcal{D}|F_1}$, and let us consider equations (12) and (13), that become:

$$(\mathbf{K}_{\mathcal{D}} \nabla h_{\mathcal{D}}, \nabla \phi_{\ell})_{\mathcal{D}} = b_1(s_1, \phi_{\ell|F_1}), \quad \forall \ell = 1, \dots, \mathcal{N}_{h_{\mathcal{D}}}$$

$$(\mathbf{K}_i \nabla_i h_i, \nabla_i \psi_{1,\ell})_{F_1} = -b_1(s_1, \psi_{1,\ell}), \quad \forall \ell = 1, \dots, \mathcal{N}_{h_1}$$

where the source term s_1 appears with opposite sign. We thus have $\|h_{\mathcal{D}|F_1} - h_1\|_{L^2(F_1)} > 0$.

- $N_F > 1$

If $h_{\mathcal{D}} = \text{const} \neq 0$, proceeding similarly to the case $N_F = 1$, we have $\beta h_{\mathcal{D}|F_i} = q_i \neq 0$ and $\|h_{\mathcal{D}|F_i} - h_i\|_{L^2(F_i)} > 0$.

If instead $h_{\mathcal{D}} \neq \text{const}$, we proceed in the following way: since $q_i \neq 0$ we have $h_i \neq 0$, whereas it is $h_j = 0$, for all $j = 1, \dots, N_F, j \neq i$. Choosing, in particular, one index j^* such that fracture F_i and F_{j^*} intersect in a trace S_m , we have $\|h_i - h_{j^*}\|_{L^2(S_m)} > 0$.

Non-null function u_i^m

Let us now consider $u_i^m = \varrho_{i,j}^m$ for some $i = 1, \dots, N_F, m \in \mathcal{S}_i$, and for an index $j = 1, \dots, \mathcal{N}_{u_i}^m$, depending on the value of k . Also in this case it can be easily shown that we have $h_i \neq 0$, whereas we have $h_{\mathcal{D}} = 0$ and $h_p = 0$ for all $p = 1, \dots, N_F, p \neq i$, thus having again a non null functional value and thus $z_k^T \mathbf{G} z_k > 0$.

Being \mathbf{G} positive semi-definite by definition, it is $x^T \mathbf{G} x \geq 0$ and $x^T \mathbf{G} x = 0$ if and only if $x \in \ker(\mathbf{G})$, [25] and being $z_k^T \mathbf{G} z_k > 0, z_k \notin \ker(\mathbf{G})$ for $z = 1, \dots, \mathcal{N}_w$. The space $\mathcal{Z} = \text{span}\{z_1, \dots, z_{\mathcal{N}_w}\}$ is thus a subspace of $\text{Im}(\mathbf{G})$, and each vector $y \in \mathcal{Z}$ can be written as $y = \mathbf{Z}v$, for a vector $v \in \mathbb{R}^{\mathcal{N}_w}, v \neq 0$. Then $v^T \mathbf{Z}^T \mathbf{G} \mathbf{Z} v > 0$.

Theorem 1 *Problem (26) has a unique solution $h^* = [(h_{\mathcal{D}}^*)^T, (h_{\mathcal{F}}^*)^T]^T, w^* = [(q^*)^T, (u^*)^T]^T, \lambda^*$, such that $h_{\mathcal{D}}^*, h_{\mathcal{F}}^*, q^*, u^*$ correspond to the constrained minimum of problem (22)-(24).*

The proof follows from Lemma 1 applying a classical argument of quadratic programming (see Theorem 16.2 in [30]).

4 Unconstrained optimization problem

We can proceed formally, replacing the constraint equations into the functional, to obtain an unconstrained minimization problem. We have $h = \mathcal{A}^{-1}(\mathcal{B}w + b)$, from which we obtain:

$$\begin{aligned} \mathcal{J}^*(w) &= w^T \left(\mathcal{B}^T \mathcal{A}^{-T} \mathbf{G} \mathcal{A}^{-1} \mathcal{B} + \mathcal{C} - \mathcal{B}^T \mathcal{A}^{-T} \mathcal{B}^+ - \alpha \mathcal{B}^{+T} \mathcal{A}^{-1} \mathcal{B} \right) w \\ &\quad + 2 \left(b^T \mathcal{A}^{-T} \mathbf{G} \mathcal{A}^{-1} \mathcal{B} - b^T \mathcal{A}^{-T} \mathcal{B} \right) w + b^T \mathcal{A}^{-T} \mathbf{G} \mathcal{A}^{-1} b \\ &:= w^T \mathcal{G} w + 2g w + \text{const} \end{aligned}$$

The unconstrained minimization problem then reads

$$\min_w w^T \mathcal{G} w + 2g^T w \quad (27)$$

or equivalently $\mathcal{G}w + g = 0$. Matrix \mathcal{G} is symmetric positive definite, given the equivalence of (27) with (22)-(24). The unconstrained minimization problem can thus be solved with a gradient based iterative method, such as the conjugate gradient method. The steps of the method are as follows:

```

guess  $w_0$ 
compute  $\gamma_0 = (\mathcal{G}w_0 + g)$  and set  $d_0 = -\gamma_0$ 
set  $k = 0$ 
while  $\gamma_k \neq 0$ 
  compute step size  $\zeta_k = \frac{\gamma_k^T \gamma_k}{d_k^T \mathcal{G} d_k}$ 
  set  $w_{k+1} = w_k + \zeta_k d_k$ 
  set  $\gamma_{k+1} = \gamma_k + \zeta_k \mathcal{G} d_k$ 
  compute  $\theta_{k+1} = \frac{\gamma_{k+1}^T \gamma_{k+1}}{\gamma_k^T \gamma_k}$ 
  set  $d_{k+1} = -\gamma_{k+1} + \theta_{k+1} d_k$ 
  set  $k = k + 1$ 
end

```

The computation of quantity $y_k = \mathcal{G}d_k$, at each step k can be performed as follows: setting $\bar{h}_k = \mathcal{A}^{-1}(\mathcal{B}d_k)$ and $\lambda_k = \mathcal{A}^{-T}(\mathbf{G}\bar{h}_k - \mathcal{B}^+ d_k)$, it is $y_k = \mathcal{B}^T \lambda_k + \mathcal{C}d_k - \mathcal{B}^{+T} \bar{h}_k$. If $\beta = 0$, which is possible as long as there is a non empty portion of the Dirichlet boundary for the three dimensional domain, i.e. $|I_D| > 0$, the computation of \bar{h}_k , λ_k at each step can be performed independently and in parallel on each fracture and on the three dimensional domain, thus easily allowing to use parallel computing resources for efficient resolution of the scheme, thanks to the block diagonal structure of \mathcal{A} and $\mathbf{A}_{\mathcal{F}}$. If $\beta > 0$ then problems on the fractures can be decoupled from the problem in the bulk domain as follows: at step $k > 0$, being $\bar{h}_k = [\bar{h}_{\mathcal{D},k}^T \ \bar{h}_{\mathcal{F},k}^T]^T$ and splitting $d_k = [d_{q,k}^T \ d_{u,k}^T]^T$, we compute

$$\begin{aligned} \bar{h}_{\mathcal{D},k} &= \mathbf{A}_{\mathcal{D}}^{-1}(\mathbf{E}d_{q,k}) \\ \bar{h}_{\mathcal{F},k} &= \mathbf{A}_{\mathcal{F}}^{-1}(\mathbf{B}d_{u,k} - \beta(\mathbf{G}^{\mathcal{DF}})^T \bar{h}_{\mathcal{D},k-1} - \mathbf{D}d_{q,k}), \end{aligned}$$

and similarly for λ_k .

5 Numerical results

In this section we provide some numerical results in order to show the applicability of the present approach to flow simulations in porous media crossed by arbitrarily complex networks of fractures. All the simulations are performed using linear Lagrangian finite elements on $\mathcal{T}_{\delta_{\mathcal{D}}}^{\mathcal{D}}$ for $h_{\mathcal{D}}$, linear Lagrangian finite elements on $\mathcal{T}_{\delta_{F_i}}^i$ for h_i , piecewise constant basis functions on $\mathcal{T}_{\delta_{\Gamma_i}}^i$ for q_i and piece-wise constant basis functions on $\mathcal{T}_{\delta_{S_m,i}}^i$ for u_i^m on each trace S_m , on each fracture F_i , $i = 1, \dots, N_F$, $m \in \mathcal{S}_i$. In all cases we set $\beta = 1$ and, if $\mathcal{S} \neq \emptyset$, $\alpha = 1$, even if other choices of $\alpha, \beta > 0$ could be equivalently used. Indeed we remark that the value of such parameters does not play any relevant role on the quality of the computed solution and values of $\alpha, \beta > 0$ are only needed for well posedness of local problems.

5.1 Problems with known solution

We first propose two simple problems with known analytical solutions, labelled Problem 1 and Problem 2, having the same domain and type of boundary conditions. A cubic domain with unitary edge length is considered; the bottom face is on the plane $z = -\frac{1}{2}$ with respect to a reference system $\mathcal{O}xyz$, and the cube is crossed by a single fracture F_1 placed on the plane $z = 0$, see Figure 3, left. The problems are set as follows:

$$\begin{aligned} a_{\mathcal{D}}(H_{\mathcal{D}}, v) - b_1(Q_1, v|_{F_1}) &= (f, v) \\ a_1(H_1, w_1) + (H_{\mathcal{D}|F_1}, w_1)_{F_1} &= -b_1(Q_1, w_1) \\ b_1(H_{\mathcal{D}|F_1} - H_1, \mu_1) &= 0, \quad \forall \mu_1 \in V'_1 \end{aligned}$$

with $f = -1$ for Problem 1 and $f = 0$ for Problem 2, $\mathbf{K}_{\mathcal{D}} = \mathbf{K}_1 = 1$ for both problems. Dirichlet boundary conditions are set on cube faces on planes $z = -\frac{1}{2}$, $z = \frac{1}{2}$, $x = 0$, $x = 1$, Neumann boundary conditions on cube faces on planes $y = 0$ and $y = 1$. Boundary conditions on fracture edges are prescribed accordingly to the boundary conditions on cube edges. Dirichlet and Neumann boundary conditions are derived from the analytical solution, which is $h = \frac{1}{4}(x^2 + y^2) + \frac{1}{2}|z|$ for Problem 1 and $h = \frac{1}{2}(x^2 - y^2) + z$ for Problem 2. The two problems here considered also share the same meshes. In Figures 3, right and 4, we display the colormap of the solution of Problem 1. The mesh for the three dimensional domain is non conforming with the fracture plane and independent from the mesh on the fracture, as shown in Figure 3, right. In Figure 5 we report the behaviour of the error with respect to the mesh size both in L^2 and in H^1 norm for Problem 1. The three dimensional mesh parameter ranges between 0.02 and 4×10^{-5} , the mesh on the fracture between 0.3 and 5×10^{-3} . Due to the non conformity of the mesh and to the irregular behaviour of the solution across the interface, sub-optimal convergence trends are obtained. The obtained slopes for the error are compatible with the bounded regularity of the solution $h \notin H^2(\mathcal{D})$. The absolute value of the relative error for Problem 1 on the finest mesh is reported in Figure 6, showing that the error in the 3D solution is mainly located near the interface, where the solution is irregular and the mesh is not conforming with the irregularity interface. The error for the 2D solution appears, instead, almost equally distributed in the domain, going to zero towards the edges with Dirichlet boundary conditions. Optimal convergence curves are however recovered if the solution across the interface is smooth. In fact, if we consider Problem 2, having a smooth solution, optimal convergence trends are recovered, as reported in Figure 7. In this case, the error is smoothly distributed in both the 3D and 2D domains, as shown in Figure 8, where the absolute value of the relative residual is reported for the 3D and 2D solutions of Problem 2.

5.2 Simple DFN problem

The second example proposes a validation of the method on a more general DFN configuration through a qualitative comparison of the obtained solution with the solution given by a method based on conforming meshes.

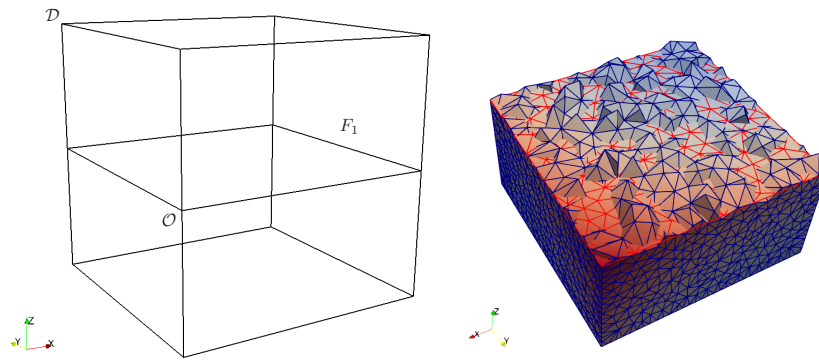


Fig. 3 Problem 1: domain description (left) and detail of the non conforming mesh at the interface (right)

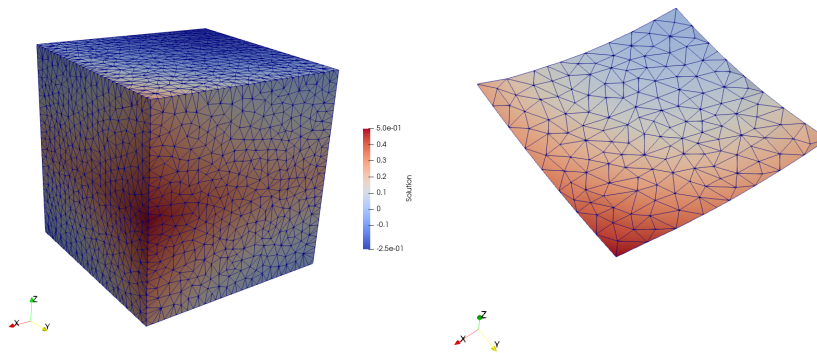


Fig. 4 Problem 1: solution on the three dimensional domain (left) and solution on the fracture (right)

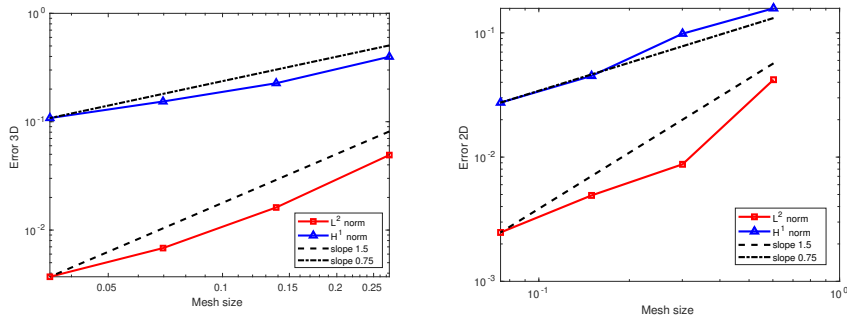


Fig. 5 Problem 1: convergence curves against mesh refinement

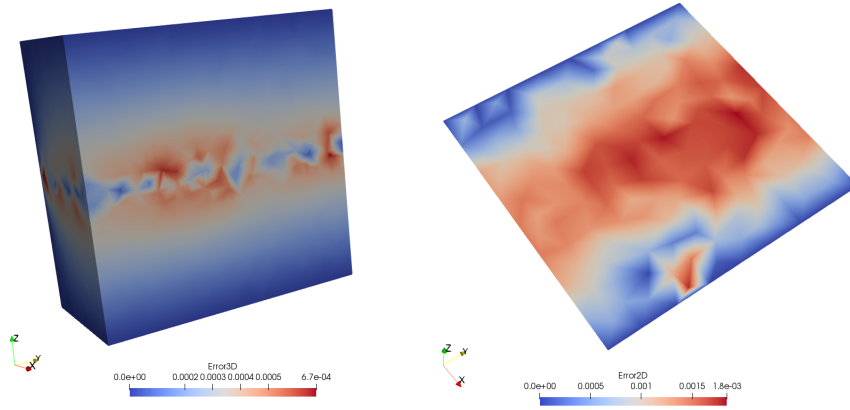


Fig. 6 Problem 1: Distribution of the absolute value of the relative error for the 3D and 2D solution on the finest mesh

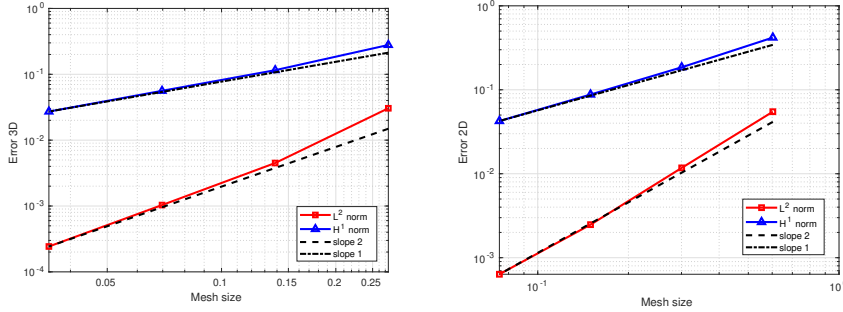


Fig. 7 Problem 2: convergence curves against mesh refinement for a problem with smooth solution across interface

Let us consider a unitary edge cubic block of porous material, crossed by a network of 10 fractures forming 14 traces, as shown in Figure 9. A Dirichlet boundary equal to 1 is imposed on the bottom face of the cubic domain, whereas homogeneous Dirichlet boundary conditions are imposed on the edges of the fractures lying on the top face of the domain, being instead the top face and all other block faces and fracture edges insulated. The hydraulic transmissivity is set to one for matrix and fractures. The same problem is solved with a VEM based approach on a polygonal/polyhedral conforming mesh, following the approach described in [6], and with the proposed FEM based optimization method. A fine mesh is used for the VEM based reference solution and for the optimization based solution, with elements of maximum size of about 1.5×10^{-5} , shown again in Figure 9. The solution obtained with the two approaches is reported in Figure 10 on three different planes, placed at $z = 0.25$, $z = 0.5$, and $z = 0.75$, on the left for the VEM based approach on the conforming mesh and on the right for the FEM based optimization approach on non conforming meshes. We can see that the two solutions are in very good agreement, despite the irregularities of the solution are not reproduced on the non conforming mesh as sharply as it is done on the conforming mesh.

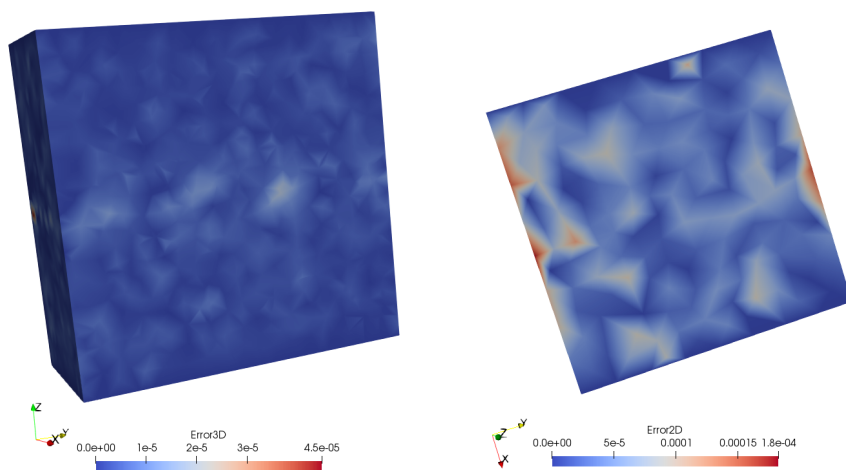


Fig. 8 Problem 2: Distribution of the absolute value of the relative error for the 3D and 2D solution on the finest mesh

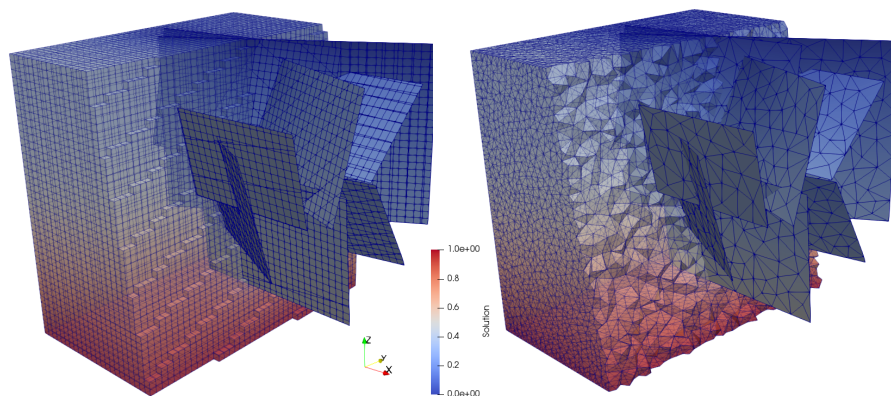


Fig. 9 Problem 3: Computational domain, mesh and solution with the VEM on conforming meshes (left) and with the FEM based optimization method on non conforming meshes (right)

On the other hand, the optimization approach allows an easy and robust meshing process, that ensures the generation of good shaped elements independently of the complexity of the geometry.

5.3 DFN problem

In the last example, a more complex and realistic DFN is considered, embedded in a cubic domain, with barycentre in the origin of a reference system $\mathcal{O}xyz$ and edge length equal to two, as shown in Figure 11, on the left. The embedded DFN consists of 20 randomly placed fractures, forming 62 traces, with a number of traces per fracture ranging between 4 and 10. Traces intersect, forming angles as

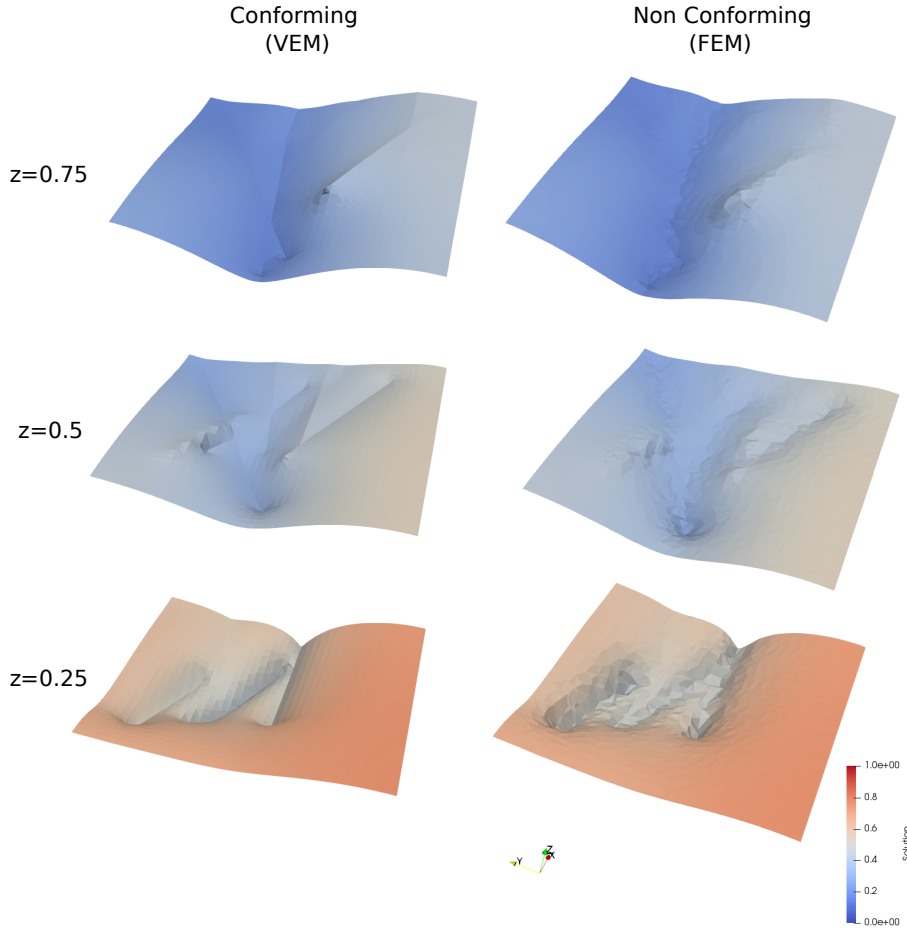


Fig. 10 Problem 3: Qualitative comparison of the solution obtained with the VEM on conforming meshes (left) and with the FEM based optimization method on non conforming meshes (right)

narrow as 11.5 degrees, whereas the minimum angle between the normals of couples of intersecting fractures is 17.3 degrees. A unitary pressure Dirichlet boundary condition is imposed on fracture edges lying on the planes $z = 1$, and a zero pressure Dirichlet boundary condition is imposed on the cube face on the plane $z = 0$, all other fracture edges and cube faces being insulated. An inflow is thus obtained through some fracture edges, and outflow occurs through the bottom face of the cube. Figure 11, on the right, shows the computed solution on the 3D domain and on the fractures, through a section of the three dimensional domain, along with the used mesh, characterized by a mesh parameter equal to $\delta_{\mathcal{D}} = 0.001$ for the tetrahedral mesh and to $\delta_{F_i} = 0.05$, $i = 1, \dots, 20$ for the triangular mesh on all the fractures. On this mesh, the total number of unknowns, $\mathcal{N}_h + \mathcal{N}_q + \mathcal{N}_u$ is 5541, and the minimization problem is solved using 90 iterations to reach a relative residual of 10^{-8} , resulting in a functional value of 0.069. Considering a refined mesh, with mesh parameter 1.25×10^{-4} for the tetrahedral mesh and

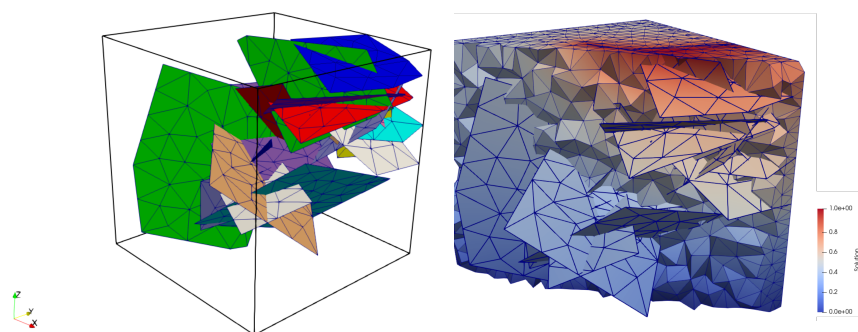


Fig. 11 DFN problem: domain (left) and a section of the computed solution (right)

1.25×10^{-2} for the triangular mesh, the total number of unknowns rises to 28686 and the number of iterations to reach the same relative residual is 125 and the functional value is reduced to 0.057. We remark that the minimum of the discrete functional is greater than zero, as a consequence of the non conformity of the mesh. These results show the viability of the proposed approach in dealing with complex domains.

6 Conclusions

A new discretization strategy for the simulation of the flow in arbitrarily complex DFM geometries has been presented and validated. The method is based on standard finite element discretizations for both the three dimensional domain and the fractures, and the meshing can be performed independently on each geometrical entity, thus actually overcoming any mesh related issue for DFM simulations. The resulting discrete problem is well posed and can be efficiently solved via a gradient scheme. The proposed numerical tests validate the method and show its applicability to realistic DFM configurations. Although the proposed method can be easily implemented for parallel solution, optimal parallel solver and suitable well balanced partitioning strategies, yielding to efficient parallel solvers, should be investigated but are out of the scope of the present work.

Acknowledgements This work was supported by the MIUR project “Dipartimenti di Eccellenza 2018-2022” (CUP E11G18000350001), PRIN project “Virtual Element Methods: Analysis and Applications” (201744KLJL_004), by INdAM-GNCS and by SmartData@polito.

References

1. Ahmed, R., Edwards, M., Lamine, S., Huisman, B., Pal, M.: Control-volume distributed multi-point flux approximation coupled with a lower-dimensional fracture model. *Journal of Computational Physics* **284**, 462 – 489 (2015). DOI 10.1016/j.jcp.2014.12.047
2. Al-Hinai, O., Srinivasan, S., Wheeler, M.F.: Mimetic finite differences for flow in fractures from microseismic data. In: *SPE Reservoir Simulation Symposium*. Society of Petroleum Engineers (2015)

3. Angot, P., Boyer, F., Hubert, F.: Asymptotic and numerical modelling of flows in fractured porous media. *ESAIM: M2AN* **43**(2), 239–275 (2009). DOI 10.1051/m2an/2008052
4. Antonietti, P.F., Facciola, C., Russo, A., Verani, M.: Discontinuous Galerkin approximation of flows in fractured porous media on polytopic grids. *SIAM Journal on Scientific Computing* **41**(1), A109–A138 (2019). DOI 10.1137/17M1138194
5. Benedetto, M.F., Borio, A., Kyburg, F., Mollica, J., Scialò, S.: An arbitrary order Mixed Virtual Element formulation for coupled multi-dimensional flow problems (2020). ArXiv:2001.11309
6. Berrone, S., Borio, A., Fidelibus, C., Pieraccini, S., Scialò, S., Vicini, F.: Advanced computation of steady-state fluid flow in discrete fracture-matrix models: FEM–BEM and VEM–VEM fracture-block coupling. *GEM - International Journal on Geomathematics* **9**(2), 377–399 (2018). DOI 10.1007/s13137-018-0105-3
7. Berrone, S., Borio, A., Scialò, S.: A posteriori error estimate for a PDE-constrained optimization formulation for the flow in DFNs. *SIAM J. Numer. Anal.* **54**(1), 242–261 (2016). DOI 10.1137/15M1014760
8. Berrone, S., Borio, A., Vicini, F.: Reliable a posteriori mesh adaptivity in discrete fracture network flow simulations. *Computer Methods in Applied Mechanics and Engineering* **354**, 904 – 931 (2019). DOI 10.1016/j.cma.2019.06.007
9. Berrone, S., D’Auria, A., Vicini, F.: Fast and robust flow simulations in discrete fracture networks with GPGPUs. *GEM - International Journal on Geomathematics* **10**(1), 8 (2019)
10. Berrone, S., Pieraccini, S., Scialò, S.: A PDE-constrained optimization formulation for discrete fracture network flows. *SIAM J. Sci. Comput.* **35**(2), B487–B510 (2013). DOI 10.1137/120865884
11. Berrone, S., Pieraccini, S., Scialò, S.: On simulations of discrete fracture network flows with an optimization-based extended finite element method. *SIAM J. Sci. Comput.* **35**(2), A908–A935 (2013). DOI 10.1137/120882883
12. Berrone, S., Pieraccini, S., Scialò, S.: Flow simulations in porous media with immersed intersecting fractures. *Journal of Computational Physics* **345**, 768 – 791 (2017). DOI 10.1016/j.jcp.2017.05.049
13. Berrone, S., Scialò, S., Vicini, F.: Parallel meshing, discretization and computation of flow in massive Discrete Fracture Networks. *SIAM J. Sci. Comput.* **41**(4), C317–C338 (2019). DOI 10.1137/18M1228736
14. Boon, W., Nordbotten, J., Yotov, I.: Robust discretization of flow in fractured porous media. *SIAM Journal on Numerical Analysis* **56**(4), 2203–2233 (2018). DOI 10.1137/17M1139102
15. Brenner, K., Groza, M., Guichard, C., Lebeau, G., Masson, R.: Gradient discretization of hybrid dimensional darcy flows in fractured porous media. *Numerische Mathematik* **134**(3), 569–609 (2016). DOI 10.1007/s00211-015-0782-x
16. Chave, F.A., Di Pietro, D.A., Formaggia, L.: A Hybrid High-Order method for Darcy flows in fractured porous media. *SIAM Journal on Scientific Computing* **40**(2), A1063–A1094 (2018). DOI 10.1137/17M1119500
17. Chen, Z., Huan, G., Ma, Y.: *Computational Methods for Multiphase Flows in Porous Media*. SIAM, Philadelphia, PA, USA (2006)
18. Chernyshenko, A.Y., Olshanskii, M.A.: An unfitted finite element method for the darcy problem in a fracture network. *Journal of Computational and Applied Mathematics* **366**, 112424 (2020). DOI <https://doi.org/10.1016/j.cam.2019.112424>
19. Coulet, J., Faille, I., Girault, V., Guy, N., Nataf, F.: A fully coupled scheme using virtual element method and finite volume for poroelasticity. *Computational Geosciences*, (2019). DOI 10.1007/s10596-019-09831-w
20. Faille, I., Fumagalli, A., Jaffré, J., Roberts, J.: Model reduction and discretization using hybrid finite volumes for flow in porous media containing faults. *Computational Geosciences* **20**(2), 317–339 (2016). DOI 10.1007/s10596-016-9558-3
21. Formaggia, L., Fumagalli, A., Scotti, A., Ruffo, P.: A reduced model for Darcys problem in networks of fractures. *ESAIM: Mathematical Modelling and Numerical Analysis* **48**(4), 1089–1116 (2014). DOI 10.1051/m2an/2013132
22. Fumagalli, A., Keilegavlen, E.: Dual virtual element methods for discrete fracture matrix models. *Oil Gas Sci. Technol. - Rev. IFP Energies nouvelles* **74**, 41 (2019). DOI 10.2516/ogst/2019008
23. Fumagalli, A., Pasquale, L., Zonca, S., Micheletti, S.: An upscaling procedure for fractured reservoirs with embedded grids. *Water Resources Research* **52**(8), 6506–6525 (2015). DOI 10.1002/2015WR017729

24. Fumagalli, A., Scotti, A.: A numerical method for two-phase flow in fractured porous media with non-matching grids. *Advances in Water Resources* **62**, 454 – 464 (2013). DOI 10.1016/j.advwatres.2013.04.001
25. Horn, R.A., Johnson, C.R.: *Matrix Analysis*. Cambridge University Press, Cambridge, United Kingdom (1990)
26. Li, L., Lee, S.H.: Efficient Field-Scale Simulation of Black Oil in a Naturally Fractured Reservoir Through Discrete Fracture Networks and Homogenized Media. *SPE Reservoir Evaluation & Engineering* **11**(4) (2008). DOI 10.2118/103901-PA
27. Lipnikov, K., Manzini, G., Shashkov, M.: Mimetic finite difference method. *Journal of Computational Physics* **257**, 1163–1227 (2014)
28. Martin, V., Jaffré, J., Roberts, J.: Modeling fractures and barriers as interfaces for flow in porous media. *SIAM Journal on Scientific Computing* **26**(5), 1667–1691 (2005). DOI 10.1137/S1064827503429363
29. Moinfar, A., Varavei, A., Sepehrnoori, K., Johns, R.: Development of an Efficient Embedded Discrete Fracture Model for 3D Compositional Reservoir Simulation in Fractured Reservoirs. *SPE Journal* **19**(2), (2014). DOI 10.2118/154246-PA
30. Nocedal, J., Wright, S.J.: *Numerical Optimization*, Second edn. Springer, New York, USA (2006)
31. Odsæter, L.H., Kvamsdal, T., Larson, M.G.: A simple embedded discrete fracturematrix model for a coupled flow and transport problem in porous media. *Computer Methods in Applied Mechanics and Engineering* **343**, 572 – 601 (2019). DOI 10.1016/j.cma.2018.09.003
32. P. F. Antonietti, L. Formaggia, A. Scotti, M. Verani, N. Verzott: Mimetic finite difference approximation of flows in fractured porous media. *ESAIM: M2AN* **50**(3), 809–832 (2016). DOI 10.1051/m2an/2015087
33. Qi, D., Hesketh, T.: An analysis of upscaling techniques for reservoir simulation. *Petroleum Science and Technology* **23**(7-8), 827–842 (2005). DOI 10.1081/LFT-200033132
34. Sandve, T., Berre, I., Nordbotten, J.: An efficient multi-point flux approximation method for discrete fracturematrix simulations. *Journal of Computational Physics* **231**(9), 3784 – 3800 (2012). DOI 10.1016/j.jcp.2012.01.023