

Pressure assisted flash sintering of Mn-Co based spinel coatings for solid oxide electrolysis cells (SOECs)

Original

Pressure assisted flash sintering of Mn-Co based spinel coatings for solid oxide electrolysis cells (SOECs) / Javed, H.; Saunders, T.; Reece, M. J.; Zanchi, E.; Sabato, A. G.; Boccaccini, A. R.; Smeacetto, F.. - In: CERAMICS INTERNATIONAL. - ISSN 0272-8842. - ELETTRONICO. - (2021). [10.1016/j.ceramint.2021.03.055]

Availability:

This version is available at: 11583/2886476 since: 2021-04-08T17:44:06Z

Publisher:

Elsevier Ltd

Published

DOI:10.1016/j.ceramint.2021.03.055

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

1
2 **Pressure assisted flash sintering of Mn-Co based spinel coatings for solid oxide electrolysis**
3 **cells (SOECs)**
4
5
6

7 **Hassan Javed¹, Theo Saunders², Michael John Reece², Elisa Zanchi³, Antonio Gianfranco**
8 **Sabato⁴, Aldo R. Boccaccini⁵, Federico Smeacetto³**
9
10

- 11
12
13
14 1. Sunfire GmbH, Gasanstaltstraße 2, 01237 Dresden, Germany
15
16 2. School of Engineering and Materials Science, Queen Mary University of London, UK
17
18 3. Department of Applied Science and Technology (DISAT), Politecnico di Torino, Italy
19
20 4. IREC-Institut de Recerca en Energia de Catalunya, 08930 Sant Adrià de Besòs, Barcelona,
21
22 Spain
23
24 5. Institute of Biomaterials, Friedrich Alexander University Erlangen-Nuremberg, 91058 Erlangen,
25
26 Germany
27
28
29
30

31
32
33
34 Corresponding author: hassan.javed@sunfire.de
35
36
37
38
39
40
41
42
43

44 **Abstract**

45
46 Pressure assisted flash sintering was used to process Mn-Co-Cu based spinel coatings,
47
48 electrophoretically deposited on a Crofer22APU interconnect. This method resulted in highly dense
49
50 coatings, heat-treated for only a short duration (<10 minutes) at temperatures lower than
51
52 conventional sintering temperatures. The electrophoretically deposited coatings showed no
53
54 delamination or cracks after flash sintering at high heating rates (>200 °C/min). The high heating
55
56 rate promoted Cu modified Mn-Co spinel and limited the formation of a Cr-oxide scale on the
57
58
59
60
61
62
63
64
65

1 Crofer22APU substrate. Flash sintering was found to be a promising and time efficient sintering
2 technique to overcome some of the issues related to low coating density and oxide scale formation
3
4 in solid oxide electrolysis cell conditions.
5
6
7
8

9 **Key words:** Flash sintering, protective coatings, EPD, SOEC, SOFC
10
11
12
13

14 **1. Introduction**

15
16

17 Cr-based steel interconnects such as Crofer22APU and Crofer22H are most commonly used in solid
18 oxide electrolysis cells (SOECs) thanks to their high electrical conductivity, mechanical stability
19 and coefficient of thermal expansion (CTE) matching with other cell components [1,2]. SOECs
20 generally operate at 700-900 °C, which enhances the possibility of Cr evaporation from the
21 interconnect, which can contaminate neighboring electrodes. Deposition of protective coatings on
22 metallic interconnects is considered the most effective way to hinder the Cr evaporation. In this
23 context, Mn-Co based spinel coatings, due to their high electrical conductivity, high Cr retention
24 capability and CTE closely matching with interconnect, are likely to be the materials of choice [3].
25 Doping and or modification of Mn-Co spinel with transition metal elements (Fe and Cu) is an
26 attractive way to further improve their performance [4–7]. For instance, many researchers have
27 studied Cu doped Mn-Co spinel and found that Cu addition stabilizes the cubic phase (MnCo_2O_4)
28 and improves the density of the coatings [8–10].
29
30
31
32
33
34
35
36

37 In general, conventional sintering usually produces coatings with a certain grade of porosity, which
38 might affect the Cr blocking capability of the protective layer. In order to produce dense coatings,
39 conventional sintering should be carried out above 900 °C or for a long dwell time (a matter of
40 hours). In both cases, there is a high possibility of formation of a non-conductive Cr-based oxide
41 scale at the interconnect surface, thus increasing the overall area specific resistance of the
42 interconnect [11].
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 Pressure assisted flash sintering is a promising technology that can produce dense coatings in just a
2 few minutes by combining simultaneously high pressure and electric current [12]. A limited number
3 of studies has been carried out on flash sintering of Mn-Co based spinel in order to understand its
4 phase stability and densification [11,13,14]. However, up to now, much of the research related to
5 flash sintering of ceramics was mainly carried out on compact of powders. To the best of the
6 author's knowledge, no studies have been conducted to observe the (pressure assisted) flash
7 sintering effect on as-deposited Mn-Co based coatings. Due to high heating and cooling rates, there
8 is a high possibility of stress generation at the coating/substrate interface subjected to flash
9 sintering. The high stress can subsequently lead to delamination at the coating/substrate interface or
10 can even generate cracks within the coatings. Therefore, it is important not only investigate the
11 density of coatings but also the coating/substrate interface.
12
13
14
15
16
17
18
19
20
21
22
23
24
25

26 In our previous studies, $Mn_{1.5}Co_{1.5}O_4$ (MCO) coatings doped with 0-10wt% of Cu were
27 successfully produced using the electrophoretic deposition (EPD) technique [10,15]. MCO and CuO
28 particles were electrophoretically co-deposited to obtain homogenous thick coatings of $\sim 15\mu m$.
29
30
31
32
33
34 Two steps sintering of MCO coatings has been repeatedly reported in literature, where first step is
35 carried out in reducing atmosphere with an aim to decompose the spinel and second step in
36 oxidizing atmosphere for reformation of spinel [10,15,16]. In present work, pressure assisted flash
37 sintering is used in addition to conventional sintering to analyze the impact of a different heat
38 treatment process on the density of Cu doped MCO spinel coatings and on the formation of the
39 oxide scale.
40
41
42
43
44
45
46
47
48
49
50

51 **2. Experimental**

52
53
54
55

56 The co-deposition of $Mn_{1.5}Co_{1.5}O_4$ (MCO) and CuO particles was carried out on disc shaped
57 (diameter: 15 ± 0.1 mm, thickness: 2 ± 0.1 mm) Crofer22APU substrates by EPD. A previous study
58
59
60
61
62
63
64
65

1 showed that a MCO coating doped with 10 wt% of CuO exhibited higher density as compared with
2 pure MCO and MCO doped with 5 wt% of CuO [10]. Therefore, for this study, a suspension of
3
4 MCO and CuO (90:10 wt%) was prepared in a solvent composed of ethanol and water in 60:40
5
6 vol%, where 37.5g of solid content was added per liter of the solvent. Further details about the EPD
7
8 deposition parameters can be found elsewhere [15,17]. After the deposition, the samples were dried
9
10 in air for 24 hours and subsequently sintered.
11
12

13 The EPD coated samples were sintered according to three different heat treatments, referred as S1,
14
15 S2 and S3. S1 was a single step treatment where the coatings were sintered by flash sintering. Flash
16
17 sintering was done in vacuum (1 m.bar) using a load of 5 kN. The disc shaped coated samples were
18
19 introduced into a graphite die and two cylindrical graphite punches were used to hold the sample in
20
21 the die. Boron nitride (BN) was sprayed on the graphite punches to avoid direct contact with the
22
23 coated Crofer22APU samples. The samples were heated up to 700°C at a heating rate of 200
24
25 °C/min followed by a dwell of 1 min. Afterward, a power pulse of 6.8 V was applied for three
26
27 seconds to obtain a temperature of approximately 830±30 °C. Subsequently, the samples were
28
29 cooled down to room temperature at an initial cooling rate of 200 °C/min.
30
31
32
33
34
35

36 The heat treatment referred to as S2 involved a two steps process; first step sintering in reducing
37
38 atmosphere (Ar-3% H₂) at 900°C for 2 hours at a heating/cooling rate of 10°C/min, followed by a
39
40 second sintering step using flash sintering. The S3 treatment involved three steps; first two steps
41
42 were similar to S2 (first in reducing atmosphere and second by flash sintering), while a third
43
44 additional step was done in static air at 900°C for 2 hours at a heating/cooling rate of 10°C/min.
45
46 Flash sintering during S2 and S3 treatment was done under same conditions mentioned for S1.
47
48
49

50 The microstructure and compatibility of the coatings with the Crofer22APU interconnect was
51
52 examined by SEM (Merlin ZEISS). For that purpose, the cross sections of Crofer22APU/MnCoCu
53
54 coated samples were metallographically polished down to 1 µm using diamond paste. The
55
56 crystalline phase analysis of the deposited and heat-treated coatings was carried out using a
57
58 PanAlytical X'Pert Pro PW 3040/60 Philips (the Netherlands), with Cu K α and the X'Pert software.
59
60
61
62
63
64
65

1 The XRD analysis were carried out in the range of 2 theta 10°-70°, with a step size of 0.02626° and
2 time per step of 10.20 seconds. Prior to the XRD and SEM analysis, the coated Crofer22APU
3
4 samples were sonicated for 5 min, in order to remove the BN layer.
5
6
7
8

9 **3. Results and Discussion**

10
11
12
13
14
15 Figure 1 shows XRD analyses carried out on Cu doped MCO coated Crofer22APU substrates after
16
17 S1, S2 and S3 sintering treatments. The XRD pattern after the S1 treatment (Figure 1(a)) shows the
18 presence of the (Mn, Co)₃O₄ phase (PDF # 018-0408) with an intermediate tetragonal spinel
19 structure. The S1 treatment also resulted in the partial reduction of CuO into Cu₂O after flash
20 sintering. The high heating/cooling rates and short dwell time during flash sintering resulted in only
21 partial reduction of the CuO. The presence of BN phase is also visible after the S1 treatment, which
22 is due to presence of residuals of the BN layer. On the other hand, the XRD analysis after the S2
23 treatment (two steps sintering) shows the decomposition of the MCO spinel into MnO and metallic
24 Co. In contrast to the S1 treatment, the sintering performed during the first step of the S2 treatment
25 in a reducing atmosphere for 2 hours at 900 °C, ensured the complete reduction of the MCO spinel
26 into MnO and metallic Co. These results are in agreement with results found in previous studies for
27 MCO spinel sintered in reducing atmospheres [3,15]. The S2 treatment also resulted in the
28 reduction of the CuO into metallic Cu. XRD analysis after the S3 treatment (figure 1 (c)) carried out
29 in air shows the reforming of the MnCo₂O₄ cubic phase spinel (PDF# 023-1237), with the Cu
30 incorporated into the spinel as no distinct peak for a Cu based phase was observed. These results are
31 also coherent with previous studies, where Cu doping was found to stabilize the cubic phase
32 [6,10,15,18] of MCO by partial replacement of Mn [5,19]. The stabilization of the cubic phase is
33 beneficial to minimize the tetragonal-cubic phase transformation that occurs in MCO at around 400
34 °C during heating/cooling cycling, consequently limiting the thermal stresses due to difference in
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 volume and coefficient of thermal expansion of both phases. The XRD pattern of the cubic
2 MnCo_2O_4 (PDF# 023-1237) is also shown in figure 1d, for better understanding and comparison. A
3
4 slight shift can be seen between the XRD patterns of the S3 treated sample and that of MnCo_2O_4
5
6
7 (MnCo_2O_4 PDF# 023-1237), which is most likely due to lattice distortion of Mn-Co spinel as a result of Cu
8
9 inclusion into the spinel.
10

11
12
13
14 **Figure 1. XRD characterization of sintered coatings after (a) S1, (b) S2, (c) S3 treatments and (d) XRD simulated pattern of**
15
16 **Co_2MnO_4 phase**
17

18
19
20
21 Figure 2 shows the cross sections of EPD deposited Mn-Co-Cu spinel coatings on Crofer22APU,
22
23 sintered in three different ways, as previously described. The sintered coatings were uniform, with a
24
25 thickness of $\sim 15 \mu\text{m}$. By the introduction of pressure-assisted flash sintering, coatings with
26
27 negligible porosity were obtained at temperatures lower than conventional sintering temperature
28
29 (approx. $950 \text{ }^\circ\text{C}$) of Mn-Co based spinel coatings. Despite of fast heating and cooling rates (>200
30
31 $^\circ\text{C}/\text{min}$) during the flash sintering, no cracks or delamination effects between the Crofer22APU
32
33 substrate the Mn-Co-Cu spinel coatings were observed.
34
35
36
37
38
39
40
41

42 **Figure 2. EPD deposited Mn-Co-Cu coating on the Crofer22APU substrates. Sintering was performed according to (a,b) S1, (c,d)**
43
44 **S2 and (e,f) S3 treatment**
45

46
47
48
49 Figure 3 shows the EDS mapping carried out on Crofer22APU/Mn-Co-Cu coatings, sintered by the
50
51 three different heat treatments. After the S1 and S2 treatments, different phases are clearly visible in
52
53 the Mn-Co-Cu coating, while after the S3 treatment, the coating becomes homogenous with no
54
55 distinct phases. In particular, the EDS mapping shows Cu rich zones after the S1 and S2 treatments,
56
57 while after the third step sintering (S3), no Cu rich areas were observed. These EDS analyses are in
58
59
60
61
62
63
64
65

1 agreement with the XRD investigation and previous studies, where sintering of MnCoCu spinel
2 coatings in a reducing atmosphere results in decomposition of the spinel, and reforming of the
3 MnCo spinel after sintering in air. It is also worth pointing out that flash sintering (S1) did not
4 resulted in the formation of a Cr oxide scale on the Crofer22APU substrate. Nevertheless, a Cr rich
5 scale of ~1 μm was formed after the S3 treatment, as clearly visible from the corresponding EDS
6 mapping (Figure). The formation of the oxide scale is due to third step sintering carried out in air at
7 900 °C. The oxidizing sintering step in S3 could be potentially carried out during the
8 consolidation/sealing procedure of a real SOCs stack.
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23

24 **Figure 3. EDS mapping carried out at Mn-Co-Cu coated Crofer22APU substrates sintered by S1, S2 and S3 treatments**

28 **4. Conclusions**

31 Flash sintering was employed to rapidly sinter of Cu doped MnCo spinel (MCO) coatings
32 electrophoretically deposited on a Crofer22APU interconnect.
33

36 The findings in this study provide the following insights for future research:

- 37 - The proposed approach, EPD co-deposition and flash sintering can be further expanded to study
38 the in-situ formation of new spinel structures (i. e. avoid Co), by a proper selection of precursors.
- 39 - The one-step sintering treatment (S1) could be directly converted in Cu doped MCO, by a stack
40 consolidation treatment in air.
- 41 - A natural progression of this work is to analyse the effect of the pressure-assisted flash sintering
42 on the electrical properties of the coated samples

43 Flash sintering was found to be a promising sintering method that involves short sintering times
44 (<10 min) to obtain high densification with respect to conventional sintering. The high heating and
45 cooling rates during flash sintering did not produce any cracks within the coatings as well as no
46 delamination at the Crofer22APU/coating interface. Moreover, the use of a reducing atmosphere
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 during flash sintering did not promote the formation of a Cr-rich oxide scale at the Crofer22APU
2 substrate. These results confirm that flash sintering could be an attractive way to minimize the
3
4 current issues /challenges related to coatings degradation under SOEC conditions at 850°C.
5
6
7
8

9 **5. Acknowledgment**

10
11
12 The project leading to this research has received funding from “The European Union’s Horizon
13 2020 research and innovation programme under the Marie Skłodowska-Curie grant agreement No
14
15 642557 (CoACH-ETN)”.
16
17
18
19
20
21

22 **6. References**

- 23
24
25
26
27
28 [1] R. Sachitanand, M. Sattari, J.E. Svensson, J. Froitzheim, Evaluation of the oxidation and Cr
29 evaporation properties of selected FeCr alloys used as SOFC interconnects, International
30 Journal of Hydrogen Energy. 38 (2013) 15328–15334. doi:10.1016/j.ijhydene.2013.09.044.
31
32
33
34
35 [2] Y. Zheng, J. Wang, B. Yu, W. Zhang, J. Chen, J. Qiao, J. Zhang, A review of high
36 temperature co-electrolysis of H₂O and CO₂ to produce sustainable fuels using solid oxide
37 electrolysis cells (SOECs): advanced materials and technology, Chem. Soc. Rev. 46 (2017)
38 1427–1463. doi:10.1039/C6CS00403B.
39
40
41
42
43 [3] S.-I. Lee, J. Hong, H. Kim, J.-W. Son, J.-H. Lee, B.-K. Kim, H.-W. Lee, K.J. Yoon, Highly
44 Dense Mn-Co Spinel Coating for Protection of Metallic Interconnect of Solid Oxide Fuel
45 Cells, Journal of the Electrochemical Society. 161 (2014) F1389–F1394.
46
47
48
49
50
51
52
53
54
55 [4] A. Masi, M. Bellusci, S.J. Mcphail, F. Padella, P. Reale, J. Hong, R. Steinberger-wilckens,
56 M. Carlini, Cu-Mn-Co oxides as protective materials in SOFC technology: The effect of
57 chemical composition on mechanochemical synthesis, sintering behaviour, thermal
58
59
60
61
62
63
64
65

1 expansion and electrical conductivity, *Journal of the European Ceramic Society*. 7 (2016)
2 661–669. doi:10.1016/j.jeurceramsoc.2016.09.025.
3

- 4 [5] B. Talic, P.V. Hendriksen, K. Wiik, H.L. Lein, Thermal expansion and electrical
5 conductivity of Fe and Cu doped MnCo₂O₄ spinel, *Solid State Ionics*. 326 (2018) 90–99.
6 doi:10.1016/j.ssi.2018.09.018.
7
- 8 [6] A. Masi, M. Bellusci, J. Stephen, F. Padella, P. Reale, R. Steinberger-wilckens, A. Masi, M.
9 Bellusci, S.J. Mcphail, F. Padella, P. Reale, J. Hong, R. Steinberger-wilckens, The Effect of
10 Chemical Composition on High Temperature Behaviour of Fe and Cu Doped Mn-Co spinels,
11 *Ceramics International*. 43 (2016) 2829–2835. doi:10.1016/j.ceramint.2016.11.135.
12
13
14
15
16
17
18
19
20
21 [7] J.C.W. Mah, A. Muchtar, M.R. Somalu, M.J. Ghazali, J. Raharjo, Formation of sol–gel
22 derived (Cu,Mn,Co)₃O₄ spinel and its electrical properties, *Ceramics International*. 43
23 (2017) 7641–7646. doi:10.1016/j.ceramint.2017.03.060.
24
25
26
27
28 [8] R. Wang, Z. Sun, U.B. Pal, S. Gopalan, S.N. Basu, Mitigation of chromium poisoning of
29 cathodes in solid oxide fuel cells employing CuMn_{1.8}O₄ spinel coating on metallic
30 interconnect, *Journal of Power Sources*. 376 (2018) 100–110.
31
32
33
34
35
36
37
38
39 [9] W. Huang, S. Gopalan, U.B. Pal, S.N. Basu, Evaluation of Electrophoretically Deposited
40 CuMn_{1.8}O₄ Spinel Coatings on Crofer 22 APU for Solid Oxide Fuel Cell Interconnects,
41 *Journal of The Electrochemical Society*. 155 (2008) B1161. doi:10.1149/1.2975367.
42
43
44
45
46 [10] A.G. Sabato, S. Molin, H. Javed, E. Zanchi, A.R. Boccaccini, F. Smeacetto, In-situ Cu-doped
47 MnCo-spinel coatings for solid oxide cell interconnects processed by electrophoretic
48 deposition, *Ceramics International*. 45 (2019) 19148–19157.
49
50
51
52
53
54
55
56 [11] A.L.G. Prette, M. Cologna, V. Sglavo, R. Raj, Flash-sintering of Co₂MnO₄ spinel for solid
57 oxide fuel cell applications, *Journal of Power Sources*. 196 (2011) 2061–2065.
58
59
60
61
62
63
64
65

- 1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
- [12] M. Biesuz, V.M. Sglavo, Flash sintering of ceramics, *Journal of the European Ceramic Society*. 39 (2019) 115–143. doi:10.1016/j.jeurceramsoc.2018.08.048.
- [13] A. Gaur, V.M. Sglavo, Tuning the flash sintering characteristics of ceria with MnCo₂O₄, *Materials Science and Engineering B: Solid-State Materials for Advanced Technology*. 228 (2018) 160–166. doi:10.1016/j.mseb.2017.11.026.
- [14] A. Gaur, V.M. Sglavo, Flash-sintering of MnCo₂O₄ and its relation to phase stability, *Journal of the European Ceramic Society*. 34 (2014) 2391–2400. doi:10.1016/j.jeurceramsoc.2014.02.012.
- [15] S. Molin, A.G. Sabato, H. Javed, G. Cempura, A.R. Boccaccini, F. Smeacetto, Co-deposition of CuO and Mn_{1.5}Co_{1.5}O₄ powders on Crofer22APU by electrophoretic method: Structural, compositional modifications and corrosion properties, *Materials Letters*. 218 (2018) 329–333. doi:10.1016/j.matlet.2018.02.037.
- [16] S. Molin, A.G. Sabato, M. Bindi, P. Leone, G. Cempura, M. Salvo, S. Cabanas Polo, A.R. Boccaccini, F. Smeacetto, Microstructural and electrical characterization of Mn-Co spinel protective coatings for solid oxide cell interconnects, *Journal of the European Ceramic Society*. 37 (2017) 4781–4791. doi:10.1016/j.jeurceramsoc.2017.07.011.
- [17] F. Smeacetto, A. De Miranda, S. Cabanas Polo, S. Molin, D. Boccaccini, M. Salvo, A.R. Boccaccini, Electrophoretic deposition of Mn_{1.5}Co_{1.5}O₄ on metallic interconnect and interaction with glass-ceramic sealant for solid oxide fuel cells application, *Journal of Power Sources*. 280 (2015) 379–386. doi:10.1016/j.jpowsour.2015.01.120.
- [18] Z. Sun, R. Wang, A.Y. Nikiforov, S. Gopalan, U.B. Pal, S.N. Basu, CuMn_{1.8}O₄ protective coatings on metallic interconnects for prevention of Cr-poisoning in solid oxide fuel cells, *Journal of Power Sources*. 378 (2018) 125–133. doi:10.1016/j.jpowsour.2017.12.031.
- [19] T. Brylewski, A. Kruk, M. Bobruk, A. Adamczyk, J. Partyka, P. Rutkowski, Structure and electrical properties of Cu-doped Mn-Co-O spinel prepared via soft chemistry and its application in intermediate- temperature solid oxide fuel cell interconnects, *Journal of Power*

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65


List of Figures

Figure 1. XRD characterization of sintered coatings after (a) S1, (b) S2, (c) S3 treatments and (d) XRD simulated pattern of Co_2MnO_4 phase

Figure 2. EPD deposited Mn-Co-Cu coating on the Crofer22APU substrates. Sintering was performed according to (a,b) S1, (c,d) S2 and (e,f) S3 treatment

Figure 3. EDS mapping carried out at Mn-Co-Cu coated Crofer22APU substrates sintered by S1, S2 and S3 treatments

Figure 1: XRD characterization of sintered coatings after (a) S1, (b) S2, (c) S3 treatments and (d) XRD simulated pattern of

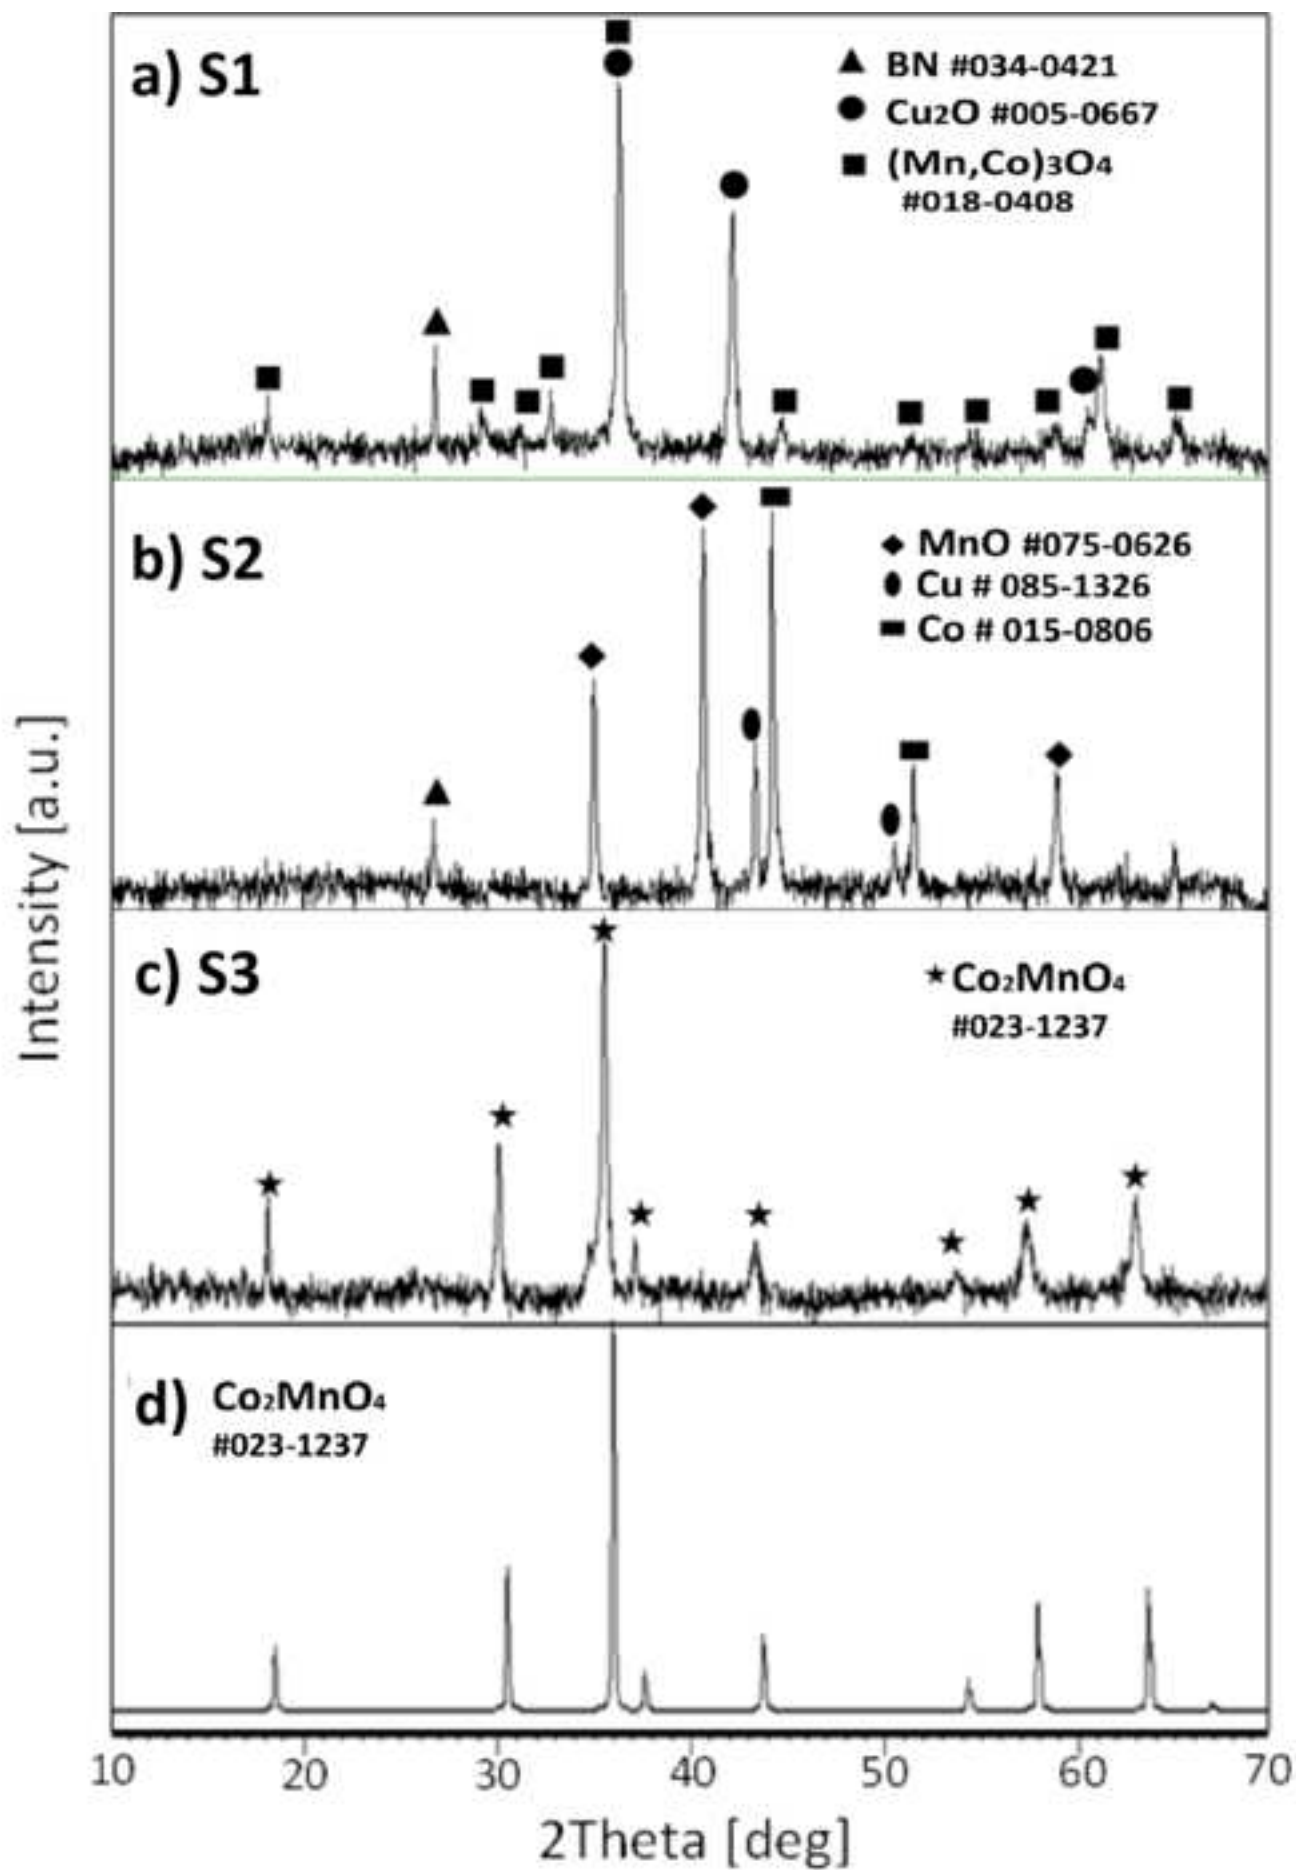

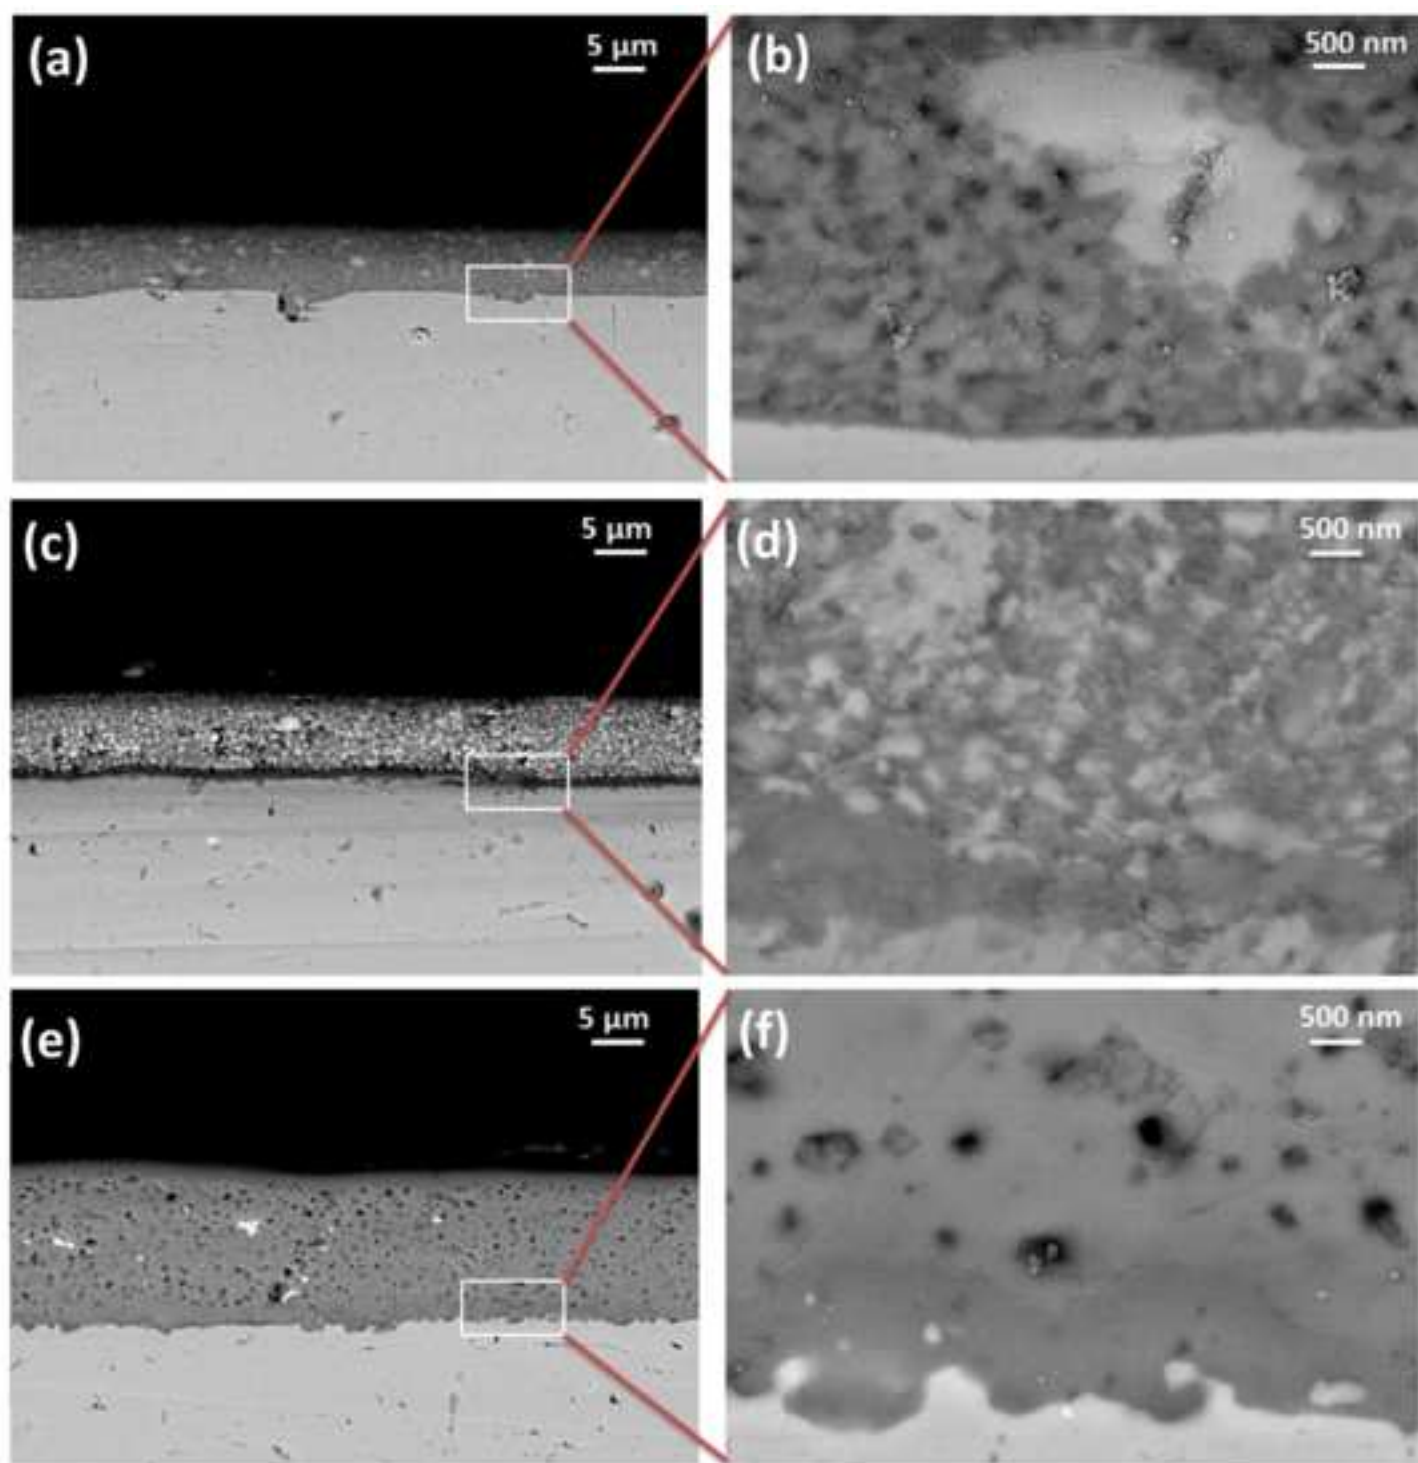


Figure 3: EDS mapping carried out at Mn-Co-Cu coated Crofer22APU substrates sintered by S1, S2 and S3 treatments

[Click here to access/download;Figure;Figure 3.bmp](#)

