

Convergence Analysis of Weighted SPSA-based Consensus Algorithm in Distributed Parameter Estimation Problem

*Original*

Convergence Analysis of Weighted SPSA-based Consensus Algorithm in Distributed Parameter Estimation Problem / Sergeenko, Anna; Erofeeva, Victoria; Granichin, Oleg; Granichina, Olga; Proskurnikov, Anton. - ELETTRONICO. - 54:(2021), pp. 126-131. (Intervento presentato al convegno 19th IFAC Symposium on System Identification SYSID 2021 tenutosi a Virtuale (formalmente Padova, Italia) nel 13-16 July 2021) [10.1016/j.ifacol.2021.08.346].

*Availability:*

This version is available at: 11583/2924392 since: 2021-09-16T17:36:58Z

*Publisher:*

Elsevier

*Published*

DOI:10.1016/j.ifacol.2021.08.346

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# Convergence Analysis of Weighted SPSA-based Consensus Algorithm in Distributed Parameter Estimation Problem

Anna Sergeenko<sup>\*,\*\*</sup>, Victoria Erofeeva<sup>\*\*\*</sup>, Oleg Granichin<sup>\*,\*\*</sup>,  
Olga Granichina<sup>\*\*\*\*</sup>, and Anton Proskurnikov<sup>\*\*,†</sup>

<sup>\*</sup> Saint Petersburg State University (Faculty of Mathematics and  
Mechanics, Research Laboratory for Analysis and Modeling of Social  
Processes), St. Petersburg, Russia

<sup>\*\*</sup> Institute for Problems in Mechanical Engineering of the Russian  
Academy of Sciences, St. Petersburg, Russia

<sup>\*\*\*</sup> Skolkovo Institute of Science and Technology, Moscow, Russia

<sup>\*\*\*\*</sup> Herzen State Pedagogical University of Russia, St. Petersburg,  
Russia

<sup>†</sup> Politecnico di Torino, Turin, Italy

**Abstract:** In this paper, we study a distributed parameter estimation problem in a large-scale network of communication sensors. The goal of the sensors is to find a global estimate of an unknown parameter minimizing, which minimizes some aggregate cost function. Each sensor can communicate to a few “neighbors”, furthermore, the communication channels have limited capacities. To solve the resulting optimization problem, we use a *weighted* modification of the distributed consensus-based SPSA algorithm whose main advantage over the alternative method is its ability to work in presence of arbitrary *unknown-but-bounded* noises whose statistical characteristics can be unknown. We provide a convergence analysis of the weighted SPSA-based consensus algorithm and show its efficiency via numerical simulations.

Copyright © 2021 The Authors. This is an open access article under the CC BY-NC-ND license (<http://creativecommons.org/licenses/by-nc-nd/4.0>)

**Keywords:** Sensor network, randomized algorithms, consensus, distributed parameter estimation

## 1. INTRODUCTION

Multi-agent systems and technologies have found numerous applications in engineering, from mobile robotics to distributed computing (Bullo et al., 2009; D.Bertsekas and Tsitsiklis, 1989; Olfati-Saber et al., 2007; Ren and Cao, 2011; Shoham and Leyton-Brown, 2008). Coordination of simple and inter-replaceable agents enables them to solve complex problems more efficiently than centralized systems, enhancing also their reliability and resilience. Being a special class of multi-agent systems, *sensor networks* constituted by low-power miniature wireless sensor devices “promise to revolutionize sensing in a wide range of application domains” (Tubaishat and Madria, 2003) due to their reliability, ease of deployment and cost-efficiency.

Obviously, data fusion from numerous sensors leads to more accurate estimates of the unknown parameters than small sensor groups can provide. However, as a sensor network becomes large, data acquisition and processing at a single center become virtually impossible, and distributed algorithms are needed that require only local interactions among sensors. A number of problems arises in design of

such networks (Tubaishat and Madria, 2003) caused by time-varying topology of the network, limited capabilities of individual sensors (low power, small memory and minor computational capacity) and communication constraints (a large amount of data can lead to traffic congestion).

To provide accurate data fusion in the face of uncertainties (e.g. measurement noises and other kinds of unknown signals), distributed stochastic optimization is commonly used: the desired estimate of an unknown parameter should deliver an optimum to a certain mean-risk functional. In distributed optimization, most studied are methods for convex optimization, e.g. the alternating direction method of multipliers (ADMM) (Boyd et al., 2011) and subgradient methods (Nedić and Olshevsky, 2016; Rabbat and Nowak, 2004). For non-convex optimization, methods of surrogate functions have been used (Di Lorenzo and Scutari, 2016). There are also algorithms that embed a dynamic average consensus protocol into optimization process (Falsone et al., 2020; Xie and Guo, 2018). Most of methods, however, assume that some statistical characteristics of the uncertain parameters are known, for instance, the noises are Gaussian or have zero expectation. In this paper, we are concerned with situation where the random signals are completely unknown yet supposed to be bounded (Granichin and Amelina, 2015), which makes many statistical methods inapplicable.

<sup>\*</sup> This work was supported IPME RAS by Russian Science Foundation (project no. 21-19-00516).  
E-mails: [anna.sergeenko98@gmail.com](mailto:anna.sergeenko98@gmail.com), [victoria@grenka.net](mailto:victoria@grenka.net),  
[o.granichin@spbu.ru](mailto:o.granichin@spbu.ru), [olga.granichina@mail.ru](mailto:olga.granichina@mail.ru),  
[anton.p.1982@ieee.org](mailto:anton.p.1982@ieee.org)

In this paper, we pursue another line of research concerned with the simultaneous perturbation stochastic approximation (SPSA) proposed by Spall (1992). The important feature of SPSA is the underlying gradient approximation that requires only two loss function measurements and does not depend on the number of parameters being optimized. Granichin and Amelina (2015) showed that SPSA converges even in the presence of an arbitrary unknown-but-bounded noise (whereas usually the estimation algorithms are suitable only for noises with zero mean). In Spall (2012), a modification of stochastic approximation procedure based on a cyclic approach is considered. The essence of the approach is that the parameter vector is divided into several subvectors, which then is sequentially updated while holding the remaining parameters at their most recent values. The cyclic approach naturally generalizes to distributed optimization.

The paper extends the results of our previous works. In (Amelina et al., 2020; Granichin et al., 2021), we propose and analyze a consensus-based distributed SPSA algorithm for multi-target tracking in a heterogeneous sensor network. An important feature of this algorithm is a randomized gossip-based communication protocol needed to satisfy the communication constraints assuming that each agent can communicate only with a small group of its neighbors. In Sergeenko et al. (2020), stronger communication constraints are introduced, and parameter optimization is provided. In the papers mentioned above, we consider the variance of the tracking error as a performance index of our algorithm. In Erofeeva et al. (2021), we propose a weighted version of the SPSA-based consensus algorithm accounting for the heterogeneity of targets and estimate a more important characteristic: the covariance matrix of residuals. In this paper, we provide the convergence analysis of the weighted SPSA-based consensus algorithm in stationary case. We also determine a suitable step-size of the algorithm based on this analysis.

The rest of this paper is organized as follows. Section 2 provides notations used in the paper. The formal problem is stated in Section 3. The weighted SPSA-based consensus algorithm for distributed parameter estimation is introduced in Section 4. The convergence analysis of the algorithm is provided in Section 5. In Section 6, we consider the numerical simulation results that shows how estimates evolve over time. Section 7 concludes the paper.

## 2. PRELIMINARIES

Let  $(\Omega, \mathcal{F}, P)$  be the underlying probability space corresponding to sample space  $\Omega$ , set of all events  $\mathcal{F}$ , and probability measure  $P$ .  $\mathbb{E}$  denotes mathematical expectation.

### 2.1 Graph Theory

Given a network consisting of  $n$  nodes. Let the interaction between nodes be described by the directed graph  $\mathcal{G}_A = (\mathcal{N}, \mathcal{E})$ , where  $\mathcal{N} = \{1, \dots, n\}$  is a set of vertices and  $\mathcal{E} \subseteq \mathcal{N} \times \mathcal{N}$  is a set of edges. Denote by  $i \in \mathcal{N}$  an identifier of  $i$ -th node and  $(j, i) \in \mathcal{E}$  if there is a directed edge from node  $j$  to node  $i$ . The latter means that node  $j$  is able to transmit data to node  $i$ . For a node  $i \in \mathcal{N}$ , the set of *neighbors* is defined as  $\mathcal{N}^i = \{j \in \mathcal{N} : (j, i) \in \mathcal{E}\}$ . The

*in-degree* of  $i \in \mathcal{N}$  equals  $|\mathcal{N}^i|$ . Here and after,  $|\cdot|$  is the cardinality of a set, and the identifier of  $i$ -th node is used as a superscript and not as an exponent.

Let  $a^{i,j} > 0$  be the weight associated with the edge  $(j, i) \in \mathcal{E}$  and  $a^{i,j} = 0$  whenever  $(j, i) \notin \mathcal{E}$ . Let  $A = [a^{i,j}]$  be the *weighted adjacency matrix*, or simply *connectivity matrix*, associated with graph  $\mathcal{G}_A$ . The *weighted in-degree* of  $i \in \mathcal{N}$  is defined as  $\deg_i^+(A) = \sum_{j=1}^n a^{i,j}$ , the maximum in-degree among all nodes contained in graph  $\mathcal{G}_A$  as  $\deg_{\max}^+(A)$ , and the diagonal matrix as  $\mathcal{D}(A) = \text{diag}_n(\text{col}\{\deg_1^+(A), \dots, \deg_n^+(A)\})$ , where  $\text{col}\{\cdot\}$  is the column vector obtained by stacking its entries on top of one another,  $\text{diag}_n(\mathbf{b})$  is a square diagonal matrix with elements of a vector  $\mathbf{b}$  on the diagonal and other elements equal to zero. Then,  $\mathcal{L}(A) = \mathcal{D}(A) - A$  is the *Laplacian* of graph  $\mathcal{G}_A$ .

*Definition 1.* A directed graph  $\mathcal{G}_A$  is said to be strongly connected if for every pair of nodes  $j, i \in \mathcal{N}$ , there exists a path of directed edges that goes from  $j$  to  $i$ .

Denote the eigenvalues of Laplacian  $\mathcal{L}(A)$  by  $\lambda_1(A), \dots, \lambda_n(A)$  and arrange them in ascending order of real parts:  $0 \leq \text{Re}(\lambda_1(A)) \leq \text{Re}(\lambda_2(A)) \leq \dots \leq \text{Re}(\lambda_n(A))$ . It is known, that if the graph is strongly connected then  $\lambda_1(A) = 0$  and all other eigenvalues of  $\mathcal{L}$  are in the open right half of the complex plane (see, e.g., Lewis et al. (2013)). The eigenvalue of matrix  $A$  with maximum absolute magnitude is defined as  $\lambda_{\max}(A)$ .

### 2.2 Notations

Let  $[\cdot]^T$  be vector or matrix transpose operation,  $[\cdot]^{-1}$  be matrix inversion.  $\|A\|$  is the Frobenius norm:  $\|A\| = \sqrt{\sum_i \sum_j (a^{i,j})^2}$ .  $\mathbf{1}_d = [1, \dots, 1]^T \in \mathbb{R}^d$  is the vector of all ones.  $\mathbf{e}_i = [\dots, 0, 1, 0, \dots]^T \in \mathbb{R}^d$  is the canonical basis vector from  $\mathbb{R}^d$ , where  $i$ -th entry is equal to 1.  $I_d \in \mathbb{R}^{d \times d}$  is the identity matrix.  $A \otimes B$  is the Kronecker product defined for any matrices  $A$  and  $B$ . The following notation  $A \leq B$  means that matrices are ordered in the sense of quadratic forms: for every nonzero  $x \in \mathbb{R}^n$ :  $x^T A x \leq x^T B x$ .

## 3. PARAMETER ESTIMATION PROBLEM

We consider a network of  $n$  spatially-distributed sensors in a field, namely, agents, capable of measuring parameters (e.g., distance, heading, etc), performing local computations, and exchange information with neighboring nodes. In this field, there are  $m$  targets. Each sensor  $i \in \mathcal{N} = \{1, \dots, n\}$  has its own hypothesis regarding the state of the targets (i.e., their positions) or more simply an estimate of the states. The goal of the network is to accurately estimate the unknown parameters of the targets. The sensors must also act together as a team to achieve this goal.

Let  $\mathbf{s}^i = [s^{i,1}, \dots, s^{i,d}]^T \in \mathbb{R}^d$  be the state of sensor  $i$ ,  $\mathbf{r}^l = [r^{l,1}, \dots, r^{l,d}]^T \in \mathbb{R}^d$  be the state of target  $l \in \mathcal{M} = \{1, \dots, m\}$ , and  $\theta = \text{col}\{\mathbf{r}^1, \dots, \mathbf{r}^m\}$  be the vector consisting of all states to be estimated. Suppose that each sensor measures a scalar quantity, which is the distance between its own position and position of a target:

$$\rho(\mathbf{s}^i, \mathbf{r}^l) = \|\mathbf{r}^l - \mathbf{s}^i\|^2, \quad \forall i \in \mathcal{N}, l \in \mathcal{M}. \quad (1)$$

Note that the proposed approach can be used for other types of measuring parameters (e.g., bearing/azimuth).

In general, the problem is to find an estimation  $\hat{\theta}_t$  of an unknown parameter  $\theta$ :

$$\hat{\theta}_t^* = \arg \min_{\hat{\theta}_t} \|\hat{\theta}_t - \theta\|^2. \quad (2)$$

In this paper, we consider a more difficult problem setting. First, the solution of the optimization problem (2) needs to be found in a distributed way. Second, we impose the following *communication constraints*: at time instant  $t$ , each sensor  $i \in \mathcal{N}$  is able to measure the squared distance to not more than one target. In practice, due to hardware constraints, the number of communication channels that can be used is usually less than the dimension of space or equal to it. Without loss of generality, in this paper, we assume that each sensor is able to collect data only from  $d$  neighbors. In this case and if there is no noise, we can use standard triangular approaches to determine the target position. However, if positions of all  $m$  targets need to be computed, then we have to simultaneously collect  $m(d-1)$  measurements, and it is often impossible in practice. Third, we assume that there is the *unknown-but-bounded* noise involved in the measuring process, which is considered in the next subsection.

Suppose sensor  $i$  estimates the state of target  $l$  at time instant  $t$ . The sensor is able to collect the distances to the same target measured by its neighbors  $j \in \bar{\mathcal{N}}_t^i \subset \mathcal{N}^i$ ,  $|\bar{\mathcal{N}}_t^i| = d$ . Let  $\mathbf{u}_t^i = [j_1, \dots, j_d, l]^T$ ,  $j_1, \dots, j_d \in \bar{\mathcal{N}}_t^i$ , be a vector defining a set of neighbors used to collect measurements associated with target  $l$  at time instant  $t$ . Denote by

$$\bar{\rho}_t^j(\mathbf{u}^i) = \rho(\mathbf{s}^i, \mathbf{r}^h(\mathbf{u}^i)) - \rho(\mathbf{s}^j, \mathbf{r}^h(\mathbf{u}^i)) \quad \forall j \in \bar{\mathcal{N}}_t^i, \quad (3)$$

a residual between a measurement of sensor  $i$  and its neighbors. Here and after,  $h(\mathbf{u}_t^i) : \mathbb{R}^{d+1} \rightarrow \mathbb{R}$  gives the last element of  $\mathbf{u}_t^i$ .

In this case, using the square difference formula we get  $d$  equations

$$\bar{\rho}_t^j(\mathbf{u}_t^i) = (\mathbf{s}^j - \mathbf{s}^i)^T (2\mathbf{r}^h(\mathbf{u}_t^i) - \mathbf{s}^j - \mathbf{s}^i), j \in \bar{\mathcal{N}}_t^i.$$

This allows us to derive

$$C^{\mathbf{u}_t^i} \mathbf{r}_t^{h(\mathbf{u}_t^i)} = D^{\mathbf{u}_t^i}, \quad \mathbf{r}_t^{h(\mathbf{u}_t^i)} = [C^{\mathbf{u}_t^i}]^{-1} D^{\mathbf{u}_t^i}, \quad (4)$$

where

$$C^{\mathbf{u}_t^i} = 2 \begin{bmatrix} (\mathbf{s}^{j_1} - \mathbf{s}^i)^T \\ \dots \\ (\mathbf{s}^{j_d} - \mathbf{s}^i)^T \end{bmatrix}, D^{\mathbf{u}_t^i} = \begin{bmatrix} \bar{\rho}_t^1(\mathbf{u}_t^i) + \|\mathbf{s}^{j_1}\|^2 - \|\mathbf{s}^i\|^2 \\ \dots \\ \bar{\rho}_t^d(\mathbf{u}_t^i) + \|\mathbf{s}^{j_d}\|^2 - \|\mathbf{s}^i\|^2 \end{bmatrix}.$$

Using the introduced notations, we define the measurements of sensor  $i \in \mathcal{N}$  at time instant  $t$  as follows:

$$y_t^i = F_t^i(\mathbf{u}_t^i, \mathbf{x}_t^i) + v_t^i = \|\hat{\mathbf{r}}_t^{h(\mathbf{u}_t^i)} - [C^{\mathbf{u}_t^i}]^{-1} D^{\mathbf{u}_t^i}\|^2 + v_t^i, \quad (5)$$

where  $v_t^i$  is the unknown-but-bounded additive noise,  $\mathbf{x}_t^i$  is the measurement point depending on currently available estimate  $\hat{\mathbf{r}}_t^{h(\mathbf{u}_t^i)}$  at time instant  $t$ . For example,  $\mathbf{x}_t^i = \hat{\mathbf{r}}_t^{h(\mathbf{u}_t^i)}$ .

### 3.1 Distributed Optimization

Denote by  $\mathcal{F}_{t-1}$  the  $\sigma$ -algebra of all probabilistic events, which happened up to time instant  $t$ .  $\mathbb{E}_{\mathcal{F}_{t-1}}$  denotes the conditional expectation with respect to the  $\sigma$ -algebra  $\mathcal{F}_{t-1}$ . This  $\sigma$ -algebra is generated by the values of

all random variables (i.e., position of targets, noise, changes in communication topology) at time instants  $\tau = \{1, 2, \dots, t\}$ .

Let  $\mathbf{u}_t = [\mathbf{u}_t^1, \dots, \mathbf{u}_t^n]^T$  be the common vector defining the sets of neighbors used to collect measurements from each sensor. The multi-sensor multi-target problem can be formulated as the following minimization problem: to find estimate  $\hat{\theta}_t = \text{col}\{\hat{\mathbf{r}}_t^{h(\mathbf{u}_t^1)}, \dots, \hat{\mathbf{r}}_t^{h(\mathbf{u}_t^m)}\}$  that minimizes the following loss function

$$\hat{\theta}_t^* = \arg \min_{\hat{\theta}_t} \bar{F}_t(\mathbf{u}_t, \hat{\theta}_t),$$

$$\bar{F}_t(\mathbf{u}_t, \hat{\theta}_t) = \mathbb{E}_{\mathcal{F}_{t-1}} \sum_{i \in \mathcal{N}} F_t^i(\mathbf{u}_t^i, \hat{\mathbf{r}}_t^{h(\mathbf{u}_t^i)}). \quad (6)$$

Usually, during optimization, each sensor fuses the needed information from all available neighboring nodes. In our problem setting, we mentioned the communication constraints that prohibit such communication strategy of the sensors. These communication constraints arise due to hardware and physical limitations since the bandwidths of communication channels is not unlimited. When a large number of sensors send and receive messages at the same time, communication becomes a bottleneck. To deal with this, we propose to choose communication links between sensors randomly. More formally, for each sensor  $i \in \mathcal{N}$ , we randomize the communication topology described by graph  $\mathcal{G}_A$  at each time instant  $t$  to satisfy topology constraints such as the maximum number of links equals to  $d$ . We use a randomly chosen subgraph  $\mathcal{G}_{B_t} \subset \mathcal{G}_A$  associated with adjacency matrix  $B_t = [b_t^{i,j}]$ , where the rows contain no more than  $d$  nonzero entries. Afterwards, the observable target at time instant  $t$  contained in  $\mathbf{u}_t^i$  is generated from a uniform distribution independently for each sensor  $i \in \mathcal{N}$  as in gossip algorithm (Boyd et al., 2011). We randomize the communication topology described by graph  $\mathcal{G}_A$  based on the strategy similar to one presented in Amelina et al. (2014).

## 4. WEIGHTED SPSA-BASED CONSENSUS ALGORITHM

Let  $\mathbf{u}_k^i$  and  $\Delta_k^i \in \mathbb{R}^d$ ,  $k = 1, 2, \dots$ ,  $i \in \mathcal{N}$ , be independent random variables. We generate  $\Delta_k^i$  called the *simultaneous test perturbation* from Bernoulli distribution with each component independently taking values  $\pm \frac{1}{\sqrt{d}}$  with probabilities  $\frac{1}{2}$ . Let  $\mathbf{e}_{h(\mathbf{u}_k^i)} \in \mathbb{R}^m$  be the sparse vector corresponding to the current target that sensor  $i$  observes, then  $\hat{\Delta}_k^i = \mathbf{e}_{h(\mathbf{u}_k^i)} \otimes \Delta_k^i$ . In this case,  $\hat{\Delta}_k^i$  is the vector of all zeros except for the rows that corresponds to  $h(\mathbf{u}_k^i)$ .

Let  $\mathcal{U}^{i,l}$  be a set containing all possible subsets  $\bar{\mathcal{N}}_t^i$  for target  $l$ . The neighborhood of sensor  $i$  at time instant  $t$  is defined by the  $i$ -th row of matrix  $B_t$  associated with graph  $\mathcal{G}_{B_t}$ . This row is defined by subset  $\bar{\mathcal{N}}_t^i$  generated from the uniform distribution on the set  $\mathcal{U}^{i,l}$ .

Next, we introduce a weighted version of SPSA-based consensus algorithm. We define diagonal matrix  $\Psi = [\psi_{ij}]$ , where  $\psi_{ij} > 0$  if  $i = j$  and  $\psi_{ij} = 0$  otherwise. At initialization step, for each  $i \in \mathcal{N}$ , we choose initial vector  $\hat{\theta}_0^i \in \mathbb{R}^{md}$ , positive step-size  $\alpha_k$ , matrix  $\Psi$ , gain coefficient  $\gamma$ , and the scale of perturbation  $\beta > 0$ .

In order to get estimates  $\{\widehat{\theta}_t^i\}$  of overall state vectors  $\{\theta_t^i\}$  based on measurement points  $\{\mathbf{x}_t^i\}$ , we propose to use the weighted algorithm with two measurements of distributed sub-functions  $F_t^i(\mathbf{u}_t^i, \mathbf{x}_t^i)$ :

$$\begin{cases} \mathbf{x}_{2k}^i = \widehat{\theta}_{2k-2}^i + \beta \widehat{\Delta}_k^i, & \mathbf{x}_{2k-1}^i = \widehat{\theta}_{2k-2}^i - \beta \widehat{\Delta}_k^i, \\ \widehat{\theta}_{2k-1}^i = \widehat{\theta}_{2k-2}^i, \\ \widehat{\theta}_{2k}^i = \widehat{\theta}_{2k-1}^i - \alpha_k \Psi \left[ \widehat{\Delta}_k^i \frac{y_{2k}^i - y_{2k-1}^i}{2\beta} + \right. \\ \left. \gamma \sum_{j \in \mathcal{N}_{2k-1}^i} b_{2k-1}^{i,j} (\widehat{\theta}_{2k-1}^i - \widehat{\theta}_{2k-1}^j) \right]. \end{cases} \quad (7)$$

Consider the last equation of the algorithm (7): the first part is similar to SPSSA-like algorithm from Granichin and Amelina (2015) and the second one coincides with Local Voting Protocol (LVP) from Amelina et al. (2015), where it was studied for stochastic networks in the context of load balancing problem. The SPSSA part represents a stochastic gradient descent of sub-functions  $F_t^i(\mathbf{u}_t^i, \mathbf{x}_t^i)$ , and LVP part is determined for each agent  $i$  by the weighted sum of differences between the information about the current estimate  $\widehat{\theta}_{2k-1}^i$  of agent  $i$  and available information about the estimates of its neighbors.

Further, we use notation  $\bar{\theta}_t = \text{col}\{\bar{\theta}_t^1, \dots, \bar{\theta}_t^n\}$  for the common vector of estimates of all agents at time instant  $t$ . Also, we introduce the following:  $\bar{\mathbf{y}}_t = \text{col}\{y_t^1, \dots, y_t^n\}$ ,  $\bar{\Delta}_{t \div 2} = \text{diag}_{nmd}(\text{col}\{\bar{\Delta}_{t \div 2}^1, \dots, \bar{\Delta}_{t \div 2}^n\})$ . Using these notations, the algorithm (7) can be rewritten in the following form

$$\begin{aligned} \bar{\theta}_{2k} = \bar{\theta}_{2k-1} - \alpha_k \bar{\Psi} \left[ \bar{\Delta}_k \left( \frac{\bar{\mathbf{y}}_{2k} - \bar{\mathbf{y}}_{2k-1}}{2\beta} \otimes \mathbf{1}_{md} \right) + \right. \\ \left. \gamma (\mathcal{L}(B_{2k-1}) \otimes I_{md}) \bar{\theta}_{2k-1} \right]. \end{aligned} \quad (8)$$

The algorithm (7) runs in parallel at each sensor to estimate  $\widehat{\theta}_t$ . In the next section, we show that all these  $n$  sequences converge to the neighborhood of true vector  $\theta_t$ .

## 5. MAIN RESULT

In this section, we provide a convergence analysis of the proposed algorithm. First, let us formulate assumptions about the dynamics of the targets, noise, and network topology.

*Assumption 1:*  $\forall i \in \mathcal{N}$ ,  $k = 1, 2, \dots$ , matrices  $C_{2k}^{\mathbf{u}_k^i}$ ,  $C_{2k-1}^{\mathbf{u}_k^i}$  are invertible.

*Assumption 2:* For  $k = 1, 2, \dots$ , the successive differences  $\tilde{v}_k^i = v_{2k}^i - v_{2k-1}^i$  of measurement noise are bounded:  $|\tilde{v}_k^i| \leq c_v < \infty$ , or  $\mathbb{E}(\tilde{v}_k^i)^2 \leq c_v^2$  if sequence  $\{\tilde{v}_k^i\}$  is random.

*Assumption 3:* For all  $k = 1, 2, \dots$ ,  $i \in \mathcal{N}$ ,  $l \in \mathcal{M}$ :

- vectors  $\mathbf{u}_k^i$ ,  $\Delta_k^i$ , are mutually independent;
- if  $\mathbf{u}_k^i$ ,  $\Delta_k^i$  are random, they do not depend on the  $\sigma$ -algebra  $\mathcal{F}_{2k-2}$ ;
- if  $\tilde{v}_k^i$  are random, then random vectors  $\mathbf{u}_k^i$ ,  $\Delta_k^i$ , and elements  $\tilde{v}_k^i$  are independent;
- $\mathbb{E}\|\Delta_k^i\|^2 \leq \sigma_\Delta^2$ ,  $\mathbb{E}[\Delta_k^i(\Delta_k^i)^T] \leq \sigma_\Delta^2 I_{md}$ .

*Assumption 4:* a) For all  $i \in \mathcal{N}$ ,  $j \in \mathcal{N}_t^i$  weights  $b_t^{i,j}$  are independent random variables with mean  $\mathbb{E}b_t^{i,j} = b_{av}^{i,j}$ , and  $\mathbb{E}[(\mathcal{L}(B_t) - \mathcal{L}(B_{av}))(\mathcal{L}(B_t) - \mathcal{L}(B_{av}))^T] \leq Q_B$ ,  $B_{av} = [b_{av}^{i,j}]$ .

Denote  $b_{\max}$  as the maximum element of  $Q_B$ ;

b) Graph  $\mathcal{G}_{B_{av}}$  is strongly connected.

Our analysis of the proposed algorithm applied to the problem presented in subsection 3.1 relies on the following definition.

*Definition 2.* A covariance matrix of residual has an asymptotically efficient upper bound  $S > 0$  if  $\exists \bar{k}$  such that  $\forall k > \bar{k}$

$$\mathbb{E}[(\bar{\theta}_{2k} - \mathbf{1}_n \otimes \theta)(\bar{\theta}_{2k} - \mathbf{1}_n \otimes \theta)^T] \leq \frac{1}{k} S + o\left(\frac{1}{k}\right).$$

The following theorem shows the asymptotically efficient upper bound of the covariance matrix of residual provided by the algorithm (7).

*Theorem 1:* If Assumptions 1–4 hold,  $\alpha_k = \frac{1}{k}$  and  $-(\gamma \bar{\lambda}_2 + \frac{2}{m})\bar{\Psi} + \frac{1}{2}I_{nmd}$  is stable (Gantmacher and Brenner (2005)), then the covariance matrix of residual provided by the algorithm (7) has asymptotically efficient upper bound  $S$ , which is the solution of the following equation

$$\begin{aligned} S \left( (\gamma \bar{\lambda}_2 + \frac{2}{m})\bar{\Psi}^T - \frac{1}{2}I_{nmd} \right) + \\ \left( (\gamma \bar{\lambda}_2 + \frac{2}{m})\bar{\Psi} - \frac{1}{2}I_{nmd} \right) S = 4nc_v^2 \bar{\Psi} \bar{\Psi}^T. \end{aligned} \quad (9)$$

## 6. SIMULATION

In this section, we present a numerical experiment, which illustrates the performance of the suggested algorithm (7).

Given a distributed network of 5 sensors monitoring an area of interest. Let  $\mathcal{N} = \{1, 2, 3, 4, 5\}$  be the set of sensors. Each sensor has no more than two active communication channels at each time instant, i.e.,  $|\mathcal{N}_t^i| = 2$ . The communication channels are used to collect data from the neighbors. Within the area of interest, there are 10 targets. The sensors have to estimate their states. At time instant  $t$ ,  $\mathbf{s}^i = [s^{i,1}, s^{i,2}]^T \in \mathbb{R}^2$  is the current state of sensor  $i \in \mathcal{N}$ ,  $\mathbf{r}^l = [r^{l,1}, r^{l,2}]^T \in \mathbb{R}^2$  is the state of target  $l \in \mathcal{M} = \{1, 2, \dots, 10\}$ ,  $\theta = \text{col}\{\mathbf{r}^1, \dots, \mathbf{r}^{10}\}$  is the common state of all targets.

In this simulation, we consider hybrid noise which is uniformly distributed around constants that change with time, e.g.  $v_k^i = \pm 1 + 0.1 * \sin(k)$ , where the sign in front of 1 switches each 50-th iteration.

According to Theorem 1, the step-size parameter  $\alpha$  has to be equal to  $\frac{1}{k}$ . However, the algorithm (7) working on each node with the parameter  $\alpha_k = \frac{1}{k^{1-\rho}}$ ,  $\forall \rho > 0$  has more consistent convergence. In this simulation, the following parameter were chosen:  $\alpha_k = \frac{1}{k^{3/5}}$ ,  $\beta = 0.1$ ,  $\gamma = 1.0$  were chosen to satisfy the conditions of Theorem 1. The targets are located in the interval  $[0; 100]$ . The targets and sensors coordinates are random values uniformly distributed in intervals  $[0; 100]$  and  $[100; 120]$  respectively.

Let us consider for every target  $l$  and sensor  $i$  at each time instant  $t$  the covariance matrix of residuals  $\tilde{\Sigma}_t^{i,l} \in \mathbb{R}^{d \times d}$ , which is represented as a part of the common covariance matrix. Fig. 1 shows how the average first diagonal element of the covariance matrix of residuals  $\tilde{\Sigma}_t^{i,l}$  depending on different matrices  $\Psi$  evolves over time. It is well seen that

the new algorithm converges. The algorithm for choosing optimal  $\Psi$  will be studied in future works.

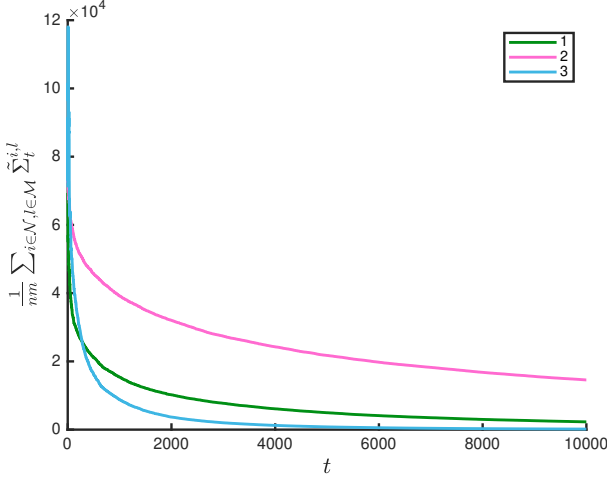


Fig. 1. The average value over all sensors and targets of the first entry of covariance matrix of residuals  $\bar{\Sigma}_t^{i,l}$ , where (1):  $\Psi_1 = I_{md}$ , (2):  $\Psi_1 = 0.5I_{md}$ , (3):  $\Psi_3 = 2I_{md}$

## 7. CONCLUSION

In this paper, we study the weighted SPSA-based consensus algorithm. We provide the convergence analysis of this algorithm in stationary case. We also determine a suitable step-size of the algorithm based on this analysis. The method is validated through simulation, where the parameters were chosen based on the convergence analysis.

## APPENDIX

*The proof of Theorem 1:*

Denote  $\mathbf{d}_t^i = \hat{\theta}_{\lceil \frac{t-1}{2} \rceil}^i - \theta$ ,  $\bar{\mathbf{d}}_t = \text{col}\{\mathbf{d}_t^1, \dots, \mathbf{d}_t^n\}$ , where  $\lceil \cdot \rceil$  is a ceiling function,  $\nu_k = \bar{\mathbf{d}}_{2k}$ ,  $D_k = \nu_k \nu_k^T$ ,  $\Sigma_k = \mathbb{E}[D_k]$ ,  $\bar{\mathbf{s}}_k = \frac{\alpha_k}{2\beta} \bar{\Delta}_k ((\bar{\mathbf{y}}_{2k} - \bar{\mathbf{y}}_{2k-1}) \otimes \mathbf{1}_{md})$ ,  $\bar{\mathbf{v}}_t = \text{col}\{\tilde{v}_t^1, \dots, \tilde{v}_t^n\}$ ,  $\bar{\mathbf{u}}_k = \text{col}\{\mathbf{u}_k^1, \dots, \mathbf{u}_k^n\}$ ,  $\bar{\Psi} = I_n \otimes \Psi$ .

Let  $\bar{\mathcal{F}}_{k-1} = \sigma\{\mathcal{F}_{k-1}, \bar{\mathbf{v}}_{2k-1}, \bar{\mathbf{v}}_{2k}, \bar{\mathbf{u}}_k, \bar{\Delta}_k\}$  be the  $\sigma$ -algebra of probabilistic events generated by  $\mathcal{F}_{k-1}$ ,  $\bar{\mathbf{v}}_{2k-1}$ ,  $\bar{\mathbf{v}}_{2k}$ ,  $\bar{\Delta}_k$ ,  $\hat{\mathcal{F}}_{k-1} = \sigma\{\mathcal{F}_{k-1}, \bar{\mathbf{v}}_{2k-1}, \bar{\mathbf{v}}_{2k}, \bar{\mathbf{u}}_k\}$ , and  $\tilde{\mathcal{F}}_{k-1} = \sigma\{\mathcal{F}_{k-1}, \bar{\mathbf{v}}_{2k-1}, \bar{\mathbf{v}}_{2k}\}$ :  $\mathcal{F}_{k-1} \subset \tilde{\mathcal{F}}_{k-1} \subset \hat{\mathcal{F}}_{k-1} \subset \bar{\mathcal{F}}_{k-1} \subset \mathcal{F}_k$ .

Using that  $\bar{\theta}_{2k-1} = \bar{\theta}_{2k-2}$  and  $\mathcal{L}(B_{2k-2})\mathbf{1}_n = 0$ , we get

$$\begin{aligned} \nu_k &= \bar{\theta}_{2k} - \mathbf{1}_n \otimes \theta = \\ &= \bar{\mathbf{g}}_k - \bar{\Psi}\bar{\mathbf{s}}_k - \alpha_k \gamma \bar{\Psi}[(\mathcal{L}(B_{2k-2}) - \mathcal{L}(B_{av})) \otimes I_{md}] \nu_{k-1}, \end{aligned}$$

where  $\bar{\mathbf{g}}_k = [I_{nmd} - \alpha_k \gamma \bar{\Psi}(\mathcal{L}(B_{av}) \otimes I_{md})] \nu_{k-1}$ . Then,

$$\begin{aligned} D_k &= \bar{\mathbf{g}}_k \bar{\mathbf{g}}_k^T - \bar{\mathbf{g}}_k \bar{\mathbf{s}}_k^T \bar{\Psi}^T - \bar{\Psi} \bar{\mathbf{s}}_k \bar{\mathbf{g}}_k^T + \bar{\Psi} \bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T \bar{\Psi}^T - \\ &\alpha_k \gamma (\bar{\mathbf{g}}_k - \bar{\Psi} \bar{\mathbf{s}}_k) \nu_{k-1}^T [(\mathcal{L}(B_{2k-2}) - \mathcal{L}(B_{av})) \otimes I_{md}]^T \bar{\Psi}^T - \\ &\alpha_k \gamma \bar{\Psi} [(\mathcal{L}(B_{2k-2}) - \mathcal{L}(B_{av})) \otimes I_{md}] \nu_{k-1} (\bar{\mathbf{g}}_k^T - \bar{\mathbf{s}}_k^T \bar{\Psi}^T) + \\ &\alpha_k^2 \gamma^2 \bar{\Psi} [(\mathcal{L}(B_{2k-2}) - \mathcal{L}(B_{av})) \otimes I_{md}] D_{k-1} [(\mathcal{L}(B_{2k-2}) - \\ &\mathcal{L}(B_{av})) \otimes I_{md}]^T \bar{\Psi}^T. \end{aligned}$$

1. Consider  $\sigma$ -algebra  $\bar{\mathcal{F}}_{k-1}$ .

Now, we take the conditional expectation over  $\sigma$ -algebra  $\bar{\mathcal{F}}_{k-1}$  and apply Assumption 4:

$$\begin{aligned} \mathbb{E}_{\bar{\mathcal{F}}_{k-1}}[D_k] &\leq \bar{\mathbf{g}}_k \bar{\mathbf{g}}_k^T - \bar{\mathbf{g}}_k \bar{\mathbf{s}}_k^T \bar{\Psi}^T - \bar{\Psi} \bar{\mathbf{s}}_k \bar{\mathbf{g}}_k^T + \bar{\Psi} \bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T \bar{\Psi}^T + \\ &\alpha_k^2 \gamma^2 b_{\max} \|D_{k-1}\|^2 \bar{\Psi} \bar{\Psi}^T, \end{aligned} \quad (10)$$

where  $b_{\max}$  is the maximum element of  $Q_B$ .

2. Consider  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$ .

After we take the conditional expectation over  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$  step by step:

$$\begin{aligned} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[D_k] &\leq \bar{\mathbf{g}}_k \bar{\mathbf{g}}_k^T - \bar{\mathbf{g}}_k \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k^T] \bar{\Psi}^T - \bar{\Psi} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k] \bar{\mathbf{g}}_k^T + \\ &\bar{\Psi} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T] \bar{\Psi}^T + \alpha_k^2 \gamma^2 b_{\max} \|D_{k-1}\|^2 \bar{\Psi} \bar{\Psi}^T. \end{aligned} \quad (11)$$

Under fulfilment of Assumption 4b, we have  $\bar{\lambda}_2 > 0$  (see Olfati-Saber and Murray (2004)). Hence, for the first term in (11) we derive

$$\begin{aligned} \bar{\mathbf{g}}_k \bar{\mathbf{g}}_k^T &\leq D_{k-1} - \alpha_k \gamma \bar{\lambda}_2 (\bar{\Psi} D_{k-1} + D_{k-1} \bar{\Psi}^T) + \\ &\alpha_k^2 \gamma^2 \bar{\lambda}_{\max}^2 \|D_{k-1}\|^2 \bar{\Psi} \bar{\Psi}^T. \end{aligned}$$

By virtue of Assumptions 1, 3 we can evaluate the second and the third term in (11) as following. Denote  $\mathbf{r}^{h(\mathbf{u}_k^i)} = \mathbf{e}_{h(\mathbf{u}_k^i)} \otimes [C^{\mathbf{u}_k^i}]^{-1} D^{\mathbf{u}_k^i}$ ,  $\hat{\mathbf{r}}_t^{h(\mathbf{u}_k^i)} = \text{diag}_{md}(\mathbf{e}_{h(\mathbf{u}_k^i)} \otimes I_d) \hat{\theta}_t^i$ ,  $\tilde{v}_k^i = v_{2k}^i - v_{2k-1}^i$ , then  $\forall i \in \{1, \dots, n\}$ :

$$y_{2k}^i - y_{2k-1}^i = 4\beta (\hat{\Delta}_k^i)^T (\hat{\mathbf{r}}_{2k-2}^{h(\mathbf{u}_k^i)} - \mathbf{r}^{h(\mathbf{u}_k^i)}) + \tilde{v}_k^i.$$

Under Assumption 3 we have  $\mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\tilde{v}_k^i \hat{\Delta}_k^i] = 0$ . Denote  $\bar{R}_t = \text{diag}_{nmd}(\text{col}\{\mathbf{e}_{h(\mathbf{u}_t^{i+2})} \otimes I_d, \dots, \mathbf{e}_{h(\mathbf{u}_t^{i+2})} \otimes I_d\})$ . By Assumption 3, using that  $\hat{\Delta}_k^i$  is drawn from the symmetric distribution, for the fourth term in (11), we obtain

$$\begin{aligned} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T] &\leq 4\alpha_k^2 \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\Delta}_k (\bar{\Delta}_k)^T \bar{R}_k D_{k-1} \bar{R}_k \bar{\Delta}_k^i (\bar{\Delta}_k)^T] + \\ &\frac{\alpha_k^2}{4\beta^2} \sum_{i \in \mathcal{N}} (\tilde{v}_k^i)^2 \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\Delta}_k^i (\bar{\Delta}_k^i)^T]. \end{aligned}$$

3. Consider  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$ .

Denote  $Z_k = \mathbb{E}[\bar{\Delta}_k (\bar{\Delta}_k)^T]$ . Summing up the second and the third term from (11) and taking the conditional expectation over  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$ , we derive the following:

$$\begin{aligned} -\mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{g}}_k \bar{\mathbf{s}}_k^T] \bar{\Psi}^T - \bar{\Psi} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k \bar{\mathbf{g}}_k^T] &\leq \\ -2 \frac{\alpha_k}{m} (D_{k-1} Z_k^T \bar{\Psi}^T + \bar{\Psi} Z_k D_{k-1}) &+ \\ 2\alpha_k^2 \gamma \frac{1}{m} \bar{\lambda}_{\max} \bar{\Psi} (D_{k-1} Z_k^T + Z_k D_{k-1}) \bar{\Psi}^T. \end{aligned}$$

4. Consider  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$ .

After we take the conditional expectation over  $\sigma$ -algebra  $\hat{\mathcal{F}}_{k-1}$ :

$$\begin{aligned} \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T] &\leq 4 \frac{\alpha_k^2}{m^2} \|D_{k-1}\| \mathbb{E}_{\hat{\mathcal{F}}_{k-1}}[\|\bar{\Delta}_k\|^4] + \\ &\frac{\alpha_k^2}{4\beta^2} \sum_{i \in \mathcal{N}} (\tilde{v}_k^i)^2 Z_k. \end{aligned}$$

5. Consider  $\sigma$ -algebra  $\mathcal{F}_{k-1}$ :

Finally, taking the conditional expectation over  $\sigma$ -algebra  $\mathcal{F}_{k-1}$ , by virtue of Assumption 2, for the fourth term in (11) we get

$$\bar{\Psi} \mathbb{E}_{\mathcal{F}_{k-1}} [\bar{\mathbf{s}}_k \bar{\mathbf{s}}_k^T] \bar{\Psi}^T \leq 4 \frac{\alpha_k^2}{m^2} \|D_{k-1}\| \bar{\Psi} \|\mathbb{E}_{\mathcal{F}_{k-1}} [\|\bar{\Delta}_k\|^4]\| \bar{\Psi}^T + \frac{\alpha_k^2}{4\beta^2} n c_v^2 \bar{\Psi} Z_k.$$

Summing up the bounds, taking the unconditional expectation, and considering that  $\|z_k^{-1} Z_k - I_{nmd}\| = \mathcal{O}(k^{-1})$ ,  $\alpha_k z_k = k^{-1}$  we derive the following from (11)

$$\Sigma_k \leq \Sigma_{k-1} - (\alpha_k \gamma \bar{\lambda}_2 + \frac{1}{k} \frac{2}{m}) (\Sigma_{k-1} \bar{\Psi}^T + \bar{\Psi} \Sigma_{k-1}) + 4\alpha_k^2 z_k n c_v^2 \bar{\Psi} \bar{\Psi}^T + \frac{1}{k} \kappa_k \mathcal{O}(\|\Sigma_{k-1}\|) + o(k^{-2}),$$

where  $\{\kappa_k\} : \kappa_k \rightarrow 0$  if  $k \rightarrow \infty$ .

Let  $\alpha_k = \frac{1}{k}$ ,  $W_k = \frac{1}{\frac{1}{k} \gamma \bar{\lambda}_2 + \frac{1}{k} \frac{2}{m}} (\Sigma_k - \frac{1}{k} S)$ . Consider the equation (9): if  $-(\gamma \bar{\lambda}_2 + \frac{2}{m}) \bar{\Psi} + \frac{1}{2} I_{nmd}$  is stable, then there exists a positive-definite matrix  $S$  which is a solution of this Lyapunov equation.

Then, according to Lemma 9 from Granichin and Polyak (2003),  $W_k \xrightarrow[k \rightarrow \infty]{} 0$ .

This completes the proof of Theorem 1.

## REFERENCES

- Amelina, N., Erofeeva, V., Granichin, O., Ivanskiy, Y., Jiang, Y., Proskurnikov, A., and Sergeenko, A. (2020). Consensus-based distributed algorithm for multisensor-multitarget tracking under unknown-but-bounded disturbances. *IFAC-PapersOnline*, 53(2), 3589–3595.
- Amelina, N., Fradkov, A., Jiang, Y., and Vergados, D.J. (2015). Approximate consensus in stochastic networks with application to load balancing. *IEEE Transactions on Information Theory*, 61(4), 1739–1752.
- Amelina, N., Granichin, O., Granichina, O., and Jiang, Y. (2014). Differentiated consensuses in decentralized load balancing problem with randomized topology, noise, and delays. In *53rd IEEE Conference on Decision and Control*, 6969–6974. IEEE.
- Boyd, S., Parikh, N., Chu, E., Peleato, B., Eckstein, J., et al. (2011). Distributed optimization and statistical learning via the alternating direction method of multipliers. *Foundations and Trends® in Machine Learning*, 3(1), 1–122.
- Bullo, F., Cortes, J., and Martinez, S. (2009). *Distributed control of robotic networks: a mathematical approach to motion coordination algorithms*. Princeton Univ. Press.
- D.Bertsekas and Tsitsiklis, J. (1989). *Parallel and Distributed Computation: Numerical Methods*. Prentice-Hall, Englewood Cliff, NJ.
- Di Lorenzo, P. and Scutari, G. (2016). Next: In-network nonconvex optimization. *IEEE Trans. Signal and Information Processing over Networks*, 2(2), 120–136.
- Erofeeva, V., Granichin, O., Proskurnikov, A., and Sergeenko, A. (2021). Weighted SPSA-based consensus algorithm for distributed cooperative target tracking (accepted). In *European Control Conference*.
- Falson, A., Notarnicola, I., Notarstefano, G., and Prandini, M. (2020). Tracking-ADMM for distributed constraint-coupled optimization. *Automatica*, 117, 108962.
- Gantmacher, F. and Brenner, J. (2005). *Applications of the Theory of Matrices*. Dover Books on Mathematics. Dover Publications. URL <https://books.google.ru/books?id=eWJb5EJp1GYC>.
- Granichin, O. and Amelina, N. (2015). Simultaneous perturbation stochastic approximation for tracking under unknown but bounded disturbances. *IEEE Transactions on Automatic Control*, 60(6), 1653–1658.
- Granichin, O., Erofeeva, V., Ivanskiy, Y., and Jiang, Y. (2021). Approximation-based consensus for tracking under unknown-but-bounded disturbances (accepted). *IEEE Transactions on Automatic Control*, 66.
- Granichin, O. and Polyak, B. (2003). *Randomized algorithms of estimation and optimization under almost arbitrary noise*. Nauka.
- Lewis, F.L., Zhang, H., Hengster-Movric, K., and Das, A. (2013). *Cooperative control of multi-agent systems: optimal and adaptive design approaches*. Springer Science & Business Media.
- Nedić, A. and Olshevsky, A. (2016). Stochastic gradient-push for strongly convex functions on time-varying directed graphs. *IEEE Transactions on Automatic Control*, 61(12), 3936–3947.
- Olfati-Saber, R., Fax, J., and Murray, R. (2007). Consensus and cooperation in networked multi-agent systems. *Proceedings of the IEEE*, 95(1), 215–233.
- Olfati-Saber, R. and Murray, R.M. (2004). Consensus problems in networks of agents with switching topology and time-delays. *IEEE Transactions on automatic control*, 49(9), 1520–1533.
- Rabbat, M. and Nowak, R. (2004). Distributed optimization in sensor networks. In *Proceedings of the 3rd international symposium on Information processing in sensor networks*, 20–27. ACM.
- Ren, W. and Cao, Y. (2011). *Distributed Coordination of Multi-agent Networks*. Springer.
- Sergeenko, A., Granichin, O., and Proskurnikov, A. (2020). Advanced SPSA-based algorithm for multi-target tracking in distributed sensor networks. In *IEEE Conference on Decision and Control (CDC)*, 2424–2429. IEEE.
- Shoham, Y. and Leyton-Brown, K. (2008). *Multiagent Systems: Algorithmic, Game-Theoretic, and Logical Foundations*. Cambridge Univ. Press.
- Spall, J.C. (1992). Multivariate stochastic approximation using a simultaneous perturbation gradient approximation. *IEEE Trans. Autom. Control*, 37(3), 332–341.
- Spall, J. (2012). Cyclic seesaw process for optimization and identification. *J. Optim. Theor. Appl.*, 154, 187–208.
- Tubaishat, M. and Madria, S. (2003). Sensor networks: an overview. *IEEE Potentials*, 22(2), 20–23.
- Xie, S. and Guo, L. (2018). Analysis of normalized least mean squares-based consensus adaptive filters under a general information condition. *SIAM J. Control Optim.*, 56, 3404–3431.