



POLITECNICO DI TORINO
Repository ISTITUZIONALE

Modelling of passive mode-locking in Quantum Dot Lasers: a comparison between a Finite – Difference Travelling Wave model and a Delayed Differential Equation approach

Original

Modelling of passive mode-locking in Quantum Dot Lasers: a comparison between a Finite – Difference Travelling Wave model and a Delayed Differential Equation approach / M.Rossetti; P.Bardella; I. Montrosset. - ELETTRONICO. - (2010), pp. 29-30. ((Intervento presentato al convegno HSSL High Speed Semiconductor Laser Workshop tenutosi a Wroclaw, Poland nel 7-8 October2010.

Availability:

This version is available at: 11583/2501530 since:

Publisher:

Published

DOI:

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)



Wrocław University of Technology

Institute of Physics

Centre for Advanced Materials and Nanotechnology



International workshop on high
speed semiconductor lasers

HSSL

7-8 OCTOBER 2010

Book of Abstracts

www.delightproject.eu/hssl/

Modelling of passive mode-locking in Quantum-Dot Lasers: a comparison between a Finite-Difference Travelling-Wave model and a Delayed Differential Equation approach

M. Rossetti, P. Bardella and I. Montrosset

Politecnico di Torino, Corso Duca degli Abruzzi 24, 10129 Torino, Italy

In this work, we provide a quantitative comparison between a finite-difference travelling-wave (FDTW) model [1] and delayed differential equation (DDE) approaches for the simulation of passive mode-locking (ML) in quantum-dot (QD) lasers. FDTW models allow to accurately describe two-section ML lasers with both Fabry-Perot (FP) and Ring cavity geometries but they usually require a large computational time [1]. On the contrary, the DDE model frequently used in the literature, e.g. [2-4] for QD but also for QW ML lasers, represents a simple and computationally efficient approach but several assumptions are introduced in its formulation: a unidirectional ring cavity is assumed (Fig. 1a-b), spectral filtering due to the finite gain bandwidth, output losses and intrinsic waveguide losses are introduced as lumped elements in a single reference section of the device ($z=0$) (red arrow in Fig. 1a-b); finally only two sections acting as gain and saturable absorber (SA) are assumed. Despite these assumptions, DDE models have often been applied to the analysis of ML in QD

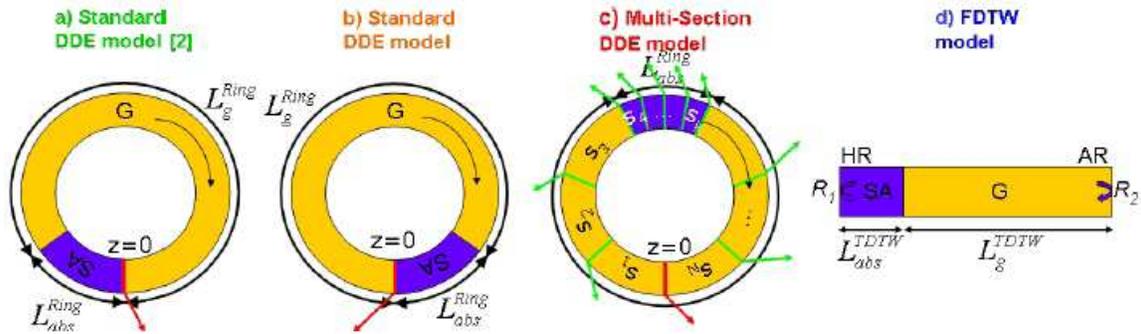


Fig.1 (a-b) Scheme of ring lasers described by a standard DDE model; (c) ring laser simulated by the multi-section DDE model; (d) schematics of FP laser modelled via the FDTW model.

ML lasers with FP cavity geometry [3,4]. In Fig. 2, a quantitative comparison between simulation results obtained using the FDTW model on a QD Fabry Perot ML laser (Fig. 1d) and results obtained using a standard DDE model on the equivalent ML ring lasers (Fig. 1a-b) reveals large differences in the obtained dynamic regimes. In order to improve the agreement between the two methods, we propose a modified DDE approach that allows to take into account an arbitrary number N of electrically isolated sections ($N \geq 3$), allowing to properly describe the alternative equivalent ring structure reported in Fig.1c. The modifications introduced allow to significantly improve the agreement with the results obtained with the

FDTW model (Fig. 2). The proposed multi-section DDE model can therefore be successfully used in extensive analyses of QD ML lasers with FP cavity geometry.

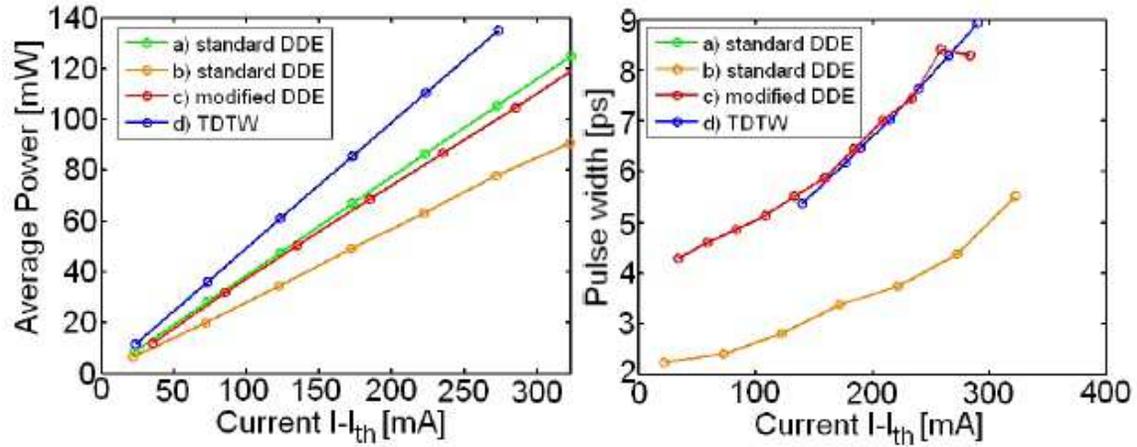


Fig.2 Average power and pulse width vs. current obtained at a fixed 7V SA voltage for the structures reported in Fig.1, using respectively a standard DDE model (a-b), the proposed multi-section DDE model (c) and the FDTW model (d). Structure (a) (green) shows a continuous-wave operating regime.

- [1] M. Rossetti et al., *IEEE J. Quant. Elec.* (2010) in press.
- [2] E.A. Viktorov et al., *Appl. Phys. Lett.* **88**, 201102 (2006).
- [3] M.A. Cataluna et al., *Appl. Phys. Lett.* **90**, 101102 (2007).
- [4] E.A. Viktorov et al., *Appl. Phys. Lett.* **91**, 231136 (2007).

This work has received funding from the European Community's Seventh Framework Programme (FP7/2007-2013) under grant agreement n° 224338 (FAST-DOT project).