

Plant layout and pick-and-place strategies for improving performances in secondary packaging plants of food products

Original

Plant layout and pick-and-place strategies for improving performances in secondary packaging plants of food products / Comba, L.; Belforte, Gustavo; Gay, Paolo. - In: PACKAGING TECHNOLOGY AND SCIENCE. - ISSN 0894-3214. - STAMPA. - 26:6(2013), pp. 339-354. [10.1002/pts.1984]

Availability:

This version is available at: 11583/2505134 since:

Publisher:

John Wiley & Sons, Ltd.

Published

DOI:10.1002/pts.1984

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Plant Layout and Pick-and-place Strategies for Improving Performances in Secondary Packaging Plants of Food Products[†]

By Lorenzo Comba,¹ Gustavo Belforte² and Paolo Gay^{1*}

¹D.E.I.A.F.A. – Università degli Studi di Torino, 44 Via Leonardo da Vinci, 10095, Grugliasco (TO), Italy

²D.AU.IN. – Politecnico di Torino, 24 Corso Duca degli Abruzzi, 10129, Torino, Italy

The aim of secondary packaging plants is to pick food products from a conveyor belt and to place them into boxes. The typical configuration of these packaging plants consists of a set of sequential robot stations, performing pick-and-place cycles from one conveyor to another parallel one, which transport the products and the boxes to be filled. Depending on the relative movement of the two conveyors, the plant operates in co-current or counter-current flow configuration. Undesired perturbations in the product flow rate from its nominal value can lead to critical events, i.e. unpicked product at the end of the first conveyor or not completely filled boxes. Even if the structures of co-current flow and of counter-current flow plants are very similar, their behaviour in non-nominal or perturbed conditions can be significantly different.

The aim of this paper is to deeply investigate the behaviour of these two kinds of secondary packaging lines, evaluating their performances in the case of different pick-and-place strategies, using discrete events simulation techniques.

Results show to which extent the different proposed control strategies can improve the performances of both co-current and counter-currents plants and, in particular, how co-current plant layouts can achieve performances that are equivalent to, or perhaps even better than, those that can be obtained with a counter-current plant layout, which cannot be freely used because it has been patented. The simulation tool, control algorithms and results presented can help packaging plant designers for choosing the most appropriate solutions and for properly sizing the plant. Copyright © 2012 John Wiley & Sons, Ltd. Q1

Received 28 December 2011; Revised 20 April 2012; Accepted 17 May 2012

KEY WORDS: packaging plants; robotics; food industry

INTRODUCTION

Secondary packaging is the last step in most production plants. During this phase, food products, such as pastries, chocolate and candies, as well as meat products, which could have already been singularly packed into a protection envelope or paper, are placed into boxes ready for the market.^{1–3} The layout of boxes can be quite different from product to product, and in some cases, it is rather elaborate. The number of units to be placed in each box and their layout are fixed and known for each given product.

Typical secondary packaging plants consist of two aligned belts conveying the product ready for packaging and the empty boxes to a series of robot stations in which the product delivered on one belt is picked and placed in the boxes carried by the other belt.^{4–6} In general, the pick-and-place cycle rate of one single robot is lower than the rate of incoming products on the conveyor belt, so that it cannot pick all the units of product and fill up all the boxes. For this reason, more robotic cells are typically arranged in series across the conveyor belts.⁴ In this way, product units pass sequentially throughout

* Correspondence to: Paolo Gay, D.E.I.A.F.A. – Università degli Studi di Torino, 44 Via Leonardo da Vinci, 10095 Grugliasco (TO), Italy.

E-mail: paolo.gay@unito.it

[†] Supporting information may be found in the online version of this article.

the working areas of the robotic cells, each one of which picks a fraction of the incoming products and places them into available empty positions in the boxes. Indeed, in a properly working plant, the joint action of the robotic cells should ensure that all the incoming products are picked from the conveyor belt and all the boxes are properly filled up when leaving the plant. This goal is not trivial. On one side, it is needed that the inflow of products on the conveyor belt and of empty places in the boxes is balanced so that each single unit of product can be placed into a suitable position in a box. On the other side, it is required that the work of the robots is properly organized so that no matching between an incoming unit of product and an empty position in a box is missed. The plant is malfunctioning whenever some product is not picked from the conveyor belt by any robot so that it becomes wasted or a not properly filled box leaves the last robotic cell. Both such dropout conditions represent a loss and should therefore be avoided. It should be noted that the cost of a not properly filled box, mainly given by the labour required to manually handle and complete the filling, is in general quite larger than the cost of an unpicked product. The level of success of a packaging plant is then typically evaluated looking at the amount of dropouts that occur in given operational conditions.

The pick-and-place process is distributed over the different robotic cells, and also within each robotic cell, it targets the whole working area. As depicted in Figure 1, any unit of product, which is on the conveyor belt within the working volume of a given robot, can be picked and delivered to an empty place in a box, which also needs to be in the working area of the robot. To avoid dropouts, it is needed that 'average flows' of product units and of empty places in the boxes are equal in the area in which the pick-and-place activity is carried on. It should be noted that such flows are not the instant flows entering the robotic cells.

Indeed, the inflow of product on the conveyor belt in real plants is often not constant. Low frequency perturbations, which can be commonly observed in food production plants, can be the consequence of variations in the production rate of upstreaming machines. Similarly, high frequency variations of the inflow of the product are also a common feature and depend on several other factors. The randomness that often affects the position of the product on the conveyor belt is one of them as in the case of dropping of products from trays or moulds in chocolate moulding lines onto the product conveyor belt. Such changes in flow can indeed cause dropouts.

For what concerns the possibility that incomplete matching of product units with empty positions in the boxes occurs in the pick-and-place process, it should be noted that the whole process is quite complex and is affected by different factors such as the logic by which the different products to be

Colour online, B&W in print

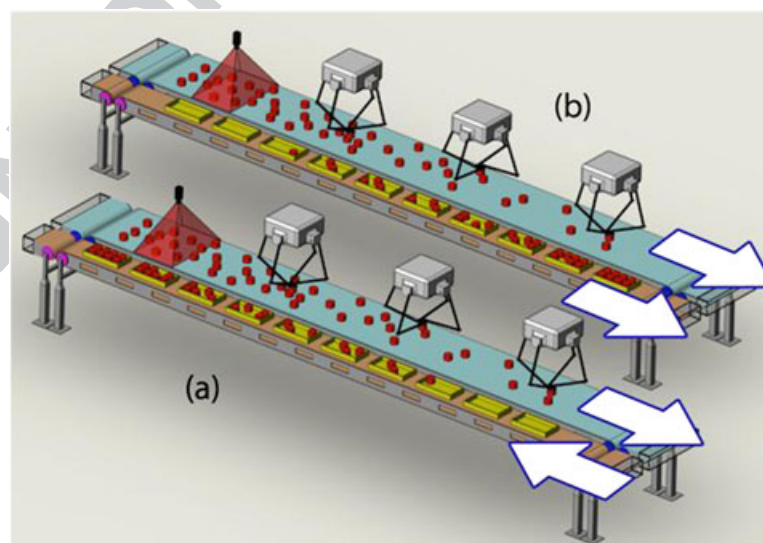


Figure 1. The packaging plant in the counter-current flow (a) and co-current flow (b) configurations with three robot isles.

1
2
3 picked are assigned to the different robots and the logic underlying the pick-and-place cycle.⁷ It is
4 also important to underline that the different robotic cells are not isolated but operate sequentially
5 on the same conveyor belts, and therefore, they influence each other with complex dynamics in
6 which delays and nonlinearities play an important role. In this regard, the relative movement of
7 the product conveyor belt and the box conveyor belt represents an important variable, for what
8 concerns the total performances of the plant. Two solutions are in fact possible. In the first one,
9 the two belts move in the same direction, whereas in the second solution, they move in opposite
10 directions. The first case is usually referred to as co-current flow setting, and the second one as
11 counter-current flow setting.⁸ This last setting, which is known by plant designer to be more stable
12 against flow rate perturbations, has been patented⁹ and therefore cannot be adopted without licence
13 or permission. These two layouts are represented in Figure 1 for the case of conveyor belts serving
14 a series of three robotic cells.

15 To understand why counter-current plants are nowadays preferred, consider the following simple
16 example. In co-current flow setting, define as robot number 1 the first to which the conveyor belt
17 delivers the products to be packed, i.e. the first that receives the boxes to be filled. It has therefore
18 plenty of product units to pick-and-place in many empty places in the boxes. On the contrary,
19 robot number 3, which is the last to which the conveyor belt delivers the products to be packed,
20 has few product units left on the conveyor belt and has also few free places left in the boxes. It
21 could therefore happen that robot number 3 is unable to complete a box that is leaving its working
22 space because no unit of product is available in its working space on the conveyor belt. If in such
23 condition the conveyor of the boxes is slowed down to wait for a product to be placed in the
24 incomplete box, the consequence is that also the boxes in the workspace of robot 1 are slowed
25 so that robot 1, which has plenty of units to pick, fills up all the boxes in its working space. As
26 a consequence, when later on these boxes arrive in the workspace of the following robots, these
27 last cannot make any picking because they do not have empty boxes where to place incoming units
28 of product. Consequently, there are dropouts of the product from the conveyor belt. If in such
29 condition the belt of the boxes is accelerated to try to have more empty places in the boxes for robots
30 2 and 3, robot 1 reduces the number of placements in the boxes, and this could lead again to the
31 condition in which an incomplete box is leaving the working space of the last robot. This kind of
32 unstable behaviour that could occur is also related to the fact that the speed of the two conveyor belts
33 is not the same because the density of units of product on the conveyor belt and the density of places
34 in the boxes are not the same per unit length. In general, the two belts have to move at different speed,
35 and there are belt segments, between the robot cells, where no pick-and-place can occur. Consequently,
36 the boxes to be filled are aligned with different portions of the product conveyor belt during their
37 movement throughout the working spaces of the different robots.

38 In the counter-flow configuration, robot 1, which has plenty of products to pick from the conveyor,
39 receives almost full boxes and should therefore be easily able to pick products to complete their filling.
40 On the contrary, robot number 3 receives few units on the conveyor together with empty boxes so that
41 it should be easily able to pick all the units and put them in the boxes. In such condition, a slowdown of
42 the speed of the box belt to avoid that an incomplete box leaves the working space of robot 1 is less
43 likely to cause instability because its consequence is that more units to be picked will reach robots 2
44 and 3, which, however, have less filled boxes that they will just fill more.

45 The whole process dynamics is quite complex with complex interaction mechanisms between
46 the pick and place activities of the different robotic cells. Different solutions can be adopted to
47 improve the flexibility of the system and to relax undesired interactions between robotic cells that
48 appear to affect the performances of the packaging line in perturbed conditions. The plant can be
49 modified introducing in each robotic cell a buffer in which units of product, delivered by the
50 conveyor belt, can be stored when there are no empty places available in the boxes. Similarly,
51 the product units in the buffer can be transferred to the boxes when there is no product available
52 on the conveyor belt. Although this qualitative analysis seems reasonable, plant designers require
53 quantitative methods to a priori evaluate plant performances. No mathematical models, in terms
54 of dynamic equations, is nowadays available neither can they be reasonably derived to satisfactorily
55 describe the behaviour of the whole system analytically. It is however possible to build a rather
56 accurate simulator to study the behaviour of this system.

The aim of this paper is to evaluate, by means of an extensive simulation study, the performances of co-current and counter-current flow packaging plants under different operative settings, in nominal and perturbed conditions, considering also the possible presence of buffers. The simulation tool that has been developed by our research group is presented first, together with some implementation details. The results of a rather extensive simulation study that has been carried out with its help are then illustrated. It is interesting to anticipate that the study allowed to find out unexpected characteristics of packaging plants and in particular to show that, adopting specific control strategies, co-current flow plants can achieve performance levels comparable with those of counter-current flow ones that, contrary to expectations, present some drawbacks and weaknesses.

The paper is structured as follows: Simulation suite of secondary packaging plants section introduces the simulator that has been developed and used, whereas Simulation study section presents the different simulation conditions adopted in the paper. The results of the performance evaluation and comparison of the different scenarios are reported and discussed in 'Discussion of simulation results' section, whereas conclusions are drawn in 'Conclusions and future research directions' section.

SIMULATION SUITE OF SECONDARY PACKAGING PLANTS

A flexible computer simulator, completely implemented in MATLAB[®] (MathWorks, Natick, MA, USA), has been developed to study secondary packaging plants with the structure outlined in the previous section. In the simulator, the system is represented in discrete time form with a discrete time interval Δt that can be arbitrarily chosen. Its geometric layout, as well as the number of robotic cells, with or without product buffers, can be varied properly choosing a set of input parameters. Similarly, other operative conditions such as product inflow, boxes layout, belt speed, co-current or counter-current flow and so on can be conveniently chosen through dedicated parameters. Actually, the simulator consists of a suite of three modules that perform different functions. Q2

The first module mainly consists in a graphic interface that allows setting all the relevant parameters, which are needed to fully characterize the geometric layout of the plant, to specify algorithms and logics for its operation and to generate the distribution of the product units and of the boxes on the two conveyor belts. Such parameters are rather consistent in number and can be grouped in the following categories:

- Simulation times, which include the total duration of the simulation, the discrete time interval used for the simulation and the time interval that is used to generate the distribution of product units on the conveyor belt. This last time interval can differ from the one used in the simulation because in general, it must be very short to properly compute product distributions when high frequency variations in the flow are considered.
- Geometric parameters of conveyor belt, such as the width of the conveyor belt, its speed, its distance from the box conveyor belt and the radius of the single product units that, for simplicity, are supposed to be circular. Indeed, also the co-current flow or the counter-current flow is chosen within this parameter group.
- Geometric parameters of the buffer that allow to specify the possible availability of a buffer in the robotic cells and to describe its characteristics in terms of dimension and number of buffer positions.
- Geometric parameters of boxes that fully characterize them and include also the distance between boxes on the belt.
- Parameters of robotic cells, which are used to characterize each robotic cell as well as to indicate their total number. The simulator supports Delta robots. For this reason, the working space is assumed circular. Indeed, other kinds of robotic cells, with different working space and parameters, could be added. Robot parameters include also the specifications needed to compute the duration of each single pick-and-place cycle, i.e. the maximum allowed acceleration and speed.
- Parameters of the scanner define the position in which the scanner that, in the real plant, performs the optical recognition of the units of product and identifies their position on the conveyor belt by means of artificial vision techniques is located. Because in the real plant each recognized unit of

product is assigned to one or more robotic cells that must take care of picking it and placing it in the boxes, the parameters of the scanner include also the indication of the assignment algorithm. Such assignment can indeed be performed according to several logics. In the simulation suite, five different assignment and pick-and-place logics have been implemented so far, but the modularity of the programs would easily accommodate new assignment algorithms. In any logic, when in the working space there are more units that can be picked, then the one that is going to leave sooner the working space is picked first. Similarly, when more empty positions are available in the working space, the one that is going to leave sooner the working space is filled first. When the buffer is available, units are delivered to the buffer only when there are no empty places in the boxes, and units are picked from the buffer only when there are no units on the conveyor belt. The assignment and pick-and-place logics implemented so far in the simulation suite are as follows:

- No assignment at all. Each robot can pick any unit of product in its working space and place it in any empty position in the boxes.
- Incoming units of product are cyclically assigned to the robotic cells so that they are equally partitioned among the robots, obtaining a balanced workload of the cells. The last cell, however, picks also the units, which have been missed by the previous ones.
- The same rules of Logic 2 for the picking phase, applying also a cyclical assignment of the empty places in the boxes to the different cells. Applying this rule, a robot cannot place units of product in any position but only in the ones that have been assigned to it. Obviously, the last robot is free to fill up any empty position.
- This logic is used only when the buffer is available. Besides implementing Logic 3, the manipulator picks a unit of product whenever there is an empty position available to place it. If there are no available positions in the boxes, the unit of product is picked and placed in the buffer only when it is in the second half of the working space. Similarly, units of product are picked from the buffer only when an empty place in the boxes is present in the second half of the working space.

Obviously, in the simulator, there is no need to perform the recognition of product units and of their position because it is well known. However, the information about the scanner position is used to simulate the assignments, which are performed only when the product units pass under the scanner.

- *Seed for random generations*: set the seed that is used for initializing the generation of random data (which is needed to replicate the simulation, if required).
- *Instant flow profile of product on the conveyor belt*. Such flow is expressed in units per second and is given as a function of time on the whole time horizon on which the simulation has to be computed. Through the graphic interface (see Figure 2), the flow profile is specified as the sum of at most 20 different elementary functions that have to be chosen from the following list:
- Constant function, for which the value, the initial time and the duration (within the total simulation time) have to be specified.
- Sinusoid function, for which the average value is zero and the peak value and the period have to be specified. It is used to model deterministic periodical fluctuation of the flow rate of the incoming products.
- Random noise function, with zero mean and uniform distribution, for which the amplitude has to be specified. It can be used, for example, to model position uncertainties affecting product units during their load of the conveyor belt.
- Random noise function, with zero mean and Gaussian distribution, for which the standard deviation has to be specified.
- Trapezoidal function for which the maximum value has to be specified together with the starting time, the duration of the linear increasing interval, the duration of the constant interval and the duration of the linearly decreasing interval. All of them have to be within the total simulation time. This profile can be used to model upstream temporary supply changes to the packaging lines like in chocolate moulder machines during their start and stop phases.

Once the product flow profile has been provided, the generation of the units of product on the conveyor belt is computed for the whole duration foreseen for the simulation. The units on the

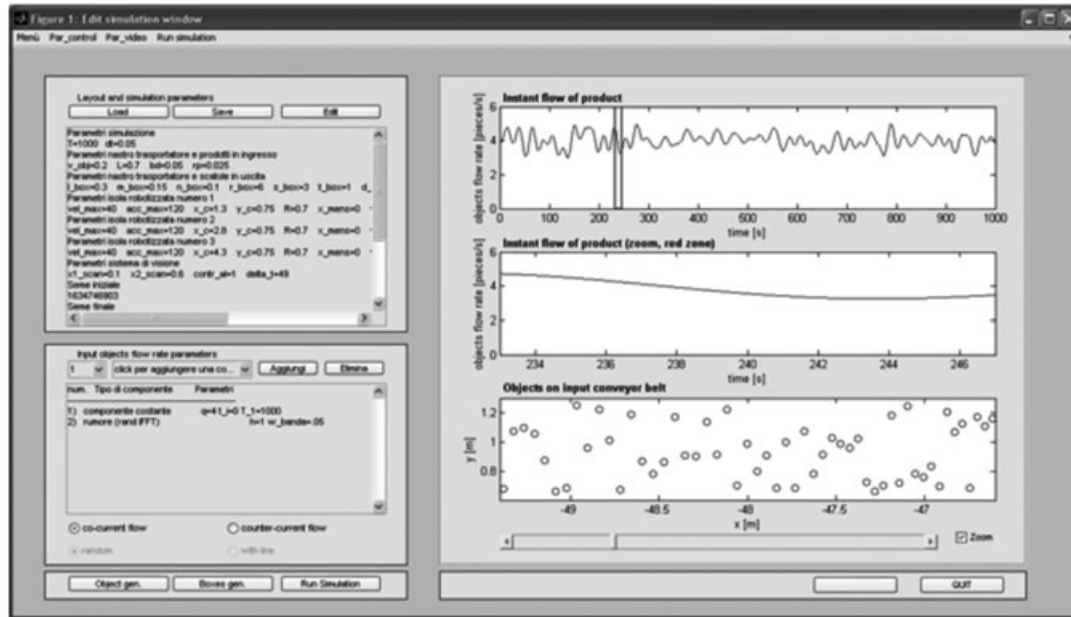


Figure 2. Graphic interface of the first module of the software. All the relevant parameters can be set on the left side of the window, whereas the right side of the window is devoted to displaying the inflow of product and the displacement of the items on the conveyor belt.

conveyor belt are graphically displayed together with the graph of the instant unit flow and the main parameters used for the simulation as shown in Figure 2.

- *Output data presentation.* These parameters specify the output data that are of interest and that have to be collected. This is particularly important in connection with the possibility, which is offered by the simulation suite, to provide a video showing the functioning of the packaging line. With these parameters, it is possible to specify if the video has to be produced for the whole simulation or if it has to be provided only for those time intervals in which some specific events occur (e.g. product dropout and/or unfilled box). A more extended description of the output options is provided later on when presenting the third module of the suite that enables the output visualization.

Once simulation parameters have been defined using this first module and its graphic interface, they are saved, together with the computed distribution of product units on the conveyor belt, in a file and are ready to be used by the next module. The file can also be reloaded in the first module that can then be used to edit the data avoiding the need to input again all of them. This feature can be used to easily create sets of data files that differ only for a few parameters whose influence on the simulation can be tested, ensuring that all remaining parameters are unchanged.

The second module of the simulation suite just simulates the behaviour of the whole packaging plant and prepares the required output data that are stored in a file that is then used by the following module.

The last module of the suite allows to visualize the relevant data of the simulation. Besides the movies of the working plant in the selected time intervals, output information is provided with tables, which mainly summarize the number of dropouts and the time instant at which they occur, and with plots, which provide visual information on different features of the packaging plant.

The plots that can be visualized over the whole simulation horizon are as follows:

- flow of product units on the conveyor belt;
- number of drop outs (units of product);
- number of drop outs (boxes);
- work load of the different robots in pick-and-place cycles per minute;
- number of objects in the buffer.

The visualization module is provided with a feature that allows visualizing, together with each whole plot, also its details within a suitable window that can be moved over the whole simulation horizon and is expanded in a second plot. It is therefore possible to examine the details of each plot in the relevant zones.

SIMULATION STUDY

With the previously described simulation suite, a study has been undertaken to evidence the characteristics of secondary packaging lines in connection with different possible plant layouts and operational conditions. In particular, the study has been aimed to evaluate the possible advantages that can be obtained using the counter-current flow layout with respect to the co-current flow and to determine the advantages that the use of buffers in the robotic cells can provide to the overall performances.

Obviously, such analysis is meaningful only when the conveyor belt feeds more than one robotic cell. The case with two cells only seems to be still rather particular. It has therefore been decided to develop the analysis for a plant with three robotic cells. This is the smallest plant configuration in which there is at least one robot that is neither the first nor the last one. A larger number of robotic cells would increase the complexity of the system and consequently the amount of required computation and data storage. Typical parameters of commercial robots and packaging lines have been chosen to represent the system. All such parameters are shown in Table 1.

From the heuristic analysis of the problem outlined in the introduction, it appears that the conditions that can provide troubles to the system are likely to occur when the flow of product units on the conveyor is changing in time and when the flow of product is close to Q_{\max} , which is the maximum pick-and-place rate of the plant. To conduct the analysis in meaningful conditions, a first study has been conducted to find out such maximum value Q_{\max} . To this extent, different simulations were computed. In each simulation, the product inflow was kept constant for 1 h. The value of the flow was increased from simulation to simulation until dropouts started to occur. The maximum value Q_{\max} has been chosen to be the highest inflow value for which there have not been dropouts in three distinct simulations. Note that with the obtained flow values, there are about 18.000 pick-and-place events per hour. Therefore, Q_{\max} has been derived as the highest constant flow for which about 54.000 events have been safely processed. The numerical value that has been experimentally derived is 5.01 units per second in the counter-current flow setting. Unexpectedly, in the co-current setting, the maximum flow is 5.52 units per second, higher value than in the counter-current configuration. The reason for this difference is explained in the following section. The value of Q_{\max} has been derived when the units of product to be picked and placed are assigned to the different robotic cells according to the Logic 2 (incoming units of product are cyclically assigned to the robotic cells so that they are equally partitioned among the robots. The last cell, however, picks also the units that have been missed by the previous ones).

To test the performances of the plant in different conditions, it was decided to use an inflow that is the sum of two components: a constant one, whose value is expressed as a percentage of Q_{\max} and sets the 'working point' of the plant, and a (zero mean) sinusoidal one, whose peak amplitude is again expressed as a percentage of Q_{\max} whereas its frequency can assume different values. Such continuously varying component, modelled by sinusoids of different periods, stresses the plant rather consistently. The simulation horizon was assumed to last 1 h. The speed of the box conveyor belt has been set constant so that the inflow of empty incoming spaces is also constant and equal to the total number of generated units of product divided by the total simulation time. Even if 'intelligent' rules could be used to modulate the speed of the conveyor according to the inflow of the product, we assumed it constant to

Table 1. Commercial picker robot parameters.

Working diameter	1130 mm
Working height	250 mm
Maximum speed	10 m/s
Maximum acceleration	100 m/s ²
Maximum torque of spindle	1 Nm

better highlight the degree by which the different picking strategies and possible plant layouts can cope with changes and irregularities in product inflow.

Simulation data were generated for the 60 different input sequences resulting from all the combinations of the following parameters values:

- constant value, equal to 70%, 80% and 90% of Q_{\max} ;
- amplitude of the sinusoidal signal equal to 10%, 15%, 20% and 25% of Q_{\max} ;
- period of the sinusoidal signal equal to 1, 2, 4, 8 or 16 min.

A second simulation study has then been conducted adopting an incoming product flow rate described as the sum of a constant function and a random component modelled by a uniformly distributed white noise, filtered by a low-pass filter at different frequencies. The parameters for such random noise are

- amplitude of the uniform white noise equal to 10%, 15%, 20% and 25% of Q_{\max} ;
- cut-off frequency of the low-pass filter equal to 1, 0.1, 0.05, 0.01 and 0.005 Hz.

Also, for this second simulation study, there are 60 different input sequences resulting from all possible combinations of the relevant parameters.

Complete output data (S1) and video clips (S2–S7) are available in the supplementary material section of the journal online. In the following section, instead, simulation results and output data are presented in a more condensed way for reference and discussion.

DISCUSSION OF SIMULATION RESULTS

The first unexpected result, as previously evidenced, has been the fact that the maximum steady-state product flow that can be handled by the plant is slightly higher in the co-current flow setting. The explanation for this occurrence lies in the fact that when there is a high flow rate, the robots come to a point in which they are chasing the units that are almost leaving their working space and similarly are putting them in empty box positions that are also leaving the robot working space. When this happens, distances that have to be covered during a pick-and-place cycle are shorter for the case of co-current flow layout, as it can be seen from Figure 3. The consequence **F3**

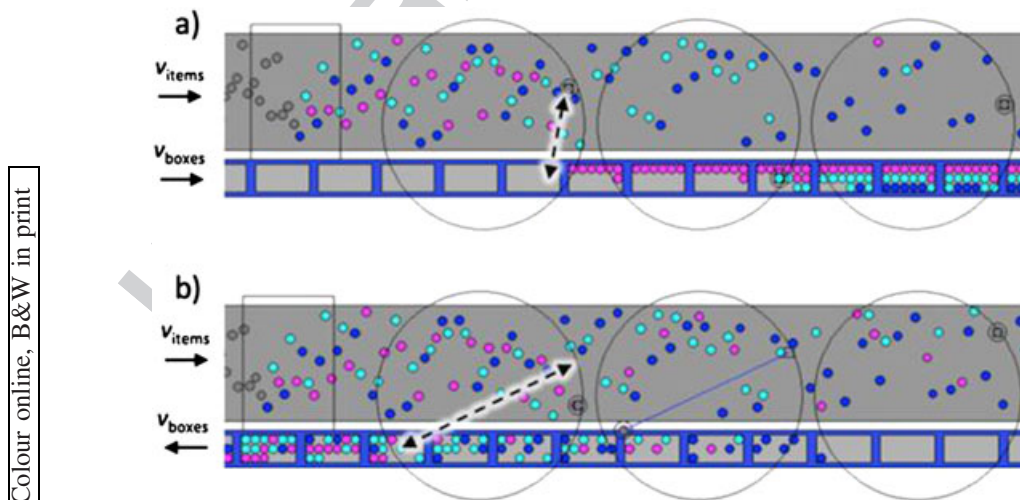


Figure 3. Example of the behaviour of a packaging plant in co-current (a) and counter-current (b) flow configuration under stress condition. Circles represent the working areas of the three manipulators. Dashed arrows represent two examples of trajectories in the case of heavy working condition, in both co-current and counter-current flow configurations. As can be seen, the path length of pick-and-place cycles in the case of co-current plant is shorter.

is that a higher pick-and-place rate is possible in the co-current setting. Actually, in the counter-current environment, there is a kind of catastrophic behaviour: when the unit inflow increases, the robots increase the pick-and-place rate until they start to work in a less favourable condition with longer pick-and-place trajectories that consequently decrease the rate. When this happens in the first robotic cell, the following ones receive more units that make them soon collapse, according to an avalanche effect, that drastically reduces the overall pick-and-place capacity of the plant.

The main characteristics that this study has evidenced for the different pick-and-place strategies as well as for the influence of co-current and counter-current settings with and without buffer are now synthetically analysed.

A comparative overview of the different strategies is reported in Tables 2–5, where the performances of the different strategies are evaluated in terms of number of dropouts. Tables 2 and 3 summarize the results obtained stressing the plant with an inflow of product constituted of a constant and a sinusoidal component. Such results are expressed in terms of not completely filled boxes and runoffs, respectively. The results of the simulations performed with an inflow composed by a constant added to a random component are shown in Tables 4 (not completely filled boxes) and 5 (runoffs). Each column of the tables contains five numbers that synthetically describe the results of a group of 60 simulation conducted with a particular control strategy and with or without buffers. More in detail, results are expressed as follows:

- mean value of the percentage of dropouts (runoff or not completely filled boxes), with respect to the total number of objects or boxes handled during each simulation;
- maximum value found in the worst simulation of the group;
- percentage of simulations that have results between 0% and 2% of dropouts, with respect to the 60 simulations;
- percentage of simulations that have results between 2% and 5% of dropouts;
- percentage of simulations that have results worst than 5% of dropouts.

In general, the best results have been obtained implementing Strategies C and D with buffers. Strategy D results however to be better because it also improves the workload of the robots, reducing unnecessary movements. In particular, Strategy D also allows co-current flow configured plants to minimize the gap of performance that this kind of configuration shows with respect to the counter-current setting, obtaining almost the same number of dropouts.

Table 2. Results, in terms of percentage of not completely filled boxes (NCFB), obtained in the simulations performed with product inflow profiles that are the sum of a constant and a sinusoid of different period and amplitude.

	Strategy	A		B		C		D
		No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Buffer							
Co-current flow	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
	Mean value	27.27	11.37	17.74	9.70	8.79	3.62	3.98
	Maximum value	40.43	30.28	33.17	28.44	27.99	19.82	22.61
	0% ≤ NCFB % < 2%	5.0%	45.0%	26.7%	48.3%	53.3%	66.7%	66.7%
	2% ≤ NCFB % < 5%	0.0%	0.0%	0.0%	1.7%	1.7%	6.7%	5.0%
	NCFB % ≥ 5%	95.0%	55.0%	73.3%	50.0%	45.0%	26.7%	28.3%
Counter-current flow	Mean value	35.27	31.69	16.52	10.13	11.65	5.16	3.92
	Maximum value	85.06	80.48	45.32	44.92	29.78	21.22	21.22
	0% ≤ NCFB % < 2%	45.0%	46.7%	55.0%	65.0%	61.7%	70.0%	68.3%
	2% ≤ NCFB % < 5%	0.0%	0.0%	0.0%	0.0%	1.7%	0.0%	3.3%
	NCFB % ≥ 5%	55.0%	53.3%	45.0%	35.0%	36.7%	30.0%	28.3%

Table 3. Results, in terms of runoffs, obtained in the simulations performed with product inflow profiles that are the sum of a constant and a sinusoid of different period and amplitude.

	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Mean value	3.86	1.81	2.73	1.70	1.31	0.43	0.52
	Maximum value	7.42	6.63	7.11	6.58	6.29	4.38	4.86
	0% ≤ runoff % < 2%	15.0%	60.0%	40.0%	61.7%	73.3%	90.0%	88.3%
	2% ≤ runoff % < 5%	55.0%	28.3%	38.3%	28.3%	21.7%	10.0%	11.7%
	Runoff % ≥ 5%	30.0%	11.7%	20.0%	8.3%	5.0%	0.0%	0.0%
Counter-current flow	Mean value	5.52	4.50	2.22	1.41	1.27	0.37	0.37
	Maximum value	15.73	13.93	8.40	8.16	6.29	4.25	4.26
	0% ≤ runoff % < 2%	36.7%	36.7%	53.3%	70.0%	73.3%	91.7%	90.0%
	2% ≤ runoff % < 5%	18.3%	21.7%	30.0%	21.7%	21.7%	8.3%	10.0%
	Runoff % ≥ 5%	45.0%	41.7%	16.7%	8.3%	5.0%	0.0%	0.0%

Table 4. Results, in terms of percentage of not completely filled boxes (NCFB), obtained in the simulations performed with product inflow profiles that are the sum of a constant and a random noise, with different amplitude and filtered with low-pass filter with different cut-off frequency.

	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Mean value	10.49	3.16	5.72	2.31	2.06	0.42	0.45
	Maximum value	27.9	16.6	21.62	12.23	13.25	6.37	6.56
	0% ≤ NCFB % < 2%	26.7%	65.0%	48.3%	66.7%	70.0%	91.7%	91.7%
	2% ≤ NCFB % < 5%	8.3%	6.7%	11.7%	15.0%	13.3%	5.0%	5.0%
	NCFB % ≥ 5%	65.0%	28.3%	38.3%	18.3%	16.7%	3.3%	3.3%
Counter-current flow	Mean value	28.89	22.04	6.00	2.56	4.84	1.35	1.08
	Maximum value	81.66	77.38	20.68	12.52	16.37	9.3	9.24
	0% ≤ NCFB % < 2%	53.3%	48.3%	55.0%	73.3%	56.7%	83.3%	83.3%
	2% ≤ NCFB % < 5%	3.3%	11.7%	13.3%	8.3%	16.7%	10.0%	10.0%
	NCFB % ≥ 5%	41.7%	40.0%	31.7%	18.3%	26.7%	6.7%	6.7%

Table 5. Results, in terms of runoffs, obtained in the simulations performed with product inflow profiles that are the sum of a constant and a random noise, with different amplitude and filtered with low-pass filter with different cut-off frequency.

	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Strategy	A		B		C		D
	Buffer	No	Yes	No	Yes	No	Yes	Yes
Co-current flow	Mean value	1.03	0.43	0.67	0.73	0.41	0.08	0.07
	Maximum value	3.47	2.11	2.65	1.97	1.67	0.77	0.71
	0% ≤ runoff % < 2%	81.7%	98.3%	90.0%	100.0%	100.0%	100.0%	100.0%
	2% ≤ runoff % < 5%	18.3%	1.7%	10.0%	0.0%	0.0%	0.0%	0.0%
	Runoff % ≥ 5%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%	0.0%
Counter-current flow	Mean value	4.23	2.61	0.48	0.41	0.22	0.04	0.04
	Maximum value	12.48	8.93	2.57	1.88	1.67	0.74	0.69
	0% ≤ runoff % < 2%	65.0%	65.0%	95.0%	100.0%	100.0%	100.0%	100.0%
	2% ≤ runoff % < 5%	1.7%	3.3%	5.0%	0.0%	0.0%	0.0%	0.0%
	Runoff % ≥ 5%	33.3%	31.7%	0.0%	0.0%	0.0%	0.0%	0.0%

Because however the study has evidenced several other characteristics that cannot be directly inferred only from Tables 2–5, the main findings that this study has highlighted for the different pick-and-place strategies and for the different possible plant layouts are concisely described in the following paragraphs. For each strategy, the case in which no buffer is available is analysed first, whereas the case with buffer is considered in a second stage.

Strategy A. (No assignment at all)

This is the less performing strategy. In the co-current setting with no buffer, the workload of the different robotic cells is very unbalanced, leading to an unsafe ageing of the plant, which can reduce its reliability. Practically, the first robot is saturated and works at its maximum speed, whereas the last one is idle or performs few pick-and-place cycles per minute because it does not receive units of product or does not have empty places in the boxes where to place them. In Figure 4a, the graph of **F4** the product inflow together with the workload of the different robotic cells is reported for the quite demanding case in which the product unit inflow is constituted by a constant equal to 90% of Q_{max} plus a sinusoid of amplitude equal to 25% of Q_{max} and 1 min period.

In the counter-current setting, the performances are more satisfactory with less dropouts and a better distribution of the workload among robots, although there is still a consistent variability in

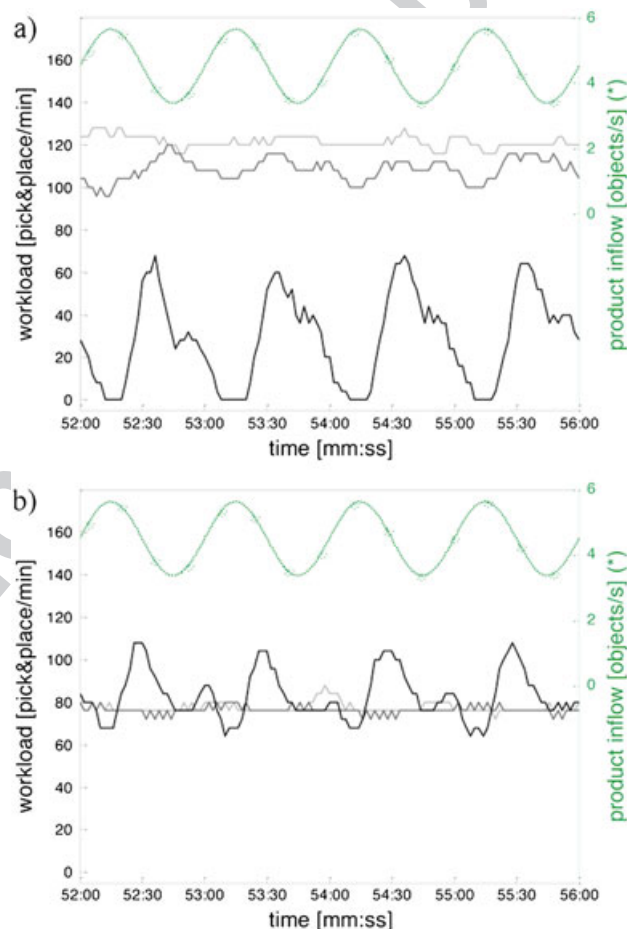


Figure 4. Workload of the first (light grey), second (dark grey) and third robotic cells (black) managing the product inflow (dotted *) with control Strategy A without buffers, in co-current (a) and counter-current (b) flow configurations. The workload of the different robotic cells is very unbalanced.

time, as evidenced in Figure 4b, which is taken from the simulation with the same inflow as in the previous example. MPEG files S2 and S3, available in the supplementary material online, show the behaviour of the three robotic cells working with strategy A, respectively in co-current and counter-current flow configurations, within the illustrative time interval [53:10 53:40] – minute:second of simulation.

Considering that the simulated robotic cells can handle about 120 units per minute when they work efficiently, whereas their pick-and-place capability drops to about 80 units per minute when they behave inefficiently picking units that are almost leaving the working area and putting them in empty positions that are also leaving the working area, it can be seen from the figure that the first and second robots work inefficiently at a rather constant low picking rate, whereas the last one switches between the efficient and inefficient conditions in connection with the decrease or the increase of the unit inflow.

The introduction of a buffer in the robotic cells improves the performances of the system in particular in the co-current flow setting. However, the negative features encountered when no buffer is present are still present.

Strategy B. (Incoming units of product are cyclically assigned to the robotic cells)

This strategy consistently improves the performances of the system, in particular in the counter-current setting. As a matter of fact, the equal distribution of the incoming units of product among robotic cells allows them to work in optimal conditions for longer periods of time reducing consistently the eventuality that a cell is overloaded and starts working in inefficient conditions that usually lead to dropouts. The improvement that is obtained in the same case of product inflow as previously, constituted by a constant equal to 90% of Q_{\max} and a sinusoid of amplitude equal to 25% of Q_{\max} and 1 min period, is clearly shown in Figure 5b. From the figure, it can be inferred that the three cells work almost **F5** at the same rate.

Also, in the co-current flow setting, Strategy B performs quite better than Strategy A. The distribution of units to be picked among robots avoids that the first cells completely fill some boxes that would then cause runoffs when they reach the following robotic cells (as example in MPEG file S2 at 53:35 time instant). In Figure 5a, the workload of the robots is reported for the same previously mentioned representative simulation. Also, with this second strategy, the introduction of a buffer in the robotic cells improves the performances of the system in particular in the co-current flow setting. However, it happens that at the very beginning of the simulation, the robots that first receive the empty boxes to be filled (first and second cells in co-current flow setting; second and third cells in counter-current flow setting) empty their buffers because they have plenty of places to fill with the available units. Such buffers remain then empty throughout the simulation, and only the last buffer is actually used by the last robot, as shown in Figure 6a and MPEG file S4, movie of the time **F6** interval [53:10 53:40] – minute:second of the co-current flow simulation performed with the above parameters.

Strategy C. (Incoming units of product as well as empty places in the boxes are cyclically assigned to the robotic cells)

This strategy further improves the performances of the plant, in particular in the case in which buffers are available. Indeed, the double assignment of units of product and of empty places to the different robotic cells strongly reduces the phenomenon of unbalanced use of the buffers. In Figure 6b, the time course of the number of object parked on the buffers is reported during a simulation, performed with co-current flow configuration and Strategy C, in which the product unit inflow is constituted by a constant equal to 90% of Q_{\max} and a sinusoid of amplitude equal to 15% of Q_{\max} and 4 min period. MPEG file S5 contains the movie of the simulation during a representative time interval of this simulation ([47:20 47:40] – minute:second).

However, a quite negative feature that arises in these conditions is the fact that the robots often work uselessly at high rate. This is related to the fact that quite often the robots pick a unit of product and put it in the buffer (because there is no place available in the boxes) and immediately

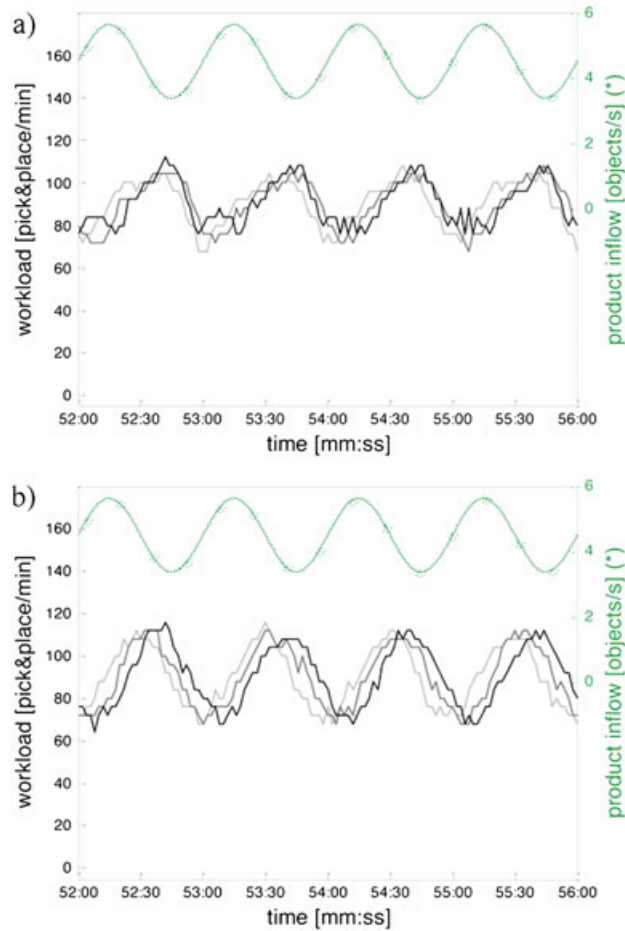



Figure 5. Workload of the first (light grey), second (dark grey) and third robotic cells (black) managing the product inflow (dotted *) with control Strategy B without buffers, in co-current (a) and counter-current (b) flow configurations. The workload of the different robotic cells is more balanced.

after they pick it from the buffer (because no new unit is available on the conveyor belt) and put it in an empty position that just entered their working space. Such double cycles are clearly not desirable because they overload the robots. This kind of working condition is represented both in Figure 7a and MPEG file S5 [at 47:24 time], where it is possible to evince that movements **F7** from the belt to the shelf and from the shelf to the boxes occur almost at the same time.

Strategy D. (Incoming units of product as well as empty places in the boxes are cyclically assigned to the robotic cells, but belt-to-buffer and buffer-to-box cycles are executed only if the unit to be picked or the empty place in the boxes is in the second half of the working space of the robot)

This is the best performing strategy among all those considered in this study: the problem of useless double belt-to-buffer and buffer-to-box cycles is almost eliminated. As represented in Figures 6c and 7b, the different robotic cells work in a rather decoupled way and can deal with consistent variations of the product inflow. Simulation movies of the plant working with co-current and counter-current flow configurations and Strategy D (with the product unit inflow constituted by a constant equal to 90% of Q_{\max} and a sinusoid of amplitude equal to 15% of Q_{\max} and 4 min period) are reported in MPEG files S6 and S7, respectively.

It is important to underline that with this strategy, the performances that can be obtained with the co-current flow setting are practically equal to those that are obtained with the counter-current flow

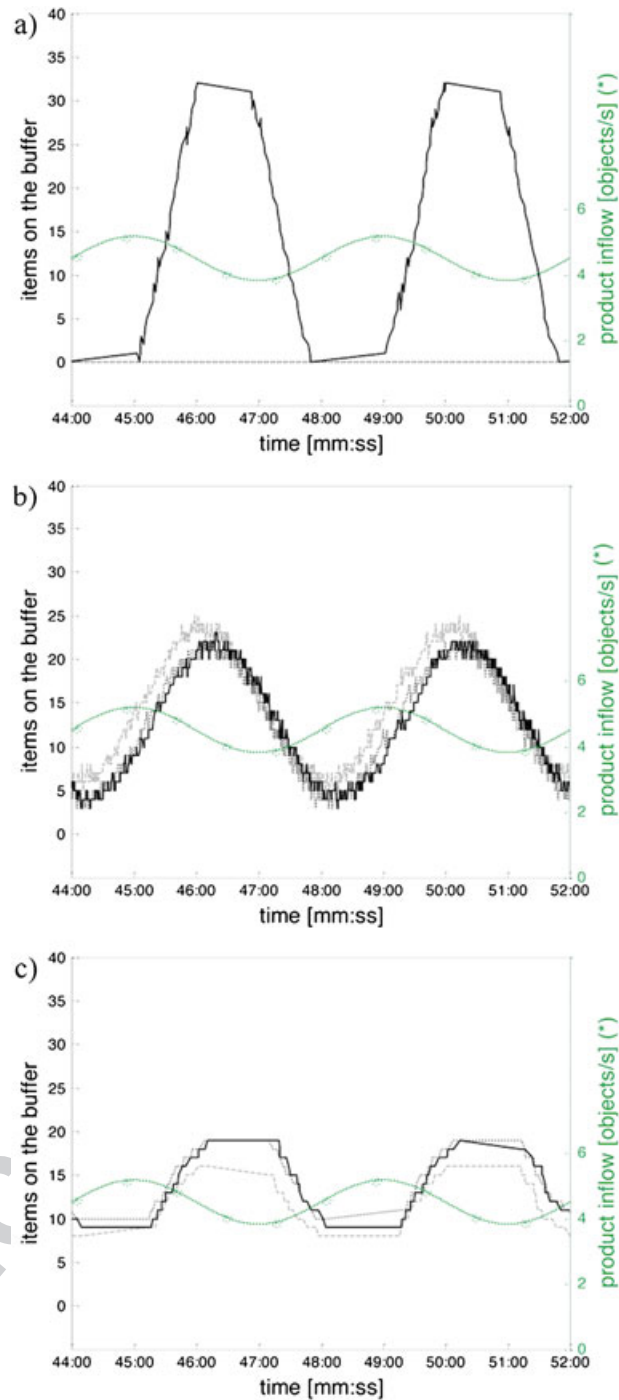

Colour online, B&W in print

Figure 6. Objects on the buffer of the first (dashed light grey), second (dotted dark grey) and third robotic cells (solid black) managing the product inflow (dotted *) in co-current flow configuration. Adopting control Strategy B, only the third buffer is utilized (a), whereas with control Strategy C, all the buffers are equally used (b). With control Strategy D (c), the improper use of the buffers is eliminated.

setting. On top of this, the co-current flow setting has the advantage that it can handle higher maximum inflow of products without switching to a less efficient working condition as it happens with the counter-current flow setting.

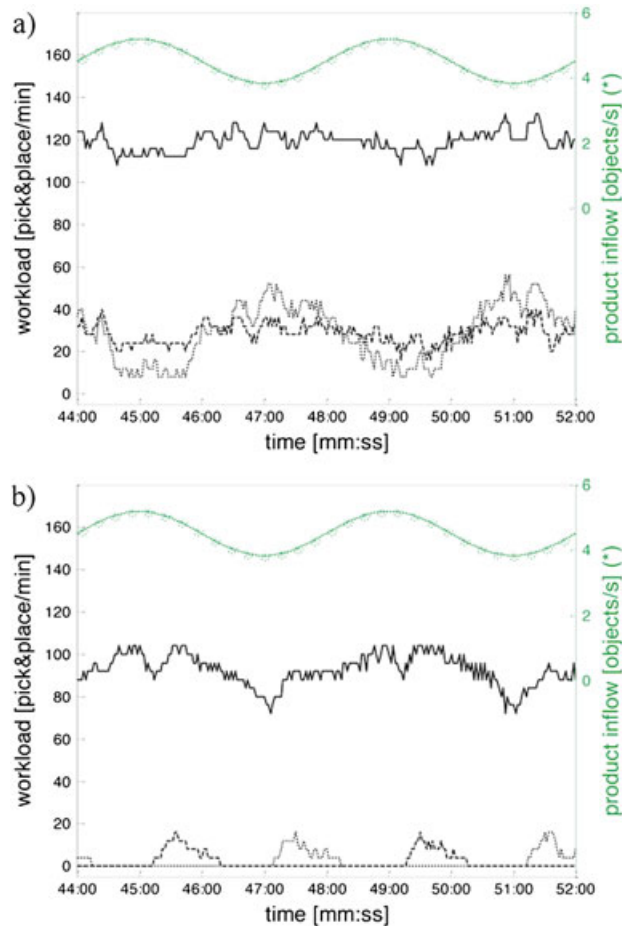


Figure 7. Total workload of the first robotic cell (solid line) managing the product inflow (dotted *) in co-current flow configuration with buffers. Partial workload: quantity of pick-and-place cycles per minute performed to move objects from the inflow conveyor belt to the buffers (dashed line) and from the buffers to the boxes (dotted line), with control strategy C (a) and D (b).

CONCLUSIONS AND FUTURE RESEARCH DIRECTIONS

The performances of co-current and counter-current secondary packaging plants have been analysed adopting different settings. Against the common thinking of many packaging plant designers, which consider counter-current configuration the only viable solution to face product-boxes unbalanced perturbations, this paper has clearly shown that it is possible to obtain very good performances with both settings if a proper pick-and-place strategy is chosen as described in the paper. This analysis is of particular practical interest because there is a patent related to the counter-current setting that prevents unauthorized adoption of this configuration. Performances have been shown to be further upgradeable if suitable buffers are accommodated in the robotic cells. The robots can use these buffers to store (or to pick) units of product whenever there is not a free position available in the boxes (or there is not a product unit available on the conveyor belt).

Results have been obtained using a simulator, developed for this purpose, which has been also presented in this paper. It has proved to be a flexible tool for analysing the behaviour of secondary packaging plants for which a meaningful description in terms of their dynamic equations is out of reach. The simulator allows setting a very consistent amount of parameters that practically allow to model a huge number of different possible plants, helping packaging plant designer to chose the best solutions.

ACKNOWLEDGEMENTS

This work was partially supported by POR-FESR Project 'PackOPT – Individuazione di strategie innovative di pick-and-place per il packaging secondario dei prodotti alimentari'. Authors would like to thank Abrigo s.p.a. for the collaboration.


REFERENCES

1. Holmes JF, Holcombe WD. Guidelines for designing washdown robots for meat packing applications. *Trends in Food Science & Technology* 2010; **21**: 158–163
2. Sahin H. Design of a secondary packaging robotic system. *PhD Thesis*, The Graduate School of Natural and Applied Science of Middle East Technical University, Turkey, 2005.
3. Mahalik NP, Nambiar AN. Trends in food packaging and manufacturing systems and technology. *Trends in Food Science & Technology* 2010; **21**: 117–128.
4. Is-il Bozma H, Kalahog lu ME. Multirobot coordination in pick-and-place tasks on a moving conveyor. *Robotics and Computer-Integrated Manufacturing* 2012; **28**: 530–538.
5. Wallin PJ. Robotics in food industry: an update. *Trends in Food Science & Technology* 1997; **81**: 193–198.
6. Mattone R, Divona M, Wolf A. Sorting of items on a moving conveyor belt. Part 2: performance evaluation and optimization of pick-and-place operations. *Robotics and Computer Integrated Manufacturing* 2000; **16**: 81–90.
7. Hou JL, Wu N, Wu YJ. A job assignment model for conveyor-aided picking system. *Computer & Industrial Engineering* 2009; **56**: 1254–1264.
8. Connolly C. Robots at the heart of Schubert packaging machinery lead to great flexibility. *Industrial Robot: An International Journal* 2007; **34**(4): 277–280.
9. Schubert R. Process and apparatus for introducing products into containers. Patent no. 6122895, United States, Gerhard Schubert GmbH (Crailsheim, DE), 2000.

Research Article

Plant Layout and Pick-and-place Strategies for Improving Performances in Secondary Packaging Plants of Food Products

Lorenzo Comba, Gustavo Belforte and Paolo Gay

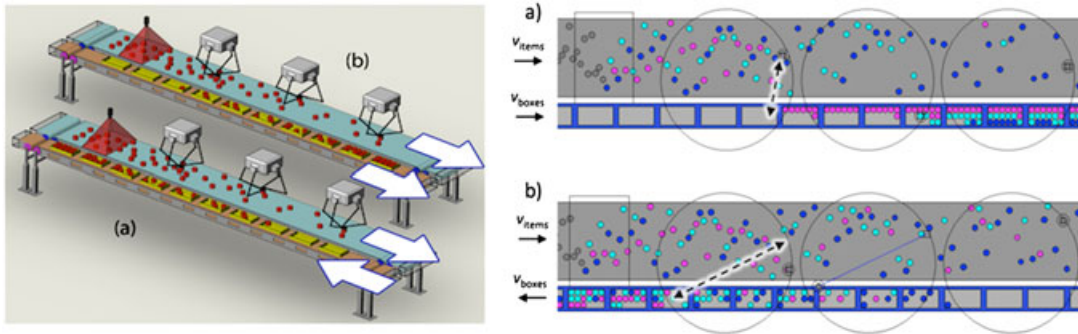

Author Query Form

Journal: Packaging Technology and Science

Article: pts_1984

Dear Author,

During the copyediting of your paper, the following queries arose. Please respond to these by annotating your proofs with the necessary changes/additions.

- If you intend to annotate your proof electronically, please refer to the E-annotation guidelines.
- If you intend to annotate your proof by means of hard-copy mark-up, please refer to the proof mark-up symbols guidelines. If manually writing corrections on your proof and returning it by fax, do not write too close to the edge of the paper. Please remember that illegible mark-ups may delay publication.

Whether you opt for hard-copy or electronic annotation of your proofs, we recommend that you provide additional clarification of answers to queries by entering your answers on the query sheet, in addition to the text mark-up.


Query No.	Query	Remark
Q1	AUTHOR: "From 2010, PTS publishes a graphical table of contents online. For this purpose, would you please submit a short summary of your paper in no more than 80 words or three sentences?"	
Q2	AUTHOR: Please check and confirm that the manufacturer details supplied for 'MATLAB [®] ' are correct.	
Q3	AUTHOR: For '18.000 pick-and-place events', do you mean '18,000 pick-and-place events'? Also, for '54.000 events', do you mean '54,000 events'? Please check.	

USING e-ANNOTATION TOOLS FOR ELECTRONIC PROOF CORRECTION


Required software to e-Annotate PDFs: Adobe Acrobat Professional or Adobe Reader (version 7.0 or above). (Note that this document uses screenshots from Adobe Reader X)

The latest version of Acrobat Reader can be downloaded for free at: <http://get.adobe.com/uk/reader/>

Once you have Acrobat Reader open on your computer, click on the [Comment](#) tab at the right of the toolbar:



This will open up a panel down the right side of the document. The majority of tools you will use for annotating your proof will be in the [Annotations](#) section, pictured opposite. We've picked out some of these tools below:

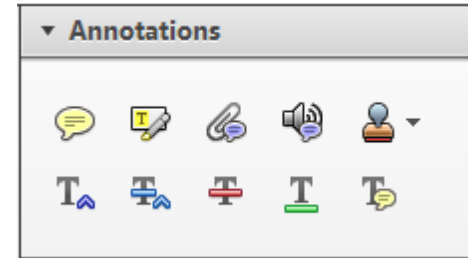

1. Replace (Ins) Tool – for replacing text.




Strikes a line through text and opens up a text box where replacement text can be entered.

How to use it

- Highlight a word or sentence.
- Click on the [Replace \(Ins\)](#) icon in the Annotations section.
- Type the replacement text into the blue box that appears.

standard framework for the analysis of microeconomics. Nevertheless, it also led to the emergence of strategic behaviour in the number of competitors in the industry. This is that the structure of the industry, which led to the main components of the industry level, are exogenous to the industry. An important work on this by Shirasaka (henceforth) we open the 'black b

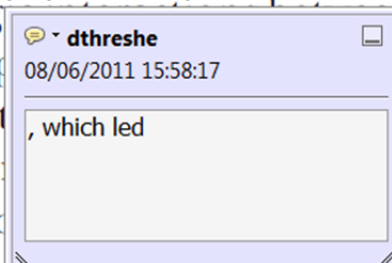

2. Strikethrough (Del) Tool – for deleting text.



Strikes a red line through text that is to be deleted.

How to use it

- Highlight a word or sentence.
- Click on the [Strikethrough \(Del\)](#) icon in the Annotations section.

there is no room for extra profits and the number of competitors are zero and the number of firms (net) values are not determined by Blanchard and ~~Kiyotaki~~ (1987), perfect competition in general equilibrium of aggregate demand and supply in the classical framework assuming monopoly. An exogenous number of firms

3. Add note to text Tool – for highlighting a section to be changed to bold or italic.



Highlights text in yellow and opens up a text box where comments can be entered.

How to use it

- Highlight the relevant section of text.
- Click on the [Add note to text](#) icon in the Annotations section.
- Type instruction on what should be changed regarding the text into the yellow box that appears.

dynamic responses of mark ups consistent with the **VAR** evidence

sation... y Ma... and... on n... to a... on... stent also with the demand-



4. Add sticky note Tool – for making notes at specific points in the text.



Marks a point in the proof where a comment needs to be highlighted.

How to use it

- Click on the [Add sticky note](#) icon in the Annotations section.
- Click at the point in the proof where the comment should be inserted.
- Type the comment into the yellow box that appears.

and supply shocks. Most of the... number of... standard framework... cy. Nevertheless, it also led to the emergence of strategic behaviour in the number of competitors and the impact is that the structure of the sector



USING e-ANNOTATION TOOLS FOR ELECTRONIC PROOF CORRECTION


5. Attach File Tool – for inserting large amounts of text or replacement figures.



Inserts an icon linking to the attached file in the appropriate place in the text.

How to use it

- Click on the [Attach File](#) icon in the Annotations section.
- Click on the proof to where you'd like the attached file to be linked.
- Select the file to be attached from your computer or network.
- Select the colour and type of icon that will appear in the proof. Click OK.

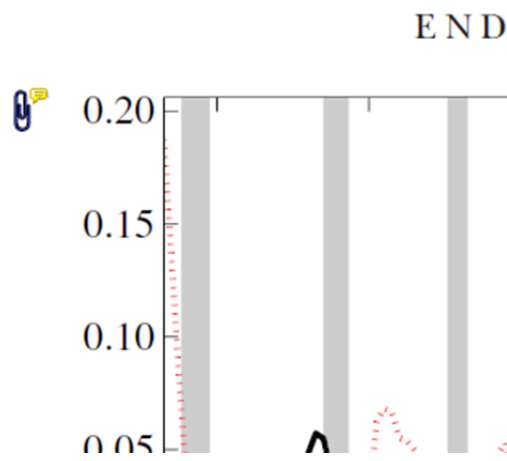

6. Add stamp Tool – for approving a proof if no corrections are required.




Inserts a selected stamp onto an appropriate place in the proof.

How to use it

- Click on the [Add stamp](#) icon in the Annotations section.
- Select the stamp you want to use. (The [Approved](#) stamp is usually available directly in the menu that appears).
- Click on the proof where you'd like the stamp to appear. (Where a proof is to be approved as it is, this would normally be on the first page).

of the business cycle, starting with the
 on perfect competition, constant return
 production. In this environment goods
 extra profits and the number of firms
 he number of firms is determined by the model. The New-Key
 otaki (1987), has introduced product
 general equilibrium models with nomin
 ed and supply shocks. Most of this literat

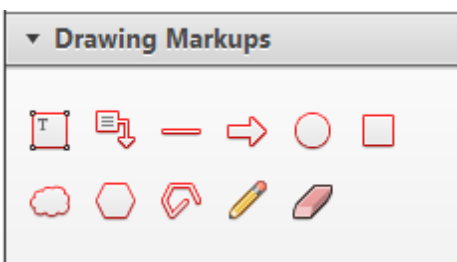


7. Drawing Markups Tools – for drawing shapes, lines and freeform annotations on proofs and commenting on these marks.


Allows shapes, lines and freeform annotations to be drawn on proofs and for comment to be made on these marks..

How to use it

- Click on one of the shapes in the [Drawing Markups](#) section.
- Click on the proof at the relevant point and draw the selected shape with the cursor.
- To add a comment to the drawn shape, move the cursor over the shape until an arrowhead appears.
- Double click on the shape and type any text in the red box that appears.

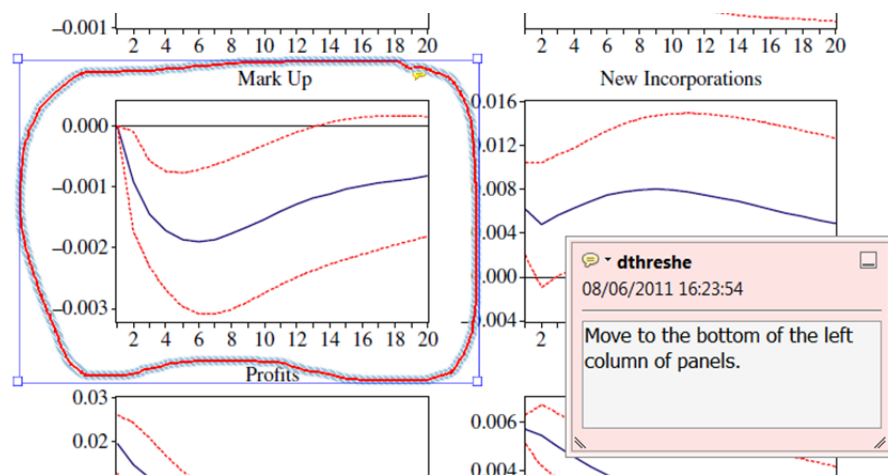

For further information on how to annotate proofs, click on the [Help](#) menu to reveal a list of further options:

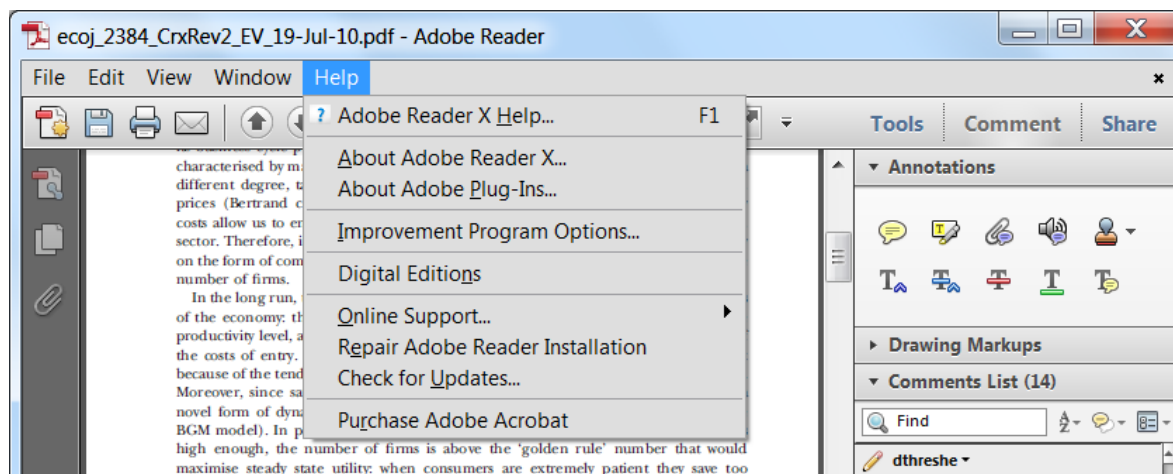



WILEY AUTHOR DISCOUNT CLUB

We would like to show our appreciation to you, a highly valued contributor to Wiley's publications, by offering a **unique 25% discount** off the published price of any of our books*.

All you need to do is apply for the **Wiley Author Discount Card** by completing the attached form and returning it to us at the following address:

The Database Group (Author Club)
John Wiley & Sons Ltd
The Atrium
Southern Gate
Chichester
PO19 8SQ
UK

Alternatively, you can **register online** at www.wileyeurope.com/go/authordiscount
Please pass on details of this offer to any co-authors or fellow contributors.

After registering you will receive your Wiley Author Discount Card with a special promotion code, which you will need to quote whenever you order books direct from us.

The quickest way to order your books from us is via our European website at:

<http://www.wileyeurope.com>

Key benefits to using the site and ordering online include:

- Real-time SECURE on-line ordering
- Easy catalogue browsing
- Dedicated Author resource centre
- Opportunity to sign up for subject-orientated e-mail alerts

Alternatively, you can order direct through Customer Services at:
cs-books@wiley.co.uk, or call +44 (0)1243 843294, fax +44 (0)1243 843303


So take advantage of this great offer and return your completed form today.

Yours sincerely,

Verity Leaver
Group Marketing Manager
author@wiley.co.uk

*TERMS AND CONDITIONS

This offer is exclusive to Wiley Authors, Editors, Contributors and Editorial Board Members in acquiring books for their personal use. There must be no resale through any channel. The offer is subject to stock availability and cannot be applied retrospectively. This entitlement cannot be used in conjunction with any other special offer. Wiley reserves the right to amend the terms of the offer at any time.




REGISTRATION FORM

For Wiley Author Club Discount Card

To enjoy your 25% discount, tell us your areas of interest and you will receive relevant catalogues or leaflets from which to select your books. Please indicate your specific subject areas below.

<p>Accounting <input type="checkbox"/></p> <p>Public <input type="checkbox"/></p> <p>Corporate <input type="checkbox"/></p> <p>Chemistry <input type="checkbox"/></p> <p>Analytical <input type="checkbox"/></p> <p>Industrial/Safety <input type="checkbox"/></p> <p>Organic <input type="checkbox"/></p> <p>Inorganic <input type="checkbox"/></p> <p>Polymer <input type="checkbox"/></p> <p>Spectroscopy <input type="checkbox"/></p> <p>Encyclopedia/Reference <input type="checkbox"/></p> <p>Business/Finance <input type="checkbox"/></p> <p>Life Sciences <input type="checkbox"/></p> <p>Medical Sciences <input type="checkbox"/></p> <p>Physical Sciences <input type="checkbox"/></p> <p>Technology <input type="checkbox"/></p> <p>Earth & Environmental Science <input type="checkbox"/></p> <p>Hospitality <input type="checkbox"/></p> <p>Genetics <input type="checkbox"/></p> <p>Bioinformatics/ Computational Biology <input type="checkbox"/></p> <p>Proteomics <input type="checkbox"/></p> <p>Genomics <input type="checkbox"/></p> <p>Gene Mapping <input type="checkbox"/></p> <p>Clinical Genetics <input type="checkbox"/></p> <p>Medical Science <input type="checkbox"/></p> <p>Cardiovascular <input type="checkbox"/></p> <p>Diabetes <input type="checkbox"/></p> <p>Endocrinology <input type="checkbox"/></p> <p>Imaging <input type="checkbox"/></p> <p>Obstetrics/Gynaecology <input type="checkbox"/></p> <p>Oncology <input type="checkbox"/></p> <p>Pharmacology <input type="checkbox"/></p> <p>Psychiatry <input type="checkbox"/></p> <p>Non-Profit <input type="checkbox"/></p>	<p>Architecture <input type="checkbox"/></p> <p>Business/Management <input type="checkbox"/></p> <p>Computer Science <input type="checkbox"/></p> <p>Database/Data Warehouse <input type="checkbox"/></p> <p>Internet Business <input type="checkbox"/></p> <p>Networking <input type="checkbox"/></p> <p>Programming/Software Development <input type="checkbox"/></p> <p>Object Technology <input type="checkbox"/></p> <p>Engineering <input type="checkbox"/></p> <p>Civil <input type="checkbox"/></p> <p>Communications Technology <input type="checkbox"/></p> <p>Electronic <input type="checkbox"/></p> <p>Environmental <input type="checkbox"/></p> <p>Industrial <input type="checkbox"/></p> <p>Mechanical <input type="checkbox"/></p> <p>Finance/Investing <input type="checkbox"/></p> <p>Economics <input type="checkbox"/></p> <p>Institutional <input type="checkbox"/></p> <p>Personal Finance <input type="checkbox"/></p> <p>Life Science <input type="checkbox"/></p> <p>Landscape Architecture <input type="checkbox"/></p> <p>Mathematics Statistics <input type="checkbox"/></p> <p>Manufacturing <input type="checkbox"/></p> <p>Materials Science <input type="checkbox"/></p> <p>Psychology <input type="checkbox"/></p> <p>Clinical <input type="checkbox"/></p> <p>Forensic <input type="checkbox"/></p> <p>Social & Personality <input type="checkbox"/></p> <p>Health & Sport <input type="checkbox"/></p> <p>Cognitive <input type="checkbox"/></p> <p>Organizational <input type="checkbox"/></p> <p>Developmental & Special Ed <input type="checkbox"/></p> <p>Child Welfare <input type="checkbox"/></p> <p>Self-Help <input type="checkbox"/></p> <p>Physics/Physical Science <input type="checkbox"/></p>
--	--

Please complete the next page /





I confirm that I am (*delete where not applicable):

a **Wiley** Book Author/Editor/Contributor* of the following book(s):

ISBN:

ISBN:

a **Wiley** Journal Editor/Contributor/Editorial Board Member* of the following journal(s):

SIGNATURE: Date:

PLEASE COMPLETE THE FOLLOWING DETAILS IN BLOCK CAPITALS:

TITLE: (e.g. Mr, Mrs, Dr) FULL NAME:

JOB TITLE (or Occupation):

DEPARTMENT:

COMPANY/INSTITUTION:

ADDRESS:

.....

TOWN/CITY:

COUNTY/STATE:

COUNTRY:

POSTCODE/ZIP CODE:

DAYTIME TEL:

FAX:

E-MAIL:

YOUR PERSONAL DATA

We, John Wiley & Sons Ltd, will use the information you have provided to fulfil your request. In addition, we would like to:

- 1. Use your information to keep you informed by post of titles and offers of interest to you and available from us or other Wiley Group companies worldwide, and may supply your details to members of the Wiley Group for this purpose. [] Please tick the box if you do **NOT** wish to receive this information
- 2. Share your information with other carefully selected companies so that they may contact you by post with details of titles and offers that may be of interest to you. [] Please tick the box if you do **NOT** wish to receive this information.

E-MAIL ALERTING SERVICE

We also offer an alerting service to our author base via e-mail, with regular special offers and competitions. If you **DO** wish to receive these, please opt in by ticking the box [].

If, at any time, you wish to stop receiving information, please contact the Database Group (databasegroup@wiley.co.uk) at John Wiley & Sons Ltd, The Atrium, Southern Gate, Chichester, PO19 8SQ, UK.

TERMS & CONDITIONS

This offer is exclusive to Wiley Authors, Editors, Contributors and Editorial Board Members in acquiring books for their personal use. There should be no resale through any channel. The offer is subject to stock availability and may not be applied retrospectively. This entitlement cannot be used in conjunction with any other special offer. Wiley reserves the right to vary the terms of the offer at any time.

PLEASE RETURN THIS FORM TO:

Database Group (Author Club), John Wiley & Sons Ltd, The Atrium, Southern Gate, Chichester, PO19 8SQ, UK author@wiley.co.uk
Fax: +44 (0)1243 770154

