



POLITECNICO DI TORINO  
Repository ISTITUZIONALE

A Normalized and Extended Correlation Equation for Predicting Single-Collector Efficiency in Physicochemical Filtration in Saturated Porous Media

*Original*

A Normalized and Extended Correlation Equation for Predicting Single-Collector Efficiency in Physicochemical Filtration in Saturated Porous Media / Messina, Francesca; Marchisio, Daniele; Sethi, Rajandrea. - (2015). ((Intervento presentato al convegno 7th International Conference on Porous Media & Annual Meeting tenutosi a Padova nel May 18 - 21, 2015.

*Availability:*

This version is available at: 11583/2614533 since: 2015-07-08T08:44:00Z

*Publisher:*

*Published*

DOI:

*Terms of use:*

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# **A Normalized and Extended Correlation Equation for Predicting Single-Collector Efficiency in Physicochemical Filtration in Saturated Porous Media**

*Presenter: Rajandrea Sethi*

## **AUTHORS**

**Francesca Messina (1), Daniele Marchisio (2), Rajandrea Sethi (3)**

1. Politecnico di Torino - DIATI, C.so Duca degli Abruzzi 24, 10129, Torino, IT
2. Politecnico di Torino - DISAT, Corso Duca degli Abruzzi 24, 10129, Torino, IT
3. Politecnico di Torino - DIATI, Corso Duca degli Abruzzi 24, 10129, Torino, IT

## **ABSTRACT**

The colloidal transport and deposition are phenomena involved in different engineering problems. In the environmental engineering field the use of micro- and nano-scale zerovalent iron (M-NZVI) is one of the most promising technologies for groundwater remediation. Colloid deposition is normally studied from a micro scale point of view and the results are then implemented in macro scale models that are used to design field-scale applications.

The single collector efficiency concept predicts particles deposition onto a single grain of a complex porous medium in terms of probability that an approaching particle would be retained on the solid grain. Different approaches and models are available in literature to predict it, but most of them fail in some particular conditions (e.g. low fluid velocity and/or very small or very big particle dimension) because they predict efficiency values exceeding unity.

By analysing particle fluxes and deposition mechanisms and performing a mass balance on the entire domain, the traditional definition of efficiency was reformulated and a novel total flux normalized correlation equation is proposed for predicting single-collector efficiency under a broad range of parameters. The new equation has been formulated starting from a combination of Eulerian and Lagrangian numerical COMSOL Multiphysics® simulations, performed under Smoluchowski-Levich conditions in a geometry which consists of a sphere enveloped by a cylindrical control volume (Figure 1). The normalization of the deposited flux is performed accounting for all of the particles entering into the control volume through all transport mechanisms (not just the upstream convective flux as conventionally done) to provide efficiency values lower than one under any possible combination of transport mechanisms. The particle fluxes onto the collector and through the control volume have been described mathematically as a summation of terms. In order to guarantee the independence of each term, the correlation equation is derived through a rigorous hierarchical parameter estimation process, accounting for single and mutual interacting transport mechanisms.

The new correlation equation provides efficiency values lower than one over a wide range of parameters (Figure 2) and it is valid both for point and finite-size particles. Moreover the correlation equation is extended to include porosity dependence and reduced forms are also proposed by elimination of the less relevant terms without losing the main features of the full equation.

## **REFERENCES**

1. Yao, K. M.; Habibian, M. M.; Omelia, C. R., Water and Waste Water Filtration - Concepts and Applications. Environ Sci Technol 1971, 5, (11), 1105-1112.
2. Tufenkji, N., M. Elimelech, Correlation equation for predicting single-collector efficiency in physicochemical filtration in saturated porous media. Environmental Science & Technology 2004 38(2):529-536.
3. Tosco T., Sethi R. - Transport of Non-Newtonian Suspensions of Highly Concentrated Micro- And

4. Messina, F.; Marchisio, D. L.; Sethi, R An extended and total flux normalized correlation equation for predicting single-collector efficiency. Submitted to J Colloid Interface Sci, In press

5. Boccardo, G.; Marchisio, D. L.; Sethi, R., Microscale simulation of particle deposition in porous media. J Colloid Interface Sci 2014, 417, 227-37.

## GRAPHICS

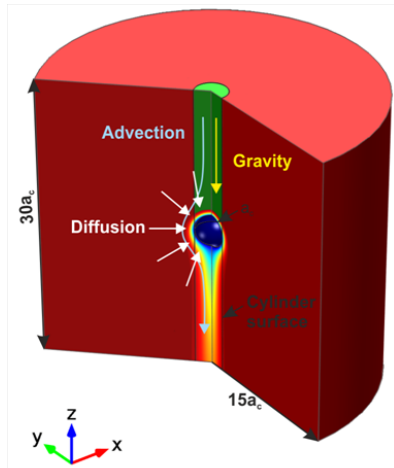


Figure 1: Geometry analyzed, sphere enveloped by a cylindrical control volume

Graphic1

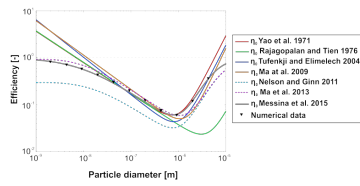


Figure 2: Comparison of the proposed equation with existing models for a typical range of particle size. Parameters values: porosity  $\epsilon = 4$ , fluid density  $\rho_f = 998 \text{ kg/m}^3$ , particle density  $\rho_p = 1050 \text{ kg/m}^3$ , temperature  $T = 298 \text{ K}$ , fluid viscosity  $\mu = 0.8 \cdot 10^{-4} \text{ Pa}\cdot\text{s}$ , collector radius  $a_c = 250 \text{ }\mu\text{m}$ , fluid approach velocity  $U = 1 \cdot 10^{-4} \text{ m/s}$

Graphic2

$$\eta_{0,0}^* = \frac{1.5062 \cdot d_p \cdot V_p^{0.667} + 7.5609 \cdot V_p^2 + V_p^3 + 2.9352 \cdot d_p^{0.667} \cdot V_p^{-1.667} (1 + 0.93621 \cdot V_p^{0.667}) + 0.9461 \cdot V_p^{0.667} \cdot V_p^{-0.667}}{[1 + 6.0098 \cdot V_p^{0.667}] + 7.5609 \cdot V_p^2 + V_p^3 + 2.9352 \cdot d_p^{0.667} \cdot V_p^{-1.667} (1 + 0.93621 \cdot V_p^{0.667}) + 2.7972 \cdot V_p^{0.667} \cdot V_p^{-0.667}}$$

Graphic3