

Energy cost and discount rate influence on the optimal packages of energy efficiency measures.

Original

Energy cost and discount rate influence on the optimal packages of energy efficiency measures / Corrado, Vincenzo; Ballarini, Ilaria; Ottati, Ilenia; Paduos, SIMONA ANGELA ALINA. - ELETTRONICO. - (2015), pp. 447-454. ((Intervento presentato al convegno BSA 2015 - 2nd IBPSA-Italy conference tenutosi a Bozen-Bolzano nel 4th – 6th February 2015.

Availability:

This version is available at: 11583/2627018 since: 2021-01-22T13:30:51Z

Publisher:

Bozen-Bolzano University Press

Published

DOI:

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Konferenzbeiträge / Atti / Proceedings

Building Simulation Applications BSA 2015

2nd IBPSA-Italy conference
Bozen-Bolzano, 4th–6th February 2015

Edited by
Marco Baratieri, Vincenzo Corrado,
Andrea Gasparella, Francesco Patuzzi

bu,press

bozen
bolzano
university
press

Scientific committee

Ian Beausoleil-Morrison, Carleton University, Canada
Jan Hensen, Technische Universiteit Eindhoven, The Netherlands
Ardeshir Mahdavi, Technische Universität Wien, Austria
Athanasios Tzempelikos, Purdue University, USA
Natale Arcuri, Università della Calabria, Italy
Paolo Baggio, Università degli Studi di Trento, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Livio Mazzarella, Politecnico di Milano, Italy

Organizing committee

Paolo Baggio, Università degli Studi di Trento, Italy
Marco Baratieri, Free University of Bozen-Bolzano, Italy
Francesca Cappelletti, IUAV University of Venice, Italy
Alfonso Capozzoli, Politecnico di Torino, Italy
Vincenzo Corrado, Politecnico di Torino, Italy
Enrico Fabrizio, Politecnico di Torino, Italy
Andrea Gasparella, Free University of Bozen-Bolzano, Italy
Norbert Klammsteiner, Energytech Ltd., Bozen-Bolzano, Italy
Marco Noro – Università degli Studi di Padova
Fabian Ochs, Universität Innsbruck, Austria
Francesco Patuzzi, Free University of Bozen-Bolzano, Italy
Paola Penna, Free University of Bozen-Bolzano, Italy
Giovanni Pernigotto, Università degli Studi di Padova, Italy
Alessandro Prada, Free University of Bozen-Bolzano, Italy
Piercarlo Romagnoni, IUAV Università di Venezia, IBPSA, Italy

Other reviewers and chairmen

Anna Atzeri, Free University of Bozen-Bolzano, Italy
Adolfo Palombo, Università degli Studi di Napoli, Italy
Fabio Sicurella, Professional Engineer, Catania, Italy
Francesco Asdrubali, Università degli Studi di Perugia, Italy
Luigi Marletta, University of Catania, Italy
Marco Manzan, University of Trieste, Italy
Laura Bellia, Università degli Studi di Napoli, Italy
Jerome Kämpf, École Polytechnique Fédérale de Lausanne, Switzerland
Ulrich Pont, Technische Universität Wien, Austria

Design: DOC.bz

© 2015 by Bozen-Bolzano University Press

Free University of Bozen-Bolzano

All rights reserved

1st edition

www.unibz.it/universitypress

ISBN 978-88-6046-074-5

<http://purl.org/bzup/publications/9788860460745>

Energy cost and discount rate influence on the optimal packages of energy efficiency measures

Vincenzo Corrado – Department of Energy, Politecnico di Torino (Italy) – vincenzo.corrado@polito.it

Ilaria Ballarini – Department of Energy, Politecnico di Torino (Italy) – ilaria.ballarini@polito.it

Ilenia Ottati – Department of Energy, Politecnico di Torino (Italy) – ilenia.ottati@polito.it

Simona Paduos – Department of Energy, Politecnico di Torino (Italy) – simona.paduos@polito.it

Abstract

The Commission Delegated Regulation No. 244/2012 supplementing Directive 2010/31/EU on the comparative methodology framework for calculating cost-optimal levels of minimum energy performance requirements enforces Member States to perform an analysis to determine the sensitivity of the calculation outcomes to changes in the energy price developments and the discount rates, as well as other parameters which are expected to have a significant impact on the outcome of the calculations.

In Italy the cost optimal methodology has been performed by using a simulation tool enforced on a quasi-steady state numerical model (UNI/TS 11300) while the cost optimisation procedure is based on a sequential search-optimisation technique considering discrete options, as introduced in a previous work (Corrado et al., 2014). Packages of energy efficiency measures giving optimal EP levels have been found for different buildings and climatic conditions (Italian Ministry of Economic Development, 2013; Corrado et al., 2013). Results show that the optimal solutions are strongly influenced by energy costs of the different energy wares, and this can affect the suitable technical solutions for refurbishment.

The present work is focused on the definition of different economic scenarios. The aim is to assess a wide economic framework as to determine the influence of the energy cost and discount rate on the costs/benefits analysis and how cost optimal solutions can change according to these trends. Different energy cost variations are considered for electricity and natural gas, which are the most used energy carriers in Italy. The economic framework is applied to four Italian reference buildings to emphasize its influence when different building uses and climatic boundary conditions are considered. Discrepancies in results are then discussed.

1. Introduction

1.1 The comparative methodology framework

European Directive 2010/31/EU (European Union, 2010) on the energy performance of buildings requires Member States to take the necessary measures to ensure that minimum energy performance requirements for buildings or building units are set with a view to achieving cost-optimal levels. Member States shall calculate cost-optimal levels of minimum energy performance requirements using a comparative methodology framework.

The comparative methodology framework has been established by the Commission Delegated Regulation No. 244/2012 (European Union, 2012a) supplementing the Directive 2010/31/EU, in order to calculate cost-optimal levels of minimum requirements for the energy performance of buildings and building elements. The Guidelines that accompany the Regulation (European Union, 2012b) include information to help Member States to apply the comparative methodology at the national level.

A cost-optimal level is the energy performance (EP) level which leads to the lowest global cost during the estimated economic lifecycle, taking into account energy-related investment costs, maintenance and operating costs (including energy costs and savings, the category of building concerned, earnings from energy produced), and disposal costs, where applicable.

The comparative methodology includes the following steps:

- definition of reference buildings (RBs), representative of the building stock in terms of function and climatic conditions,
- identification of energy efficiency measures (EEMs), in terms of different packages/variants for each RB,
- calculation of the primary energy demand resulting from the application of the EEMs to a RB,
- calculation of the global cost in terms of net present value for each RB in the expected economic lifecycle,
- derivation of a cost-optimal level of energy performance for each RB and, consequently, the optimal EEM package/variant.

Several studies have been carried out on this topic, concerning, for instance, the methodology for cost-optimal analysis (Ascione et al., 2105; Hamdy et al., 2013) and the definition of reference buildings (Brandão de Vasconcelos et al., 2015).

1.2 Sensitivity analysis on some key parameters

For the purpose of adapting the comparative methodology framework to national circumstances, the Commission Delegated Regulation No. 244/2012 (European Union, 2012a) requires Member States to determine the estimated economic lifecycle of a building and/or building element, the appropriate cost for energy carriers, products, systems, maintenance, operational and labour costs, primary energy conversion factors, and the energy price developments. Member States should also establish the discount rate to be used in both macroeconomic and financial calculations.

In addition, the Regulation requires the Member States to undertake some sensitivity analyses, when outcomes depend on assumptions on key parameters of which the future development can have a significant impact on the final result. A sensitivity analysis is required on different price scenarios for all energy carriers of relevance in a national context, plus at least two scenarios each for the discount rates to be used for the macroeconomic and financial cost optimum calculations.

Starting from the outcomes of a previous study

(Italian Ministry of Economic Development, 2013; Corrado et al., 2013) in which energy efficiency measures and related costs were identified for several reference buildings and climatic conditions, the present article investigates different economic scenarios in order to determine the influence of the energy cost and of the discount rate on the costs/benefits analysis and to verify how the cost optimal solutions might change in case of different variations of the energy price development. The most used energy carriers in Italy, i.e. electricity and natural gas, are taken into account in the analysis.



2. Economic scenarios in the cost-optimal analysis

2.1 Description of the reference buildings

In order to analyse different economic scenarios, two reference buildings are selected among those introduced in previous works (Italian Ministry of Economic Development, 2013; Corrado et al., 2013), each one considered in two different Italian climatic zones, Milano (zone E – 2404 HDD) and Palermo (zone B – 751 HDD).

The first reference building is a multi-family house taken from the Italian “National Building Typology”, as developed in the *Intelligent Energy Europe* TABULA project (Corrado et al., 2011). The second reference building is an office building-type as defined by ENEA (Margiotta, 2010).

Table 1 – Main geometric data of the reference buildings

Reference Building	Main geometric data				no. units
	V_g [m ³]	$A_{t,n}$ [m ²]	A_{env}/V_g [m ⁻¹]	A_w [m ²]	
 Residential	3076	827	0.51	150	12
 Office	1339	363	0.60	115	12

Both the case studies belong to the construction period ranging from 1946 to 1976. The main geometric data do not differ across the climatic zones (see Table 1).

2.2 Identification of the cost-optimal level of energy performance through a cost-optimisation procedure

The energy efficiency measures (EEMs) applied to each reference building have been defined by the Italian Ministry of Economic Development (2013) and by Corrado et al. (2013). An appropriate parameter is associated to each measure; e.g. the U -value for the thermal insulation of the building envelope, the heat generator efficiency (either η or COP or EER) for the technical systems replacement, the collectors area (A_{coll}) for the thermal solar system installation, the peak power (W_{PV}) for the photovoltaic system installation. For each measure, up to five energy efficiency options or levels (EEOs) are defined. The first level usually represents an inefficient solution used as a test value; the second level represents the requirement fixed by current legislation (Italian Government, 2005); the levels from the third to the fifth (if applicable) are more efficient solutions.

The initial investment cost associated to each EEO comes either from extensive market surveys or from official databases. The costs of the energy carriers are derived from the National Authority for Electricity and Natural Gas (AEEG), considering the rates applied for the enhanced protection service. The estimated energy carriers price development trends are those provided by the European Commission on a biannually updated basis (PRIMES model), according to Annex 2 of the Commission Delegated Regulation No. 244/2012 (European Union, 2012a). These trends have been extrapolated beyond 2030, which is the last year taken into account in the available projections.



Other input data and assumptions are detailed in the report of the Italian Ministry of Economic Development (2013) and in Corrado et al. (2013).

The energy performance is calculated according to the Italian technical specification UNI/TS 11300 (Italian Organisation for Standardisation, 2010-

2014) and the global cost analysis is performed according to EN 15459 (European Committee for Standardization, 2007), considering an estimated economic lifetime of 30 years for the residential buildings and 20 years for the offices, a discount rate of 4%, and applying a financial cost optimum calculation.

The cost optimisation is carried out by means of a procedure based on a sequential search-optimisation technique considering discrete options, as described in Corrado et al. (2014). The optimal level of annual primary energy use for heating, cooling and domestic hot water, and the corresponding actualized global cost are shown in Table 2 for the selected reference buildings. The related optimal values of the design parameters are listed in Table 3.

Table 2 – Cost optimal level of the reference buildings

Reference Building	Climatic Zone	EP [kWh m ⁻²]	Global cost [€ m ⁻²]
 Residential	Milano (2404 HDD)	61.0	495
	Palermo (751 HDD)	36.6	384
 Office	Milano (2404 HDD)	86.9	781
	Palermo (751 HDD)	65.3	695

2.3 Description of the economic scenarios

Cost calculations and projections with many assumptions and uncertainties, including for example energy price developments over time, are generally accompanied by a sensitivity analysis to evaluate the robustness of the key input parameters. For the purpose of the cost-optimal calculations, the Regulation No. 244/2012 (European Union, 2012a) requires that the sensitivity analysis should at least address the discount rate and the energy price developments.

2.3.1 Discount rate scenario

The discount rate means a definite value for comparison of the value of money at different times

Table 3 – Optimal values of the energy efficiency measures for the analysed reference buildings

EEM		Optimal EEO			
		Residential / Milano	Residential / Palermo	Office / Milano	Office / Palermo
Wall insulation (on external surface) or Wall insulation (on cavity)	U_{wl} [W m ² K ⁻¹]	- 0.34	- 0.48	- 0.20	- 0.44
Upper floor insulation	$U_{fl,up}$ [W m ² K ⁻¹]	0.40	0.50	0.27	0.38
Lower floor insulation	$U_{fl,lw}$ [W m ² K ⁻¹]	0.45	0.65	-	-
Windows	U_w [W m ² K ⁻¹]	1.60	3.00	1.60	3.00
Solar shading devices	τ_{sh} [-] / M or F (*)	0.4 / F	0.2 / F	0.4/F	0.2 / F
Heat generator for space heating	$\eta_{H,gn}$ [-] or COP [-]	-	-	-	-
+ Heat generator for domestic hot water	$\eta_{W,gn}$ [-]	-	-	-	-
+ Chiller	EER [-]	-	-	-	-
or Combined heat generator for space heating and domestic hot water	$\eta_{H,W,gn}$ [-]	-	-	0.93	0.93
+ Chiller	EER [-]	-	-	3.50	3.50
or Combined generator for heating, cooling and domestic hot water	COP [-]	4.20	4.20	-	-
	EER [-]	3.10	3.10	-	-
Thermal solar system	A_{coll} [m ²]	14	14	2	2
Photovoltaic system	W_{pv} [kW _p]	2	2	5	5
Ventilation heat recovery	NO or YES (η_{ru} [-])	NO	NO	YES (0.6)	YES (0.6)
Efficiency of the heat control system	η_{rg} [-]	0.995	0.995	0.97	0.97
Lighting power density(**)	W_{lgt} [W m ⁻²]	N/A	N/A	4.60	4.60
Lighting control system parameters(**)	F_O [-]	N/A	N/A	0.8	0.8
	F_C (F _D) [-]	N/A	N/A	0.9	0.9

(*) M = mobile louvres; F = fixed louvres.

(**) Not applicable (N/A) for the residential buildings.

expressed in real terms, hence excluding inflation. The global cost is directly linked to the duration of the calculation period t , as shown in Eq. (1). The calculation of the global cost $C_g(t)$ referred to the starting year t_0 may be performed by a component or system approach, considering the initial investment C_I , and, for every component or system j , the annual costs C_a and the discount factor $R_{disc}(i)$ for every year i (referred to the starting year), and the final value Val_F .

$$C_g(t) = C_I + \sum_j \left[\sum_{i=1}^t (C_{a,i}(j) \cdot R_{disc}(i)) - Val_{F,j}(j) \right] \quad (1)$$

The discount factor $R_{disc}(i)$, for every year i , is a multiplicative number used to convert a cash flow occurring at a given point in time to its equivalent

value at the starting point. The discount factor is derived from the discount rate r and is calculated as:

$$R_{disc}(i) = \left(\frac{1}{1 + \frac{r}{100}} \right)^i \quad (2)$$

where, i is the number of years from the starting period.

According to the Guidelines accompanying the Regulation (European Union, 2012b), a higher discount rate – typically higher than 4% excluding inflation – would reflect a purely commercial, short-term approach to the valuation of investments. A lower rate – typically ranging from 2% to 4% excluding inflation – would more closely reflect the benefits that energy efficiency invest

ments bring to building occupants over the entire investment's lifetime.

The first economic scenario on the reference buildings consists in the variation of the discount rate, from 4% of the base scenario to 5%.

2.3.2 Energy price development scenario

The information provided in Annex 2 of the Regulation (European Union, 2012a) is taken from energy trend scenarios developed with the PRIMES model, i.e. a modelling system that simulates a market equilibrium solution for energy supply and demand in the EU27 and its Member States.

The baseline price assumptions for the EU27 are the result of world energy modelling (using the PROMETHEUS stochastic world energy model) that derives price trajectories for oil, gas and coal under a conventional wisdom view of the development of the world energy system.

The latest update (2009) implies a 2.8% annual increase in gas prices, a 2.8% annual increase in oil prices and a 2% annual increase in coal prices. As regards electricity, estimated long-term after-tax electricity price developments in €/MWh are shown in Table 4.

Table 4 – Estimated long-term after-tax electricity price developments (€/MWh; source: European Commission)

Sector	2000	2005	2010	2015	2020	2025	2030
Residential	127	133	144	164	180	191	192
Services	123	124	124	139	152	159	159

According to the Guidelines (European Union, 2012b), the trends of the energy prices may be extrapolated beyond 2030 until more long-term projections become available. In order to consider the whole estimated economic lifetime of the residential buildings and of the offices, the extrapolation is done up to 2050 (considering 2013 as the starting year).

Table 5 – Identification of price development scenarios of electricity (E) and/or natural gas (NG)

Scenario	E	NG	E and NG
50% lower annual estimated increment of price	I	III	V
50% higher annual estimated increment of price	II	IV	VI

Starting from the base scenario for each reference building, the second economic analysis consists in applying the scenarios listed in Table 5 to the energy trend of the Annex 2 of the Regulation.

For each of the scenarios listed in Table 5, a discount rate of 4% is applied. The energy price trends of the base scenario are shown in Fig. 1.

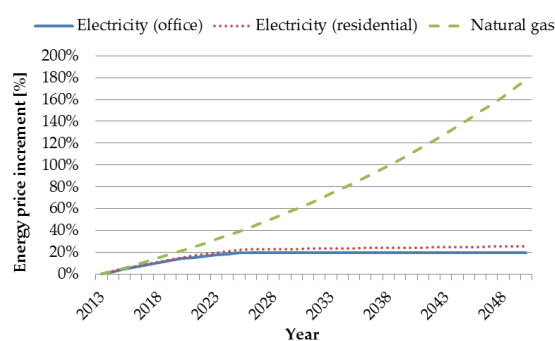


Fig. 1 – Base scenario energy price trends

3. Result analysis and discussion

The results of the economic scenarios on the reference buildings are shown in Figs. 2-3 for residential buildings and offices respectively, where “DR” stands for the variation of the discount rate, the roman numerals correspond to the cases in Table 5 and the lines represent the base scenario Cost Optimality trend for the two climatic zones considered. The results show the robustness of the residential buildings optimal EEM package, as the energy performance approximately keeps the value of 36.6 kWh m⁻² in Palermo and of 61.0 kWh m⁻² in Milano when different economic scenarios are applied. Concerning the economic aspects, as an effect of the financial calculation principle, the amount of global costs is lower when

a higher discount rate is applied, but the deviation from the base scenario is only of 25 € m⁻² in Palermo and of 31 € m⁻² in Milano. By applying the different energy costs scenarios in Table 5 the global cost deviation in respect with the base scenario is not significant.

Concerning the offices in Palermo, the energy performance still approximately remains at the base scenario same value of 65.3 kWh m⁻² when different economic scenarios are applied; the only relevant difference is shown for Milano, where the highest deviation between the DR and the base scenario is of 5.0 kWh m⁻², as the increasing discount rate involves a reduction of the EEMs optimal performance levels of the roof thermal insulation and of the photovoltaic system peak power installed. Other changes in the optimal level of the energy efficiency measures are shown for the offices in Milano, as follow: when the electricity cost increase is lower (scenario I) the optimal solution consists of the installation of a lower surface of PV panels; when the natural gas cost increase is lower (scenarios III and V) the optimal solution consists of lower roof thermal insulation as well as of PV system performance levels. Conversely, in Palermo when the natural gas cost increase is higher (scenarios IV and VI), the roof thermal insulation optimal level is higher.

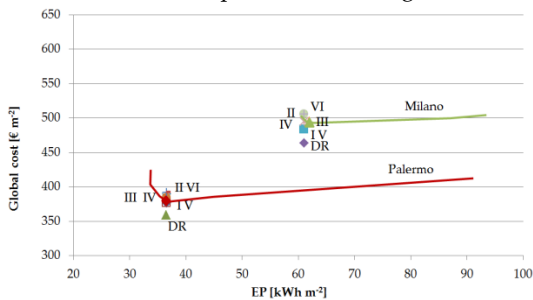


Fig. 2 – Residential Cost Optimal values for different economic scenarios

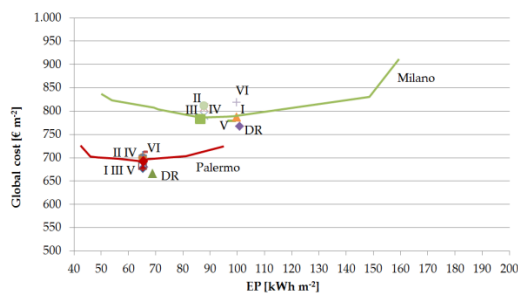


Fig. 3 – Office Cost Optimal values for different economic scenarios

Figs. 4-5 show the optimal global costs for the different economic scenarios mentioned above, for residential and office respectively, where “MI” stands for Milano and “PA” for Palermo. The energy costs are subdivided in investment, energy and operating & maintenance. With regard to the residential buildings, the investment costs are generally twice the amount of the energy costs and of the operating & maintenance costs; as the energy efficiency measures and levels do not change with the different economic scenarios, the investment costs remain fixed, while the operating & maintenance costs only change when the discount rate varies. In addition, the energy costs vary with the energy scenarios, but the highest deviation is lower than 25 € m⁻² in Milano and 15 € m⁻² in Palermo.

Concerning the offices, the energy costs are comparable with respect to the investment costs: in terms of energy costs the highest deviation corresponds to 50 € m⁻² either for Milano (between III and VI scenarios) and Palermo (between DR and II scenarios), while deviations in investment costs never exceed the 15 € m⁻².

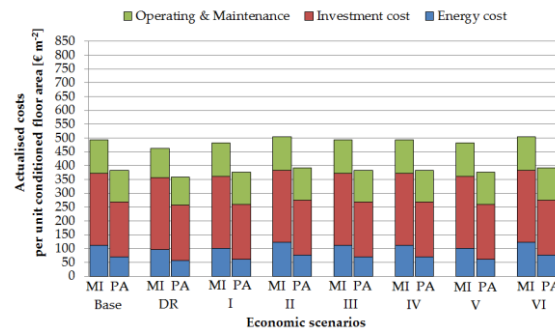


Fig. 4 – Residential Cost Optimal actualized costs for different economic scenarios

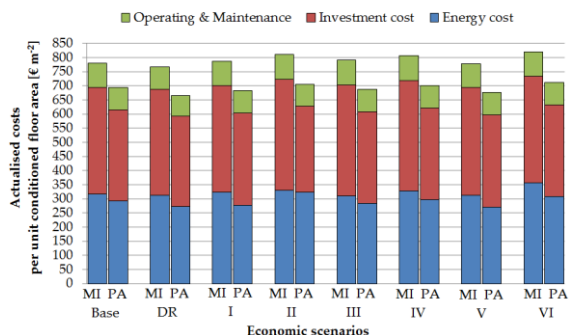


Fig. 5 – Office Cost Optimal actualized costs for different economic scenarios

4. Conclusion

In the present article different economic scenarios have been investigated in order to determine the influence of the discount rate and of the energy price trend on the cost optimal packages of EEMs and on the corresponding levels of building EP.

For some reference buildings different in use and location, it has been verified that the optimal level of energy efficiency usually corresponds to a set of design parameters consistent with the requirements fixed by the current legislation (Italian Government, 2005), which mainly concern the insulation-value of the vertical building enclosures.

Through the application of a sensitivity analysis in the cost optimisation procedure, the robustness of the optimal solutions of EEMs packages has been demonstrated, as both the discount rate and the energy price development variations have a weak influence on the cost optimal level of building energy performance and on the choice of the optimal energy efficiency measures (EEMs) package. This result is especially true in the case of residential buildings, as the weight of the investment costs is twice the amount of the energy costs and of the operating & maintenance costs.

A future analysis will consist in conducting additional sensitivity analyses for other cost drivers as identified in the calculation, for instance the initial investment cost of the building components. In this regard, a range of variation should be defined for each investment cost and the costs differentiated by climatic zone.

5. Acknowledgement

This work has been carried out within a cooperation agreement with ENEA (*Italian National agency for new technologies, Energy and sustainable economic development*) concerning the “*Development and updating of the cost optimal methodology for assessing the compliance of national energy standards according to Directive 2010/31/EU*”.

6. Nomenclature

Symbols

<i>A</i>	area (m ²)
<i>C</i>	cost (€)
<i>COP</i>	coefficient of performance (-)
<i>EEM</i>	energy efficiency measure
<i>EEO</i>	energy efficiency option
<i>EER</i>	energy efficiency ratio (-)
<i>EP</i>	energy performance (kWh m ⁻²)
<i>F, R</i>	factor (-)
<i>r</i>	rate (-)
<i>U</i>	thermal transmittance (Wm ⁻² K ⁻¹)
<i>V</i>	volume (m ³)
<i>Val</i>	value (€)
<i>W</i>	power (W)
<i>η</i>	efficiency (-)
<i>τ</i>	transmission coefficient (-)

Subscripts/Superscripts

<i>a</i>	annual
<i>C</i>	constant (illuminance)
<i>coll</i>	solar collectors
<i>D</i>	daylight
<i>disc</i>	discount
<i>env</i>	envelope
<i>F</i>	final
<i>f</i>	floor
<i>fl,lw</i>	lower floor
<i>fl,up</i>	upper floor
<i>g</i>	global, gross
<i>gn</i>	generation (system)
<i>H</i>	heating
<i>I</i>	investment
<i>lgt</i>	lighting
<i>n</i>	net
<i>O</i>	occupancy
<i>PV</i>	photovoltaic (system)
<i>rg</i>	control (system)
<i>ru</i>	heat recovery unit
<i>sh</i>	shading
<i>W</i>	domestic hot water
<i>w</i>	window
<i>wl</i>	wall (opaque)

References

- Ascione, F., N. Bianco, C. De Stasio, G. M. Mauro, and G. P. Vanoli. 2015. "A new methodology for cost-optimal analysis by means of the multi-objective optimisation of building energy performance". *Energy and Buildings* 88: 78-90. doi: 10.1016/j.enbuild.2014.11.058.
- Brandão de Vasconcelos, A., M. Duarte Pinheiro, A. Manso, and A. Cabaço. 2015. "A Portuguese approach to define reference buildings for cost-optimal methodologies". *Applied Energy* 140: 316-328. doi: 10.1016/j.apenergy.2014.11.035.
- Corrado, Vincenzo, Ilaria Ballarini, Stefano Corgnati, and Novella Talà. 2011. *Building Typology Brochure – Italy. Fascicolo sulla Tipologia Edilizia Italiana*. Torino: Politecnico di Torino.
- Corrado, Vincenzo, Ilaria Ballarini, and Simona Paduos. 2013. *Sviluppo della metodologia comparativa cost-optimal secondo Direttiva 2010/31/UE*. ENEA RdS/2013/144.
- Corrado, V., I. Ballarini, and S. Paduos. 2014. "Assessment of cost-optimal energy performance requirements for the Italian residential building stock" *Energy Procedia* 45: 443-452. doi: 10.1016/j.egypro.2014.01.048.
- European Committee for Standardization. 2007. EN 15459. Energy performance of buildings - Economic evaluation procedure for energy systems in buildings.
- European Union. 2010. Directive 2010/31/EU of the European Parliament and of the Council of 19 May 2010 on the energy performance of buildings (recast). Official Journal of the European Union, 18 June 2010.
- European Union. 2012a. Commission Delegated Regulation (EU) No 244/2012 of 16 January 2012 supplementing Directive 2010/31/EU of the European Parliament and of the Council. Official Journal of the European Union, 21 March 2012.
- European Union. 2012b. Guidelines accompanying Commission Delegated Regulation (EU) No 244/2012 of 16 January 2012 supplementing Directive 2010/31/EU of the European Parliament and of the Council. Official Journal of the European Union, 19 April 2012.
- Hamdy, M., A. Hasan, and K. Siren. 2013. "A multi-stage optimization method for cost-optimal and nearly-zero-energy building solutions in line with the EPBD-recast 2010". *Energy and Buildings* 56:189-203. doi: 10.1016/j.enbuild.2012.08.023.
- Italian Government. 2005. Legislative Decree 19 August 2005, no. 192 (and subsequent modifications and additions), complying the European Directive 2002/91/EC on the energy performance of buildings.
- Italian Ministry of Economic Development. 2013. "Applicazione della metodologia di calcolo dei livelli ottimali in funzione dei costi per i requisiti minimi di prestazione energetica (Direttiva 2010/31/UE Art. 5)". Accessed December 2014. http://ec.europa.eu/energy/efficiency/buildings/doc/2013_it_cost-optimal_en.zip
- Italian Organisation for Standardisation (UNI). 2010-2014. UNI/TS 11300 (series). Energy performance of buildings.
- Margiotta, Francesca. 2010. *Metodologia per la determinazione delle caratteristiche strutturali ed impiantistiche di "Edifici Tipo" del Parco Edilizio Nazionale ad uso ufficio e Valutazione del Potenziale di Risparmio energetico sulla base della fattibilità degli interventi di riqualificazione Energetica*. ENEA RdS/2010/197.