

Human powered press for producing straw bales for use in construction during post-emergency conditions

*Original*

Human powered press for producing straw bales for use in construction during post-emergency conditions / Franco, Walter; Iarussi, Federico; Quaglia, Giuseppe. - In: BIOSYSTEMS ENGINEERING. - ISSN 1537-5110. - STAMPA. - 150:(2016), pp. 170-181. [10.1016/j.biosystemseng.2016.08.007]

*Availability:*

This version is available at: 11583/2650462 since: 2017-05-31T11:39:17Z

*Publisher:*

Elsevier

*Published*

DOI:10.1016/j.biosystemseng.2016.08.007

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Elsevier postprint/Author's Accepted Manuscript

© 2016. This manuscript version is made available under the CC-BY-NC-ND 4.0 license  
<http://creativecommons.org/licenses/by-nc-nd/4.0/>. The final authenticated version is available online at:  
<http://dx.doi.org/10.1016/j.biosystemseng.2016.08.007>

(Article begins on next page)

# Human powered press for producing straw bales for use in construction during post-emergency conditions

W.Franco\*, F.Iarussi, G. Quaglia,

\*Corresponding author [walter.franco@polito.it](mailto:walter.franco@polito.it)

Department of Mechanical and Aerospace Engineering DIMEAS, Politecnico di Torino  
C.so Duca degli Abruzzi 24, 10129 Torino, Italy

## Abstract

The straw bale construction technique is considered one of the most appropriate for the improvement of housing conditions in developing countries and for the reconstruction in post-emergency situations. In this environment, no electricity or other energy sources are available; for this reason, straw bales have to be produced by means of a human powered press. This paper presents the designing process of a manual press, that is a key tool for the objectives introduced above. Following definition of the machine architecture and the actuating mechanism (slider-crank), a design method based on energy considerations is introduced. Given the mechanical properties of straw, described by a simplified linear model, and the maximum work that a human operator can do, applying the designing method, it was possible to obtain the main functional parameters of the machine, such as the pressing piston stroke, and the length both of the connecting rod and of the crank. The method was experimentally validated and a prototype assembled and used for the production of infill bales in the construction of a warehouse in Haiti.

## Keywords:

Straw bale construction; slider crank mechanism synthesis; human powered baler; hand-operated machine

## Nomenclature

Symbol	Meaning	units
$A$	compression plate area	m <sup>2</sup>
$b$	connecting rod length	m
$C$	operating torque	Nm
$F$	compression force	N
$F_{op}$	operating force	N
$F_{opmax}$	maximum force that is exerted by the operator	N
$F_{op\ peak}$	peak of the operating force	N
$k$	stiffness constant of the straw	Pa m <sup>3</sup> kg <sup>-1</sup>
$l$	operating lever length	m
$l_f$	final length of the compression chamber	m
$l_o$	initial length of the compression chamber	m
$L_c$	compression work per cycle	J
$L_{opmax}$	maximum input mechanical work that an operator can do in one compacting cycle	J
$m$	crank length	m
$m_c$	mass of the straw loaded in the loading chamber between each compaction cycle	kg
$m_{tot}$	total bale mass	kg
$n_c$	number of compaction cycles necessary to produce a bale	

$p$	compression pressure	Pa
$p_f$	straw compression pressure at final density $\rho_f$	Pa
$y$	compression plate (piston) displacement	m
$y_c$	compression plate (piston) stroke in one compaction cycle	m
$\alpha$	rotation angle of the crank (operating lever)	rad
$\alpha_c$	rotation angle of the crank (operating lever) for one complete compaction cycle	rad
$\alpha_o$	initial crank (operating lever) angle	rad
$\lambda$	$m/b$ , dimensionless parameter, mechanism's proportions	
$\rho$	density of the straw	$\text{kg m}^{-3}$
$\rho_f$	final density of the straw bale	$\text{kg m}^{-3}$
$\rho_o$	initial density of the straw	$\text{kg m}^{-3}$
ASF	Architettura Senza Frontiere ( <i>Architects Without Borders</i> )	

## 1. Introduction

The earliest straw bale constructions were built in Nebraska, USA, towards the end of the 19th century (Jones, 2009; King, 1996; Magwood, 2000). Those were temporary constructions, built while waiting for the wood supplies needed for the producing permanent constructions. Only later straw bales were applied as the main building material for permanent constructions (Jones, 2009) and some of these are still in use today (Lerner, 2000).

Around 1970, with the increase in awareness of the green building technology, there was renewed interest in this construction technique. Straw is a sustainable naturally renewable material, which is widespread, cheap and with good insulating properties. Building with straw bales can provide energy-efficient, durable, attractive, fire-resistant, and comfortable accommodation (Ashour 2011, Jones 2009).

Thanks to these characteristics, particularly availability, the low cost of straw and the easy implementation in self-construction projects, straw bale building is considered one of the most appropriate techniques for providing improved housing in developing countries and for reconstruction in post-emergency situations (earthquakes, tsunami etc.) (ASF, 2013; Bonoli, 2015; Kean, 2010). To apply this construction technique, it is necessary to have bale production equipment, and where there is no availability of motorised balers for agricultural use, or the cost to handle this kind of equipment is too high, the application of a manual pressing machine can be a very effective alternative.

There appears to be no scientific literature regarding manual straw bales pressing. The solutions currently available are the result of empirical studies and progressive adjustments on the field. For example, the Pakistan Straw Bale and Appropriate Building (PAKSAB) reported by Khan and Donovan (2012), a project of Builders Without Borders (<http://www.builderswithoutborders.org/>), straw bales were made with locally fabricated compression moulds using manually operated farm jacks. In this case, the pushing mechanism of the pressing plate has a constant transmission ratio which is disadvantageous because the resistance applied by the straw increases according to its density. In other cases, different articulated mechanisms were applied for the motion and force transmission, but in none of these cases was a dimensioning methodology introduced (The Appropedia Foundation, <http://www.appropedia.org/>).

To address this shortcoming, in our study the aim was to produce a rigorous methodology for the functional synthesis of a slider crank mechanism applied to a manual straw bale press. The concept was to produce a dimensioning method for optimising the performance of baling mechanisms based on a simplified straw mechanical characteristic model developed for the purpose; making it possible, even in areas with a low availability of instrumentation, to conduct tests.

The methodology proposed is applied to the design of a hand-powered rice straw press that can produce bales for use as infill material for construction. The authors developed the design method for the *Architettura Senza Frontiere Piemonte (ASF, Architects Without Borders)* project for building a straw warehouse for a rice farmers cooperative in Saint Marc, Artibonite Valley, Haiti (ASF Piemonte, 2013). Artibonite Valley is the main rice production area in Haiti, and the farmers' cooperative is a local partner of an international cooperation project, aimed at enhancing the rice supply chain and also enabling the straw to be used as a construction material.

In this paper the design specification of the press is defined and listed, and an energy-based calculation method for the functional parameters of the press, in particular the number of compaction cycles required by the hand-powered mechanism, is introduced, described and validated. The mechanical architecture of the press, the functional and detailed design of the slider crank mechanism are described, and all

the technical data of the machine are listed. The mechanism synthesis method is validated by means of experimental tests and the end prototype that was built is presented and conclusions provided.

## 2. Goal statements and design specifications

Starting from rice straw with initial density of  $\rho_o = 30 \text{ kg m}^{-3}$ , the press has to produce straw bales with final dimensions of  $0.3 \times 0.45 \times 0.9 \text{ m}$  and a density of  $\rho_f = 90 \text{ kg m}^{-3}$ . The final density needs to be sufficient for utilising the bales as an infill material in construction (King, 2006). The main characteristics of the bale are listed in Table 1.

**Table 1.** Main straw bale characteristics

Straw initial density $\rho_o$	$30 \text{ kg m}^{-3}$
Bale final density $\rho_f$	$90 \text{ kg m}^{-3}$
Bale dimensions	$0.3 \times 0.45 \times 0.9 \text{ m}$
Total bale mass $m_{tot}$	$10.9 \text{ kg}$

The press must be able to work in rural areas of developing countries, even in post emergency conditions, for example during the re-building phase following an earthquake. For this reasons any press must be capable of operation without electricity or fuel. To cope with this situation, it is therefore necessary to opt for a hand-powered actuating mechanism.

Since one of the aims of the project was to involve local communities and to engage a self-constructing and sustainable technology process at a local level, the press has to be simple, ergonomic and easy to build; it has to be made using metal products and other materials that can be found directly on site. An objective was not only to build a hand-powered press for producing straw bales, but to transmit knowledge to local people, so that in the future they could build, use and maintain other presses. During the designing phase it is therefore necessary to take into account the limits imposed by the technical means that the destination territory can offer, in this case the community of Bocozele, Saint Marc, Artibonite Valley, Haiti.

### 3. Human powered press design: an energy method

Apart from the architecture and the transmission mechanism, the press can be seen as a black box machine. The operator moves the actuating lever (i.e. the input link) through an angle  $\alpha$ , obtaining the displacement  $y$  from the compressing plate (i.e. the output link, Fig. 1). The goal of the design phase is to build a machine that transforms the rotation of the lever into the translation movement of the compression plate, by mean of instantaneously variable transmission ratios defined considering the force slope needed for compression and the range of the torque applied by the operator. The compressed straw applies a resistant force  $F$  to the compression plate that requires the operator to apply an input torque  $C$  to the lever.

Defined  $F_{opmax}$  the maximum force that a human operator can apply at the end of the lever of length  $l$ , and  $\alpha_c$  the angular rotation of the lever that corresponds to one single compaction cycle, the maximum mechanical work that an operator can do in one compaction cycle is given by:

$$L_{opmax} = F_{opmax} l \cdot \alpha_c \quad (1)$$

The work needed, for each compaction cycle, in order to compress the straw is:

$$L_c = \int_0^{y_c} F dy = \int_0^{y_c} p(\rho)A dy \quad (2)$$

where  $y_c$  is the compression plate stroke,  $p$  is the compression pressure that the plate of area  $A$  exerts on the straw, dependent on the straw density  $\rho$ .

The compression work  $L_c$  has to be assumed equal to a fraction of the maximum work  $L_{opmax}$  that the operator can do in one compacting cycle, expressed in Eq. (1). However, the force that the operator exerts on the lever depends on the mechanical characteristics of the straw, on the instantaneous transmission ratio, and on the efficiency of the mechanism. For this reason, the applied force cannot be considered constant and equal to the maximum force that can be exerted  $F_{opmax}$  for all the range of the lever rotation.

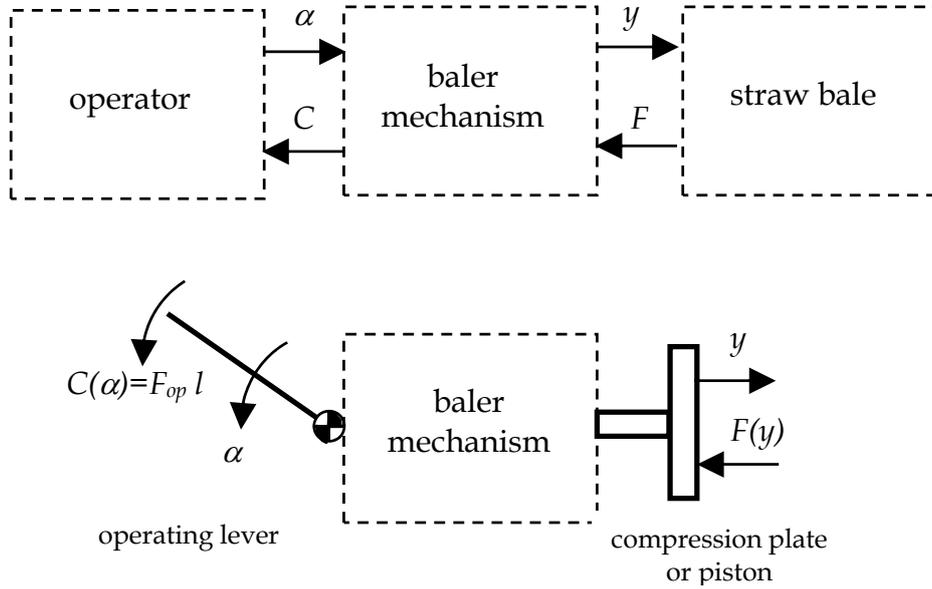


Fig. 1. Black box baler model

In literature there are many straw and hay mechanical characteristics models (Afzalinia 2013; Bilanski 1985; Faborode, 1986; Ferrero 1990; Galedar, 2008; Kaliyan, 2009; Mewes, 1958; Nona 2014; Watts, 1991). Since each model has been developed with straw in different initial conditions, the trends that correlate compression pressure  $p$  and straw density  $\rho$ , are heterogeneous, and are not applicable to this case of study. Also, at the Haiti site, during construction activities, it was not possible to execute complete compression tests in order to identify a mechanical model of the straw behaviour, and in general in these contexts, the problem of the mechanical characterisation of the straw to be compressed is common. The ASF operators could only measure the straw initial density  $\rho_o$  ( $30 \text{ kg m}^{-3}$ ) and the required pressure  $p_f$  ( $0.3 \times 10^5 \text{ Pa}$ ) to reach the final density of  $\rho_f$  ( $90 \text{ kg m}^{-3}$ ). Not having sufficient data, it was necessary to opt for a linear model for the straw mechanical behaviour (Fig. 2):

$$p = k(\rho - \rho_o) \quad (3)$$

where  $k$  is the stiffness constant of the straw, and can be obtained experimentally:

$$k = \frac{P_f}{\rho_f - \rho_o} \quad (4)$$

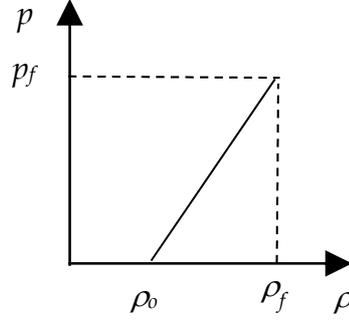


Fig. 2. Straw mechanical characteristic


Merging Eq. (3) in Eq. (2), taking into account that  $\rho$  is the ratio between the straw mass  $m_c$  and its true volume, and integrating, it is possible to obtain the straw mass  $m_c$  that is need to load the press in between each pressing cycle and relate it to the compression work  $L_c$ :

$$m_c = \frac{L_c}{k \left( \ln \left( \frac{\rho_f}{\rho_o} \right) + \frac{\rho_o}{\rho_f} - 1 \right)} \quad (5)$$

Defining  $m_{tot}$  as the total mass of the straw bale, and assuming the compression work  $L_c$  is available for each pressing cycle as a fraction of the maximum input mechanical work, it is possible to obtain the number of pressing cycles ( $n_c$ ) needed for the bale production:

$$n_c = \frac{m_{tot}}{m_c} = \frac{m_{tot} k \left( \ln \left( \frac{\rho_f}{\rho_o} \right) + \frac{\rho_o}{\rho_f} - 1 \right)}{L_c} \quad (6)$$

The trend of the number of compression cycles  $n_c$ , related to the compression work for each cycle, needed to obtain a bale of total mass  $m_{tot}$  of 10.9 kg and a final density  $\rho_f$  of 90 kg m<sup>-3</sup>, starting from straw with an initial density  $\rho_o$  of 30 kg m<sup>-3</sup> is shown in Fig. 3. The curve parameter is the stiffness constant of the straw  $k$  that can be obtained experimentally using Eq. (4).

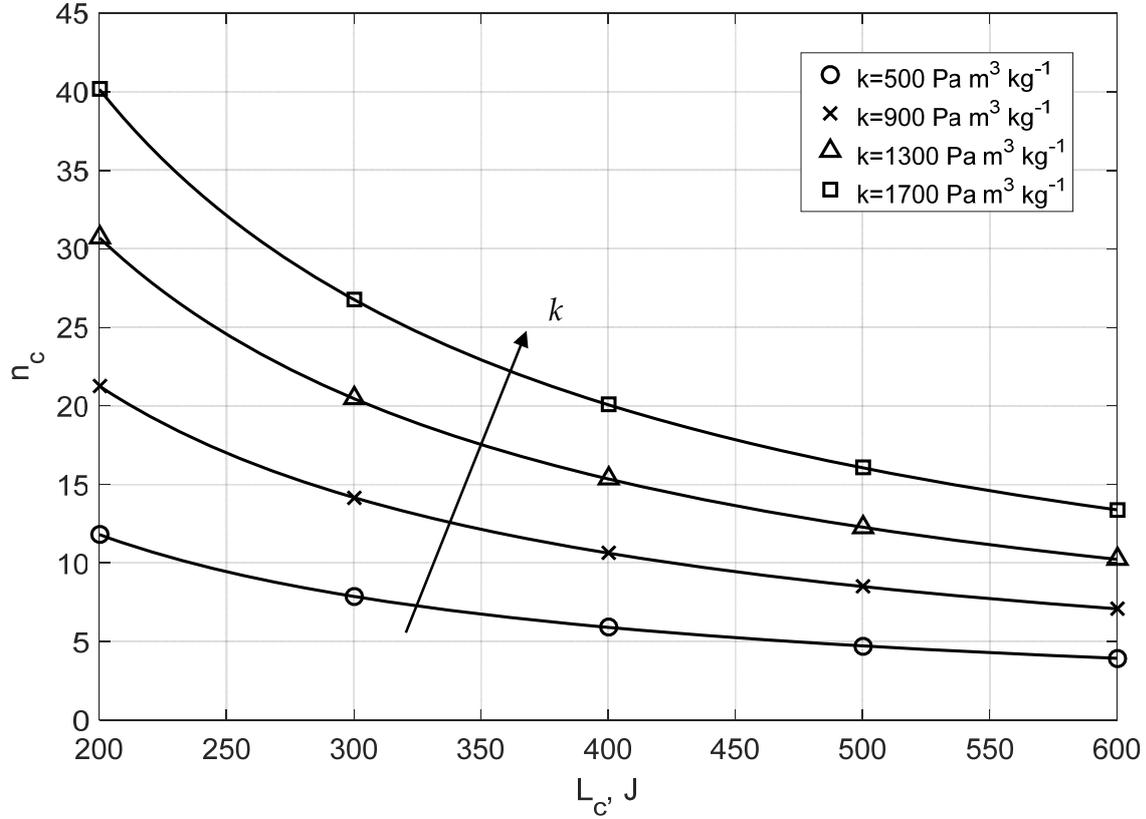

**Fig. 3.** Number of compaction cycles  $n_c$  related to the compression work for each cycle  $L_c$  (straw stiffness constant  $k$ ,  $m_{tot} = 10.9$  kg,  $\rho_o = 30$  kg m<sup>-3</sup>,  $\rho_f = 90$  kg m<sup>-3</sup>)

In order to guide the reader, and indicate how the parameters  $k$  and  $L_c$  are evaluated, it is useful to consider a specific case: If an operator applies a constant force  $F_{op} = 200$  N, to a lever of length 1.5 m, which is always normal to the level itself for a rotation of 80°, it provides work of about 400 J (Eq. 1). For the straw stiffness, using the straw initial density  $\rho_o = 30$  kg m<sup>-3</sup> and the required pressure  $p_f = 0.3 \times 10^5$  Pa, to reach the final density of  $\rho_f = 90$  kg m<sup>-3</sup>, Eq. 4 provides a value of  $k = 500$  Pa m<sup>3</sup> kg<sup>-1</sup>.

Each of the  $n_c$  compaction cycles consists of putting a mass of straw  $m_c$  as for Eq. (5), with an initial nominal density of  $\rho_o = 30$  kg m<sup>-3</sup>, in the compression chamber with section  $A$  and initial length  $l_o$  (Fig. 4), compressing the straw up to a density of  $\rho_f = 90$  kg m<sup>-3</sup> and reducing the compression chamber length to  $l_f$ , i.e. imposing the piston stroke of  $y_c$ , then:

$$y_c = l_o - l_f = \frac{1}{\rho_o A} m_c \left( 1 - \frac{\rho_o}{\rho_f} \right) = \left( \frac{1}{\rho_o} - \frac{1}{\rho_f} \right) \frac{L_c}{Ak \left( \ln \left( \frac{\rho_f}{\rho_o} \right) + \frac{\rho_o}{\rho_f} - 1 \right)} \quad (7)$$

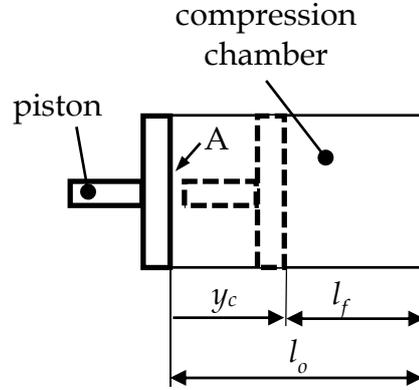


Fig. 4. Compression chamber scheme

The piston stroke  $y_c$ , for each compaction cycle is expressed by Eq. (7) and related to the compression work per cycle  $L_c$ , as shown in Fig. 5. These curves are again obtained by using the parameters needed for a straw bale of total mass  $m_{tot} = 10.9$  kg and transverse sectional area  $A = 0.3 \times 0.45$  m<sup>2</sup>, initial density  $\rho_o = 30$  kg m<sup>-3</sup>, and a final density  $\rho_f = 90$  kg m<sup>-3</sup>. The curve parameter remains the stiffness constant of the straw  $k$ .

Equation (7) allows the piston stroke for each compaction cycle  $y_c$  to be calculated, fixing the compression work per cycle  $L_c$  as a percentage of  $L_{opmax}$ , i.e. the maximum work that the operator can do, and knowing the straw stiffness constant  $k$ . This value  $y_c$  is used as input for the next designing step of the transmission mechanism.

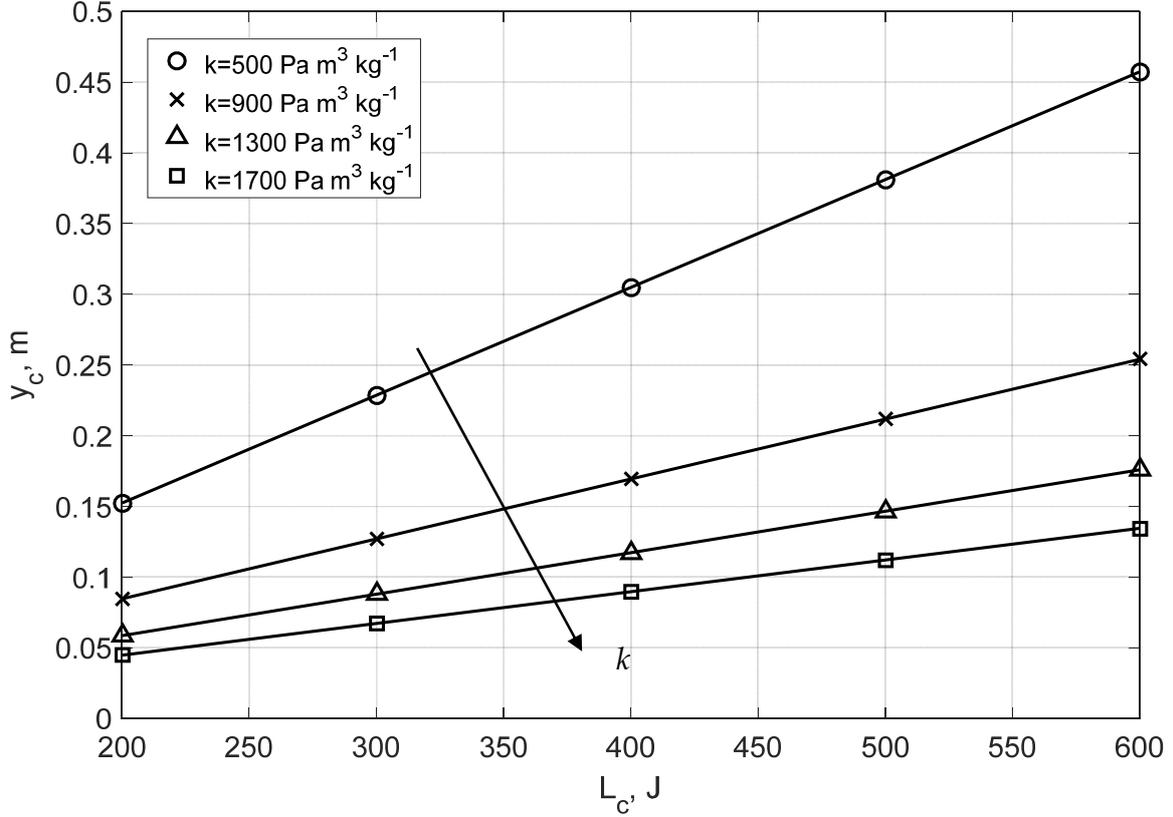


Fig. 5. Piston stroke  $y_c$  for cycle related to the compression work for each cycle  $L_c$  (straw stiffness constant  $k$ ,  $m_{tot} = 10.9$  kg,  $\rho_o = 30$  kg m<sup>-3</sup>,  $\rho_f = 90$  kg m<sup>-3</sup>)

#### 4. The functional design

Considering the design specifications introduced in section 2, in particular the need for a simple manufacturing process of the machine, a centred slider crank mechanism was chosen as the transmission mechanism for the press. The operating lever is rigidly connected to the crank (Fig. 6). In this section the dimensioning process of the mechanism will be described. It is assumed that the operating lever length is  $l$ , the crank length  $m$ , and the connecting rod length is  $b$ .

The crank has an initial angular position  $\alpha_o$ , and it rotates at an angle  $\alpha$ , until reaching a maximum value  $\alpha_c$  ( $0 < \alpha < \alpha_c$ ) corresponding to the translation  $y_c$  of the piston. The aim of the functional model is to choose the optimum lengths of the crank  $m$ , and the rod  $b$ , and the initial angle of the lever  $\alpha_o$ , in order to reach a desired stroke of the piston  $y_c$  and reduce the peak of the operating force. The lever length  $l$  and its

rotation angle for one compaction cycle  $\alpha_c$ , were chosen taking into account ergonomic reasons that will be clarified later.

Referring to Fig. 6, it is possible to obtain the piston displacement  $y$  starting from the initial position:

$$y = b(\cos \beta - \cos \beta_o) + m(\cos \alpha_o - \cos(\alpha_o + \alpha)) \quad (8)$$

with:

$$\lambda = m/b \quad \beta_o = \arcsin(\lambda \sin(\alpha_o)) \quad \beta = \arcsin(\lambda \sin(\alpha_o + \alpha)) \quad (9)$$

The stroke of the compression plate for one compaction cycle is thus:

$$y_c = b(\cos \beta_c - \cos \beta_o) + m(\cos \alpha_o - \cos(\alpha_o + \alpha_c)) \quad (10)$$

being:

$$\beta_c = \arcsin(\lambda \sin(\alpha_o + \alpha_c)) \quad (11)$$


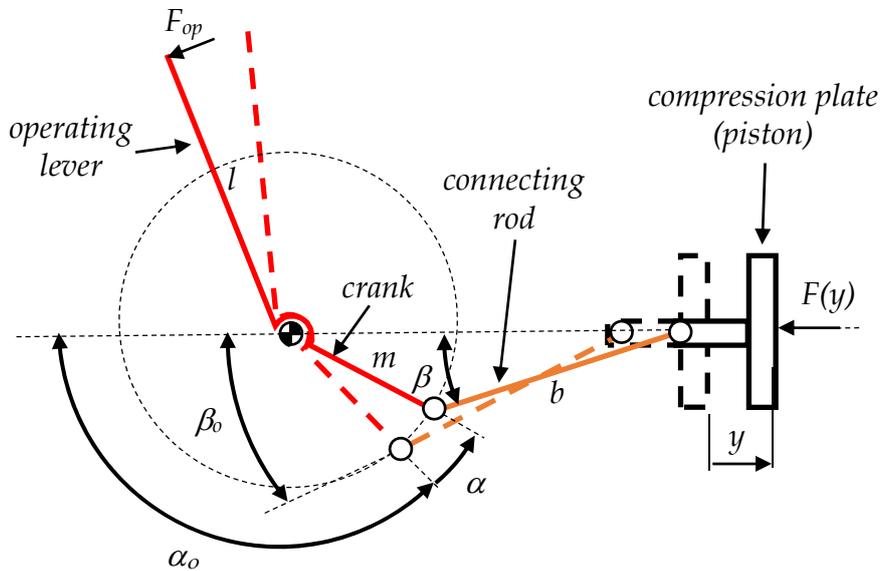


Fig. 6. Baler slider-crank mechanism. Initial position (hatched line); generic position (continuous line).

Dividing Eq. (10) by the crank length  $m$ , and bearing in mind that  $\lambda = m/b$  is the ratio between the crank length  $m$  and the connecting rod length  $b$ , it is possible to obtain:

$$\frac{m}{y_c} = \frac{1}{1/\lambda(\cos \beta_c - \cos \beta_o) + \cos \alpha_o - \cos(\alpha_o + \alpha_c)} \quad (12)$$

The Eqs. (9), (11) and (12), allow the ratio between the crank length and the piston stroke  $m/y_c$  to be calculated as a function of the initial crank angle  $\alpha_o$ , once the parameter  $\lambda$  and the maximum rotating angle of the lever  $\alpha_c$  are chosen. The choice of parameter  $\lambda$  affects the minimum transmission angle and it has to be as high as possible in order to reduce the normal component of the force applied to the frame. The choice of the rotation angle  $\alpha_c$  of the lever, that corresponds to one compacting cycle, can be based on ergonomic considerations. Even with a centred sliding crank mechanism this angle can be  $180^\circ$ , usually, in the manual mechanism it is fixed in the range  $80-90^\circ$  so that the operator can easily hold the suitably shaped lever, and rotate it from an almost vertical position to a horizontal one, optimising the applied force application. In Fig. 7 the trend of the Eq. (12) is shown for different  $\lambda$  values ( $\lambda = 0.14, 0.28, 0.42$ ), with a fixed value of  $\alpha_c = 80^\circ$ .

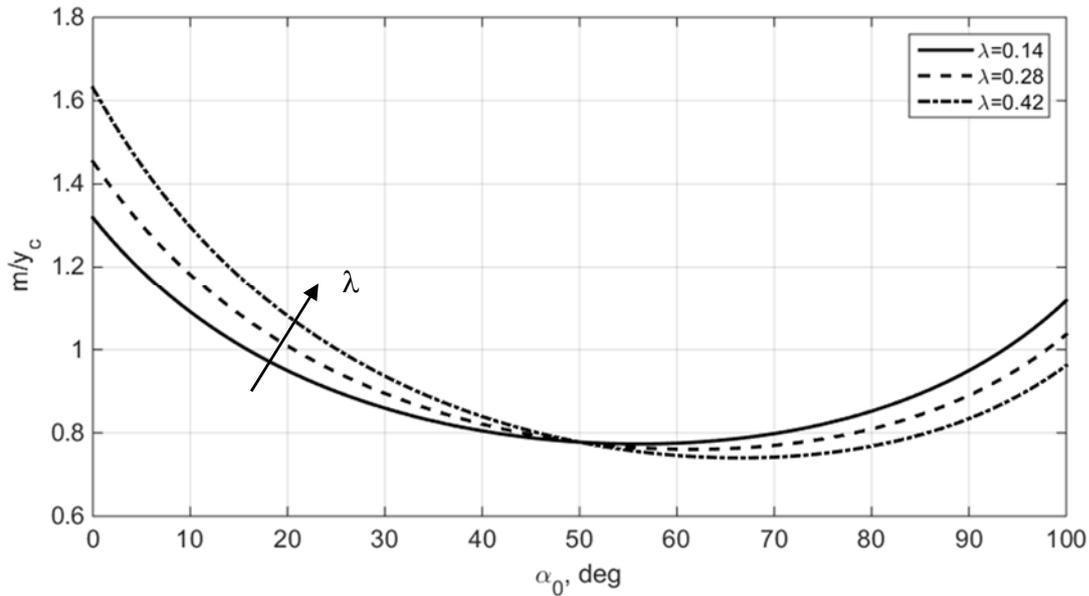

**Fig. 7.** Trend of the ratio of the crank length and the piston stroke  $m/y_c$  related to the initial rotation angle of the lever  $\alpha_o$  ( $\alpha_c = 80^\circ$ )

In order to calculate the force applied by the operator at the lever end, we can write:

$$F_{op} l \cdot d\alpha = \frac{F dy}{\eta} \quad (13)$$

where  $\eta$  is the total efficiency of the transmission and recalling Eq. (3)

$$F_{op} = \frac{F}{\eta l} \frac{dy}{d\alpha} = \frac{pA}{\eta l} \frac{dy}{d\alpha} = \frac{k(\rho - \rho_o)A}{\eta l} y' \quad (14)$$

where  $y'$  is the geometrical speed  $dy/d\alpha$  of the output link

$$y' = [b \cos \beta - m \cos(\alpha_o + \alpha)] \tan \beta \quad (15)$$

Considering that:

$$\rho = \frac{m_c}{A(l_o - y)} \quad (16)$$

$$\rho_o = \frac{m_c}{Al_o} \quad (17)$$

$$l_o = \frac{y_c}{1 - \frac{\rho_o}{\rho_f}} \quad (18)$$

and considering Eq. (8), it is possible to obtain the trend of the force applied by the operator  $F_{op}$  versus the rotation angle of the lever  $\alpha$ :

$$F_{op} = \frac{L_c}{\eta l \left( \ln \left( \frac{\rho_f}{\rho_o} \right) + \frac{\rho_o}{\rho_f} - 1 \right)} \left( \frac{1}{1 - \frac{\rho_o}{\rho_f}} - \frac{m}{y_c} \left( \frac{1}{\lambda} (\cos \beta - \cos \beta_o) + \cos \alpha_o - \cos(\alpha_o + \alpha) \right) - \left( 1 - \frac{\rho_o}{\rho_f} \right) \right) \cdot \left( \frac{m}{y_c} \left( \frac{1}{\lambda} \cos \beta - \cos(\alpha_o + \alpha) \right) \right) \tan \beta \quad (19)$$

where  $m/y_c$  is expressed by Eq. (12).


The lever length  $l$  can be chosen based on ergonomic considerations. Even if a longer lever is better from a force reduction point of view, the operator has to be able to grab it even, when it is in a vertical position. For this reason, the maximum lever length is around 2 m.

Equation (19) shows that the operator force trend related to the rotation angle of the lever is defined once that the initial density of the straw  $\rho_o$ , the final density of the bale  $\rho_f$ , the lever length  $l$ , the rotation angle of the lever for one compacting cycle  $\alpha_c$ , the compression work per cycle  $L_c$ , and the ratio  $\lambda$  are all known. It does not depend


from the straw stiffness constant  $k$  because, according to the mechanical characteristic of the straw and to the compression work  $L_c$ , the piston stroke  $y_c$  will change on a case to case basis based on Eq. (7) (Fig. 5). For example, fixed the compression work  $L_c$ , and  $\lambda$ , is possible to compress straw to high stiffness, reducing the stroke of the piston.

Equation (19) (with  $\rho_o = 30 \text{ kg m}^{-3}$ ;  $\rho_f = 90 \text{ kg m}^{-3}$ ;  $\alpha_c = 80^\circ$ ;  $l = 2\text{m}$ ;  $L_c = 400 \text{ J}$ ;  $\eta = 0.95$ ) is plotted in Fig. 8 considering  $m/b = \lambda = 0.14$ , considering  $m/b = \lambda = 0.28$  in Fig. 9, and considering  $m/b = \lambda = 0.42$  in Fig. 10. Figures 8, 9 and 10 show the actuating force related to the lever rotation angle of the lever, for different initial angles of the lever. The trend for the operating force peak  $F_{op\ peak}$  related to the starting angle of the operating lever  $\alpha_o$ , calculated in the same conditions and fixed the ratio  $m/b = \lambda$ , is showed in Fig. 13.


Equations (5), (7), (12) and (19) are valid for the manual press dimensioning and a useful tool. Assuming that we want to produce a straw bale with known geometry and known final and initial densities, knowing the straw stiffness constant  $k$ , and choosing a compression work per cycle  $L_c$ , from Eq.(5) it is possible to obtain the straw mass that is needed to load between each cycle  $m_c$ , and from Eq. (7) the piston stroke  $y_c$ . Chosing the lever length  $l$  and the lever rotation angle  $\alpha_c$ , based on the ergonomic considerations discussed above, and fixed the appropriate value of  $\lambda$  in order to have acceptable forces discharged by the piston on the frame, from Eq. (19) it is then possible to obtain the operating force  $F_{op}$  trend and in particular the operator force peak  $F_{op\ peak}$  (Fig. 11). From Fig. 11 it is possible to see that, in order to minimise the peak operating force, it is convenient to choose initial rotation angles in the range of  $80 - 100^\circ$ . Fixed  $\alpha_o$ , based on these considerations, using Eq. (12), showed in Fig. 7 that it is possible to obtain the ratio  $m/y_c$ , or rather, if  $y_c$  and  $l$  are known, it is possible to calculate the crank length  $m$  and the connecting rod length  $b$  of the slider-crank mechanism that best satisfies the design requirements.

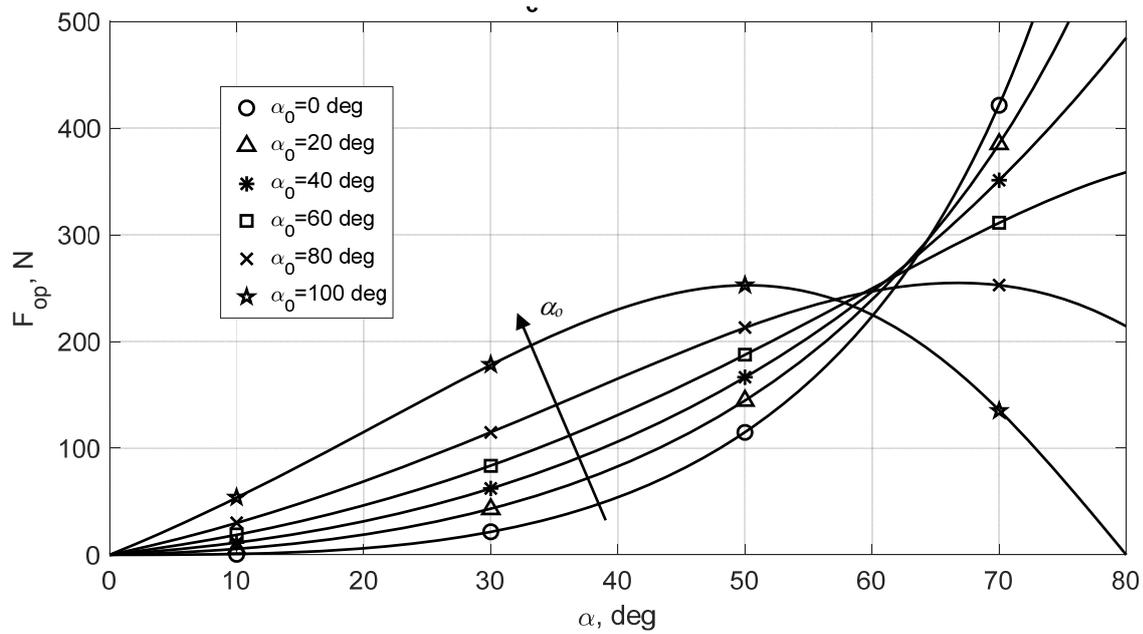


**Fig. 8.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_0$   
 $(\rho_o = 30 \text{ kg m}^{-3}; \rho_f = 90 \text{ kg m}^{-3}; \alpha_c = 80^\circ; m/b = \lambda = 0.14; l = 2\text{m}; L_c = 400 \text{ J}; \eta = 0.95)$

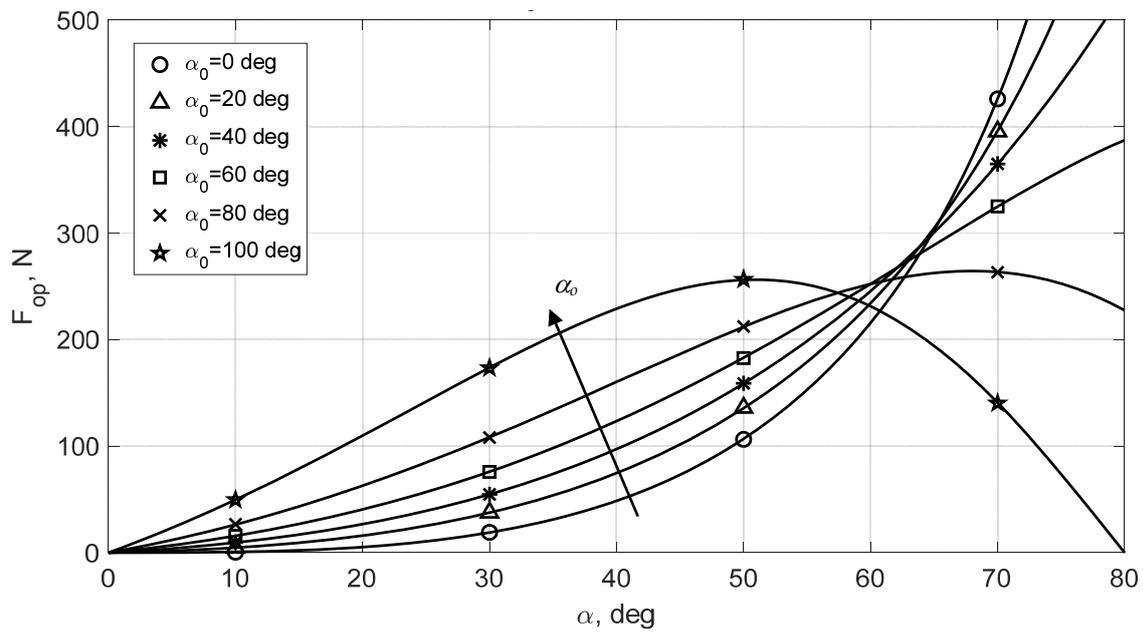

**Fig. 9.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_0$   
 $(\rho_o = 30 \text{ kg m}^{-3}; \rho_f = 90 \text{ kg m}^{-3}; \alpha_c = 80^\circ; m/b = \lambda = 0.28; l = 2\text{m}; L_c = 400 \text{ J}; \eta = 0.95)$

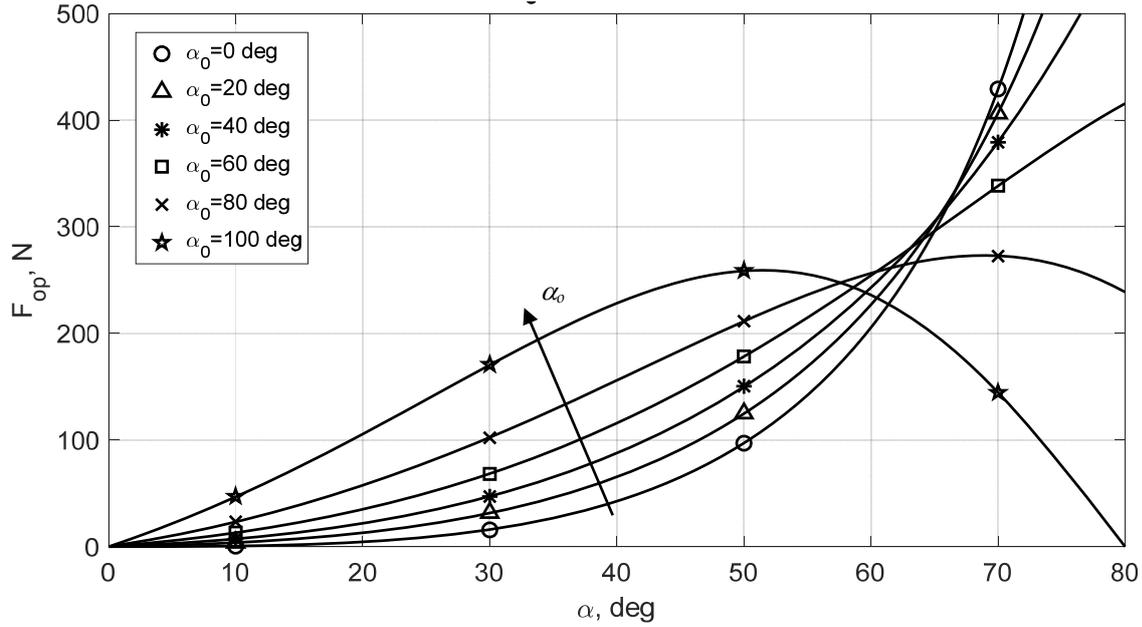

**Fig. 10.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_0$   
 $(\rho_o=30 \text{ kg m}^{-3}; \rho_f=90 \text{ kg m}^{-3}; \alpha_c=80^\circ; m/b=\lambda=0.42; l=2\text{m}; L_c=400 \text{ J}; \eta=0.95)$

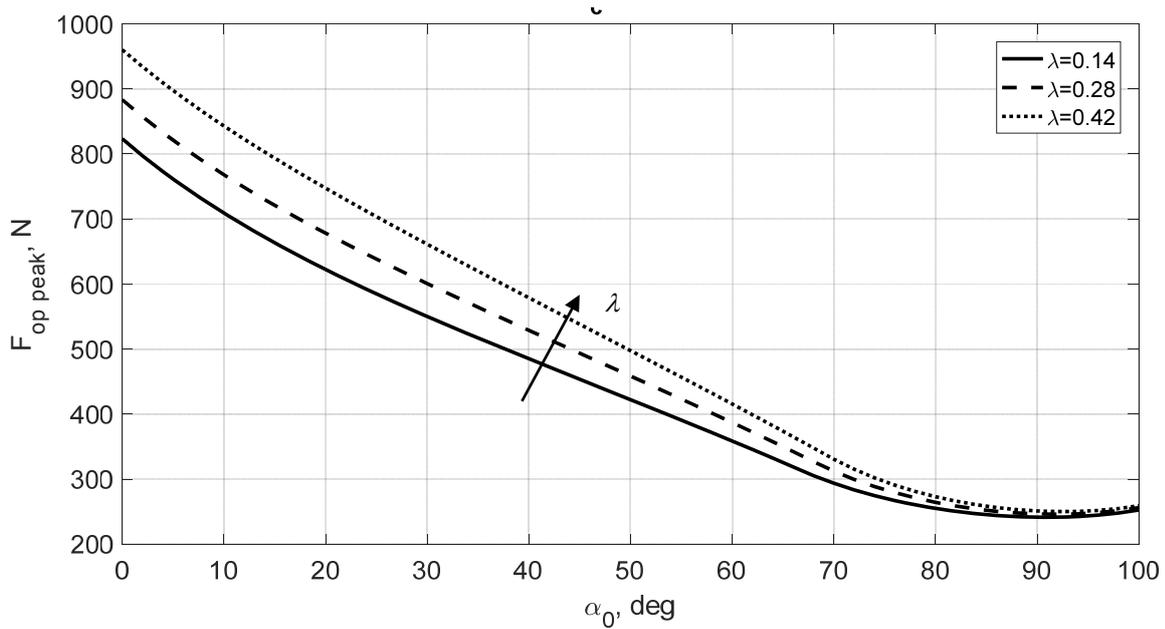

**Fig. 11.** Peak of the operating force  $F_{op \text{ peak}}$  related to the initial rotation angle of the lever  $\alpha_0$  for different ratios  $m/b=\lambda$   
 $(\rho_o=30 \text{ kg m}^{-3}; \rho_f=90 \text{ kg m}^{-3}; \alpha_c=80^\circ; l=2\text{m}; L_c=400 \text{ J}; \eta=0.95)$


## 5. Validation of the synthesis methodology

In order to validate the functional designing methodology, introduced in the previous paragraphs, a synthesis of the actuation mechanism of a press able to

compress rice straw on which an accurate experimental mechanical characterisation was conducted.

A total mass of 1.720 kg of straw was introduced into the compressing chamber of section 0.36 x 0.45 m. The compression plate displacement was controlled at the speed of 3 mm s<sup>-1</sup> until it reached the 90 kg m<sup>-3</sup> final density required. The compression force and the position plate data were elaborated in order to obtain the pressure - density characteristic of the straw. The experimental trend was linearised based on Eq. (3) evaluating the stiffness coefficient of the straw using Eq.(4) ( $k = 246 \text{ Pa m}^3 \text{ kg}^{-1}$ ). Applying the synthesis methodology, considering a compression work per cycle  $L_c = 400 \text{ J}$ , an actuating lever length  $l = 2\text{m}$ , a rotation angle of the lever per cycle  $\alpha_c = 80^\circ$ , an initial angle of the operating lever  $\alpha_o=100^\circ$ ,  $\lambda = 0.42$ , it showed that the plate stroke must be  $y_c = 0.63 \text{ m}$  (Eq. (7)), and this can be obtained using a crank length of  $m = 0.60 \text{ m}$  and a shaft length of  $b = 1.44\text{m}$  (Eq. (12)).

In Fig. 12 the operating force trends related to the rotating angle are shown, based both on the linear and on the experimental relation between straw density and compression pressure. The trends of the operating forces are comparable. The maximum operating force obtained with the experimental curve is lower, around 11%, than the one calculated using a linear trend. In general, therefore, it is possible to state that the linear model can be used to design the mechanism in a conservative way, with a limited and acceptable for the application error.

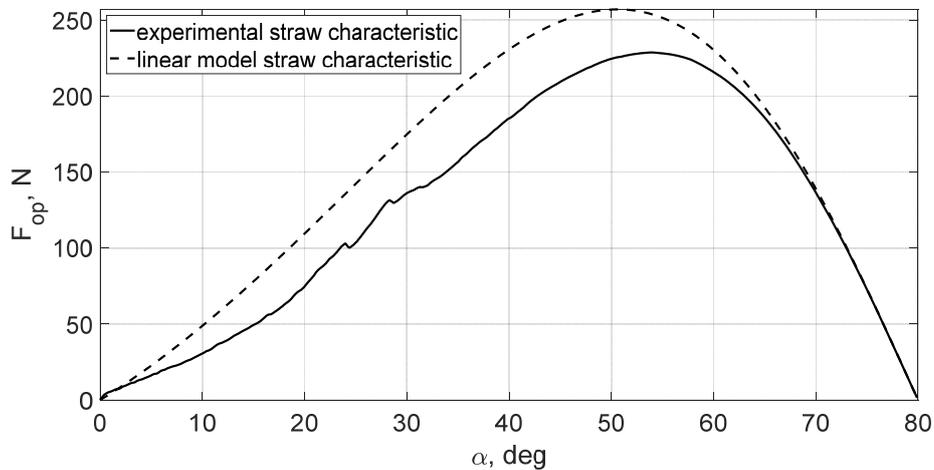

**Fig. 12.** Operating force  $F_{op}$  related to the lever rotation angle  $\alpha$ , calculated using the linear model of the straw characteristic (dashed line), and the experimental characteristic (continuous line).

## 6. The detailed design

The synthesis methodology was used to define the functional parameters of the press. The design parameters assumed and calculated using the methodology described in the sections 3 and 4 are listed in Table 2.

The stiffness constant of the straw was calculated by means of Eq. (4), being measured, in experimental tests done on the Haiti site, the values of the compression pressure  $p_f = 0.3 \times 10^5$  Pa needed to reach the final bale density of  $\rho_f = 90$  kg m<sup>-3</sup> starting from an initial density of  $\rho_0 = 30$  kg m<sup>-3</sup>. The lever length  $l$  and its rotation angle for the compaction cycle  $\alpha_c$  were fixed based on the ergonomic considerations, as discussed in section 4. The compression work  $L_c$  was fixed, in a conservatively, to equal the half of the maximum work that can be done by a single operator and considering an efficiency of the all transmission  $\eta$ :

$$L_c = \frac{1}{2} \eta L_{op\max} = \frac{1}{2} \eta F_{op\max} l \cdot \alpha_c \quad (20)$$

assuming  $F_{op\max} = 300$  N and  $\eta = 0.95$ .

**Table 2.** Design parameters assumed and calculated

<i>Design parameters assumed</i>	
Actuating lever length	$l = 2$ m
Rotation angle of the lever per cycle	$\alpha_c = 80^\circ$
Compression work per cycle	$L_c = 400$ J
Ratio between crank and rod lengths	$\lambda = 0.42$
<i>Design parameters calculated</i>	
Straw stiffness constant	$k = 500$ Pa m <sup>3</sup> kg <sup>-1</sup>
Piston stroke	$y_c = 0.31$ m
Number of compaction cycles	$n_c = 6$
Initial angle of the operating lever	$\alpha_0 = 100^\circ$
Ratio between crank length and piston stroke	$m/y_c = 0.96$
Crank length	$m = 0.3$ m
Connecting rod length	$b = 0.7$ m

In Fig. 13 a 3D scheme of the designed press is shown. The straw to be pressed for each cycle is charged into the loading chamber. The operator rotates the lever that makes the piston move forward by mean of the sliding-crank mechanism. The sliding/lockable end of the pressing chamber is adjustable, and can be moved cycle

after cycle, from a position that is near the pressing chamber to the other end of it. In this way, while the bale is being pressed, the geometry of the pressing chamber, represented in Fig. 4, is restored. The extraction of the bale, manually tied, is done by means of the unloading door.


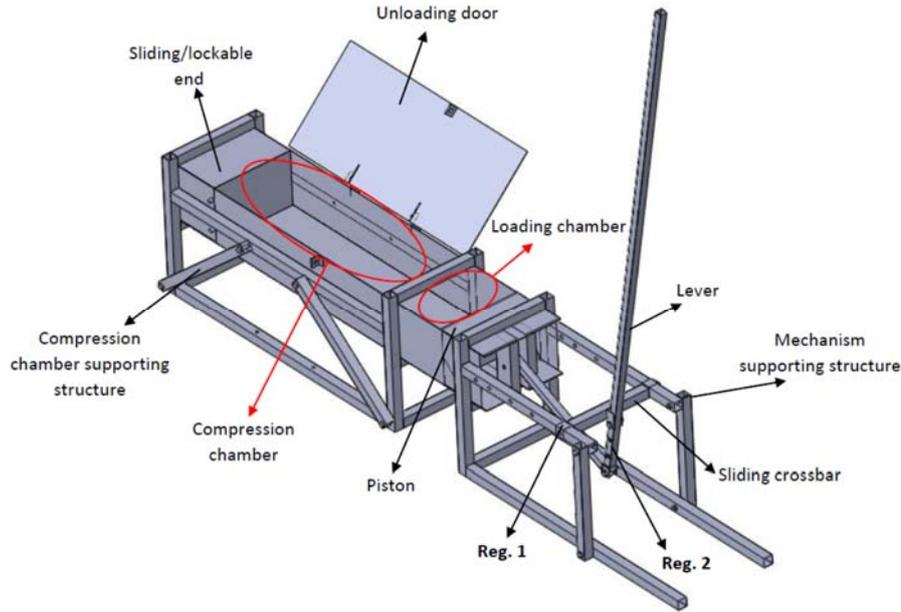


Fig. 13. Detailed design of the press

Because of the uncertainty concerning straw mechanical characteristics, and in order to produce straw bales even in the case in which the straw stiffness constant is higher than expected, a regulation of the slider-crank mechanism has been introduced (Fig. 14). Moving the lever fixed hinge  $O$ , it is possible to obtain different length of the crank  $m_1 = 0.3$  m (design length),  $m_2 = 0.2$  m,  $m_3 = 0.1$  m, maintaining the connecting rod length equal to  $b = 0.7$  m. Thanks to this, i.e. reducing the piston stroke to 0.09 m with 20 cycles of compression maintaining the compression work  $L_c = 400$  J, it is possible to press straws with a stiffness constant  $k$  up to  $1700 \text{ Pa m}^3 \text{ kg}^{-1}$  (Table 3).

**Table 3.** Functional parameters in the three press configurations

<i>Project assumptions</i>			
Straw stiffness constant	$k = 500 \text{ Pa m}^3 \text{ kg}^{-1}$	$k = 800 \text{ Pa m}^3 \text{ kg}^{-1}$	$k = 1700 \text{ Pa m}^3 \text{ kg}^{-1}$
Lever length	$l = 2 \text{ m}$	$l = 2 \text{ m}$	$l = 2 \text{ m}$
Rotation angle of the lever per cycle	$\alpha_c = 80^\circ$	$\alpha_c = 80^\circ$	$\alpha_c = 80^\circ$
Compacting work	$L_c = 400 \text{ J}$	$L_c = 400 \text{ J}$	$L_c = 400 \text{ J}$
Crank/rod ratio	$\lambda = 0.42$	$\lambda = 0.28$	$\lambda = 0.14$
<i>Calculated data</i>			
Piston stroke	$y_c = 0.31 \text{ m}$	$y_c = 0.19 \text{ m}$	$y_c = 0.09 \text{ m}$
Number of cycles per bale	$nc = 6$	$nc = 10$	$nc = 20$
Initial angle of rotation of the lever	$\alpha_o = 100^\circ$	$\alpha_o = 100^\circ$	$\alpha_o = 100^\circ$
Crank length/piston stroke ratio	$m/y_c = 0.96$	$m/y_c = 1.04$	$m/y_c = 1.12$
Crank length	$m = 0.3 \text{ m}$	$m = 0.2 \text{ m}$	$m = 0.1 \text{ m}$
Rod length	$b = 0.7 \text{ m}$	$b = 0.7 \text{ m}$	$b = 0.7 \text{ m}$

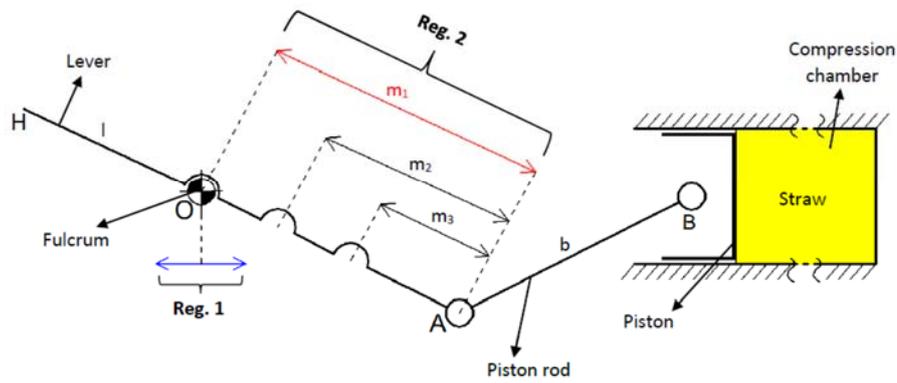

**Fig. 14.** Regulation of the sliding-crank mechanism

## 7. The prototype

Based on the design made, a prototype of the press, called Anpil Pay 1.0, was constructed by the mechanical workshop of the Salesian school of Port-au-Prince, Haiti (Fig.15). The prototype was constructed using simple equipment: a circular saw, a drill press and a welding machine. The revolute joints and the prismatic joint of the compression plate are plain bearings. In order to reduce the friction force, lubricating grease was used. The prototype press was used to produce the straw bales required as infill for the construction of the lateral walls of the warehouse (Fig.16).



Fig. 15. The prototype of the press



Fig. 16. A typical straw bale obtained by using the prototype press and the background the warehouse built by ASF in Haiti using the bales.

Although the press was able to produce the 240 bales needed to build the warehouse some weaknesses were identified:

- the re-positioning of the sliding/lockable end during the compacting of the straw bale was not really effective;
- the need to weigh the straw that was put into the loading chamber between each compression cycle was an uncomfortable operation;
- the tying operations of the bale were difficult and took a very long time, up to 10 m.

## 8. Conclusions

A rigorous design method for a hand-powered press used for producing straw bales was developed. The method was validated experimentally and used to calculate the main functional parameters of a specific prototype press.

In particular:

- The method showed that the slider crank mechanism is able to actuate a human powered straw press, allowing variable transmission ratios as the resistance force applied by the straw increases.
- It is possible to optimise the functional parameters of the mechanism starting from a simplified linear straw mechanical model, that can be identified knowing the initial density of the straw and the pressure that is needed in order to reach the desired final density.
- In order to minimise the peak operating force it is recommended to choose an initial angle of the operating lever  $\alpha_0$  in the range 80-100°.

The prototype press had some limitations, especially in the repositioning of the sliding/lockable end and in the tying operations. These limits require a re-examination of the machine architecture, for example introducing a density regulation system that enables a continuous production of the bales and some measures to simplify the bale tying operation.

Overall the technology was appropriate for the objective of completing the rice cultivation chain in the Artibonite Valley by means of using the straw that normally was considered as waste as material for self-construction.

Based on the results obtained of the first Haiti Project, the authors are confident that the press is attractive and appropriate device that is easily constructed from materials that are available by the local blacksmiths, has low cost, is easily replicable and is easy to maintain and use.

## Acknowledgements

Our gratitude goes to the Architetti Senza Frontiere Piemonte (ASF) association, in the person of Valeria Cottino, Annalisa Masetto and Veronica Brugaletta for cooperating with us, producing the experimental test in order to have a mechanical characterisation of the straw and for the building of the warehouse. Thanks also to the student team Anpil Pay 2.0 for the validation experimental tests.

## References

- Afzalnia, S., Roberge, M. (2013). Modeling of the pressure-density relationship in a large cubic baler, *Journal of Agricultural Science & Technology* 15, 35-44.
- ASF Piemonte, (2013). Haiti |2| Re-start from straw, *III Congress of the University Network for Development Cooperation (CUCS Torino 2013)*, Torino, Italy, 19-21 September 2013, 318.
- Ashour, T., Georg, H., Wu, W. (2011). Performance of straw bale wall: A case study, *Energy and Building*, 43, 1960-1967.
- Bilanski, W.K., Graham, V.A., Hanusiak, J.A. (1985). Mechanics of bulk forage deformation with application to wafering, *Transactions of the ASAE*, 28(3), 697-702.
- Bonoli, A., Rizzo S., Chiavetta C. (2015). Straw as construction material for sustainable buildings: Life Cycle Assessment of a post-earthquake reconstruction. In *Vernacular Architecture: Towards a Sustainable Future*, CRC Press, 143-146.
- Faborode, M.O., O'Callaghan, J.R. (1986). Theoretical analysis of the compression of fibrous agricultural materials, *Journal of Agricultural Engineering Research*, 35, 175-191.
- Ferrero, A., Horabik, J., Molenda, M. (1990). Density-pressure relationship in compaction of straw. *Canadian Agricultural Engineering*, 33(1) 107-111.
- Galedar, M. N., Jafari, A., Mohtasebi, S., Tabatabaefar, A., Sharifi, A., O'Dogherty, M., et al. (2008). Effects of moisture content and level in the crop on the engineering properties of alfalfa stems. *Bio-systems Engineering*, 101, 199-208.
- Jones B. (2009). *Building with Straw Bales: A Practical Guide for the U. K. and Ireland*, Devon, UK: Green Books Totnes.
- Kaliyan, N., & Vance Morey, R. (2009). Constitutive model for densification of corn stover and switchgrass. *Biosystems Engineering*, 104, 47-63.
- Kean, S. (2010). Rebuilding: from the bottom up. *Science*, 327 (5966), 638-639.
- Khan, S. Donovan, D. (2012). PAKSAB Workshop part. I: Fabricating bales and foundation construction, *International Straw Builder Conference*, September 16-22 2012, Estes Park, Colorado, USA.
- King, B. (1996). *Buildings of earth and straw: Structural Design for Rammed Earth and Straw-Bale Architecture*. Sausalito, CA: Ecological Design Press.
- King, B. (2006). *Design of straw bale buildings. The state of art*. San Rafael: Green Building Press
- Lerner, K., Theis, B., Smith, D. (2000). *Straw-bale, alternative construction: contemporary natural building materials*. New York: Elizabeth L, Adams C, editors., John Wiley & Sons, Inc.
- Magwood, C., Mack, P. (2000). *Straw bale building: how to plan, design and build with straw*. Gabriola Island, B.C. Canada: New Society Publishers.
- Mewes, E., (1958). Zum Verhalten von Pressgutern in Prestopfen (on the behaviour of compressed matter in pressure chambers). *Landtechnische Forschung*, 8(6), 154-164.
- Nona, K., Lenaerts, B., Kayacan, E., Saeys, W. (2014). Bulk compression characteristics of straw and hay. *Biosystems Engineering*, 118, 194-202.
- The Appropedia foundation. A hand powered hay and leaf Baler. Available from: [http://www.appropedia.org/A\\_Hand\\_Powered\\_Hay\\_and\\_Leaf\\_Baler](http://www.appropedia.org/A_Hand_Powered_Hay_and_Leaf_Baler) [Accessed 29th July 2016].
- Watts, K.C., Bilanski, W.K. (1991), Stress Relaxation of alfalfa under constant displacement. *Transactions of the ASAE*, 34(6), 2491-2498.

## Figure Captions

**Fig. 1.** Black box baler model

**Fig. 2.** Straw mechanical characteristic

**Fig. 3.** Number of compaction cycles  $n_c$  related to the compression work for each cycle  $L_c$  (straw stiffness constant  $k$ ,  $m_{tot} = 10.9 \text{ kg}$ ,  $\rho_o = 30 \text{ kg m}^{-3}$ ,  $\rho_f = 90 \text{ kg m}^{-3}$ )

**Fig. 4.** Compression chamber scheme

**Fig. 5.** Piston stroke  $y_c$  for cycle related to the compression work for each cycle  $L_c$

(straw stiffness constant  $k$ ,  $m_{tot} = 10.9 \text{ kg}$ ,  $\rho_o = 30 \text{ kg m}^{-3}$ ,  $\rho_f = 90 \text{ kg m}^{-3}$ )

**Fig. 6.** Baler slider-crank mechanism. Initial position (hatched line); generic position (continuous line).

**Fig. 7.** Trend of the ratio of the crank length and the piston stroke  $m/y_c$  related to the initial rotation angle of the lever  $\alpha_o$  ( $\alpha_c = 80^\circ$ )

**Fig. 8.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_o$  ( $\rho_o = 30 \text{ kg m}^{-3}$ ;  $\rho_f = 90 \text{ kg m}^{-3}$ ;  $\alpha_c = 80^\circ$ ;  $m/b = \lambda = 0.14$ ;  $l = 2\text{m}$ ;  $L_c = 400 \text{ J}$ ;  $\eta = 0.95$ )

**Fig. 9.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_o$  ( $\rho_o = 30 \text{ kg m}^{-3}$ ;  $\rho_f = 90 \text{ kg m}^{-3}$ ;  $\alpha_c = 80^\circ$ ;  $m/b = \lambda = 0.28$ ;  $l = 2\text{m}$ ;  $L_c = 400 \text{ J}$ ;  $\eta = 0.95$ )

**Fig. 10.** Operating force  $F_{op}$  related to the rotation angle of the lever  $\alpha$  for different initial angles of the lever  $\alpha_o$  ( $\rho_o = 30 \text{ kg m}^{-3}$ ;  $\rho_f = 90 \text{ kg m}^{-3}$ ;  $\alpha_c = 80^\circ$ ;  $m/b = \lambda = 0.42$ ;  $l = 2\text{m}$ ;  $L_c = 400 \text{ J}$ ;  $\eta = 0.95$ )

**Fig. 11.** Peak of the operating force  $F_{op\ peak}$  related to the initial rotation angle of the lever  $\alpha_o$  for different ratios  $m/b = \lambda$  ( $\rho_o = 30 \text{ kg m}^{-3}$ ;  $\rho_f = 90 \text{ kg m}^{-3}$ ;  $\alpha_c = 80^\circ$ ;  $l = 2\text{m}$ ;  $L_c = 400 \text{ J}$ ;  $\eta = 0.95$ )

**Fig. 12.** Operating force  $F_{op}$  related to the lever rotation angle  $\alpha$  calculated using the linear model of the straw characteristic (dashed line), and the experimental characteristic (continuous line).

**Fig. 13.** Detailed design of the press

**Fig. 14.** Regulation of the slider-crank mechanism

**Fig. 15.** The prototype of the press

**Fig. 16.** A typical straw bale obtained by using the prototype press and the background the warehouse built by ASF in Haiti using the bales.