

PEOPLES: A Framework for Evaluating Resilience

*Original*

PEOPLES: A Framework for Evaluating Resilience / Cimellaro, GIAN PAOLO; Renschler, Chris; Reinhorn, Andrei M.; Arendt, Lucy. - In: JOURNAL OF STRUCTURAL ENGINEERING. - ISSN 0733-9445. - ELETTRONICO. - 142:10(2016), p. 04016063. [10.1061/(ASCE)ST.1943-541X.0001514]

*Availability:*

This version is available at: 11583/2652922 since: 2019-10-18T12:50:35Z

*Publisher:*

American Society of Civil Engineers (ASCE)

*Published*

DOI:10.1061/(ASCE)ST.1943-541X.0001514

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

(Article begins on next page)

# PEOPLES: A FRAMEWORK FOR EVALUATING RESILIENCE

Gian Paolo Cimellaro<sup>1</sup>, Chris Renschler<sup>2</sup>, Andrei M. Reinhorn<sup>3</sup>, Lucy Arendt<sup>4</sup>,

## ABSTRACT

In recent years, the concept of resilience has been introduced to the engineering field in particular related to disaster mitigation and management. However, the built environment is only part of the elements that support community functions. Maintaining community functionality during and after a disaster, defined as resilience, is influenced by multiple components. The paper is proposing a framework for measuring community resilience at different spatial and temporal scales. Seven dimensions are identified for measuring the community resilience: *Population and Demographics, Environmental/Ecosystem, Organized Governmental Services, Physical Infrastructures, Lifestyle and Community Competence, Economic Development, and Social-Cultural Capital*. They are summarized with the acronym PEOPLES. Each dimension is characterized by a corresponding performance metric that is combined with the other dimensions using a multi-layered approach. Therefore, once a hybrid model of the community is defined, the proposed framework can be applied to measure its performance against any type of extreme event during *emergency* and in *long term* post-disaster phases. A resilience index can be determined to reflect all, or part, of the dimensions influencing the events. Several applications of part of such framework can already be found in literature for different types of infrastructures, physical and organizational (e.g. gas network, water distribution networks, health care facilities etc.). The proposed framework can be used as decision support by stakeholders and managers and it can help planners in selecting the optimal restoration strategies that enhance the community resilience index.

---

<sup>1</sup> Visiting Professor, Department of Structural & Environmental Engineering, University of California, Berkeley, Berkeley, USA, E-mail: [gianpaolo.cimellaro@polito.it](mailto:gianpaolo.cimellaro@polito.it)

<sup>2</sup> Associate Professor, Department of Geography, University at Buffalo, SUNY, 116 Wilkeson Quad, Buffalo, NY 14261, U.S.A. E-mail: [renschr@buffalo.edu](mailto:renschr@buffalo.edu).

<sup>3</sup> Professor Emeritus, Department of Civil, Structural & Environmental Engineering, University at Buffalo (SUNY), 135 Ketter Hall, North Campus, 14260-4300, Buffalo, NY, U.S.A. [reinhorn@buffalo.edu](mailto:reinhorn@buffalo.edu)

<sup>4</sup> Associate Professor of Management, Associate Dean, College of Professional Studies, Director, Austin E. Cofrin School of Business, University of Wisconsin-Green Bay, 2420 Nicolet Dr, Green Bay, WI 54311, USA, [arendtl@uwgb.edu](mailto:arendtl@uwgb.edu)

23 Keywords: Resilience; disaster resilience; infrastructures, performance metric; community resilience;  
24 environment/ecosystem; organized governmental services; physical infrastructure.

25

## 26 INTRODUCTION AND DEFINITION OF RESILIENCE

27 Recent disasters around the world have shown clearly that not all the threats can be averted. Modern  
28 societies are trying to enhance their resilience against extreme events after realizing that they cannot  
29 prevent every risk from being realized, but rather they must manage risks and adapt minimizing the  
30 impact on population and their support systems.

31 The concept of resilience has several definitions, because of its broad utilization in ecology, social  
32 science, economy and engineering fields, with different meanings and implications. As Klein *et al.*  
33 stated (2003), the term derives from the Latin word '*resilio*' that means '*to jump back*'. The term has  
34 been used first in psychology and psychiatry in 1940s, and it is mainly accredited to Norman  
35 Garnezy, Emmy Werner and Ruth Smith (Garnezy, 1974; Werner and Smith, 1989). Later the  
36 concept of resilience established in the field of ecology by Holling (1973) who stated that the  
37 resilience of an ecological system is "a measure of the persistence of systems and of their ability to  
38 absorb change and disturbance and still maintain the same relationships between populations or state  
39 variables. Stability represents the ability of a system to return to an equilibrium state after a  
40 temporary disturbance; the more rapidly it returns to equilibrium and the less it fluctuates, the more  
41 stable it would be". An extended literature review about resilience has been assembled in the past  
42 (see Table -1) with each contribution adding new nuances. Primarily resilience has been defined in  
43 context to the speed of systems to go towards equilibrium (Adger, 2000) or capability to cope and  
44 bounce back, ability to adapt to new situations (Comfort, 1999), be inherently strong, flexible and  
45 adaptive (Tierney & Bruneau, 2007), or ability to withstand external impacts and recover with least  
46 outside interferences (Mileti, 1999). After the original definition of resilience in ecological systems,  
47 the word expanded its meaning to *engineering*, *social* and *economical* fields.

48 *Engineering resilience* is defined as the capability of a system to maintain its functionality and to  
49 degrade gracefully in the face of internal and external changes (Allenby and Fink, 2005). The main

50 difference in defining resilience arises between the engineering approach where resilience occurs by  
51 recovering towards a previous or an improved stable state (Bruneau et al., 2003), and the ecological  
52 approach where resilience is achieved moving towards a different system state (Handmer & Dovers,  
53 1996).

54 *Social resilience* is defined as the ability of groups or societies to cope with external stresses and  
55 disturbances because of social, political, and environmental change (Adger, 2000).

56 *Economic resilience* is defined as the inherent ability and adaptive response that enables individual  
57 business firms and entire regions to avoid maximum potential losses (Rose and Liao, 2005). It has  
58 mainly been studied in context to seismic response and recovery (Tierney, 1997), community  
59 behavior (Chang & Shinozuka, 2004) and disaster hazard analysis (Rose, 2004).

60 Research advancements have proven that resilience should be addressed at the large-scale level and  
61 not just locally. Bruneau et al. (2003) identified four types of resilience that should be adequately  
62 measured: *technical*; *organizational*; *social*; and *economical*, (TOSE). Technical and economical  
63 resilience, are mainly related to the physical systems, while organizational and social resilience, are  
64 related to the society and the non physical systems.

- 65 • *Technical resilience* describes the capability of a system to function and perform adequately.
- 66 • *Organizational resilience* describes the ability of the organization(s) to manage the system. For  
67 example, measures of organizational resilience could include how well emergency units function,  
68 how quickly spare parts are replaced, how quickly repair crews are able to reach the affected  
69 components of a system, etc.
- 70 • *Social resilience* concerns how well society copes with the loss of services because of a disaster.  
71 For example, social resilience can become the most critical dimension of the global resilience,  
72 because of severe blackouts during a disaster.
- 73 • *Economic resilience* describes the capability to reduce both indirect and direct economic losses  
74 (Rose and Liao, 2005).

75 Following the initial resilience framework by Bruneau et al. (2003), other frameworks have been  
76 developed expanding and identifying different metrics to quantify resilience. For example, Chang  
77 and Shinozuka (2004) refined the method proposed by Bruneau (2003) by proposing a metric of

78 system functionality  $Q$  that is evaluated comparing the extreme events scenario with the pre-event  
79 conditions and they applied the method to the case study of Memphis water system. Miles and  
80 Chang (2006) presented a comprehensive functionality restoration model that establishes the  
81 relationships between community's household, business and lifeline networks. The same year  
82 Cagnan et al. (2006) developed a discrete event simulation model for modeling the post-earthquake  
83 restoration process of an electric power system. The resilience concept as input to *decision support*  
84 *methodologies* has been applied to *hospitals* (Cimellaro et al., 2010b; Cimellaro and Pique`, 2014a),  
85 *lifeline structures* (Ouyang and Duenas-Osorio, 2011, Cimellaro et al., 2014b-c) and *cities* (Chang et  
86 al., 2014) using different optimization methods based on *economic* (Chang and Shinozuka, 2004),  
87 *downtime* (Cagnan et al., 2006) or *multi-criteria analysis* (Javanbarg et al., 2012).

88 Several methods for the quantification of infrastructures' resilience have been proposed that can be  
89 grouped in *probabilistic methods* (Miller-Hooks et al, 2012, Queiroz et al., 2013), *graph theory*  
90 *methods* (Berche et al, 2009; Dorbritz, 2011), *fuzzy logic methods* (Heaslip et al., 2010) and  
91 *analytical methods* (Cimellaro et al., 2010a; Tamvakis and Xenidis, 2013). For example, Tamvakis  
92 and Xenidis (2013) proposed a framework base on entropy theory concepts. Entropy describes the  
93 system's disorder at a given point in time and it is measurable in a single metric, analogous to  
94 resilience, which describes the system's potential of recovering to a desired system's condition.

95 It should be noted that the literature review presented above it is not exhaustive; however, most of  
96 the works cited herein summarize previous works to quantify resilience, therefore this review is  
97 adequate for the classification of the different trends in the quantification of resilience for  
98 infrastructures and communities in general. However, due to its complexity, a comprehensive model  
99 that quantifies resilience of local, metropolitan or disperses communities and considers all  
100 infrastructures and their interaction is still missing.

101 This paper suggests a novel framework to evaluate resilience of a community and to assess the  
102 performance of critical infrastructures and their interdependencies while taking into account the  
103 influence of the human behavior, societal, organizational, and economic issues. The framework is

104 based on seven major groups of characteristics, defined here as dimensions, which can measure  
 105 resilience at different scales. These are: *Population and Demographics*, *Environmental/Ecosystem*,  
 106 *Organized Governmental Services*, *Physical Infrastructure*, *Lifestyle and Community Competence*,  
 107 *Economic Development*, and *Social-Cultural Capital* and are identified with the acronym  
 108 **PEOPLES**: The framework can be used for resilience-based design (RBD) at different spatial  
 109 (local, regional etc.) and temporal (emergency response, recovery and reconstruction phase, etc.)  
 110 scales. It can also be used by decision makers for disaster and post-disaster management,  
 111 minimizing all the possible consequences following an extreme event, both natural and man-made  
 112 allowing the perturbed system to return to the initial conditions as quickly as possible.

### 113 **Mathematical definition of Resilience**

114 The definition of Resilience used in this paper is the one described also by Cimellaro et al.,  
 115 (2010a), where a resilience index  $R$  of a system is defined as the normalized area underneath the  
 116 functionality-performance function  $Q(t)$  shown in Figure -1 **Error! Reference source not found.**,  
 117 while analytically is defined as

$$118 \quad R(\vec{r}) = \int_{t_{OE}}^{t_{OE}+T_{LC}} Q_{TOT}(\vec{r}, t) / T_{LC} dt \quad (1)$$

119 where  $Q_{TOT}(t)$  is the global functionality-performance function of the area considered (local,  
 120 regional, etc) which is described in the next paragraph;  $T_{LC}$  is a control time for the period of interest;  
 121  $t_{OE}$  is the time instant when the event happens;  $\vec{r}$  is a spatial vector defining the position  $P$  in the  
 122 region where the resilience index is evaluated (Cimellaro et al. 2010b). In general, the resilience  
 123 index can be applied to different fields (e.g. engineering, economic, social science etc.) and it can be  
 124 used at various *temporal and spatial* scales. The first step to quantify the resilience index ( $R$ ) is to  
 125 define the *spatial scale* (e.g. individual building, city, region, state, etc.) of the problem of interest,  
 126 because large disasters tend to expand over interacting large spaces. The second step is to define the  
 127 *temporal scale* (emergency response vs. long term reconstruction phase) of the problem of interest;

128 the selection of the control period  $T_{LC}$  affects the resilience index  $R$ , therefore it should be maintained  
129 fixed when comparing different scenarios.

## 130 **THE SEVEN DIMENSIONS**

131 The proposed framework expands the initial research at the Multidisciplinary Center of Earthquake  
132 Engineering Research (MCEER) and links with the previously identified resilience characteristics  
133 (*technical, organizational, societal, and economic*) and with the resilience attributes ( $r^4$ : *robustness,*  
134 *redundancy, resourcefulness, and rapidity*) (Bruneau et al. 2003; Bruneau and Reinhorn, 2007;  
135 Cimellaro et al. 2010b).

136 The new framework, identified by the acronym PEOPLES, incorporates the initial MCEER's  
137 definitions of service functionality of community components (assets, services, demographics) and  
138 parameters influencing resilience, all assembled into a layered approach. The seven dimension  
139 groups of the PEOPLES' framework (Renschler et al. 2010, 2011), listed below, are further  
140 explained in this section.

- 141 (1) **P**opulation and demographics;
- 142 (2) **E**nvironment/ecosystem;
- 143 (3) **O**rganized government services;
- 144 (4) **P**hysical infrastructure;
- 145 (5) **L**ifestyle and community competence;
- 146 (6) **E**conomic development;
- 147 (7) **S**ocial-cultural capital;

148 The specific dimensions represent groups of interwoven societal, technical, economic and  
149 organizational issues. Although other definitions of multiple dimensions were described by  
150 Rockefeller Foundation (Huq et al, 2007), United Nations (2013), the Institute for Social and  
151 Environmental Transition (ISET) (Tyler and Moench, 2012), Arup (da Silva and Morera, 2014), the  
152 aforementioned dimension groups were selected based on similar characteristics. A resilience index  
153 can be established for each of the above dimensions; however, the whole community resilience  
154 would be influenced by all, or only some dominant dimensions, as it is described in the following.  
155 Table -2 shows the extended list of components and sub-components of the "PEOPLES Framework",

156 while the detailed description of each dimension is given in the next paragraphs. The description of  
157 the dimensions follows the order of the PEOPLES acronym, so it is not based on a specific  
158 hierarchy. Additional details can also be found in Renschler et al. (2010, 2011).

### 159 **Population and demographics**

160 The *Population and demographics* dimension describes and differentiate the communities using  
161 specific parameters (e.g. the *median income*, the *age distribution* etc.) which might be critical for  
162 understanding its economics, health, etc. These parameters help describing the *social vulnerability*  
163 which is defined as the *incapacity of societies, organizations and citizens to resist at the exposure of*  
164 *multiple undesirable events*. These events are generated by the interaction in the society, the  
165 institutions and the systems of different cultural values. Social vulnerability is a pre-existing state of  
166 the community that affects the society's capacity to get ready for and recover from an undesirable  
167 event.

168 This dimension can be measured using a social index that describes the socioeconomic status, the  
169 composition of the population (e.g. elderly and children), the population density, the rural  
170 agriculture, the race, the gender, the ethnicity, the infrastructure employment, and the county  
171 debt/revenue.

172 Following the general definition of Resilience given in Equation (1), a possible functionality-  
173 performance metric ( $Q_p$ ) for the *Population and Demographic* dimension could be the *social*  
174 *vulnerability index* (SVI) (Barry et al., 2011). The domains that form the basis of the Social  
175 Vulnerability Index (SVI) are 1) socioeconomic status, 2) household composition and disability, 3)  
176 minority status and language, and 4) housing and transportation. The data can be collected from the  
177 European Census of Population and Housing at the census tract level. Each of the domains can be  
178 described as per following variables:

- 179 • *Socioeconomic status* comprising income, poverty, employment, and education variables;
- 180 • *Household Composition and Disability*, comprising age, single parenting, and disability
- 181 variables;

- 182 • *Minority Status and Language*, comprising race, ethnicity, and language proficiency  
183 variables;
- 184 • *Housing and Transportation*, comprising housing structure, crowding, and vehicle access  
185 variables.

186

187 Each of the above census variables, except *per capita income*, could be ranked from highest to  
188 lowest across all census tracts, to construct the SVI. Per capita income should be ranked from lowest  
189 to highest because, unlike the other variables, a higher value indicates less vulnerability. A percentile  
190 rank is then calculated for each census tract over each of these variables. A percentile rank is defined  
191 as the proportion of scores in a distribution that a specific score is greater than or equal to. Percentile  
192 ranks are calculated by using the formula:

$$193 \qquad \qquad \qquad \textit{Percentile Rank} = (\textit{Rank} - 1) / (N - 1) \qquad \qquad \qquad (2)$$

194 where *N* is the total number of data points, and all sequences of ties are assigned the smallest of the  
195 corresponding ranks. In addition, a tract-level percentile rank is calculated for each of the four  
196 domains based on an across-the-board sum of the percentile ranks of the variables comprising that  
197 domain. Finally, an overall percentile rank for each tract could be calculated as the sum of the  
198 domain percentile rankings. This process of percentile ranking—for all variables, for each domain,  
199 and for an overall SVI—is then repeated for the individual communities.

200 Others *social vulnerability index* (SoVI) (Cutter, 1996; Cutter et al., 2000) can be used as well, such  
201 as the one proposed by Cutter that integrates exposure to hazards with the social conditions that  
202 make people vulnerable to them.

203

## 204 **Environmental/Ecosystem**

205 In the *PEOPLES Framework*, the environmental and ecosystem dimension measure the capability of  
206 the ecological system to go back to its pre-event condition defined as its basic functionality. This

207 dimension measures the capability of an ecosystem to deal with disturbance, but also the amount of  
208 disturbance an ecosystem can absorb without considerably varying its processes and structures.  
209 In order to measure the environmental/ecosystem dimension of functionality and resilience, key  
210 indicators should be integrated together such as air, water and soil quality, biodiversity, and other  
211 natural resources.

212 One possible functionality-performance metric for this dimension is the *Normalized Difference*  
213 *Vegetation Index* (NDVI), which is evaluated from satellite-derived remote sensing images that  
214 analyze the density of green vegetation across an area (Rouse et al., 1973). The NDVI index ( $\leq 1$ ) is  
215 given by

216

$$217 \quad NDVI = (NIR - Red) / (NIR + Red) \quad (3)$$

218

219 where *Red* are the visible (red) infrared absorption bands and *NIR* are the near infrared absorption  
220 bands. Indeed, the *NDVI* index is highly correlated with the *Aboveground Net Primary Productivity*  
221 index (ANPP) (Pettorelli, 2005; Olofsson et al., 2007), that is based on field measurements of the  
222 biomass accumulation and therefore can be considered as an indicator of the ecosystem resilience.  
223 Several applications can be found in literature where the NDVI values obtained from Landsat images  
224 have been used to observe the restoration of the vegetation after a fire (Diaz-Delgado et al., 2002)  
225 and using time series analysis (Simoniello et al., 2008).

226 The NDVI index in Equation (3) can be used to quantify the Environmental/Ecosystem dimension by  
227 comparing the NDVI values before and after the event, to determine the variations of ecosystem  
228 productivity through the space and the time caused by natural disasters such as fire, flood,  
229 hurricanes, tsunamis, etc. Instead, in other types of disasters such as blizzards, terrorist attacks etc.,  
230 the variation of this index could be negligible, because the vegetation density might not be altered,  
231 while other indicators could be more relevant.

232

233 **Organized governmental services**

234 The dimension of *organized governmental services* includes legal and security services (e.g. Police,  
235 emergency departments, fire departments, the military etc.), and also the public health, the hygiene  
236 departments, the cultural heritage departments etc.. Each of the above mentioned organized  
237 government services play a key role in sustaining societies before and after an extreme event.

238 Key indicators for this dimension include the *number of available response units* and their *capacity*,  
239 if they are opportunely normalized with respect to the number of residents involved. This dimension  
240 can provide a measure on how much the various organized government services participate in  
241 emergency preparedness planning (e.g. survey, etc.) developing a memorandum of understanding  
242 (MOUs) and other mutual aid agreements (Tierney, 2009).

243 Other examples of performance metric for this dimension can be the patient waiting time (*WT*), that  
244 is the time the patient waits before receiving assistance (Cimellaro et al., 2011), in the case when the  
245 organized service is the Emergency Department (ED) of an hospital. This specific indicator  
246 measures the ability of the ED to provide service to all patients after a disaster. Analytically the  
247 functionality-performance metric ( $Q_o$ ) is given by

248 
$$Q_o = \frac{WT_0}{WT} \quad (3)$$

249 where  $WT_0$  is the waiting time in normal operating conditions, while  $WT$  is the waiting time during  
250 the emergency.

251 The deficiencies associated with this resilience dimension have been observed during the 2010 Haiti  
252 Earthquake, where the *lack* of organized government services and orderly control together with a  
253 *perception* that the government could not deal with the disaster reduced the response and recovery  
254 processes. In contrast, this resilience's dimension dominated the post 2010 Darfield earthquake in  
255 New Zealand, because the local, territorial and national government services were well organized to  
256 provide a quick restoration process. The organizational response during an emergency is most likely  
257 to be effective and improve resilience when it blends discipline and agility (Harrald, 2006).

258 Discipline and proper reaction are guaranteed by emergency plans, training activities, exercises and  
259 mutual aid agreements that encourage action toward common goals (Weick, 1995; Weick et al.,  
260 2005). Agility, flexibility, adaptability, and improvisations are entities which enhance resilience of  
261 a society, through volunteers, spontaneous helping behavior, and emergency groups which infuse  
262 resources and creativity into disaster response activities (Stallings and Quarantelli, 1985; Drabek and  
263 McEntire, 2002). The emergency management system following a disaster involves different groups  
264 such as the emergency response teams, the volunteers, the mass media, the economic network etc.  
265 These groups, instead of transferring information in a hierarchic way in the top-down direction, use  
266 an upward flow of information, which is the most preferred direction of communication used during  
267 disasters. In fact, the experience in the field has shown that decentralized networks with flatter  
268 organizations and less hierarchical structure are quicker in responding to disasters because they  
269 promote a free flow of information (Simoniello and Quarantelli, 1985).

270

### 271 **Physical infrastructure**

272 The *physical infrastructure dimension* includes *facilities* (e.g. housing, commercial and industrial  
273 facilities, and cultural facilities) and *lifelines* (food supply, utilities, transportation, communication  
274 networks etc.) within a built environment (Cimellaro et al., 2014b). While *facilities* are traditional  
275 essential life support for its population, *lifelines* are essential utilities which serve communities  
276 across all jurisdictions such as: (a) energy utilities (e.g. power and natural gas networks (Bruneau et  
277 al, 2003, Cimellaro et al., 2014a)); (b) transportation systems (e.g. highways, railroads, airports,  
278 seaports etc.); (c) water, storm-water and sewerage pipelines; (d) communication systems; and (e)  
279 health care facilities (e.g. hospitals, etc) (Cimellaro et al., 2011), etc. Functionality of physical  
280 infrastructures has an important impact on the restoration process following a disaster; therefore, the  
281 organized government services work actively to restore their functionality. Such interactions are  
282 essential in resilient communities.

283 For example, following Hurricane Katrina in 2005, after the evacuation of New Orleans, attention  
284 has shifted towards the restoration of the physical infrastructures. The pictures of damages have  
285 been used to communicate to the media in the world the consequences of the hurricane and of the  
286 subsequent flood (e.g. collapse of critical facilities such as churches, schools, and hospitals). The  
287 critical facilities were not able to provide their services without water and electricity. The damaged  
288 schools affected the community's self confidence to overcome the disaster and restore the initial  
289 functionality. The roads full of debris created an obstacle to the supply chain, therefore the economy  
290 in the region could not restart, because even if shops and companies re-opened they could not be  
291 accessible and even if they relocated for a short term, the previous customers were having some  
292 difficulties in finding the new location.

293 After a disaster, the restoration of physical infrastructures remains a technical problem that is also  
294 related to the socio-political events and the economic situation. The resilience dimension of physical  
295 infrastructure should also take into account the interdependencies between the different types of  
296 infrastructures and sectors during the analysis (Cimellaro and Solari, 2014c). Different functionality-  
297 performance metrics for this dimension are available in literature (Cimellaro et al., 2014a-b-c) and  
298 vary for every type of infrastructure (e.g. gas, water, transportation, etc). However, a general  
299 definition of functionality-performance metric ( $Q_{ph}$ ) for this dimension which applies to every type  
300 of infrastructure is given by

$$301 \quad Q_{ph}(t) = \frac{\sum^t n(t)}{n_{TOT}} \quad (3)$$

302 where  $n(t)$  is the number of households without service at a given instant  $t$  and  $n_{tot}$  is the total  
303 number of households with service before the emergency.

304 There are also other examples for *housing units* where a possible functionality-performance metric  
305 might be the proportion of housing stock not rated as substandard or hazardous and vacancy rates for  
306 rental housing (Tierney, 2009). Examples of functionality-performance metrics for the

307 *communication networks* might be the (i) acceptable linkages between official and unofficial  
308 information sources, (ii) the number of ties between the mass media and the emergency management  
309 entities, (iii) the sufficiency of measures for communicating the public's need and information after  
310 the disaster (Tierney, 2009).

311

## 312 **Lifestyle and Community Competence**

313 *Lifestyle Community competence dimension* deals with flexibility, creativity and problem solving  
314 skills of a community through also political partnerships (Norris et al., 2008). Principal elements of  
315 this dimension include *collective actions and decision making, collective efficacy and empowerment*  
316 *and quality of life*. This dimension captures both the raw *abilities* of a community (e.g., skills to find  
317 multifaceted solutions to complex problems through the engagement in political networks) and the  
318 *perceptions* of a community (e.g. perception to have the ability to do a positive change through a  
319 common effort that relies on peoples' aptitude to resourcefully envision a new future and then move  
320 in that direction) (Brown and Kulig, 1996). In fact, the societies that believe that they can restore,  
321 renew and rebuild themselves are expected to be more determined when facing a disaster or in  
322 general, any type of changes.

323 Quality of life surveys can be used as indicators of this perception, because they reveal whether  
324 people inside the community are devoted to their community and willing to engage in the activities  
325 necessary to maintain the community alive, before or after the disaster strikes. Examples of  
326 performance metrics for the community competence in normal condition before the disaster might be  
327 the number of immigrants, the number of citizens involved in politics, etc.

328 Specific performance metrics for this dimension directly related to the disaster might be the  
329 extensiveness of community warning procedures and plans, measured using for example the number  
330 of citizens involved, the number of organizational disaster training programs, etc. (Tierney, 2009).

331

332 **Economic development**

333 *The economic development dimension* is composed of both a *static* and a *dynamic* assessment. The  
334 *static* assessment is the *market activity* of the current economy of a community, while the *dynamic*  
335 assessment corresponds to the *economic development* which is the community's ability to  
336 continuously sustaining the economic growth. Resilient communities are characterized by the  
337 community's capacity to replace goods, services, shift employment patterns when is needed. In other  
338 words, they are associated to the employment, the variety in production and services. The economic  
339 dimension consists of three sub-categories: (i) the production within the industry, (ii) the distribution  
340 of employments within the industry, and (iii) the financial services.

341 The key indicators of the economic development dimension can be: (i) the percentage of the  
342 inhabitants that are working in the diverse industries, and (ii) the variability of the distribution of  
343 employments in the different industries which are in the community (iii) the literacy rate, (iv) the life  
344 expectancy, (v) the poverty rates. Other examples of indicators for this dimension are related to the  
345 community performance following a disaster and are: (i) the adequacy of plans for inspecting  
346 damaged buildings following disasters, (ii) the extent of evacuation plans and drills for high-  
347 occupancy structures, (ii) the adequacy of plans for post-disaster commercial restoration, etc.  
348 (Tierney , 2009). Because of these indicators, this dimension is interdependent with the *Population*  
349 *and Demographics dimension*.

350 Analytically one possible functionality-performance metric ( $Q_E$ ) for this dimension is given by

351

$$352 \quad Q_E = \frac{per\_inco + med\_inco + employ + hsg\_value + buss + insurance}{6} \quad (3)$$

353

354 where *per\_inco*= per capita income; *med\_inco*= median household income; *employ* = employed  
355 civilian population; *hsg\_value*= median value of owner occupied housing units; *buss* = business  
356 establishments; *insurance* = population with health insurance.

357

358 **Social/cultural capital**

359 *The Social/cultural capital dimension* includes numerous sub-categories such as: (i) education  
360 services, (ii) child and elderly services, (iii) cultural and heritage services, (iv) community  
361 participation etc. The key indicators in normal condition for this dimension are: (i) the number of  
362 members belonging to the diverse civil and community organizations, (ii) the surveys of leaders and  
363 their perception. The key indicators in emergency conditions are: (i) the existence of community  
364 plans targeting transportation-disadvantaged residents, (ii) the adequacy of post-disaster sheltering  
365 plans, (iii) the adequacy of plans for incorporating volunteers into official response activities, (iv) the  
366 adequacy of donations management plans, (v) the community's plans to manage various networks  
367 (Tierney, 2009).

368 In relation to disaster phases' activities, socio-cultural capital dimension can be measured using the  
369 following six components suggested in the literature (Mayunga, 2009):

- 370 1. *Participation in voluntary organizations (volunteerism)*: this component was measured using  
371 registered non-profit organizations;
- 372 2. *Involvement in social groups (association densities)*: the involvement in social groups was  
373 measured using recreational centers (bowling centers, and fitness centers), golf clubs, and  
374 sport organizations;
- 375 3. *Civic and political participation*: this social capital component was measured using three  
376 indicators including registered voters, civic and political organizations, and Census response  
377 rates for the decennial population and housing survey;
- 378 4. *Religious participation*: it was measured using religious organizations;
- 379 5. *Community attachment*: the community attachment component was measured using owner-  
380 occupied housing units;

381 6. *Connection to working places*: this element was measured using two indicators including  
382 professional organizations and business organizations;  
383 Then a three-step procedure is employed in calculation of the socio-cultural capital dimension: (i)  
384 scale adjustment of indicators, (ii) standardization or normalization, and (iii) creation of the socio  
385 cultural community resilience index.  
386 In addition, the *social support* underlies several services connected with the *social/cultural capital*,  
387 such as “helping behaviors within family and friendship networks” and the “relationships between  
388 individuals and their larger neighborhoods and communities” (Norris et al., 2008). In fact, the  
389 habitants of a community tend to manifest their sense of community and to bond with other members  
390 of the same group by providing social and cultural services. However, this emotional connection to  
391 the community is not necessary related only to the residents in those places (Manzo and Perkins,  
392 2006). For example, several displaced residents of New Orleans after Hurricane Katrina expressed  
393 the desire to return home with a strong “place attachment”, regardless the job they had and the  
394 people they knew. These residents are an important resource for the community, because if they will  
395 be provided with housing and employment after the disaster, they will act in order to restore the  
396 community to the initial condition before the disaster. The citizen participation in community  
397 organizations (e.g. religious congregations, school and resident associations, neighborhood watches,  
398 self-help groups etc.) is a way of demonstrating one’s care for their community, one’s care for  
399 meeting and understanding one’s fellow citizens and it increases individuals’ circle of influence and  
400 perception of control (Norris et al., 2008).

401

## 402 **MATHEMATICAL FORMULATION OF THE PEOPLES FRAMEWORK**

### 403 **General description of the methodology and the community hybrid model**

404 The main part of the methodology consists in developing a community hybrid model, coupling the  
405 *Network models* which will be used to model the *physical infrastructures networks* such as the power

406 and the water, with the *Agent based models* which will be used to model the *socio-technical*  
407 *networks* such as the Emergency Medical Technicians and the fire brigade (Figure -2). Inside the  
408 ABM models, the emotions in the agents will be modeled using the extended version of Belief-  
409 Desire-Intention modeling framework proposed by Zoumpadaki (2010) that has been expanded and  
410 adapted to the proposed methodology (Figure 3).

411 Both types of models will be integrated in a hybrid framework and a matrix approach will be used to  
412 describe the interdependencies between the different layers. Each layer represents an infrastructure  
413 (Figure 3) and is described by an adjacency matrix **A**, while a **D** matrix will describe the  
414 interdependencies between the nodes of the different layers (e.g.  $\mathbf{D}_{\text{Water} \rightarrow \text{Power}}$ ) and it will be obtained  
415 using an *extended version of the Haimes' input-output inoperability matrix* (IIM) (Haimes et al.,  
416 2005). For example, in Figure -2, the hospital is a node of the EMT layer and it is interdependent  
417 with the power and the water network. Therefore, a **D** matrix describing the interdependencies  
418 between the EMT layer and the water and power layer will be determined using Haimes model.

419 The matrix **D** is composed of constant scalars terms if the system does not change though the time.  
420 In reality, the interdependent networks might change through the time their interconnectedness as  
421 shown in some applications (Fantini et al., 2014), however the proposed approach can also be  
422 applied in this case. The proposed approach will require substantial computational power if the  
423 spatial and temporal dimensions of the problem increase, therefore the use of parallel computing is  
424 recommended in these cases. Below is shown in simple terms how the agent base models and the  
425 network model interact in the proposed methodology. Once the hazard is determined (e.g.  
426 earthquake event), the corresponding damage in the infrastructure networks is determined using  
427 fragility analysis combined with graph theory in order to identify the nodes of the network that will  
428 not be functional following the extreme event. Because of physical infrastructure disservice, also the  
429 socio-technical networks operating in the community will be affected. For example the road  
430 transportation disservice, might limit the capacity of the emergency rescue teams to move and  
431 operate in the community. The water network disservice might limit the capacity of the fire brigade

432 to extinguish fires etc. In order to study these interdependencies the network models and the agent-  
433 based model need to run simultaneously. So the output of the damage analysis in the network models  
434 should be used as input to modify the characteristics of the agent-based models, such as the  
435 extension of the environmental space (e.g. roads), the capacity to perform certain actions (e.g.  
436 extinguish fire) of the agents, etc.

437 Da qui

438

### 439 Resilience index and performance metrics

440 Once the *hybrid model* in Figure -2 is built, it is necessary to identify the performance metrics to  
441 estimate the resilience of each infrastructure. Several approaches exist in literature for hospitals  
442 (Cimellaro et al., 2011), lifeline structures (Ouyang et al., 2012, Cimellaro et al., 2014c) and cities  
443 (Chang et al, 2014). Once the proper performance metric is selected, the degree of interdependency  
444 between an infrastructure  $x$  and  $y$  is described using a matrix  $\mathbf{D}_{x \rightarrow y}$  which is able to identify the exact  
445 location of the interdependency in the network (e.g. node or link). However, sometimes it is also  
446 useful to identify a global index  $I$  that measures the degree of interdependency between the different  
447 infrastructures, in order to have a global evaluation of the community performance and to assign an  
448 unbiased evaluation of the weight (or important factor) to each infrastructure. This index can be  
449 determined using time series analysis (Cimellaro et al., 2014c) or from linear algebra manipulation of  
450 the  $\mathbf{D}_{x \rightarrow y}$  matrix etc. Then the indices  $I$  can be grouped into an infrastructure Interdependency  
451 Matrix (**IM**) (Figure 4). The infrastructures considered in the analysis of the community are listed in  
452 the rows and the columns, while in each cell is shown the degree of interdependency (from 0 to1)  
453 between them. The sum over the columns gives the *dependent factor* of the specific lifeline, while  
454 the sum over the rows gives the *importance factor* of a specific lifeline. Ideally, the target is to  
455 realize a community where all lifelines are independent, so **IM** will be an identity matrix. As  
456 mentioned above, the **IM** can also be used to have an unbiased estimation of the weight coefficients

457 to assign to each infrastructure considered in the layered approach shown in Figure -2. Once the  
458 spatial and temporal boundaries of the problem at hand are defined, the performance metrics of all  
459 the resilience dimensions are aggregated following the procedure described in the paper of Cimellaro  
460 et al. (2014c). The global resilience indicator at the community level is evaluated using the  
461 following equation

$$462 \quad R = \sum_i (R_i \times w_i) \quad (6)$$

463 where  $R_i$  is calculated using Equation (1). For example if it is considered the physical infrastructure  
464 dimension,  $R_i$  is the resilience indicator of a specific infrastructure, while  $w_i$  is the weight factor  
465 describing the interdependencies between the different indicators. The coefficient  $w_i$  are determined  
466 using a time series analysis approach borrowed by the economic field which is based on the analysis  
467 of the cross correlation function (CCF). The procedure can be applied to all the components and  
468 subcomponents of the PEOPLES framework in order to take into account the interdependencies  
469 between the different variables. Further details about the methodology can be found in Cimellaro et  
470 al. (2014c).

471 The selection of the proper performance metric for the critical infrastructures plays a key role in the  
472 analysis. Even if a realistic and predictive model is developed, the results might be affected by the  
473 selection of the final performance function adopted to evaluate the community resilience index using  
474 the methodology shown in Figure -2. Different innovative approaches to measure functionality are  
475 available in literature and they include agent-based modeling, input-output models, mathematical  
476 models and game theory (Pederson et al., 2006). Therefore, once the approach and the geographic  
477 scale is selected, the global performance indicator  $Q_{TOT}$  can be plotted over the region of interest  
478 using a contour plot at a given instant of time  $t$ , so the time-dependent functionality maps can be  
479 obtained. When also the control time  $T_{LC}$  is defined, the resilience contour map of the region of  
480 interest can also be plotted. The Resilience contour maps are obtained by integrating the  
481 functionality maps over time using Equation (1), therefore the resilience maps will be *time*

482 *independent*, but they will vary in space from point to point in the selected region. Finally, the  
483 community resilience index  $R_{com}$  is given by the double integral over time and space as follows

$$484 \quad R_{com} = \int_{A_c} R(\vec{r})/A_c dr = \int_{A_c} \int_{t_{OE}}^{t_{OE}+T_{LC}} Q_{TOT}(\vec{r},t)/(A_c T_{LC}) dt dr \quad (3)$$

485 where  $A_c$  is the area of the selected region. The contour plot of each dimension can be combined  
486 with the other plots using a layered approach. Then a radar graph is built (Figure -2) and the internal  
487 area will determine the final score of the resilience index that will be used to recognize the priority  
488 resilience actions to be taken in the community.

489

#### 490 **Resilience performance levels**

491 The objective of Performance Based Seismic Engineering (PBSE) is to design, construct and  
492 maintain facilities with better damage control, coupling the expected or desired performance levels  
493 with the levels of seismic hazard. Generally the levels focus on the performances a structure can  
494 hold during the shaking and are related to engineering demand parameters such as deformations.  
495 More recently SPUR (Bonowitz, 2009), the San Francisco planning and Urban Research  
496 Association, introduced other definitions of performance levels for infrastructures based on recovery  
497 target states combining safety and recovery time. Five performance measures for buildings have  
498 been identified: (i) *Safe and Operational*; (ii) *Safe and usable during repair*; (iii) *Safe and usable*  
499 *after repair*; (iv) *Safe but not repairable*; (v) *Unsafe*.

500 The proposed Resilience Performance Levels (RPL) focus on building performance after the  
501 earthquake, recognizing the importance of the temporal dimension (Recovery time  $T_{RE}$ ) in the  
502 assessment of the *RPLs* of structures and communities in general.

503 In this paper a 2-dimensional performance domain consisting of Performance Levels  $PL(i, j)$ , defined  
504 by the combination of *functionality* (index  $j$ ) and *recovery time* (index  $i$ ) is proposed. By accounting

505 for the effect of the temporal dimension, a 3-dimensional performance matrix (Figure -5) can be  
506 visualized as a set of predefined joined performance domains (“masks”) for different seismic  
507 intensity level, IM and different RPLs.

508 The resilience performance levels can be defined using expert opinions as well as public interviews  
509 which will allow identifying the acceptable and desired performance levels by citizens for different  
510 type of infrastructures, for example.

### 511 **Restoration models and recovery time**

512 The *restoration phase* and the *recovery time* are key element for the quantification of the resilience  
513 index, but they are also the most uncertain and difficult to be computed. The first step for its  
514 evaluation consists in the definition of a performance index. In general, the community performance  
515 indices are function of time  $t$  and of other parameters that depend on the type of a community  
516 considered. Numerous models have been listed in Cimellaro et al. (2010a) to describe the restoration  
517 function. They can be either *empirical* or *analytical* depending on the type of analysis and data.

518 **Empirical recovery models** are based on test or field data interpretation and engineering judgment.  
519 They can be built using Monte Carlo simulations based on data from past events or *maximum*  
520 *likelihood method*. Since the complexity of the problem changes case by case, no specific model is  
521 presented in this part.

522 **Analytical recovery models** are developed using response data from numerical simulations  
523 (nonlinear time history analysis, response spectral analysis, etc) of system models. Few example of  
524 analytical recovery models (e.g. discrete event simulation models, metamodels, etc.) for critical  
525 facilities like hospitals can be found in Cimellaro et al., (2011, 2014d).

### 526 **Step by step procedure for resilience evaluation**

527 A schematic step-by-step procedure of the methodology described in is the following:

528 (8) Define the extreme event scenarios (e.g. PSHA and ground motion selection);

- 529 (9) Definition, calibration and validation of the hybrid model of the community;
- 530 (10) Run the analysis and evaluate the response of the model;
- 531 (11) Evaluate the performance metrics (e.g. losses, restoration time, performance index, resilience  
532 index) for different scenarios and compare with different performance levels;
- 533 (12) Recognize remedial mitigation actions (e.g. advanced technologies such as base isolation,  
534 passive dampers, etc.) and/or resilience actions (e.g. resourcefulness, redundancy, etc.);

535 The proposed design approach has analogies with the feedback loop taken from control theory and it  
536 can be applied both to communities and single structures (e.g. hospital, city hall, etc).

537 Several applications of this approach can be found in literature to hospitals (Cimellaro et al., 2011),  
538 natural gas distribution networks (Cimellaro et al., 2014a), water distribution network (Cimellaro et  
539 al., 2015), but they are not reported in this paper due to the lack of space.

540

## 541 **CONCLUDING REMARKS**

542 After the recent disasters, the general public became aware that Resilience is the solution to face  
543 natural and manmade threats. The paper presents a holistic framework to evaluate the resiliency of a  
544 community at various geographical and temporal scales and identifies the gaps in the definitions and  
545 quantification of resilience at the community level. The suggested framework summarized with the  
546 acronyms P.E.O.P.L.E.S. is combining different dimensions of resilience together using a layered  
547 approach. The main contribution in the field is the development of a *community hybrid model*  
548 combining *network models* to model the physical infrastructures (electric power, water, gas etc.) with  
549 *agent-based models* to model the socio technical networks (e.g. Emergency medical technicians, fire  
550 brigade, police, etc). Furthermore, special attention is given to the human behavior and its emotions  
551 which plays a key role during the emergency and they have been modeled using the extended version  
552 of *Belief-Desire-Intention* (BDI) modeling framework proposed by Zoumpantaki in 2010.

553 Each *dimension* of the framework is made of *components* and *sub-components* with their respective  
554 performance indicators. These indicators can be grouped according to their difficulty in evaluating  
555 them, their complexity as well as spatial and temporal scales. Some of them might be valid on a  
556 multi hazard approach, while others might be valid only for certain type of hazard. In the paper are  
557 shown some examples of indicators, while is made reference to the several applications already  
558 available in literature of the PEOPLES methodology because the framework has been the result of a  
559 NIST project developed in 2009.

560 In the long term, the proposed framework can be used as decision support software by decision  
561 makers and by planners/engineers to help implementing Resilience-Based Design (RBD) techniques.  
562 The goal is to make individual structures and communities safe and resilient with both *advanced*  
563 *technologies* (e.g. base isolation, passive dampers etc.) and *resilience actions* that allow each system  
564 to recover its functionality in a short time by selecting the optimal restoration strategy and enhancing  
565 the community resilience index by comparing it with the resilience levels targets.

566

567

#### ACKNOWLEDGEMENTS

568 The research leading to these results has received funding from the European Research Council  
569 under the Grant Agreement n° ERC\_IDEAL RESCUE\_637842 of the project IDEAL RESCUE-  
570 Integrated Design and Control of Sustainable Communities during Emergencies.

571 The research leading to these results has received also funding from the European Community's  
572 Seventh Framework Programme - Marie Curie International Outgoing Fellowship (IOF) Actions-  
573 FP7/2007-2013 under the Grant Agreement n°PIOF-GA-2012-329871 of the project IRUSAT—  
574 Improving Resilience of Urban Societies through Advanced Technologies.

575 **References**

- 576 Adger, W. N. (2000) Social and ecological resilience: are they related? *Progress in Human*  
577 *Geography* 24(3): 347-64
- 578 Allenby, B., and Fink, J. (2005). "Toward inherently secure and resilient societies." *Science*,  
579 309(5737), 1034-1036.
- 580 Arcidiacono, V., G. P. Cimellaro, et al. (2012) Road network resilience assignment methodology. In:  
581 *6th International Conference on Bridge Maintenance, Safety and Management*  
582 *(IABMAS2012)*. F. B. D. Frangopol. CRC Press Taylor & Francis Group, Stresa, Lake  
583 Maggiore, July 8-12, 2012.
- 584 Berche, B., von Ferber, C., Holovatch, T., and Holovatch, Y. (2009). "Resilience of public transport  
585 networks against attacks." *European Physical Journal B*, 71(1), 125-137.
- 586 Bonowitz, D. (2009). "The Dilemma of existing buildings: Private property, public risks." San  
587 Francisco Planning Urban Research Association (SPUR), San Francisco, California.
- 588 Brown, D. and J.Kulig (1996) The concept of resiliency: Theoretical lessons from community  
589 research. *Health and Canadian Society* 4: 29-52.
- 590 Bruneau, M. and A. M. Reinhorn (2007) Exploring the Concept of Seismic Resilience for Acute  
591 Care Facilities. *Earthquake Spectra* 23(1): 41-62.
- 592 Bruneau, M., Chang, S., Eguchi, R., Lee, G., O'Rourke, T., Reinhorn, A. M., Shinozuka, M.,  
593 Tierney, K., Wallace, W., and Winterfelt, D. v. (2003). "A framework to Quantitatively  
594 Assess and Enhance the Seismic Resilience of Communities." *Earthquake Spectra*, 19(4),  
595 733-752.
- 596 Cagnan, Z., Davidson, R. A., and Guikema, S. D. (2006). "Post-Earthquake Restoration Planning for  
597 Los Angeles Electric Power." *Earthquake Spectra*, 22(3), 589-608.
- 598 Chang, S. and M. Shinozuka (2004) Measuring Improvements in the Disaster Resilience of  
599 Communities. *Earthquake Spectra* 20(3): 739-55.

- 600 Chang, S. E., McDaniels, T., Fox, J., Dhariwal, R., and Longstaff, H. (2014). "Toward Disaster-  
601 Resilient Cities: Characterizing Resilience of Infrastructure Systems with Expert Judgments."  
602 *Risk Analysis*, 34(3), 416-434.
- 603 Cimellaro, G. P., Reinhorn, A. M., and Bruneau, M. (2010a). "Framework for analytical  
604 quantification of disaster resilience." *Engineering Structures*, 32(11), 3639–3649.
- 605 Cimellaro, G. P., Reinhorn, A. M., and Bruneau, M. (2010b). "Seismic resilience of a hospital  
606 system." *Structure and Infrastructure Engineering*, 6(1-2), 127-144.
- 607 Cimellaro, G. P., A. M. Reinhorn, et al. (2011) Performance-based metamodel for health care  
608 facilities. *Earthquake Engineering & Structural Dynamics* 40 1197–217.
- 609 Cimellaro, G. P., Villa, O., and Bruneau, M. (2014a). "Resilience-Based Design of Natural gas  
610 distribution networks." *Journal of Infrastructure Systems, ASCE*, 10.1061/(ASCE)IS.1943-  
611 555X.0000204.
- 612 Cimellaro, G. P., Scura, G., Renschler, C., Reinhorn, A. M., and Kim, H. (2014b). "Rapid building  
613 damage assessment system using mobile phone technology" *Earthquake Engineering and*  
614 *Engineering Vibration*, 13(3), 519-533.
- 615 Cimellaro, G. P., Solari, D., and Bruneau, M. (2014c). "Physical infrastructure Interdependency and  
616 regional resilience index after the 2011 Tohoku earthquake in Japan." *Earthquake*  
617 *Engineering & Structural Dynamics*, 43(12), 1763-1784.
- 618 Cimellaro, G. P., Nagarajaiah, S., and Kunnath, S. (2014d). "Computational Methods, Seismic  
619 Protection, Hybrid Testing and Resilience in Earthquake Engineering - A tribute to the  
620 research contribution of Prof. Andrei Reinhorn." *Geotechnical, Geological and Earthquake*  
621 *Engineering Series*, C. Springer International Publishing AG, ed., Springer, Netherland, 250.
- 622 Cimellaro, G. P., Tinebra, A., Renschler, C., and Fragiadakis, M. (2015). "Resilience-based design of  
623 an urban water distribution system." *Journal of Structural Engineering, ASCE*, in press.
- 624 Comfort, L. K. (1999) *Shared Risk: Complex Systems in Seismic Response*. Pergamon, New York.
- 625 Crooks, A. T., and Heppenstall, A. J. (2012). "Introduction to agent-based modeling." *Agent-based*  
626 *models of geographical systems*, C. Heppenstall, See, & Batty, ed., Dordrecht: Springer, 85-  
627 105.

628 Cutter, S. L. and J. T. Mitchell (2000) Revealing the vulnerability of people and places: A case study  
629 of Georgetown County, South Carolina. *Annals of American Geographers* 90(4): 713-37.

630 Cutter, S. (1996) Vulnerability to Environmental Hazards. *Progress in Human Geography* 20(4):  
631 529-39.

632 Department of Homeland Security (DHS) (2008). DHS Risk Lexicon, Risk Steering Committee,  
633 U.S. Department of Homeland Security, Washington, D.C.

634 Díaz-Delgado, R., F. Lloret, et al. (2002) Satellite Evidence of Decreasing Resilience in  
635 Mediterranean Plant Communities After Recurrent Wildfires. *Ecology* 83(8): 2293-303.

636 Dorbritz, R. (2011). "Assessing the resilience of transportation systems in case of large-scale  
637 disastrous events." The 8th International Conference on Environmental Engineering, Vilnius,  
638 Lithuania, 19-20 May 2011, 1070-1076.

639 Drabek, T. E. and D. A. McEntire (2002) Emergent Phenomena and Multiorganizational  
640 Coordination in Disasters: Lessons from the Research Literature. *International Journal of*  
641 *Mass Emergencies and Disasters* 20: 197-224.

642 Ettema, D., de Jong, K., Timmermans, H., and Bakema, A. (2007). "PUMA: Multi-agent modelling  
643 of urban systems." 45th Congress of the European Regional Science Association, Vrije  
644 Universiteit, Amsterdam.

645 Fantini, P., Cimellaro, G. P., and Mahin, S. A. (2014). "Measuring lifeline emergency response using  
646 temporal network models " Proceedings of the 15th U.S.-Japan Workshop on the  
647 Improvement of Structural Engineering and Resiliency., ATC- Applied Technology Council,  
648 December 3-5, 2014, Island of Hawaii.

649 Fiksel, J. (2003) Designing resilient, sustainable systems. *Environmental Science and Technology*  
650 37(23): 5330-39.

651 Gunderson, L. H., C. S. Holling, et al. (2002) Resilience of large-scale resource systems,  
652 Washington, D.C.

653 Haines, Y. Y., Horowitz, B. M., Lambert, J. H., Santos, J. R., Lian, C., and Crowther, K. G. (2005).  
654 "Inoperability input-output model for interdependent infrastructure sectors. I: Theory and  
655 methodology." *Journal of Infrastructure Systems*, 11(2), 67-79.

- 656 Haimes, Y. Y. (2009) On the definition of resilience in systems. *Risk Analysis* 29(4): 498-501.
- 657 Haimes, Y. Y., N.C.Matalas, et al. (1998) Reducing vulnerability of water supply systems to attack.  
658 Reducing vulnerability of water supply systems to attack 4(4): 164-77.
- 659 Handmer, J. and S. Dovers (1996) A typology of resilience: Rethinking institutions for sustainable  
660 development. *Organization & Environment* 9: 482-511.
- 661 Harrald, J. (2006) Agility and Discipline: Critical Success Factors for Disaster Response. *Annals of*  
662 *the American Academy of Political and Social Science* 604: 256-72.
- 663 Heaslip, K., Louisell, W. C., Collura, J., and Serulle, N. U. (2010). "A sketch level method for  
664 assessing transportation network resiliency to natural disasters and man-made events." The  
665 89th Annual Meeting of the Transportation Research Board, Washington, D.C., U.S.A., 10-  
666 14 January 2010.
- 667 Holling, C. S. (1973) Resilience and Stability of Ecological Systems. *Annual Review of Ecology and*  
668 *Systematics* 4: 1-23.
- 669 Hollnagel, E. (2006) Resilience - the challenge of the unstable, Hampshire.
- 670 Holmgren, A. (2007) A framework for vulnerability assessment of electric power systems., New  
671 York, NY.
- 672 Horne, J. F. and J. E. Orr (1998) Assessing behaviors that create resilient organizations. *Employment*  
673 *Relations Today* 24(4): 29-39.
- 674 Javanbarg, M. B., Scawthorn, C., Kiyono, J., and Shahbodaghkhan, B. (2012). "Fuzzy AHP-based  
675 multicriteria decision making systems using particle swarm optimization." *Expert Systems*  
676 *with Applications*, 39(1), 960-966.
- 677 Klein, R. J. T., R. J. Nicholls, et al. (2003) Resilience to natural hazards: How useful is this concept?  
678 . *Global Environmental Change Part B: Environmental Hazards* 5(1-2): 35-45.
- 679 Manyena, S. B. (2006) The concept of resilience revisited. *Disasters* 30: 434.
- 680 Manzo, L. and D. Perkins (2006) Finding common ground: The importance of place attachment to  
681 community participation and planning. *Journal of Planning Literature* 20: 335-50.

- 682 Miles, S., and Chang, S. (2006). "Modeling Community Recovery from Earthquakes." *Earthquake*  
683 *Spectra*, 22(2), 439-458.
- 684 Miles, S. B. and S. E. Chang (2011) ResilUS: A community based disaster resilience model. *Journal*  
685 *of Cartography and GIS (CAGIS)* 38(1): 36-51.
- 686 Mileti, D. (1999). *Disasters by Design: A Reassessment of Natural Hazards in the United States*,  
687 Joseph Henry Press (May 18, 1999) Washington D.C.
- 688 Miller-Hooks, E., Zhang, X., and Faturechi, R. (2012). "Measuring and maximizing resilience of  
689 freight transportation networks." *Computers & Operations Research*, 39(7), 1633-1643.
- 690 Norris, F. H., S. P. Stevens, et al. (2008) Community Resilience as a Metaphor, Theory, Set of  
691 Capacities, and Strategy for Disaster Readiness. *Am J Community Psychol* 41: 127-50.
- 692 Olofsson, P., L. Eklundh, et al. (2007) Estimating net primary production for Scandinavian forests  
693 using data from Terra/MODIS. *Space Res* 39: 125-30.
- 694 Ouyang, M., and Duenas-Osorio, L. (2011). "An approach to design interface topologies across  
695 interdependent urban infrastructure systems." *Reliability Engineering & System Safety*,  
696 96(11), 1462-1473.
- 697 Pederson, P., D. Dudenhoeffer, S. Hartley and M. Permann. (2006). Critical Infrastructure Modeling:  
698 A Survey of US and International research, Research Report prepared at the Idaho National  
699 Laboratory, Idaho Falls, Idaho 83415 INL/EXT-06-11464.
- 700 Pettorelli, N., J. Vik, et al. (2005) Using the satellite-derived NDVI to assess ecological responses to  
701 environmental change. *TRENDS in Ecology and Evolution* 20(9): 503-10.
- 702 Queiroz, C., Garg, S. K., and Tari, Z. (2013). "A probabilistic model for quantifying the resilience of  
703 networked systems." *Ibm Journal of Research and Development*, 57(5).
- 704 Renschler, C., Frazier, A., Arendt, L., Cimellaro, G. P., Reinhorn, A. M., and Bruneau, M. (2010).  
705 "Framework for Defining and Measuring Resilience at the Community Scale: The PEOPLES  
706 Resilience Framework." *MCEER Technical Report –MCEER-10-006*, pp. 91, University at  
707 Buffalo (SUNY), The State University of New York, Buffalo, New York.
- 708 Renschler, C., Reinhorn, A. M., Arendt, L., and Cimellaro, G. P. "The PEOPLES Resilience  
709 Framework: A conceptual approach to quantify community resilience." *Proceedings of the*

710 *3rd International Conference on Computational Methods in Structural Dynamics and*  
711 *Earthquake Engineering (COMPDYN 2011)*, Corfu`, Greece, May 26-28, 2011.

712 RICSА (2010) RICSА Poverty Project. URL:  
713 <http://web.uct.ac.za/depts/ricsa/projects/publicli/poverty>.

714 Rose, A. (2004). "Economic principles, issues, and research priorities in hazard loss estimation."  
715 *Modeling Spatial and Economic Impacts of Disasters*, S. C. Yasuhide Okuyama, ed., Springer  
716 Berlin Heidelberg, 13-36.

717 Rose, A. and S. Y. Liao (2005) Modeling regional economic resilience to disasters: A computable  
718 general equilibrium analysis of water service disruptions. *Journal of Regional Science* 45(1):  
719 75-112.

720 SEAOC. (1995). "Vision 2000 - A Framework for Performance Based Earthquake Engineering ",  
721 Structural Engineers Association of California, Vision 2000 Committee, Sacramento,  
722 California.

723 Simoniello, T., Lanfredi, M., Liberti, M., Coppola, R., and Macchiato, M. (2008). Estimation of  
724 vegetation cover resilience from satellite time series. *Hydrol. Earth Syst. Sci.*, 12, 1053-1064.

725 Simoniello, R. A. and E. L. Quarantelli (1985) Emergent Citizen Groups and Emergency  
726 Management. *Public Administration Review* 45: 93-100.

727 Tamvakis, P., and Xenidis, Y. (2013). "Comparative Evaluation of Resilience Quantification  
728 Methods for Infrastructure Systems." *Selected Papers from the 26th Ipma (International*  
729 *Project Management Association), World Congress*, 74, 339-348.

730 Tierney, K. (1997) Business impacts of the northridge earthquake. *Journal of Contingencies and*  
731 *Crisis Management* 5: 87-97.

732 Tierney, K. and M. Bruneau (2007) Conceptualizing and Measuring Resilience. TR News 250: 14-  
733 17.

734 Tierney, K. (2009) Disaster Responce: Research Findings and their implications for Resilience  
735 Measures. In. CARRI Research Report 6, Community & Regional Resilience Institute,  
736 Colorado Boulder.

737 Vugrin, E. D., D. E. Warren, et al. (2010) A Framework for assessing the resilience of infrastructure  
738 and economic systems, Springer, Berlin, Germany.

- 739 Weick, K. E. (1995). *Sensemaking in Organizations (Foundations for Organizational Science)*,  
740 SAGE Publications, Inc., Thousand Oaks, California.
- 741 Weick, K. E., K. Sutcliffe, et al. (2005) Organizing and the Process of Sensemaking. *Organization*  
742 *Science* 16: 409-21.
- 743 Wildavsky, A. B. (1991). *Searching for Safety*, Oxford Transaction Publisher, New Brunswick.
- 744 Woods, D. D. (2006) Essential characteristics of resilience, Aldershot, UK.
- 745 Zoumpoulaki, A., Avradinis, N., and Vosinakis, S. (2010). "Multi-Agent Simulation Framework for  
746 Emergency Evacuations Incorporating Personality and Emotions." *Artificial Intelligence:*  
747 *Theories, Models and Applications*, Springer Berlin Heidelberg, 423-428.
- 748

Table -1 Literature review about resilience definitions

| Author                     | Definition   |
|----------------------------|--|
| Holling (1973)             | Ecological systems resilience is a measure of the persistence of systems and of their ability to absorb change and disturbance and still maintain the same relationships between populations or state variables.   |
| Wildavsky (1991)           | Resilience is the capacity to cope with unanticipated dangers after they have become manifest, learning to bounce back.  |
| Horne and Orr (1998)       | Resilience is the ability of a system to withstand stresses of 'environmental loading'... [it is] a fundamental quality found in individuals, groups, organizations, and systems as a whole.   |
| Haines et al. (1998)       | Resilience is the ability of system to return to its optimal condition in a short period of time. Considering resilience one of four strategies for hardening a system, together with security, redundancy and robustness.   |
| Mileti (1999)              | Local resiliency with regard to disasters means that a locale is able to withstand an extreme natural event without suffering devastating losses, damage, diminished productivity, or quality of life and without a large amount of assistance from outside the community.   |
| Comfort (1999)             | Resilience is the capacity to adapt existing resources and skills to new situations and operating conditions.  |
| Adger (2000)               | Social resilience is the ability of groups or communities to cope with external stresses and disturbances as a result of social, political, and environmental change.  |
| Gunderson et al. (2002)    | Engineering resilience [...] is the speed of return to the steady state following a perturbation [...] ecological resilience [...] is measured by the magnitude of disturbance that can be absorbed before the system is restructured....  |
| Fiksel (2003)              | Resilience is the essence of sustainability [...] the ability to resist disorder.  |
| Bruneau et al. (2003)      | Resilience is defined in terms of three stages: the ability of a system to reduce the probability of an adverse event, to absorb the shock if the adverse event occurs, and to quickly re-establish normal operating conditions. So resilience thus encompasses the four characteristics of robustness, redundancy, resourcefulness, and rapidity. Are considered four types of resilience: technical; organizational; economic; and social. |
| Allenby and Fink (2005)    | Resiliency is defined as the capability of a system to maintain its functions and structure in the face of internal and external change and to degrade gracefully when it must.  |
| Rose and Liao (2005)       | Regional economic resilience is the inherent ability and adaptive response that enables firms and regions to avoid maximum potential losses.   |
| Hollnagel (2006)           | Resilience is defined as the intrinsic ability of an organization (system) to maintain or regain a dynamically stable state, which allows it to continue operations after a major mishap and/or in the presence of a continuous stress.  |
| Manyena (2006)             | Evaluating all the possible definitions provided from the 90's to nowadays, resilience could be viewed as the intrinsic capacity of a system, community or society predisposed to a shock or stress to adapt and survive by changing its non essential attributes and rebuilding itself.   |
| Woods (2006)               | Evaluating all the possible definitions provided from the 90's to nowadays, resilience could be viewed as the intrinsic capacity of a system, community or society predisposed to a shock or stress to adapt and survive by changing its non essential attributes and rebuilding itself.   |
| Holmgren (2007)            | Resilience is the ability of the system to return to a stable condition after a disruption. Distinguishing robustness and resilience, using robustness to imply that the system will remain (nearly) unchanged even in the face of disruption.   |
| Tierney and Bruneau (2007) | Resilience is both the inherent strength and ability to be flexible and adaptable after environmental shocks and disruptive events.  |
| DHS (2008)                 | Resilience is the ability of systems, infrastructures, government, business, and citizenry to resist, absorb, recover from, or adapt to an adverse occurrence that may cause harm, destruction, or loss of national significance.  |
| Haines (2009)              | Resilience is defined as the ability of the system to withstand a major disruption within acceptable degradation parameters and to recover within an acceptable time and composite costs and risk.   |
| Vugrin et al. (2010)       | Given the occurrence of a particular disruptive event (or set of events), the resilience of a system to that event (or events) is the ability to efficiently reduce both the magnitude and duration of the deviation from targeted system performance levels.  |

Table -2 Complete list of components and subcomponents of PEOPLES framework

| <b>1) POPULATION AND DEMOGRAPHICS</b>                    |  |   |                                   |
|--|--|---|-----------------------------------|
| a) Distribution/Density                                  | b) Composition                                 | c) Socio-Economic Status                                |                                   |
| i) Urban   | i) Age   | i) Educational Attainment                               | iv) Home Ownership                |
| ii) Suburban   | ii) Gender                                     | ii) Income  | v) Housing Vacancies              |
| iii) Rural   | iii) Immigrant Status                          | iii) Poverty  | vi) Occupation                    |
| iv) Wildland   | iv) Race/Ethnicity                             |   |                                   |
| <b>2) ENVIRONMENTAL/ECOSYSTEM</b>                        |  |   |                                   |
| a) Water Quality/Quantity                                | b) Air Quality                                 | c) Soil Quality   | d) Biodiversity                   |
| e) Biomass (Vegetation)                                  | f) Other Natural Resources                     |   |                                   |
| <b>3) ORGANIZED GOVERNMENTAL SERVICES</b>                |  |   |                                   |
| a) Executive/Administrative                              |  | b) Judicial   | c) Legal/Security                 |
| i) Emergency Response and                                | ii) Health and Hygiene                         |   |                                   |
| <b>4) PHYSICAL INFRASTRUCTURE</b>                        |  |   |                                   |
| a) Facilities  |  | b) Lifelines  |                                   |
| i) Residential   |  | i) Communications                                       |                                   |
| (1) Housing Units  |  | (1) Internet (2) Phones (3) TV (4) Radio (5) Postal     |                                   |
| (2) Shelters   |  | ii) Health Care   |                                   |
| ii) Commercial   |  | (1) Acute Care (2) Long-Term Acute Care (4) Psychiatric |                                   |
| (1) Distribution Facilities                              | (3) Manufacturing Facilities                   | (3) Primary Care (5) Specialty                          |                                   |
| (2) Hotels - Accommodations                              | (4) Office Buildings                           | iii) Food Supply  |                                   |
| iii) Cultural  |  | iv) Utilities   |                                   |
| (1) Entertainment Venues                                 | (4) Schools                                    | (1) Electrical (2) Fuel/Gas/Energy (3) Waste            |                                   |
| (2) Museums  | (5) Sports/Recreation Venues                   | v) Transportation                                       |                                   |
| (3) Religious Institutions                               |  | (1) Aviation (2) Bridges (3) Highways                   |                                   |
|  |  | (4) Railways (5) Transit (6) Vehicles (7) Waterways     |                                   |
| <b>5) LIFESTYLE AND COMMUNITY COMPETENCE</b>             |  |   |                                   |
| a) Collective Action and Decision Making                 |  | b) Collective Efficacy and                              | c) Quality of Life                |
| i) Conflict Resolution                                   | ii) Self-Organization                          | Empowerment   |                                   |
| <b>6) ECONOMIC DEVELOPMENT</b>                           |  |   |                                   |
| a) Financial Services                                    | b) Industry – Employment - Services            |   | c) Industry – Production          |
| i) Asset Base of Financial Institutions                  | i) Agriculture                                 | x) Number of Corporate Headquarters                     | i) Food Supply                    |
| ii) Checking Account Balances (Personal and Commercial)  | ii) Construction                               | xi) Other Business Services                             | ii) Manufacturing                 |
| iii) Consumer Price Index                                | iii) Education and Health Services             | xii) Professional and Business Services                 |                                   |
| iv) Insurance  | iv) Finance, Insurance and Real Estate         | (1) Employment Services                                 |                                   |
| v) Number and Average Amount of Loans                    | v) Fortune 1000                                | (a) Flexibilities                                       |                                   |
| vi) Number of Bank and Credit Union Members              | vi) Fortune 500                                | (b) Opportunities                                       |                                   |
| vii) Number of Banks and Credit Unions                   | vii) Information, Professional Business, Other | (c) Placement   |                                   |
| viii) Savings Account Balances (Personal and Commercial) | viii) Leisure and Hospitality                  | (2) Transport and Utilities                             |                                   |
| ix) Stock Market   | ix) Manufacturing                              | (3) Wholesale and Retail                                |                                   |
| <b>7) SOCIAL/CULTURAL CAPITAL</b>                        |  |   |                                   |
| a) Child and Elderly Services                            | b) Commercial Centers                          | c) Community Participation                              | d) Cultural and Heritage Services |
| e) Education Services                                    | f) Non-Profit Organizations                    | g) Place Attachment                                     |                                   |

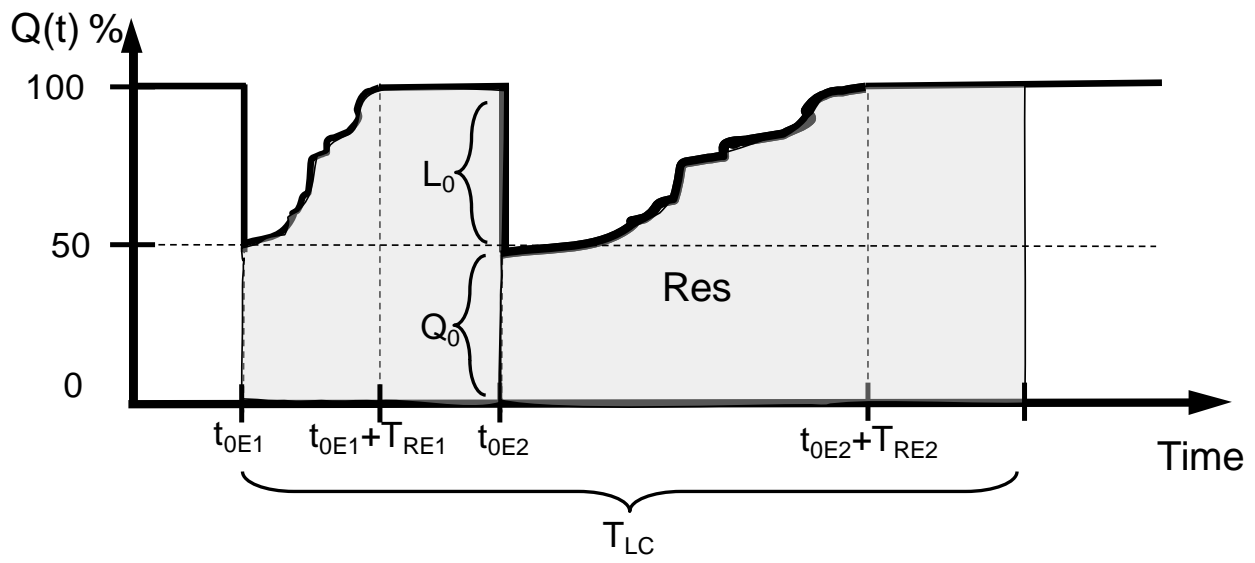


Figure -1 Resilience (adapted from Cimellaro et al., 2010a)

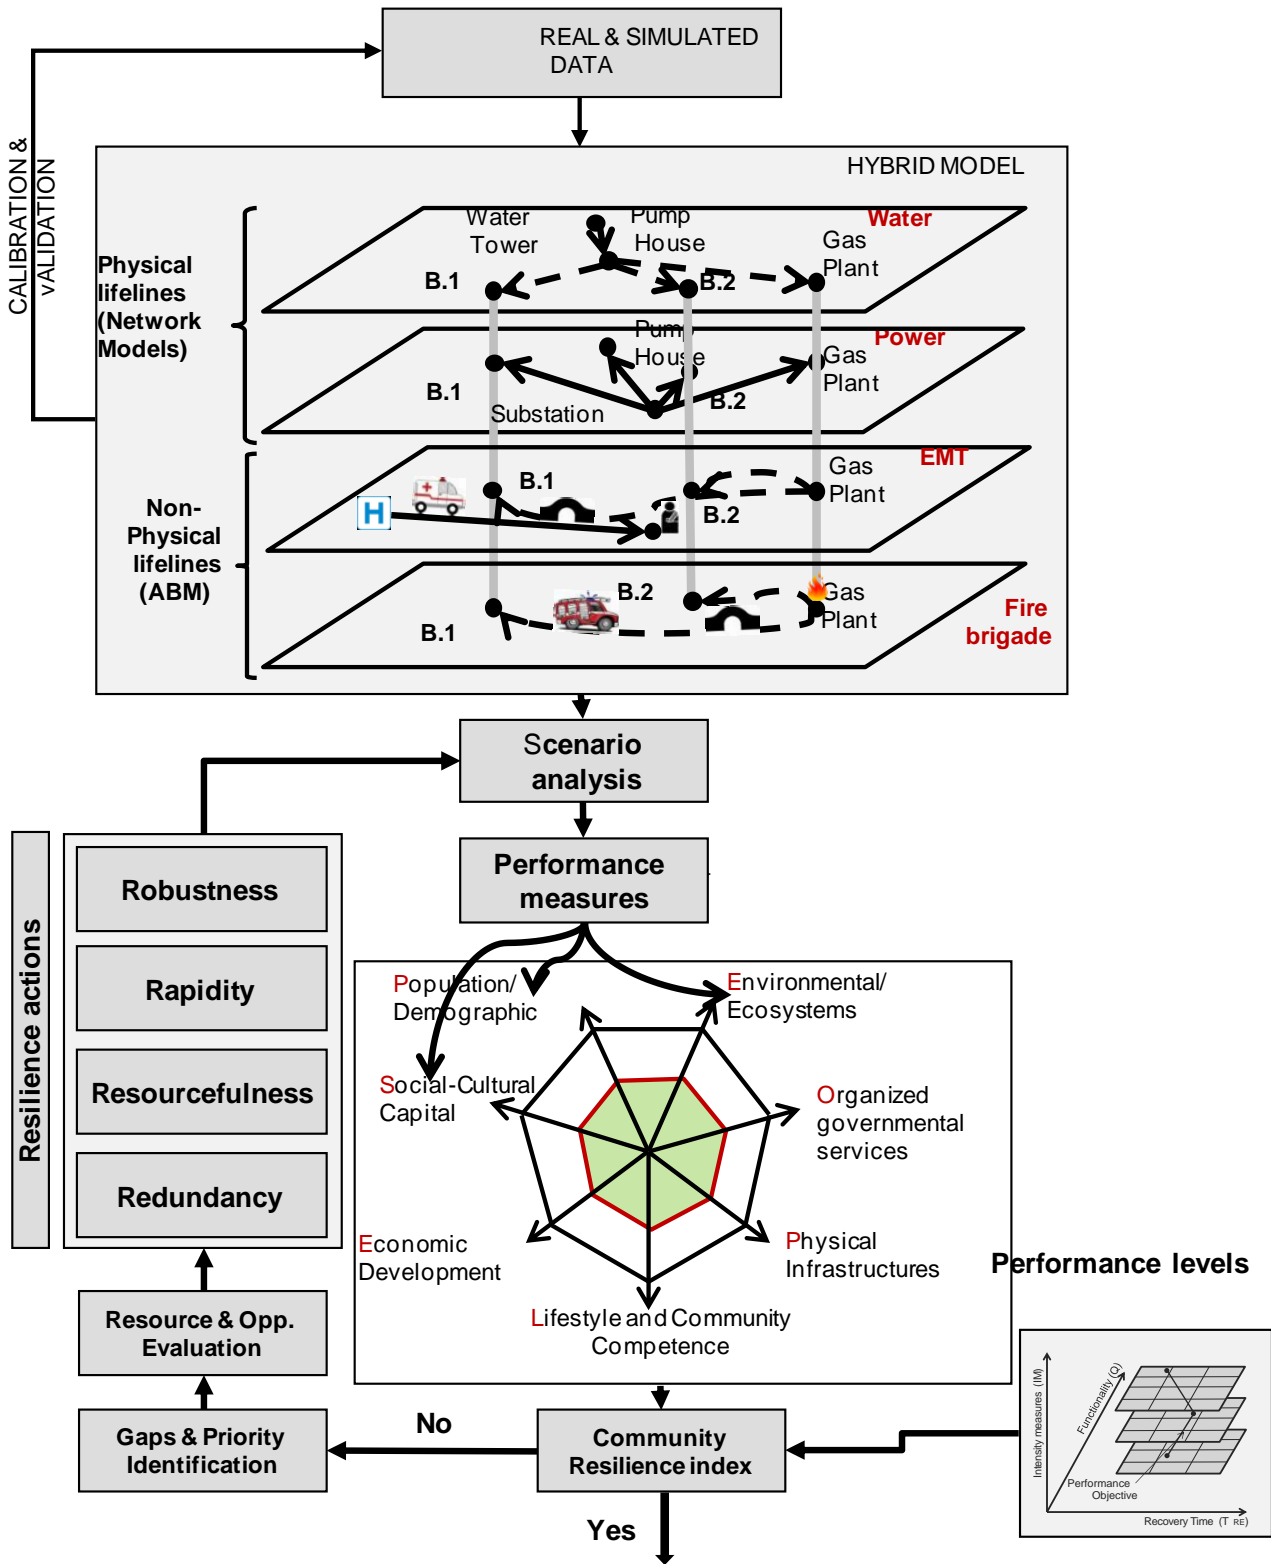


Figure -2 Methodology for Resilience-based design (RBD) based on control (feedback loop) approach and hybrid layered model

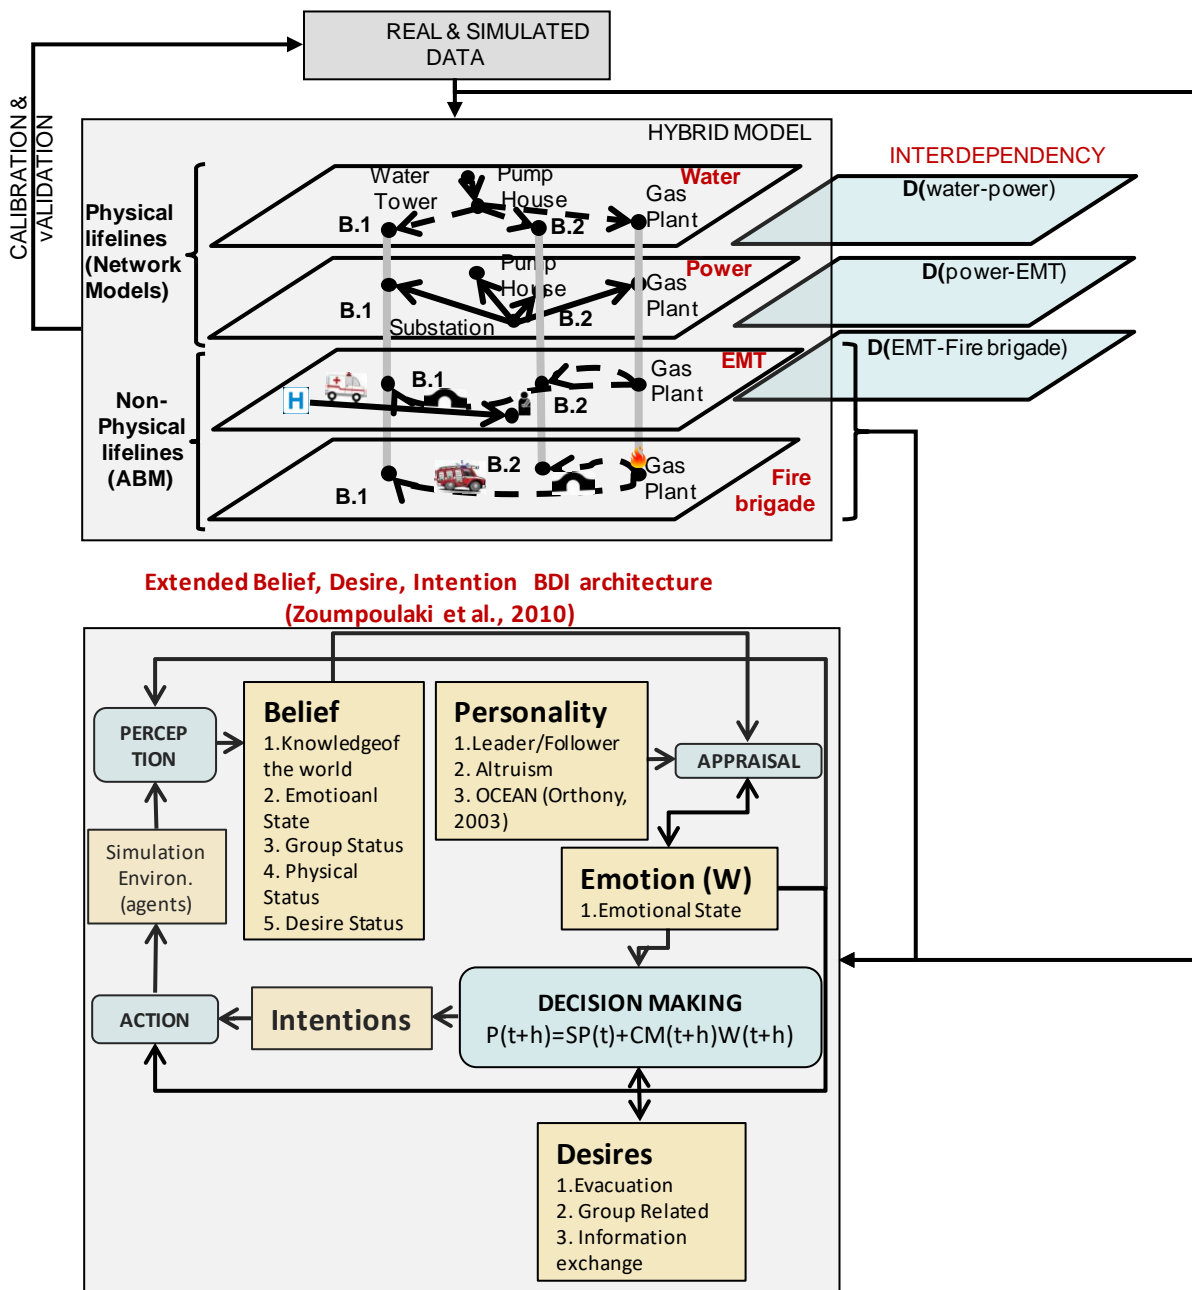


Figure 3 Methodology to model the interdependency and the human behavior within the community hybrid model

| the ↓                | can affects ↓ in this points: |              |                |                   |                      |              |                      |                  |                   |          |                    |             |            |             |           |             | Leadership index |
|----------------------|-------------------------------|--------------|----------------|-------------------|----------------------|--------------|----------------------|------------------|-------------------|----------|--------------------|-------------|------------|-------------|-----------|-------------|------------------|
|                      | Electricity                   | Oil delivery | Transportation | Telecommunication | Natural Gas delivery | Water supply | Wastewater treatment | Financial system | Building services | Business | Emergency services | Food supply | Government | Health care | Education | Commodities |                  |
| Electricity          | 1                             | 1            | 0,6            | 1                 | 1                    | 0,6          | 0,6                  | 0,6              | 0,6               | 1        | 0,6                | 1           | 1          | 0,6         | 0,3       | 0,6         | 12,1             |
| Oil delivery         | 0,6                           | 1            | 0,6            | 0,3               | 0,3                  | 0,3          | 0,3                  | 0,6              | 0,6               | 0,6      | 0,6                | 0,6         | 0,6        | 0,6         | 0,3       | 1           | 7,6              |
| Transportation       | 0,3                           | 0,6          | 1              | 0,6               | 0,6                  | 0,6          | 0,6                  | 0,6              | 0,6               | 1        | 1                  | 1           | 0,6        | 0,6         | 0,3       | 1           | 9,2              |
| Telecommunication    | 0,3                           | 0,3          | 0,6            | 1                 | 0,3                  | 0,3          | 0,3                  | 1                | 1                 | 1        | 1                  | 0,6         | 1          | 0,3         | 0,3       | 0,3         | 8                |
| Natural Gas delivery | 0,6                           | 0,3          | 0,3            | 0,3               | 1                    | 1            | 1                    | 0,6              | 0,3               | 0,6      | 0,6                | 0,6         | 0,6        | 0,3         | 0,3       | 0,3         | 6,1              |
| Water supply         | 0,6                           | 0,3          | 0,3            | 0,3               | 0,3                  | 1            | 1                    | 0,3              | 1                 | 0,6      | 0,6                | 1           | 0,6        | 0,6         | 0,6       | 0,6         | 8,4              |
| Wastewater treatment | 0,6                           | 0,3          | 0,3            | 0,3               | 0,6                  | 1            | 1                    | 0,3              | 0,6               | 0,3      | 0,3                | 0,3         | 0,6        | 0,6         | 0,3       | 0,3         | 4,9              |
| Financial system     | 0,3                           | 0,3          | 0,6            | 0,3               | 0,3                  | 0,3          | 0,3                  | 1                | 0,6               | 1        | 0,3                | 0,6         | 1          | 0,3         | 0,3       | 1           | 8,2              |
| Building services    | 0,3                           | 0,3          | 0,6            | 0,3               | 0,3                  | 0,3          | 0,3                  | 0,6              | 1                 | 0,6      | 0,6                | 0,6         | 0,3        | 0,3         | 0,6       | 0,6         | 6,1              |
| Business             | 0,3                           | 0,6          | 1              | 0,6               | 0,6                  | 0,3          | 0,3                  | 1                | 0,6               | 1        | 0,6                | 1           | 1          | 1           | 1         | 1           | 8,9              |
| Emergency services   | 0,6                           | 0,6          | 0,6            | 0,6               | 0,6                  | 0,6          | 0,6                  | 1                | 0,3               | 1        | 1                  | 1           | 1          | 1           | 0,6       | 0,6         | 10,5             |
| Food supply          | 0,3                           | 0,3          | 0,6            | 0,3               | 1                    | 0,3          | 1                    | 0,3              | 1                 | 0,6      | 1                  | 1           | 1          | 0,6         | 0,6       | 0,3         | 9,2              |
| Government           | 0,6                           | 0,6          | 0,6            | 0,6               | 0,6                  | 0,6          | 0,6                  | 1                | 0,6               | 1        | 1                  | 1           | 1          | 1           | 1         | 0,6         | 12,4             |
| Health care          | 0,3                           | 0,3          | 0,3            | 0,3               | 0,3                  | 0,3          | 0,3                  | 0,3              | 0,3               | 0,3      | 1                  | 0,6         | 1          | 1           | 0,3       | 0,3         | 5,4              |
| Education            | 0,3                           | 0,3          | 0,3            | 0,3               | 0,3                  | 0,3          | 0,3                  | 1                | 0,3               | 0,6      | 1                  | 0,3         | 1          | 0,6         | 1         | 0,3         | 8,2              |
| Commodities          | 0,3                           | 0,3          | 1              | 0,3               | 0,3                  | 0,3          | 0,3                  | 1                | 0,6               | 1        | 0,3                | 0,3         | 1          | 0,3         | 1         | 1           | 8,3              |

|                                     |     |     |     |     |     |     |     |      |     |      |      |      |      |     |     |     |
|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|------|-----|------|------|------|------|-----|-----|-----|
| Index of subordination (dependence) | 6,4 | 6,8 | 8,4 | 5,6 | 7,1 | 6,5 | 4,6 | 11,6 | 8,0 | 12,9 | 10,5 | 10,5 | 13,0 | 7,8 | 5,0 | 8,8 |
|-------------------------------------|-----|-----|-----|-----|-----|-----|-----|------|-----|------|------|------|------|-----|-----|-----|

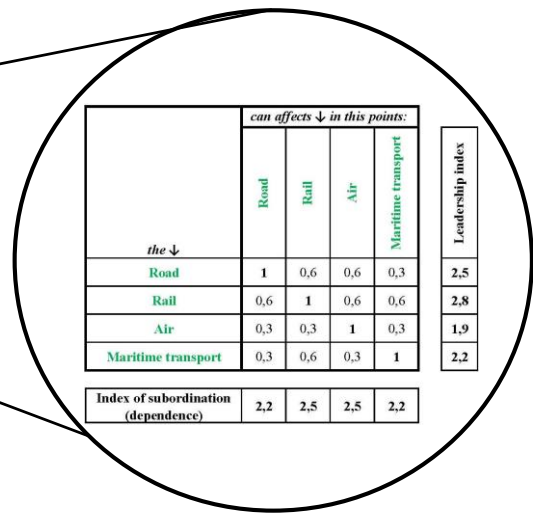


Figure 4 Sketch of a typical IM matrix.

|                                  |                            | Recovery Time          |                     |                            |
|----------------------------------|----------------------------|------------------------|---------------------|----------------------------|
|                                  |                            | Short term (Emergency) | Midterm             | Long term (Reconstruction) |
| Functionality Performance Levels | Fully Operational (Q1)     | Basic Objective        | Unacceptable        | Unacceptable               |
|                                  | Operational (Q2)           | Essential Objective    | Basic Objective     | Unacceptable               |
|                                  | Partially Operational (Q3) | Critical Objective     | Essential Objective | Basic Objective            |
|                                  | Near not Operational (Q4)  | Not feasible           | Critical Objective  | Basic Objective            |

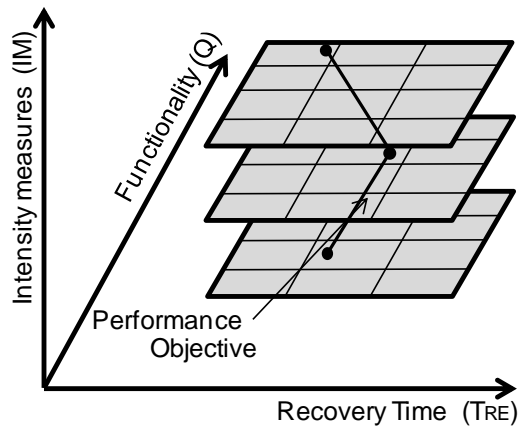


Figure -5 Tridimensional Resilience Performance levels matrix for structures, communities, systems etc.