



POLITECNICO DI TORINO
Repository ISTITUZIONALE

A new prototype of Epi.q robot family, obstacle climbing UGVs

Original

A new prototype of Epi.q robot family, obstacle climbing UGVs / Giuseppe, Quaglia; Matteo, Nisi. - STAMPA. - (2015), pp. 310-310. ((Intervento presentato al convegno AIMETA 2015 tenutosi a Genova nel 14-17 settembre 2015.

Availability:

This version is available at: 11583/2657708 since: 2016-11-25T18:33:04Z

Publisher:

De Ferrari Comunicazione

Published

DOI:

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

ATTI




UNIVERSITÀ DEGLI STUDI
DI GENOVA

GENOVA
UNIVERSITY
PRESS

XXII CONGRESSO
ASSOCIAZIONE ITALIANA DI MECCANICA TEORICA E APPLICATA

AIMETA 2015

GENOVA, 14-17 SETTEMBRE 2015
ATTI DEL CONGRESSO

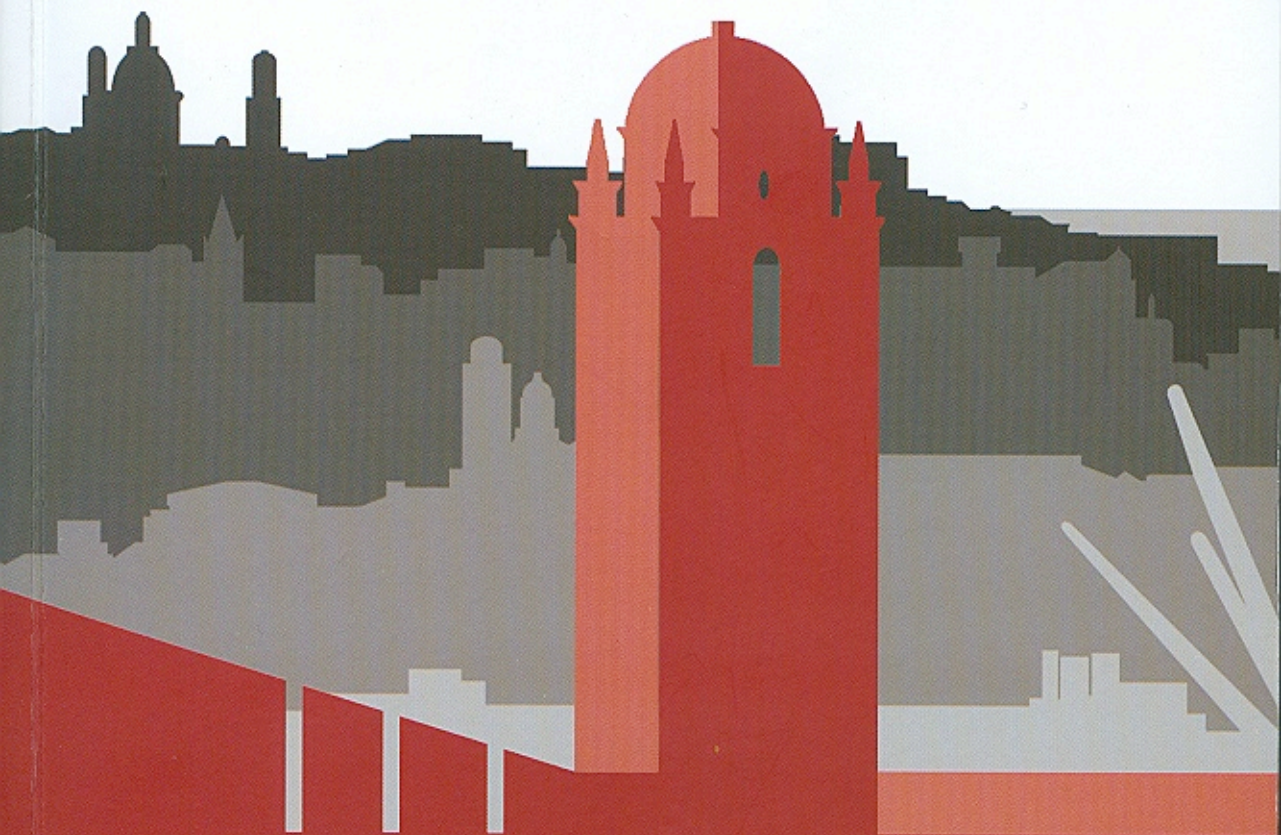

RICERCA

Atti del XXII Congresso dell'Associazione Italiana di Meccanica Teorica e Applicata

Genova, 14-17 Settembre 2015

a cura di Luigi Gambarotta e Angelo Morro

[http:// http://aimeta2015.dicca.unige.it/](http://aimeta2015.dicca.unige.it/)

ISBN 978-88-97752-52-3



È IL MARCHIO DI



UNIVERSITÀ DEGLI STUDI
DI GENOVA

EDITO DA



Realizzazione editoriale

© 2015 De Ferrari Comunicazione S.r.l.

Via D'Annunzio, 2/3 - 16121 Genova

Tel. 010 0986820 - 0986821 - 0986822

Fax 010 0986823

info@deferrareditore.it

In copertina immagine in primo piano del campanile Seicentesco
della Chiesa di San Silvestro nella Sede di Architettura.

Realizzazione grafica di Massimo Malagugini e Chiara Sparviero.

A new prototype of Epi.q robot family, obstacle climbing UGVs

Giuseppe Quaglia¹, Matteo Nisi¹

¹ DIMEAS, Politecnico di Torino, Torino, Italy

E-mail: giuseppe.quaglia@polito.it, matteo.nisi@polito.it

Keywords: mobile robot, obstacle climbing, wheel-leg locomotion


Mobile robots and UGVs are becoming more and more interesting for various application fields such as surveillance and monitoring. The robot ability to avoid getting stuck by unexpected obstacles is a key feature. Different robot architectures can be designed and compared using this feature as evaluation criteria.

The authors, developing the Epi.q robots family, explored the possibility to combine a traditional wheel locomotion system with the use of legs for obstacle climbing. Three prototypes were already built and they proved the effectiveness of the proposed solution. The hybrid wheel-leg locomotion system developed allows to switch without external control from an advancing mode on wheels to a climbing mode using rotating legs when an obstacle, like a step or a stair, is faced. This behaviour is obtained by means of an epicycloidal transmission.

In this work a new prototype of Epi.q UGV family, named Epi.q-Mod2, is presented. Higher performances in terms of speed, acceleration, height of climbing obstacle, max slope addressed the new design, together with the requirement of complete sensing and control solution. A modular approach was followed in order to obtain a structure that can be easily modified. The robot can work with 2 or 4 driving locomotion units, the degrees of freedom between front and rear axles can be changed and coupled with different types of steering logics. Finally, the robot height from ground can be modified and can be adapted to different ground roughness.

Smart features such as the communication with a remote controller for data logging and a not-operated motion are obtained through a sensing system for measuring motor speed and current and the use of a microcontroller. Moreover the manoeuvrability and controllability are extended thanks to the introduction of a speed and current close loop control. Finally different types of control logics can be selected to test various solutions for managing the robot trajectory with several robot architectures.

In conclusion, the prototype built represents a useful platform and can be used for testing several robot configurations and quantitatively evaluate which one allows the higher robot performances.

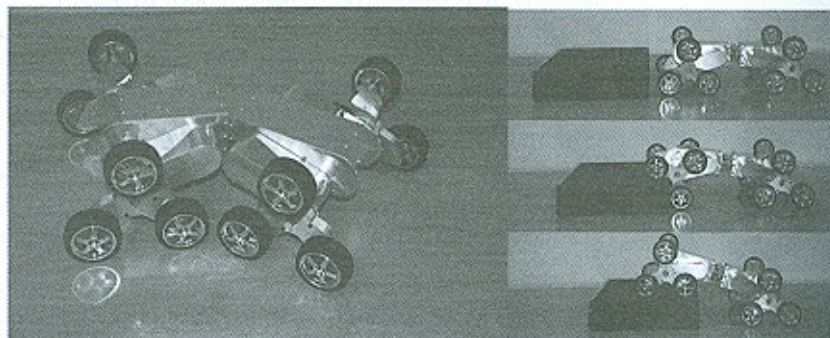

Epi.q-Mod2 mobile robot