

Shallow groundwater temperature in the Turin area (NW Italy): vertical distribution and anthropogenic effects

Original

Shallow groundwater temperature in the Turin area (NW Italy): vertical distribution and anthropogenic effects / Bucci, Arianna; Barbero, Diego; Lasagna, Manuela; Forno, M. Gabriella; De Luca, Domenico Antonio. - In: ENVIRONMENTAL EARTH SCIENCES. - ISSN 1866-6280. - 76:5(2017). [10.1007/s12665-017-6546-4]

Availability:

This version is available at: 11583/2707443 since: 2018-05-18T10:52:21Z

Publisher:

Springer Verlag

Published

DOI:10.1007/s12665-017-6546-4

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

Springer postprint/Author's Accepted Manuscript

This version of the article has been accepted for publication, after peer review (when applicable) and is subject to Springer Nature's AM terms of use, but is not the Version of Record and does not reflect post-acceptance improvements, or any corrections. The Version of Record is available online at: <http://dx.doi.org/10.1007/s12665-017-6546-4>

(Article begins on next page)

Environmental Earth Sciences

Shallow groundwater temperature in the Turin area (NW Italy): vertical distribution and anthropogenic effects --Manuscript Draft--

Manuscript Number:	ENGE-D-16-02689R2
Full Title:	Shallow groundwater temperature in the Turin area (NW Italy): vertical distribution and anthropogenic effects
Article Type:	Original Manuscript
Corresponding Author:	Arianna Bucci, M.D. Universita degli Studi di Torino ITALY
Corresponding Author Secondary Information:	
Corresponding Author's Institution:	Universita degli Studi di Torino
Corresponding Author's Secondary Institution:	
First Author:	Arianna Bucci, M.D.
First Author Secondary Information:	
Order of Authors:	Arianna Bucci, M.D. Diego Barbero, M.D. Manuela Lasagna, Dr. M Gabriella Forno, Prof. Domenico Antonio De Luca, Prof.
Order of Authors Secondary Information:	
Funding Information:	
Abstract:	<p>This study investigated the thermal regime of shallow groundwater in the Turin area (NW Italy), where the large energy demand has motivated a new interest for renewable sources, such as the use of ground-source heat pumps (GSHPs) for domestic heating and cooling. The vertical variability of the groundwater temperature between the ground surface and 10-20 m was detected: deeper temperatures were higher than shallow temperatures in spring, while a decrease with depth occurred in autumn. These variations are connected with the heating and cooling cycles of the ground surface due to seasonal temperature oscillation. Variations below the seasonal oscillation are likely to be connected with the presence of advective heat transport due to the groundwater flow, according to the hydraulic features of a shallow aquifer. Temperature values mostly ranged between 12°C and 14°C in rural areas, while below Turin city, the values were between 14°C and 16°C. This groundwater warming is attributed to a widespread urban heat island phenomenon linked to warmer land surface temperatures in Turin city. Sparse warm outliers are connected with point heat sources and site-specific conditions of land and subsurface use, which may cause the aquifer temperature to rise. A relatively stable temperature below the seasonal fluctuation zone combined with high productivity and legislated limits for deeper groundwater use represent favourable conditions for a large-scale diffusion of groundwater heat pumps (GWHPs) within the shallow aquifer. Moreover, this heat surplus should be regarded as a resource for future geothermal installations.</p>
Response to Reviewers:	According to Editor's requirements the language of the paper has been revised by professional review's system American Journal Experts (AJE). See attachment (English review certificate by AJE)



EDITORIAL CERTIFICATE

This document certifies that the manuscript listed below was edited for proper English language, grammar, punctuation, spelling, and overall style by one or more of the highly qualified native English speaking editors at American Journal Experts.

Manuscript title:

Shallow groundwater temperature in Turin area (NW Italy): vertical distribution and anthropogenic effects

Authors:

Bucci Arianna, Barbero Diego, Lasagna Manuela, Forno M. Gabriella, De Luca Domenico Antonio

Date Issued:

February 13, 2017

Certificate Verification Key:

9A83-E070-A35E-6880-689B



This certificate may be verified at www.aje.com/certificate. This document certifies that the manuscript listed above was edited for proper English language, grammar, punctuation, spelling, and overall style by one or more of the highly qualified native English speaking editors at American Journal Experts. Neither the research content nor the authors' intentions were altered in any way during the editing process. Documents receiving this certification should be English-ready for publication; however, the author has the ability to accept or reject our suggestions and changes. To verify the final AJE edited version, please visit our verification page. If you have any questions or concerns about this edited document, please contact American Journal Experts at support@aje.com.

[Click here to view linked References](#)

1 1 **Shallow groundwater temperature in the Turin area (NW Italy): vertical distribution and**
2
3 2 **anthropogenic effects**
4

5 3
6
7 4 Bucci Arianna ^{(1)*}, Barbero Diego ⁽¹⁾, Lasagna Manuela ⁽¹⁾, Forno M. Gabriella ⁽¹⁾, De Luca Domenico
8
9 Antonio ⁽¹⁾
10

11
12 6 ⁽¹⁾ University of Turin, Department of Earth Sciences - Via Valperga Caluso 35 10125 Turin ITALY
13

14 7 *Corresponding Author: arianna.bucci@unito.it; ph. +39 011 6705117
15
16

17 8
18
19 9 **Keywords:** groundwater temperature; thermal logs; seasonal oscillation; anthropogenic heat sources;
20
21 10 ground-source heat pumps
22

23 11
24
25 12 **Abstract**
26

27
28 13 This study investigated the thermal regime of shallow groundwater in the Turin area (NW Italy),
29
30 14 where the large energy demand has motivated a new interest for renewable sources, such as the use of
31
32 15 ground-source heat pumps (GSHPs) for domestic heating and cooling. The vertical variability of the
33
34 16 groundwater temperature between the ground surface and 10-20 m was detected: deeper temperatures
35
36 17 were higher than shallow temperatures in spring, while a decrease with depth occurred in autumn.
37
38 18 These variations are connected with the heating and cooling cycles of the ground surface due to
39
40 19 seasonal temperature oscillation. Variations below the seasonal oscillation are likely to be connected
41
42 20 with the presence of advective heat transport due to the groundwater flow, according to the hydraulic
43
44 21 features of a shallow aquifer. Temperature values mostly ranged between 12°C and 14°C in rural
45
46 22 areas, while below Turin city, the values were between 14°C and 16°C. This groundwater warming is
47
48 23 attributed to a widespread urban heat island phenomenon linked to warmer land surface temperatures
49
50 24 in Turin city. Sparse warm outliers are connected with point heat sources and site-specific conditions
51
52 25 of land and subsurface use, which may cause the aquifer temperature to rise. A relatively stable
53
54 26 temperature below the seasonal fluctuation zone combined with high productivity and legislated limits
55
56 27 for deeper groundwater use represent favourable conditions for a large-scale diffusion of groundwater
57
58
59
60
61
62
63
64
65

1 28 heat pumps (GWHPs) within the shallow aquifer. Moreover, this heat surplus should be regarded
2
3 29 as a resource for future geothermal installations.
4
5 30

7 31 **1. Introduction**

10 32 Italy still largely depends on non-renewable fossil fuels, despite its global energy goals for 2020.
11
12 33 In particular, NW Italy is a highly populated and industrialized area where large conurbations
13
14 34 (Turin, Milan) present critical issues for the large energy demand. Geothermal energy, one of the
15
16 35 most promising renewable worldwide sources, has had limited development in the country in
17
18 36 terms of electricity generation in recent years. Medium to high enthalpy geothermal sources
19
20 37 accounted for 1.8% of the national gross energy generation in 2005 (European Commission
21
22 38 2007), and the total contribution to the final energy consumption, excluding geothermal heat
23
24 39 pump applications, decreased from 213 to 130 ktoe/year (toe=tonne of oil equivalents) in the
25
26 40 period of 2009-2014 (European Commission 2015). High and medium enthalpy geothermal
27
28 41 sources for electricity generation have had limited development in NW Italy, hence, alternative
29
30 42 green sources should be used. Furthermore, domestic heating and cooling needs, which could
31
32 43 possibly be provided by low enthalpy heat, represent a relevant fraction of fossil fuels
33
34 44 consumption in the northernmost regions. For these reasons, low temperature geothermal
35
36 45 reservoirs are being increasingly regarded as promising thermal energy supplies. Recently,
37
38 46 geothermal systems have doubled their contribution to the final consumption of renewable
39
40 47 energy in Italy from 39 to 71 ktoe/year, but this amount still represents a small part of the
41
42 48 national demand of 10,000 ktoe/year for thermal energy (European Commission 2015).
43
44 49 Geothermal systems operation is based on the heat exchange between the soil and the
45
46 50 groundwater and a heat pump. This procedure requires knowledge of many thermal and
47
48 51 hydraulic properties, including the undisturbed subsurface temperature, thermal conductivity,
49
50 52 groundwater occurrence, local flow direction, groundwater level depth, and recharge conditions
51
52 53 (Stauffer et al. 2013). The undisturbed temperature is a crucial parameter because it represents
53

1 54 the base thermal energy level that can be extracted/injected by a geothermal heat pump. In a
2
3 55 closed-loop system (GSHPs, ground-source heat pump), the heat-carrier fluid circulating into the
4
5 56 vertical heat exchanger acquires the undisturbed temperature of the subsurface, whereas an
6
7
8 57 open-loop system (GWHP or groundwater heat pump) operates via a direct exchange between
9
10 58 the groundwater and the heat pump; hence, the aquifer temperature is the same as the inlet
11
12 59 temperature.

14 60 In NW Italy, the availability of shallow groundwater resources in the Po Plain makes the area
15
16 61 very promising for the large-scale dissemination of geothermal heat pumps, for example, for use
17
18
19 62 in district heating (Sparacino et al. 2007; Beretta et al. 2014) and space heating (Baccino et al.
20
21 63 2010). Furthermore, large cities are typical cases because previous studies indicate that a heat
22
23 64 surplus is expected to occur beneath an urban area (Ferguson & Woodbury 2004; Zhu et al.
24
25 65 2010; Menberg et al. 2013).

28 66 The Turin area still lacks a city-scale thermal aquifer characterization despite recent advances in
29
30 67 geothermal applications. The present study is concerned with the temperatures of the shallow
31
32 68 groundwater in the Turin area. Data were collected in both urban and rural areas adjacent to the
33
34 69 city, and their distribution was related to both regional and local factors, for example, the
35
36 70 climatic regime, land use, and aquifer recharge and discharge. The effect of anthropogenic
37
38 71 warming was reported and some preliminary considerations about the future dissemination of
39
40 72 GSHPs in the Turin area have been expressed according to the survey results.
41
42
43
44
45

46 74 **2. Temperature model**

48 75 The shallow underground temperature regime is mostly determined by the air temperature. The
49
50 76 unsaturated zone is the first part of the subsurface to be reached by an external input. The
51
52 77 temperature of this zone can be described using a 1D heat diffusion model for a semi-infinite
53
54 78 solid if approximations are made, i.e., a homogeneous medium with no vertical water movement.
55
56 79 Water input due to infiltration from the ground surface can be considered negligible in a heat
57
58
59
60
61
62
63
64
65

1 80 transfer process because it is of short duration in well-drained sites (Taylor & Stefan 2009). The
2
3 81 solution to the diffusion model, provided by Banks (2008), among others, consists of
4
5 82 temperature variations with time and space around the average ground temperature T_m . This
6
7 83 value represents the topmost boundary value, and it is transient because the air temperature is
8
9 84 subject to daily and seasonal variation. T_m is difficult to determine since it depends on the way
10
11 85 the air temperature is transmitted in the topmost soil. The T_m is generally higher than the air
12
13 86 temperature (Stauffer et al. 2013), but measurements of this parameter are very infrequent;
14
15 87 hence, the air temperature is commonly used as the approximate temperature at the ground
16
17 88 surface. The subsurface temperature variations mainly depend on the amplitude of the
18
19 89 temperature oscillation at the ground surface, which depends on the local climate and land cover
20
21 90 conditions. Furthermore, an exponential term gives the decay of temperature fluctuation with
22
23 91 depth, and a cosine term provides the cyclicity of the increasing time lag with depth. In general,
24
25 92 these variations show that more oscillation penetrates into the ground during longer
26
27 93 temperature cycles, but the amplitude is gradually damped with depth by the heat dissipation
28
29 94 within the geologic medium. For instance, Silliman and Booth (1993) reported that the
30
31 95 amplitude of the temperature is not significantly affected by diurnal fluctuations at the ground
32
33 96 surface below 1.5 metres.

34
35 97 The depth interval affected by external temperature oscillations can be designated as the
36
37 98 “surficial zone”, and it precedes the so-called “geothermal zone” in which a constant increase in
38
39 99 temperature occurs due to the geothermal gradient (Anderson 2005).

40 100 Physical processes become more complex when surface seasonal inputs reach the shallow
41
42 101 groundwater and a 2-layer model better describes the temperature distribution (Taylor & Stefan
43
44 102 2009). The thermal conductivity is enhanced because the pores and fractures are now filled,
45
46 103 replacing air and giving continuity to the geologic medium. At the same time, the high heat
47
48 104 capacity of the water causes a reduction of the heat diffusivity. In aquifers with high
49
50 105 permeability, the flow velocity of the water in the porous medium, the inertial effects and
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 106 eventual turbulence increase the apparent thermal diffusivity until it is orders of magnitude
2
3 107 greater than the molecular thermal diffusivity (Taylor & Stephan 2009). This phenomenon
4
5 108 results in an increased rate of heat transport due to the hydrodynamic effects of the horizontal
6
7
8 109 and vertical water movements. Such phenomena lead to temperature distortions below the
9
10 110 surficial zone and above the geothermal zone. Alterations in the thermal regime can be traced by
11
12 111 borehole temperature measurements in recharge and discharge sectors as concave or convex
13
14 112 profiles, respectively (Taniguchi 1999; Anderson 2005). Multi-temporal borehole measurements
15
16 113 in very shallow aquifers are useful to assess cyclical temperature variations. Generally, these
17
18 114 observations lead to flower-shaped profiles followed by constant temperature values. Taniguchi
19
20 115 (1993), among others, provides type-curves for assessing the recharge and discharge regime
21
22 116 depending on whether it has an elongated or compressed shape. The constant temperature
23
24 117 below the surficial zone with seasonal oscillations is usually 1 to 2°C higher than the average
25
26 118 annual temperature at the ground surface (Anderson 2005).

27
28
29
30 119 However, the groundwater temperature can be assumed as relatively constant throughout the
31
32 120 year in comparison with the seasonal air oscillations typically recorded in a medium temperate
33
34 121 climate of Europe. Consequently, most part of aquifers can be used as low enthalpy geothermal
35
36 122 reservoirs, compensating for the daily and seasonal delay between need and supply of heat and
37
38 123 cold (Rybach & Eugster 2010).

39
40
41 124 The amplitude of the temperature oscillation in aquifers strictly depends on the local climate
42
43 125 and land use, as previously shown. The shallow groundwater is thus necessarily affected by
44
45 126 anthropogenic factors at various scales. The most evident thermal footprints occur beneath
46
47 127 urban areas because local climate conditions, land use changes and artificial heat sources are
48
49 128 concentrated there. Temperature increases of several degrees have been recorded in the urban
50
51 129 subsurface all over the world, including in Asian megacities (Taniguchi et al. 2007; Zhu et al.
52
53 130 2010) as well as German (Menberg et al. 2013) and Finnish cities (Arola & Korkka-Niemi 2014).
54
55
56 131 The primary cause has been identified as the replacement of natural land cover by artificial
57
58
59
60
61
62
63
64
65

1 132 surfaces and heat loss from buildings. The magnitude of the temperature increase due to
2
3 133 anthropogenic land use varies depending on the type and density of the heat source. For
4
5 134 instance, Taylor and Stefan (2009) observed increments of up to 3°C linked to isolated roads.
6
7
8 135 Menberg et al. (2013) expressed the urban heat island intensity as the difference between rural
9
10 136 and urban areas, finding values between 1.9°C and 2.4°C in some German cities. However,
11
12 137 warmer temperatures indicated by borehole measurements have also been linked to global
13
14 138 warming (Taniguchi et al. 2007, Bayer et al. 2016). A specific analysis of past climate signals is
15
16 139 required to distinguish the two overlapping phenomena.
17
18

19 140 A synthetic scheme has been reported (Fig. 1) to summarize those anthropogenic heat sources
20
21 141 that are expected to occur in the investigated area to discuss them along with the results. The
22
23 142 idea of a schematic conceptual model of heat sources that affect the groundwater temperature in
24
25 143 an urban area was first contributed by Menberg et al. (2013) and further elaborated by Benz et
26
27 144 al. (2015). Since the Turin area includes both rural and urban sectors, the sketch includes the
28
29 145 most representative heat sources for both land use types. Point, linear and areal sources can be
30
31 146 distinguished using geometrical criteria. In rural areas (left side of Fig. 1), natural land use
32
33 147 prevails, even though some anthropogenic sources with both areal and linear geometry can be
34
35 148 found, such as irrigation and canals (1). In this case, the input can be either colder or warmer
36
37 149 depending on the type of water source (river, aquifer, etc.) and on the cultivation. Point sources
38
39 150 are those elements that have small dimensions, for example, sewage systems (2) and isolated
40
41 151 buildings or roads in remote areas (3), landfills (4), industrial sites (5), and wells for thermal
42
43 152 wastewater reinjection such as geothermal wells (6). Linear sources include many types of
44
45 153 underground infrastructures such as sewage systems or district heating networks (7) and
46
47 154 railway and road tunnels (8). Benz et al. (2015) provide evidence that sewage systems play a
48
49 155 dual role in higher ground and groundwater temperatures, as exemplified by the heat loss from
50
51 156 pipe walls and warm water leakage from damaged pipes. Areal sources are large built-up areas
52
53 157 (9), where the previously mentioned point and linear sources (roads, buildings, sewage systems,
54
55
56
57
58
59
60
61
62
63
64
65

1 158 etc.) occur at high density and extension and, for instance, heat losses derived from elevated
2
3 159 ground surface temperatures caused by interconnected asphalt and paved surfaces.
4

5
6 160

7 8 161 **3. Study area**

9 10 162 **3.1. Climatic context**

11
12 163 The area investigated is located in NW Italy and includes both the narrow sector of the western
13
14 164 Po Plain between the Western Alps (W) and Turin Hill (E) and the internal plain sector of the
15
16 165 Ivrea Morainic Amphitheatre (Fig. 2). At the regional level, the climate is determined by an
17
18 166 orographic component rather than by latitude because of the presence of the Alps and the small
19
20 167 latitudinal development of the region (Agenzia Regionale per la Protezione Ambientale 2007).
21
22 168 Air temperatures show a regular decrease with elevation and are sporadically changed by local
23
24 169 conditions such as urban areas or valley floors. In plain areas, the average annual temperature is
25
26 170 between 10°C and 12.5°C, with higher average monthly values in autumn than in spring.
27
28 171

29
30 172 Temperatures are also subject to the effects of global climate change. An analysis of a historical
31
32 173 climate series (Cortemiglia 1999) shows an increase of 0.8°C per century in the plain areas of the
33
34 174 Piedmont region. The average annual value increased from 12.5°C to 13.7°C during the periods
35
36 175 of 1870-2010 and 1971-2010 (Garzena et al. 2014). Furthermore, in the Turin area, the air
37
38 176 temperatures in the city were higher than in surrounding rural area throughout the 20th
39
40 177 century because of an urban heat island phenomenon (Oke 1995, Voogt 2004). Such a rise in
41
42 178 temperature over the last 150 years is likely to be caused by the vigorous expansion of the city.
43
44 179 The increase in the number of inhabitants and vehicles in Turin city are among the largest and
45
46 180 are responsible for the urban air warming according to Garzena et al. (2014).
47
48
49
50

51 180 52 53 181 **3.2. Geological and hydrogeological context**

54
55 182 A synthetic geo-hydrological map (Fig. 2) depicts the main lithological features of the area,
56
57 183 which include the metamorphic rocks of Western Alps (1), Tertiary marine and transitional
58
59

1 184 deposits (2), and Quaternary glacial deposits (3) that form morainic amphitheatres at the outlets
2
3 185 of main Alpine valleys. The metamorphic rocks and Tertiary deposits merge underneath the Po
4
5 186 Plain sediments, forming a weakly permeable bedrock. Transitional to marine units deposited in
6
7 187 the Pliocene and early Pleistocene are found above the bedrock and consist of silty-clayey levels
8
9 188 interbedded with sands and gravels. The Po Plain was formed by Quaternary outwash and
10
11 189 fluvial units (4) consisting of heterogeneous sediments, mainly sands and gravels with
12
13 190 subordinated silty and clayey levels (Festa et al. 2009; Forno et al. 2009; Irace et al. 2009). The
14
15 191 oldest sediments are discontinuously distributed and include highly weathered soils, while the
16
17 192 youngest sediments are ubiquitous and less altered. The distribution of the Quaternary units is
18
19 193 linked with the morphology of the Po Plain, which has been conventionally divided into two
20
21 194 sectors known as the high and the low plains. The high plain is located at the uppermost
22
23 195 elevations near the Alps and was formed by the oldest sediments (middle Pleistocene), while the
24
25 196 low plain is located topographically at lower elevations and comprises late Quaternary and
26
27 197 Holocene deposits.

28
29 198 From a hydrogeological point of view, the sediments of the Po Plain represent a continuous
30
31 199 highly permeable porous medium that hosts many groundwater systems. Conventionally, one
32
33 200 shallow and various deep aquifers have been described (Bortolami et al. 1988; Bove et al. 2005;
34
35 201 De Luca et al. 2014). The deeper aquifers are hosted in the sandy intercalations of transitional
36
37 202 and marine deposits found below the continental units. They are multi-layered, and their
38
39 203 groundwater circulation is confined to the sandy levels. The recharge of the deep aquifers occurs
40
41 204 in the high plain sectors, where the units outcrop or the low permeable intercalations have
42
43 205 limited spatial continuity and thickness. Early Pleistocene sediments with low permeability
44
45 206 vertically separate the deep and the shallow groundwater systems. The shallow aquifer is hosted
46
47 207 in late Pleistocene and Holocene units and it is mostly unconfined. The shallow aquifer is
48
49 208 supplied by the infiltration of rainfall and secondarily by rivers in the high plain sectors. The low
50
51 209 plain sectors are generally discharge areas and the Po River represents the main regional
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 210 discharge axis for the groundwater flow (Debernardi et al. 2008; Lasagna et al. 2016a, b). The
2
3 211 regional flow is thus directed from the Alps towards SE-E-NE (Fig. 3). The water table generally
4
5 212 follows the topographic surface trend, and its depth varies between 1 and 50 metres, with
6
7 213 minima in the high plain sectors. The hydraulic gradient varies between 0.1 and 3% with higher
8
9 values in high plain sectors.
10
11

12 215

14 216 **3.3. Geothermal context**

16 217 The geothermal manifestations in the Piedmont region are limited to sporadic cases of
17
18 218 hydrothermal circuits with local significance in the SE (Acqui Terme, see for example Pasquale et
19
20 219 al. 2011) and the SW Piedmont (Vinadio and Valdieri, see Perello et al. 2001 and Baietto et al.
21
22 220 2008). The most promising and easily accessible reservoir of low enthalpy heat is currently
23
24 221 represented by the Po Plain (Lo Russo et al. 2015). Both shallow and deep aquifers may be
25
26 222 exploited within the typical depths of low enthalpy geothermal systems, according to the
27
28 223 previously described lithostratigraphic setting. Closed systems cross both the shallow and the
29
30 224 deep aquifers, while open systems are mostly associated with shallow aquifers. The use of deep
31
32 225 aquifers is protected by regional regulations, which restrict deep groundwater withdrawal only
33
34 226 for human consumption and limit drillings that cross two aquifers. Hence, the focus of the many
35
36 227 geothermal investigations has been on the shallow aquifer. Recent studies (Stringari et al. 2010)
37
38 228 assessed the shallow aquifer temperatures in the Po Plain at regional scale. The average annual
39
40 229 the groundwater temperature is approximately 14°C, but lateral variability reaches several
41
42 230 degrees Celsius. A positive temperature gradient occurs from the SW to the NE Piedmont along
43
44 231 the regional groundwater flow direction and locally from the high plain to the low plain sectors.
45
46 232 Such lateral temperature variations have been attributed to both regional climatic trends and
47
48 233 hydrogeological features, including the heat conduction from the ground surface in
49
50 234 progressively warmer climatic conditions and the thermal equilibration of colder rainfall waters
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 235 infiltrating recharge areas (high plain) with warmer subsurface along the groundwater flow
2
3 236 path towards the Po River.
4

5 237
6

7 238 **4. Methods**

9
10 239 One of the most common techniques in thermal groundwater characterization at both shallow
11
12 240 and deep depths (Taniguchi 1993; Taniguchi et al. 1999) is the downhole thermal log. It can be
13
14 241 performed by automatic acquisition or manually, for example, by thermal resistances equipped
15
16 242 with wires of the proper length (Barbero et al. 2016). In this study, the groundwater
17
18 243 temperatures were collected in two surveys, one performed in spring and one performed in
19
20 244 autumn, that consisted of downhole thermal logs performed manually. Temperature values were
21
22 245 recorded throughout the entire water column by an electronic water level metre equipped with
23
24 246 a thermometer (0.01 m and 0.1°C sensitivity). In the spring survey, 40 monitoring points were
25
26 247 used, and 30 wells were used in the autumn survey; most of them were managed by the regional
27
28 248 Environmental Protection Agency (ARPA). Since Turin city lacks ARPA monitoring wells,
29
30 249 supplementary points owned by private authorities were included in the measurements (Table
31
32 250 1). The depths of the wells ranged between 8 and 50 metres and were screened exclusively in
33
34 251 the shallow aquifer. The following two classes of land use were distinguished: rural and city. The
35
36 252 city type included the wells within the municipal boundaries of Turin, and the rural type
37
38 253 encompassed the remaining areas.
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Table 1 Information about monitoring the well design, site features and the groundwater temperature data. The latter are divided into S (the spring survey) and A (the autumn survey). (*Well top temperatures are meant to be the first useful measurement, namely 1 m below the groundwater level.)

Code	Land use	Elevation (m a.s.l.)	Depth (m b.g.l.)	Screens penetrating the whole water column	Groundwater level		Saturated thickness		Well top temperature*		Well bottom temperature		Temperature difference within water column (Ttop - Tbottom)	
					S (m b.g.l.)	A (m b.g.l.)	S (m)	A (m)	S (°C)	A (°C)	S (°C)	A (°C)	S (°C)	A (°C)
Arpa P43	rural	229	23	No	3.56	3.98	19.44	19.02	13.5	14.2	12	13.1	1.6	2.9
Arpa P42	rural	254	25	No	5.50	6.65	19.5	18.35	13.5	13.5	12.3	12.3	1.7	2.1
Arpa P45	rural	384	42	No	23.57		18.43		13.5		13.4		0.2	
Arpa P24	rural	301	35	Yes	24.05	22.95	10.95	12.05	14.0	14.1	13.6	13.7	0.6	0.6
Arpa P38	rural	259	50	Yes	47.22		2.78		13.2		13.2		0	
Arpa P20	rural	237	20	No	2.38	3.01	17.62	16.99	13.7	16.0	14.4	14.5	-1.7	4.2
Arpa TF2	rural	233	15	No	5.70		9.3		13.7		13.6		0.1	
Arpa P16	rural	238	25	No	5.45		19.55		15.3		14.8		0.6	
Arpa PZ-SL6	rural	279	20	No	4.75	5.14	15.25	14.86	13.2	18.5	13.4	18.3	-0.3	0.35
Arpa P15	rural	299	30	Yes	22.67		7.33		12.4		12.3		0.1	

16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Arpa P3	rural	196	30	No	7.29		22.71		13.6	13.3	13.3		0.4	
Arpa PZ-SL3/1	rural	330	20	Yes	8.52	8.89	11.48	11.11	13.2	13.3	13.1	13	0.8	0.6
Arpa P18	rural	275	30	No	25.87	25.91	4.13	4.09	13.8	13.9	13.7	13.8	0.1	0.1
Arpa PZ-SL5/3	rural	274	20	No	13.57	15.07	6.43	4.93	13.8	14.1	13.8	14.15	0.1	-0.05
Arpa P19	rural	226	35	No	3.87	4.20	31.13	30.80	16.4	17.1	17.9	18	-2.4	-0.7
Arpa PZ-SL1	rural	441	15	No	3.26		11.74		10.3		12.3		-3.3	
Arpa PZ-SL7/1	rural	252	20	No	3.36		16.64		12.8		13.6		-2.4	
PZC1	rural	225	30	Yes	4.49	4.87	25.51	25.13	15.2	16.4	15	14.9	0.1	2.3
PZ10	rural	247	8	Not known	0.95	1.20	7.05	6.80	12.0	15.4	13.7	14	-2.9	2.2
Orbassano P1	rural	262	23.5	Not known	11.04	11.68	12.46	11.82	14.5	14.4	13.9	14	0.9	0.5
Arpa P10	rural	274	25	Yes	14.16	12.15	10.84	12.85	13.1	14.3	12.7	14	0.7	0.4
Arpa P22	rural	238	15	No	0.00	1.12	15	13.88	14.7	14.7	14.7	14.6	-3.1	5.4
Arpa P21	rural	266	20	No	2.67	3.65	17.33	16.35	12.3	15.3	13	13.5	-1.7	3.1
Arpa P37	rural	208	22.5	Yes	19.39		3.11		12.1		12.2		-0.1	
Arpa PZ-SL4	rural	319	20	No	1.41		18.59		13.0		13.9		-1.8	
Arpa P17	rural	258	14	No	1.12	1.95	12.88	12.05	13.3	15.9	13.3	13.3	-2.7	4.8
Arpa P44	rural	232	25	No	7.50	7.82	17.5	17.18	13.6	13.4	13.4	13.4	0.3	-0.1
S nuovo	city	223	13	Not known	5.51	4.86	7.49	8.14	14.8	16.6	15.5	15.2	-1.4	2.5
PZ N1	city	224	15	Not known	6.36	6.60	8.64	8.40	15.7	15.7	15.8	15.7	-0.2	-0.1
Arpa SI2	city	218	20	Yes	7.66	7.92	12.34	12.08	15.7	15.6	15.8	15.2	-0.3	0.5

16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

PZ B3	city	257	35	Not known	26.31	26.55	8.69	8.45	15.1	14.9	15	14.9	0.1	0.05
GTT PM2	city	270	40	Yes	33.79	33.91	6.21	6.09	14.3	14.2	14.2	14.2	0.1	0.1
PZ34	city	240	40	No	17.42		22.58		19.7		15.5		7.8	
PZ50	city	265	40	Yes	18.21	18.39	21.79	21.61	14.7	14.7	14.5	14.5	0.4	0.5
Arpa P26	city	247	42	No	21.49	21.80	20.71	20.40	14.9	14.9	14.8	14.9	0.2	0
PZ55	city	270	45	Yes	38.22	38.34	6.78	6.66	14.2	14.2	14.1	14	0.1	0.2
Arpa P30	rural	263	35	No	15.72	16.47	19.28	18.53	14.5	14.3	14.5	14.25	0	0.05
Arpa SI5	rural	177	20	Yes	9.65		10.35		14.6		14.4		0.3	
Arpa PZ-SL2	rural	380	20	No	2.95		17.05		9.0		9.2		-0.4	
Villarbasse P1	rural	337	14	Not known	10.18	10.64	3.82	3.36	12.8	12.7	12.7	12.6	0.1	0.2
Arpa P7	rural	246	15	No	2.05	2.38	12.95	12.62	12.3	13.1	12.8	12.8	-1.4	2.8
Arpa P34	rural	218	20	No	3.12	4.08	16.88	15.92	11.3	13.9	12.2	15.7	-2	1.6
Mean		25.53									13.8	14.4		
City mean											15.0	14.8		
Rural mean											13.4	14.2		

5. Results and discussion

The vertical distribution of the groundwater temperatures assessed by the thermal logs shows lower values in the shallow portions and a gradual increase in the spring measurements (Fig. 3). Conversely the values are higher in the first few metres and decrease with depth in autumn (Fig. 4). This vertical temperature variability is compatible with the heating and cooling cycles of the ground temperatures due to seasonal variation. According to the previously described heat transfer processes, the external daily and seasonal fluctuations are damped in the subsurface by the heat dissipation occurring in the unsaturated zone and in the shallow portions of aquifers. In the shallow wells, the temperature variations disappear within 10-20 metres below the ground surface. In the deeper wells (<20 m), the temperature variations are smaller. In the shallow wells, the attenuation occurs in the aquifer, enhanced by the groundwater flow. In the deeper boreholes, the inputs from the ground surface are dissipated into the unsaturated zone above the groundwater table. This phenomenon was confirmed by the good correlation between the depth to the groundwater and the temperature difference along the water column (Fig. 5). The plot also shows that the decrease in the temperature difference is particularly rapid at <10 m the groundwater level depth.

In both the spring and autumn logs, the deeper portions of the aquifer show small temperature oscillations and a constant value ranging between 12°C and 15°C is reached in most wells, which is compatible with the presence of the groundwater flow in the aquifer, as reported in Taniguchi's (1993) shallow borehole thermal logs. Recent studies on the groundwater temperatures in the Piedmont Po Plain (Stringari et al. 2010; Barbero et al. 2016) suggest that in the shallow alluvial aquifer, a homoeothermic surface to distinguish where the groundwater temperatures are constant in time should be defined, that is, where the daily and seasonal oscillations are no longer evident. The homoeothermic volume is the aquifer volume below the homoeothermic surface and above the geothermal zone in which the geothermal gradient causes a temperature rise. The homoeothermic surface for the whole Piedmont Po Plain ranges

1 27 between 20 and 25 metres b.g.l. according to Barbero et al. (2014), and this range is compatible
2
3 28 with the analysis of the thermal logs reported in this study (Fig. 3 and Fig. 4).
4

5 29 The vertical variations in the aquifer were considered before extracting a single temperature
6
7 30 value for each well. For this purpose, the well bottom measurements were considered as
8
9 31 representative of the aquifer temperature. The values were between 9.2°C and 17.9°C in spring
10
11 32 and between 12.3°C and 18.3°C in autumn (Table 1). The well top measurement of each log was
12
13 33 used to compute the difference along the entire water column (Table 1). Negative values (i.e.,
14
15 34 colder temperatures in the uppermost part of the aquifer) correspond to the spring logs
16
17 35 according to the shape of thermal logs described above. Conversely, the values are mostly
18
19 36 positive in the autumn logs because shallow temperatures are warmer. The overall temperature
20
21 37 variation range in the monitored wells in both surveys is between -2.9°C and +5.4°C (excluding
22
23 38 one outlier in the spring survey, which will be clarified later).
24
25
26
27

28 39 The bottom temperature measurements extracted from thermal logs were plotted on maps to
29
30 40 distinguish lateral variations of the aquifer temperature excluding the seasonal temperature
31
32 41 variations. The spring temperature values (Fig. 7) mostly lay in the interval of 12°C-14°C in rural
33
34 42 areas. Some cold outliers below this range were found N of Turin city in the high plain sectors
35
36 43 close to the Alps. In Turin city, the aquifer temperatures were generally higher (14°C-16°C),
37
38 44 while the three easternmost wells had intermediate values (14°C-15°C). In the autumn survey
39
40 45 (Fig. 8), the spatial distribution was approximately the same, with occasional warmer values.
41
42
43

44 46 The average values across the investigated area were 13.8°C and 14.4°C in spring and autumn,
45
46 47 respectively, and reflected minor variations between the two surveys. These temperatures were
47
48 48 very close to the average annual air temperatures recorded in the Piedmont Po Plain, according
49
50 49 to the aforementioned climatic features. Temperatures gradually increased from the high plain
51
52 50 sectors close to the Alps towards the Po River, which matched the main groundwater flow
53
54 51 direction. Colder aquifer temperatures in the high plain sectors reflected the colder top soil
55
56 52 temperatures occurring in the sectors close to the Alps well, due to the cooling of the air with an
57
58
59
60
61
62
63
64
65

1 53 increase in the topographic elevation. This effect was confirmed by the correlation between the
2
3 54 groundwater temperatures and the well elevation (Fig. 6). This groundwater warming along the
4
5 55 flow path was found by several basin-wide studies. Stringari et al. (2010) found this trend in the
6
7 56 Piedmont Po Plain, as described in section 3.2. Burns et al. (2016) found a similar increase in the
8
9 57 land surface and the groundwater temperatures along the Eastern Snake River Plain aquifer (SE
10
11 58 Idaho, US). The same authors also reported that the thickness of the unsaturated zone had the
12
13 59 primary effect of insulating the aquifer from the land surface. A similar observation is also valid
14
15 60 for the Turin Po Plain in the present study: wells with a deeper groundwater level have
16
17 61 narrower temperature oscillations (Fig. 5; Fig. 7; Fig. 8). Cooler groundwater in the high plain
18
19 62 sectors may also be partially determined by inputs from surface hydrology; in the high plain
20
21 63 sectors, the rivers and streams generally feed the aquifer, while in the discharge areas, the
22
23 64 aquifer is drained by the rivers. The different hydrogeological role of the respective recharge
24
25 65 and discharge areas of the high and low plain sectors of the Turin Po Plain is not still clear. The
26
27 66 role of recharge and discharge sectors was reported to have major importance in determining
28
29 67 the shape of the thermal logs of the shallow aquifer in the Nagaoka area by Taniguchi (1993). In
30
31 68 the present study, such a distinction would benefit from a comparison of the temperature logs
32
33 69 derived from the two distinct hydrogeological areas.

34
35 70 The high concentration of warm temperatures below Turin city is likely linked to the presence of
36
37 71 the large urbanized area. A rough estimate of the intensity of the groundwater warming below
38
39 72 the city was made by comparing the urban and rural bottom well (i.e., undisturbed)
40
41 73 temperatures (Table 1). The results showed warmer average temperatures in the city
42
43 74 monitoring wells of +1.6°C and +0.6°C in spring and autumn measurements, respectively. The
44
45 75 difference between the two surveys may be affected by extrinsic factors, such as the smaller
46
47 76 number of points considered in the second survey. More than one phenomenon acting
48
49 77 simultaneously in the urban areas may cause groundwater warming, i.e., global warming and the
50
51 78 urban heat island effect. In Turin city, an urban heat island effect in the air (see Paragraph 3.1)
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 79 likely affected the temperature of the shallow aquifer. The magnitude of the urban air warming
2
3 80 during recent decades was similar to the warming in the aquifer. In addition, a long climate
4
5 81 series analysis indicates that global climate change exists (see Paragraph 3). Unfortunately,
6
7 82 deeper borehole temperatures are not available to distinguish past climate signals in the
8
9
10 83 groundwater; it can only be stated that further studies should take into account its recent
11
12 84 transitory behaviour. Indeed, Garzena et al. (2014) found that during 1992-2009, the urban heat
13
14 85 island decreased in intensity, as evidenced by the relatively constant average annual air
15
16 86 temperature in Turin city; however, it increased in rural areas. Another type of heat source with
17
18
19 87 a linear geometry is expected to have an effect on a city scale: old and largely damaged
20
21 88 wastewater networks are distributed across the subsurface of Turin, and extensive leakage is
22
23
24 89 expected to be found.

25
26 90 Most wells have been drilled close to roads, squares and buildings. Paved and asphalt surfaces
27
28 91 modify the porosity and reflectivity of the natural soil, causing an enhancement of heat
29
30 92 accumulation at the ground surface (Taylor & Stefan 2009), while buildings increase the
31
32 93 temperature of the surrounding subsurface via their foundations, basements or underground
33
34
35 94 car boxes (Menberg et al. 2013). Local warming due to artificial land use is thus expected to
36
37 95 contribute in both rural and urban areas. However, the longer history and larger size of Turin
38
39
40 96 city make this phenomenon much more intense with respect to the surrounding urban centres.

41
42 97 Sporadic outliers have been found that can scarcely be explained by the previously mentioned
43
44 98 phenomena. Positive local temperature anomalies are generally related to single point heat
45
46 99 sources, for example, industrial districts, power stations, and landfills, that can affect a small
47
48
49 100 subsurface volume. One of these points lies outside Turin city in the S sector (La Loggia) and has
50
51 101 a high temperature ($>17^{\circ}\text{C}$). This anomalous warming is likely linked to the presence of an
52
53 102 industrial district that may be responsible for an abnormal heat flux from the buildings due to
54
55 103 the huge volumes of warm air inside and/or to industrial exothermic processes. Another outlier
56
57
58 104 is represented by a well in Turin city which showed anomalous temperatures (up to 23°C) in the
59
60

1 105 spring thermal log (Fig. 3). This anomaly is easily explained by the presence of a geothermal
2
3 106 system working in heat injection mode. Two outliers in the towns of Volpiano and Caselle
4
5 107 showed marked differences between the two surveys (3°C to 5°C, respectively). Such values
6
7 108 indicate that the seasonal effect was probably not completely excluded. Without prior
8
9 109 knowledge of localized heat sources, the limited depth of the groundwater and the presence of
10
11 110 large paved parking areas next to the monitoring point might have amplified the heat
12
13 111 accumulation during the warm months. Furthermore, the points at the southern boundary of
14
15 112 Turin city show higher temperatures (14°C-15°C range) compared with the points at the
16
17 113 northern side of the city. One of these points is located close to the town of Moncalieri. Since this
18
19 114 well is used for monitoring a polluted site, the exothermic decomposition of organic compounds
20
21 115 may have affected the temperatures of the subsoil and aquifer. This monitoring point should be
22
23 116 further investigated to better understand how the anthropogenic factors in the area, mainly at
24
25 117 the contaminated site and secondarily of the paved surfaces, may affect the thermal regime.
26
27
28
29
30
31

32 118

33 119 **6. Conclusions**

34
35 120 The scenario outlined shows that the regional climatic trend largely influences the thermal
36
37 121 regime of the shallow aquifer in the Turin area. A seasonal oscillation can be clearly recognized,
38
39 122 and it is rapidly damped in the shallow portions of subsurface. In addition, other factors also
40
41 123 play an important role, such as the recharge conditions and anthropogenic contributions. The
42
43 124 latter could be distinguished in the thermal regime of the shallow aquifer either as a diffuse
44
45 125 temperature increase due to Turin city or as local differences linked to local heat sources, such
46
47 126 as polluted sites, industrial districts, or geothermal systems.
48
49

50
51 127 However, the current thermal trend of the shallow aquifer in the Turin area shows a relatively
52
53 128 stable temperature, since the seasonal oscillations only affect the shallow portion of the aquifer.
54
55 129 This phenomenon, combined with high productivity, contributes to the creation of favourable
56
57 130 conditions for large-scale diffusion in the shallow aquifer for heat pumps coupled with the
58
59
60
61
62
63
64
65

1 131 groundwater (GWHPs). At present, the installation of GWHPs is limited; however, an increasing
2
3 132 demand for domestic heating and cooling by means of this technology may lead to a rise in
4
5 133 conflicts. The findings of this study would then represent a contribution for the future
6
7 134 sustainable development of GWHPs in the Turin area. For instance, the heat surplus identified in
8
9
10 135 the urban area could be used as a resource for building/district heating. This strategy should be
11
12 136 accompanied by further efforts to gain new knowledge about the thermal features of shallow
13
14 137 aquifers as affected by both local and regional factors, for instance, by extending the monitoring
15
16 138 network to the Turin subsurface. New temperature data to better support site-specific
17
18 139 interpretations may be collected and, once combined with hydraulic parameters such as
19
20 140 saturated thickness, transmissivity and storage, could be used to compute the potential for
21
22 141 GWHP exploitation in a sector such as an urban area. However, such large-scale characterization
23
24 142 should not exclude a detailed site-specific assessment of hydrogeological and thermal properties
25
26 143 for new installations.
27
28
29
30

31 144

32

33 **Acknowledgements**

34

35 146 Most of the groundwater monitoring points were accessed thanks to the kind support of Arpa
36
37 147 Piemonte and Provincia di Torino. The authors are grateful to all collaborators as well as to all
38
39 148 the private institutions and individuals who permitted access to other monitoring wells. The
40
41 149 authors deeply thank the reviewer for useful comments and suggestions that helped to improve
42
43 150 the paper.
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 152 **References**

2
3 153 Allen A, Milenic D, Sikora P (2003) Shallow gravel aquifers and the urban heat island effect: a
4
5 154 source of low enthalpy geothermal energy. *Geothermics* 32:569-578. doi:10.1016/ S0375-
6
7
8 155 6505(03)00063-4

9
10 156
11
12 157 Anderson M (2005) Heat as a Ground Water Tracer. *Ground Water* 43(6):951-968. doi:
13
14 158 10.1111/j.1745-6584.2005.00052.x

15
16 159
17
18
19 160 Agenzia Regionale per la Protezione Ambientale (2007) Il Piemonte nel cambiamento climatico.
20
21 161 Osservazioni passate, impatti presenti e strategie future. ARPA Piemonte, Torino

22
23 162
24
25 163 Anderson MP (2005) Heat as a ground water tracer. *Ground Water*, 43(6):951-968. doi:
26
27 164 10.1111/j.1745-6584.2005.00052.x

28
29 165
30
31 166 Arola T, Korkka-Niemi K (2014) The effect of urban heat islands on geothermal potential:
32
33 167 examples
34
35 168 from Quaternary aquifers in Finland. *Hydrogeol J* 22:1953-1967. doi: 10.1007/s10040-014-
36
37 169 1174-5

38
39 170
40
41 171 Baccino G., Lo Russo S, Taddia G, Verda V (2010) . Energy and environmental analysis of an
42
43 172 open-loop ground-water heat pump system in an Urban area. *Thermal Science* 14(3):693-706

44
45 173
46
47 174 Baietto A, Cadoppi P, Martinotti G, Perello P, Perrochet P, Vuataza F-D (2008) Assessment of
48
49 175 thermal circulations in strike-slip fault systems: the Terme di Valdieri case (Italian western
50
51 176 Alps). *Geological Society of London Special Publications* 299:317-339. doi:10.1144/SP299.19

1 178 Banks D (2008) An introduction to thermogeology: ground source heating and cooling.
2
3 179 Blackwell, Oxford
4
5 180
6
7
8 181 Barbero D, De Luca DA, Forno MG, Lasagna M, Magnea L (2014) A statistical approach to the
9
10 182 study of thermal data of shallow aquifer in Piedmont region (NW ITALY). Abstracts Book of
11
12 183 DAMES 2014: 4th International Conference on Data Analysis and Modeling in Earth Sciences,
13
14 184 Milano 6-8th October 2014
15
16
17 185
18
19 186 Barbero D, De Luca DA, Forno MG, Lasagna M (2016) Preliminary results on temperature
20
21 187 distribution in the Quaternary fluvial and outwash deposits of the Piedmont Po Plain (NW Italy):
22
23 188 a statistical approach. Rend Online Soc Geol It, 41:272-275
24
25
26 189
27
28 190 Bayer P, Rivera JA, Schweizer D, Schärli U, Blum P (2016) Extracting past atmospheric warming
29
30 191 and urban heating effects from borehole temperature profiles. Geothermics 64:289-299. doi:
31
32 192 <http://dx.doi.org/10.1016/j.geothermics.2016.06.011>
33
34
35 193
36
37 194 Benz SA, Bayer P, Menberg K, Jung S, Blum P (2015) Spatial resolution of anthropogenic heat
38
39 195 fluxes into urban aquifers. Science of The Total Environment 524:427-439
40
41
42 196
43
44 197 Beretta GP, Coppola G, Della Pona L (2014) Solute and heat transport in groundwater similarity:
45
46 198 Model application of a high capacity open-loop heat pump. Geothermics 51:63-70. doi:
47
48 199 <http://dx.doi.org/10.1016/j.geothermics.2013.10.009>
49
50
51 200
52
53 201 Bortolami G, De Luca DA, Filippini G (1988) Caratteristiche geolitologiche e geoidrologiche della
54
55 202 pianura torinese. In: Le acque sotterranee della pianura di Torino. Aspetti e problemi. Provincia
56
57 203 di. Torino, M/SLit, Torino
58
59
60
61
62
63
64
65

1 204
2
3 205 Bortolami G, De Luca DA, Masciocco L, Morelli di Popolo e Ticineto A (2002) Le acque
4
5 206 sotterranee della Pianura di Torino: carta della base dell'acquifero superficiale. Note illustrative.
6
7
8 207 Provincia di Torino, Torino
9
10 208
11
12 209 Bove A, Casaccio D, Destefanis E, De Luca DA, Lasagna M, Masciocco L, Ossella L, Tonussi M
13
14 210 (2005) Idrogeologia della pianura piemontese. Regione Piemonte, Torino
15
16
17 211
18
19 212 Burns ER, Ingebritsen SE, Manga M, Williams CF (2016) Evaluating geothermal and
20
21 213 hydrogeologic controls on regional groundwater temperature distribution. Water Resources
22
23 214 Research 52:1328–1344
24
25
26 215
27
28 216 Debernardi L, De Luca DA, Lasagna M (2008) Correlation between nitrate concentration in
29
30 217 groundwater and parameter affecting aquifer intrinsic vulnerability. Environ Geol 55:539-558.
31
32 218 doi: 10.1007/s00254-007-1006-1
33
34
35 219
36
37 220 De Luca DA, Destefanis E, Forno MG, Lasagna M, Masciocco L (2014) The genesis and the
38
39 221 hydrogeological features of the Turin Po Plain fontanili, typical lowland springs in Northern
40
41 222 Italy. Bull Eng Geol Environ (2014) 73:409–427. doi 10.1007/s10064-013-0527-y
42
43
44 223
45
46 224 European Commission (2007) Italy Renewable energy fact sheet. Available at
47
48 225 https://www.energy.eu/renewables/factsheets/2008_res_sheet_italy_en.pdf. Accessed 20
49
50 226 September 2016
51
52
53 227
54
55 228 European Commission (2015) Italy's Third Progress Report under Directive 2009/28/EC.
56
57 229 Available at <http://ec.europa.eu/energy/node/70>. Accessed 13 April 2016
58
59
60
61
62
63
64
65

1 230
2
3 231 Ferguson G, Woodbury AD (2004) Subsurface heat flow in an urban environment. J Geophys Res,
4
5 232 109:B02402. doi:10.1029/2003JB002715
6
7
8 233
9
10 234 Festa A, Boano P, Irace A, Lucchesi S, Forno MG, Dela Pierre F, Fioraso G, Piana F (2009) Foglio
11
12 235 156 “Torino Est” della Carta Geologica d’Italia alla scala 1:50.000. APAT, Agenzia per la
13
14 236 Protezione dell’Ambiente e per i Servizi Tecnici - Dipartimento Difesa del Suolo, Roma
15
16
17 237
18
19 238 Forno MG, Gregorio L, Vatteroni R (2009) La successione stratigrafica del settore destro del
20
21 239 Conoide di Lanzo e il suo significato per l’utilizzo del territorio. Mem Soc Geogr It 87(I-II):237-
22
23 240 247
24
25
26 241
27
28 242 Garzena D, Fratianni S, Acquaootta F (2014) Considerazioni sull’isola di calore urbana di Torino
29
30 243 attraverso l’analisi dei dati climatici. Geol Amb, 1 suppl:90-97
31
32
33 244
34
35 245 Irace A, Clemente P, Natalicchio M, Ossella L, Trenkwalder S, De Luca D. A, Mosca P, Piana F,
36
37 246 Polino R, Violanti D (2009) Geologia e idrostratigrafia profonda della Pianura Padana
38
39 247 occidentale. La Nuova Lito, Firenze
40
41
42 248
43
44 249 Lasagna M, De Luca DA, Franchino E (2016a) Nitrate contamination of groundwater in the
45
46 250 western Po Plain (Italy): the effects of groundwater and surface water interactions. Environ
47
48 251 Earth Sci 75:240. doi 10.1007/s12665-015-5039-6
49
50
51 252
52
53 253 Lasagna M, De Luca DA, Franchino E (2016b) The role of physical and biological processes in
54
55 254 aquifers and their importance on groundwater vulnerability to nitrate pollution. Environ Earth
56
57 255 Sci 75:961. doi: 10.1007/s12665-016-5768-1
58
59
60
61
62
63
64
65

1 256
2
3 257 Lo Russo S, Taddia G, Cerino Abdin E (2015) Potential of shallow aquifers in the plain sector of
4
5 258 Piemonte region (NW Italy) for groundwater heat pumps diffusion. Rend Online Soc Geol It
6
7
8 259 35:180-183
9
10 260
11
12 261 Menberg K, Bayer P, Zosseder K, Rumohr S, Blum P (2013) Subsurface urban heat islands in
13
14 262 German cities. Sci Total Environ 442:123-133. doi:10.1016/j.scitotenv.2012.10.0437
15
16
17
18 263
19
20
21 264 Oke TR (1995) The heat island characteristics of urban boundary layer: characteristics, causes
22
23 265 and effects. Wind climate in cities. 81-107. Springer Netherlands
24
25
26 266
27
28
29 267 Pasquale V, Verdoya M, Chiozzi P (2011) Groundwater flow analysis using different geothermal
30
31 268 constraints: the case study of Acqui Terme area, northwestern Italy. J Volc Geotherm Res
32
33 269 199:38-46. doi:10.1016/j.jvolgeores.2010.10.003
34
35
36 270
37
38
39 271 Perello P, Marini L, Martinotti G, Hunziker JC (2001) The thermal circuits of the Argentera Massif
40
41 272 (western Alps, Italy) An example of low-enthalpy geothermal resources controlled by Neogene
42
43 273 alpine tectonics. Eclogae geol Helv 94:75-94
44
45
46 274
47
48 275 Rybach L, Eugster WJ (2010) Sustainability aspects of geothermal heat pump operation, with
49
50 276 experience from Switzerland. Geothermics 39:365-369. doi:10.1016/j.geothermics.2010.08.002
51
52 277
53
54
55
56
57
58
59
60
61
62
63
64
65

1 278 Sparacino M, Camussi M, Colombo M, Carella R, Sommaruga C (2007) The world's largest
2
3 279 geothermal district heating using ground water under construction in Milan (Italy)-AEM unified
4
5 280 heat pump project. In: Proc. European Geothermal Congress, Unterhaching, Germany (Vol. 30)
6
7
8 281
9
10 282 Stauffer F, Bayer P, Blum P, Molina-Giraldo N, Kilzenbach W (2013) Thermal use of shallow
11
12 283 subsurface, CRC Press, Boca Raton
13
14 284
15
16 285 Stringari M, Balsotti R, De Luca DA (2010) Le caratteristiche termiche dell'acquifero superficiale
17
18 286 della Regione Piemonte. Acque sotterranee 121:29-42
19
20
21 287
22
23 288 Taniguchi M (1993) Evaluation of vertical groundwater fluxes and thermal properties of
24
25 289 aquifers based on transient temperature-depth profiles. Water Resour Res 29(7):2021-2026
26
27
28 290
29
30 291 Taniguchi M, Shimada J, Tanaka T, Kayane I, Sakura Y, Shimano Y, Dapaah-Siakwan S,
31
32 292 Kawashima S (1999) Disturbances of temperature-depth profiles due to surface climate change
33
34 293 and subsurface water flow: 1. An effect of linear increase in surface temperature caused by
35
36 294 global warming and urbanization in the Tokyo metropolitan area, Japan. Water Resour Res
37
38 295 35(5):1507-1517
39
40
41 296
42
43 297 Taniguchi M, Uemura T, Jago-on K (2007) Combined effects of urbanization and global warming
44
45 298 on subsurface temperature in four Asian cities. Vadose Zone J 6:591-596.
46
47
48 299 doi:10.2136/vzj2006.0094
49
50
51 300
52
53
54 301 Taylor CA, Stefan HG (2009) Shallow groundwater temperature response to climate change and
55
56 302 urbanization. J Hydrol 375 601-612. doi: 10.1016/j.jhydrol.2009.07.009
57
58
59
60
61
62
63
64
65

1 303
2
3 304 Voogt J (2004) Urban heat islands: hotter cities.
4
5 305 <http://www.actionbioscience.org/environment/voogt.html> (last accessed: 19/01/2017)
6
7 306
8
9
10 307 Zhu K, Blum P, Ferguson G, Balke KD, Bayer P (2010) The geothermal potential of urban heat
11
12 308 islands. Environ Res Lett 5:044002. doi:10.1088/1748-9326/5/4/044002
13
14 309
15
16 310
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

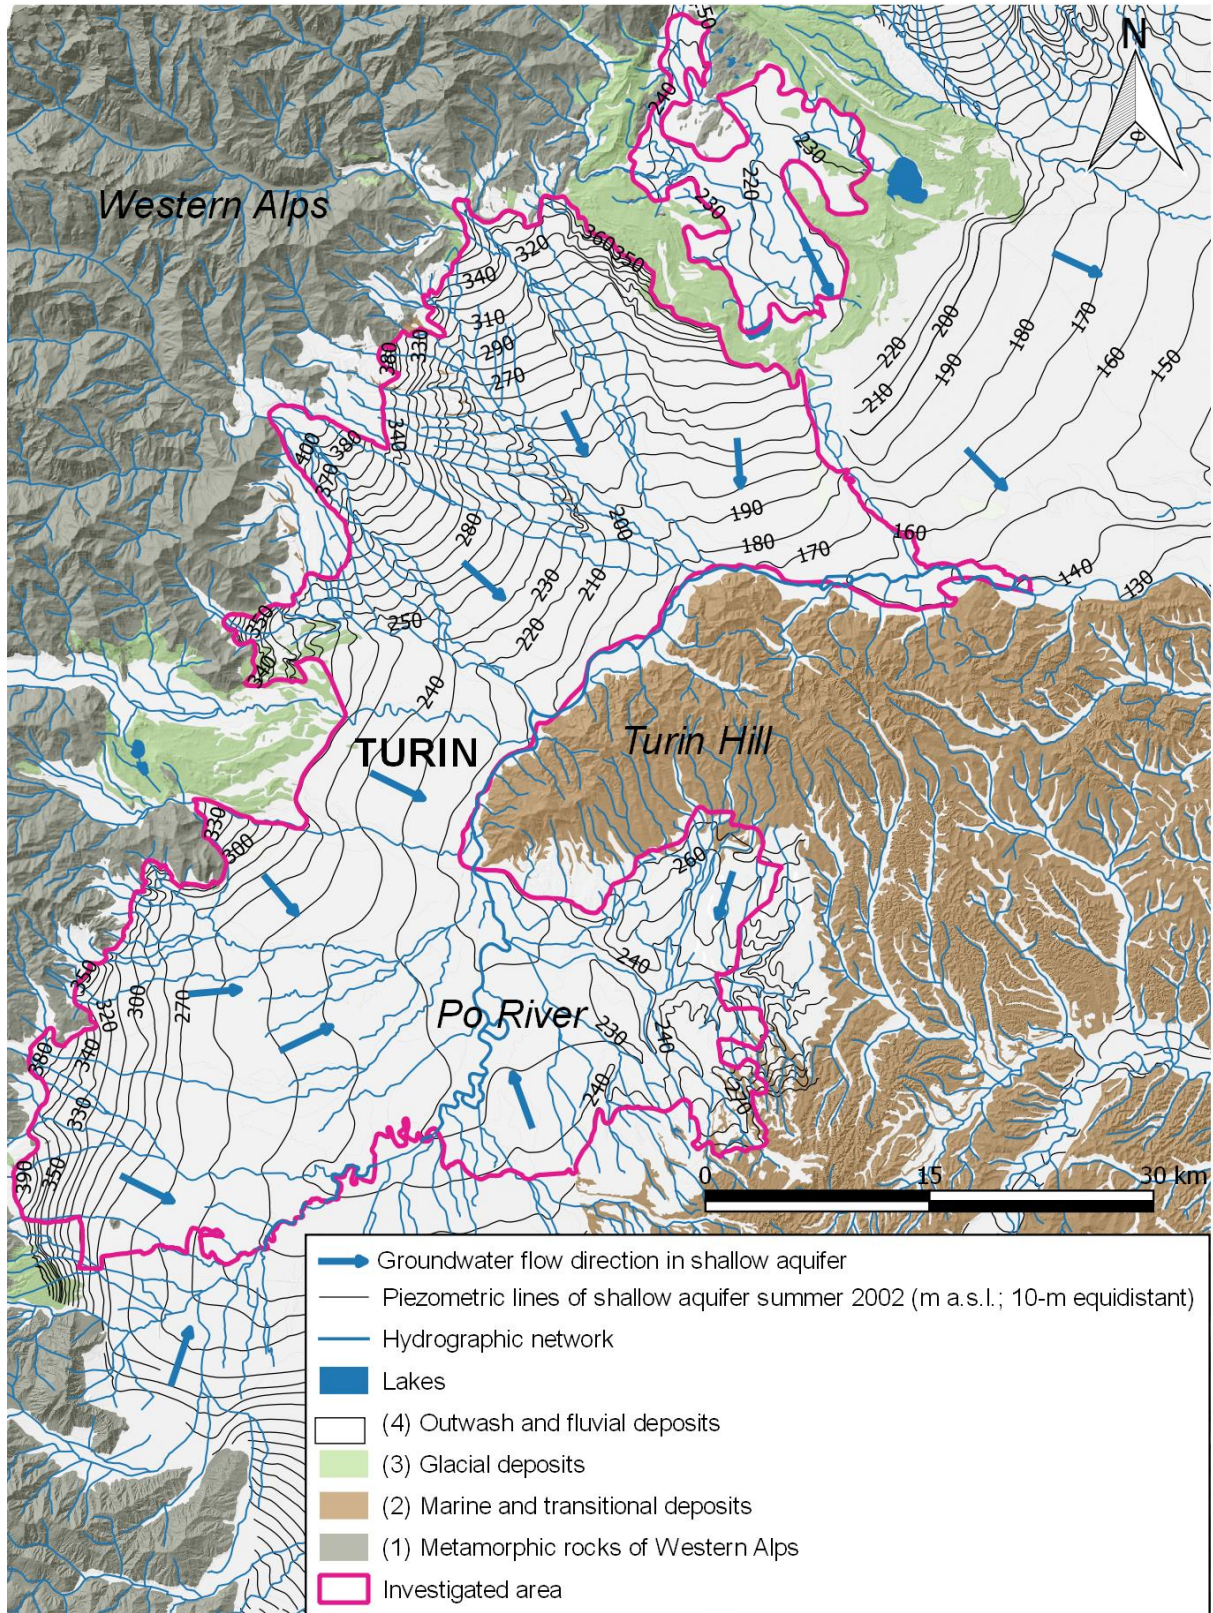


Fig. 2 Geo-hydrological map of the area investigated.

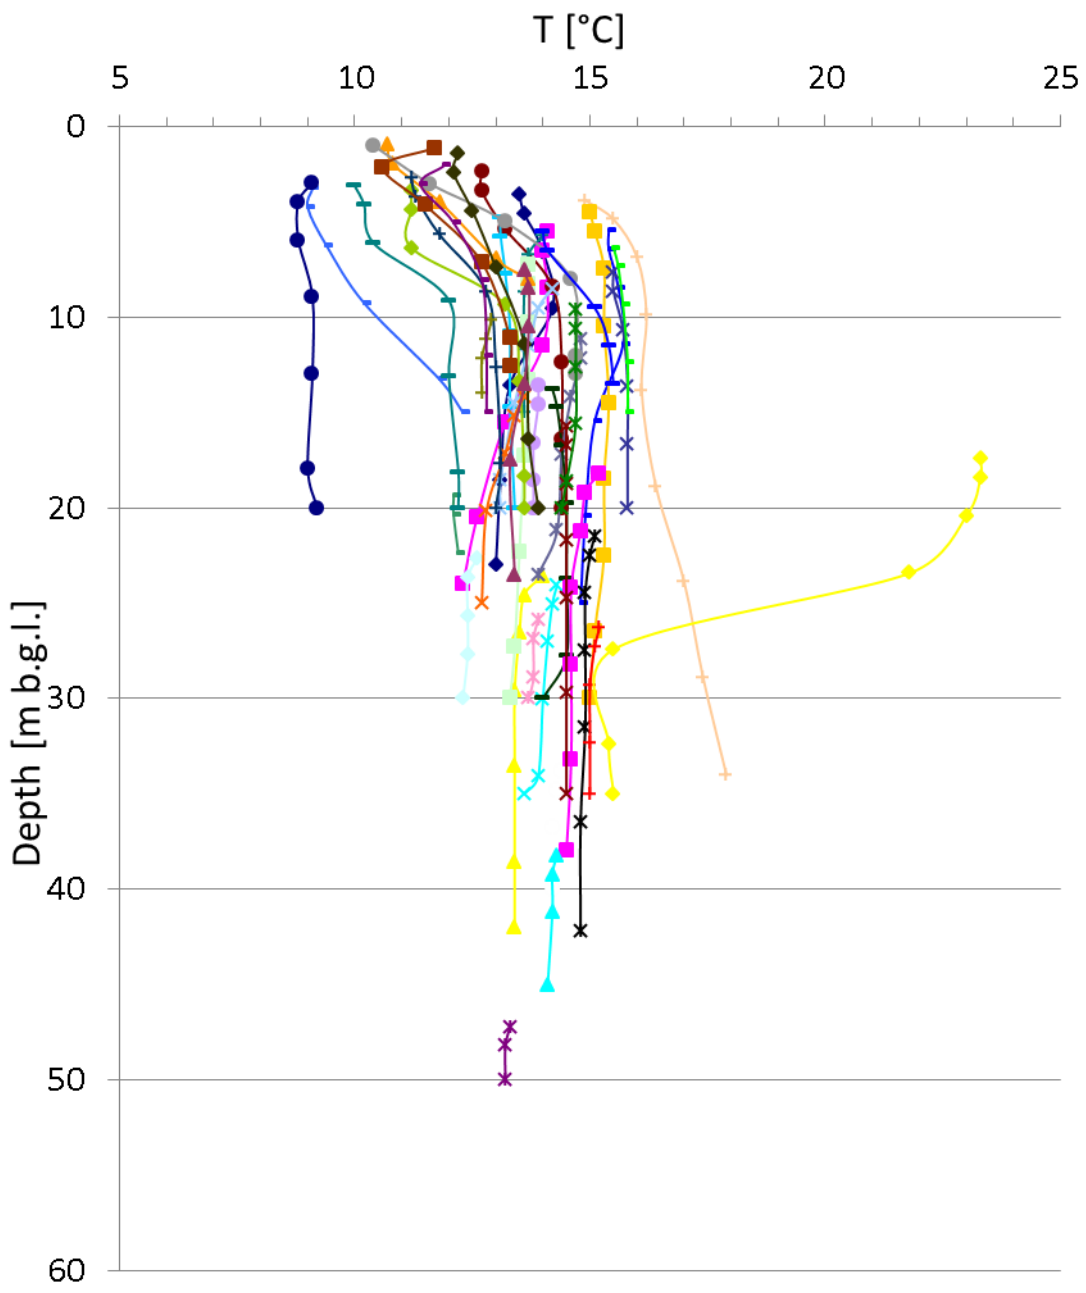


Fig. 3 Temperature logs recorded in the spring of 2014.

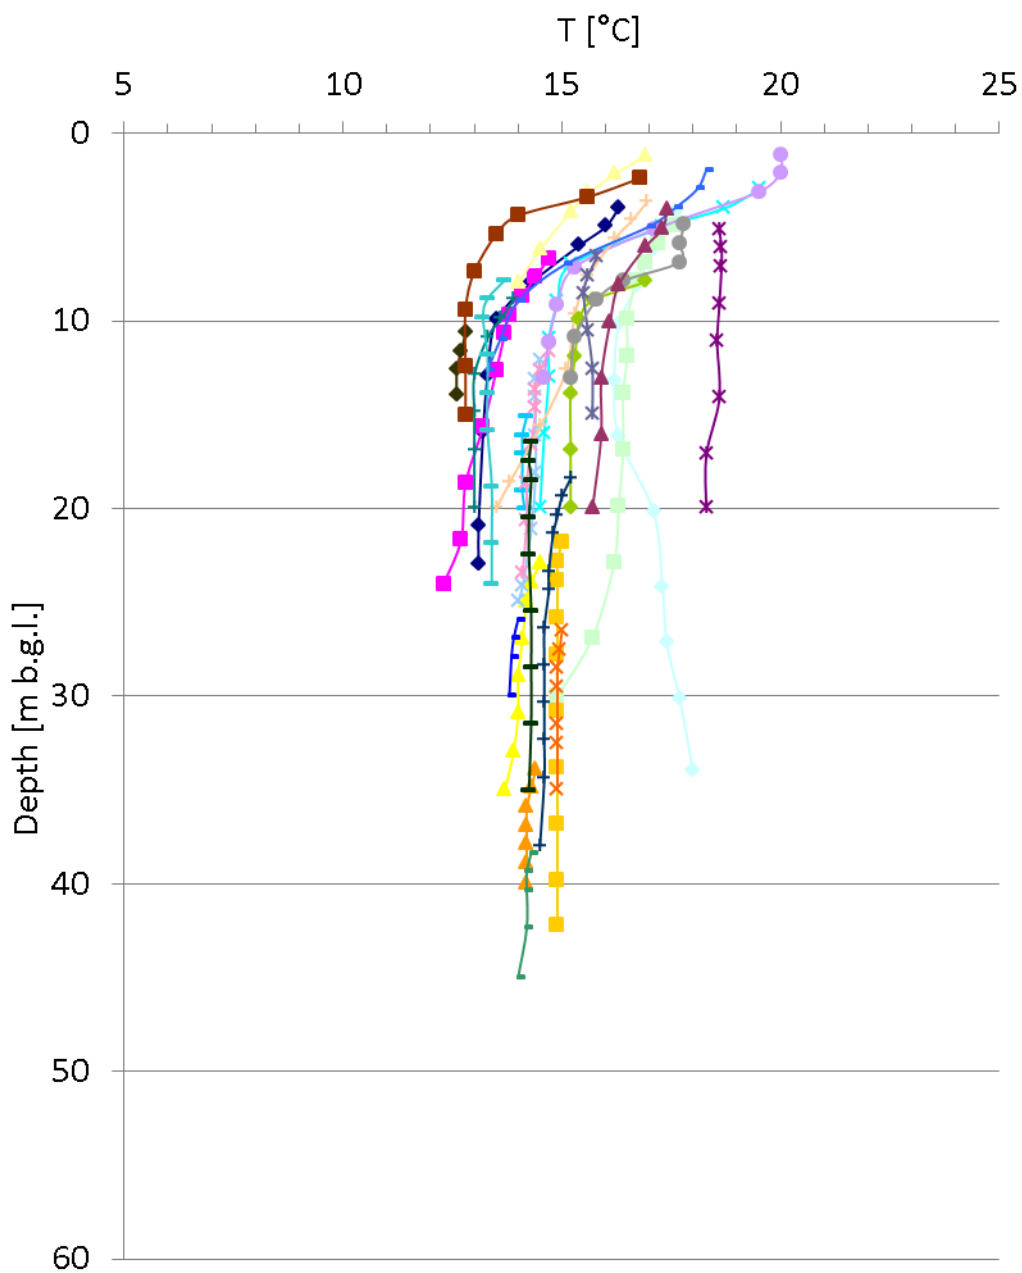


Fig. 4 Temperature logs recorded in the autumn of 2014.

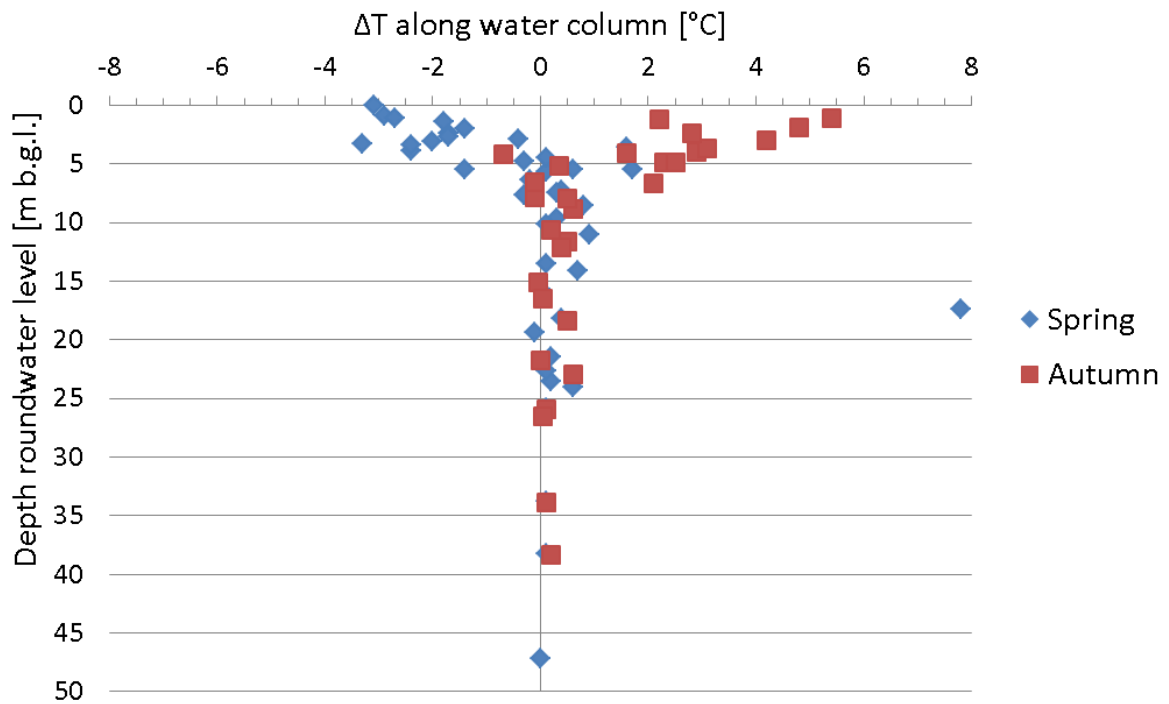


Fig. 5 The groundwater temperature correlation with temperature difference along water columns in the wells.

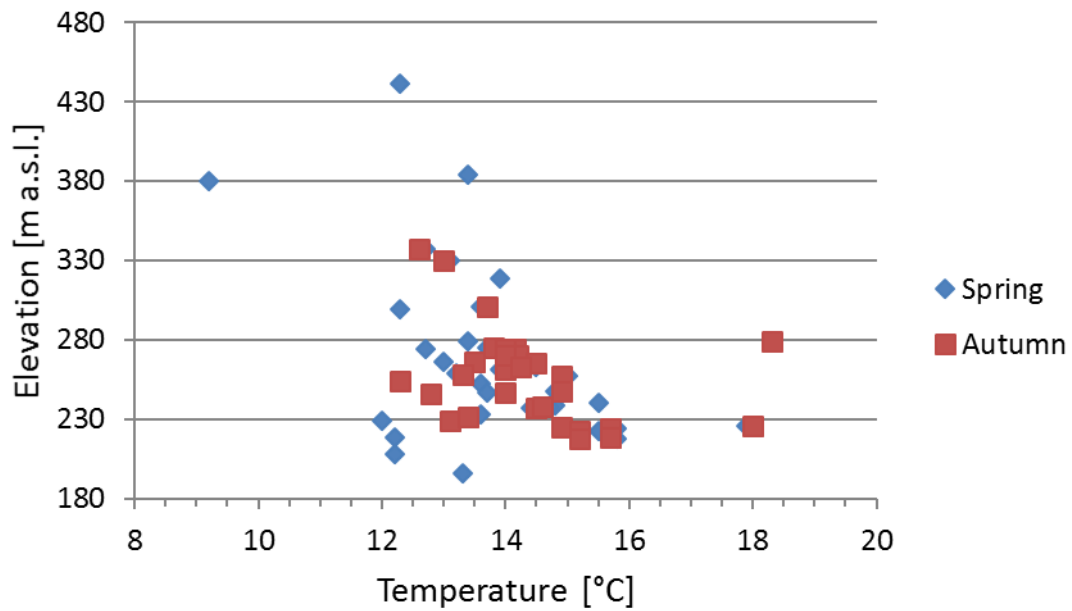


Fig. 6 The groundwater temperature correlation with well elevation.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47 329
48
49 330
50
51 331
52
53
54
55
56
57
58
59
60
61
62
63
64
65

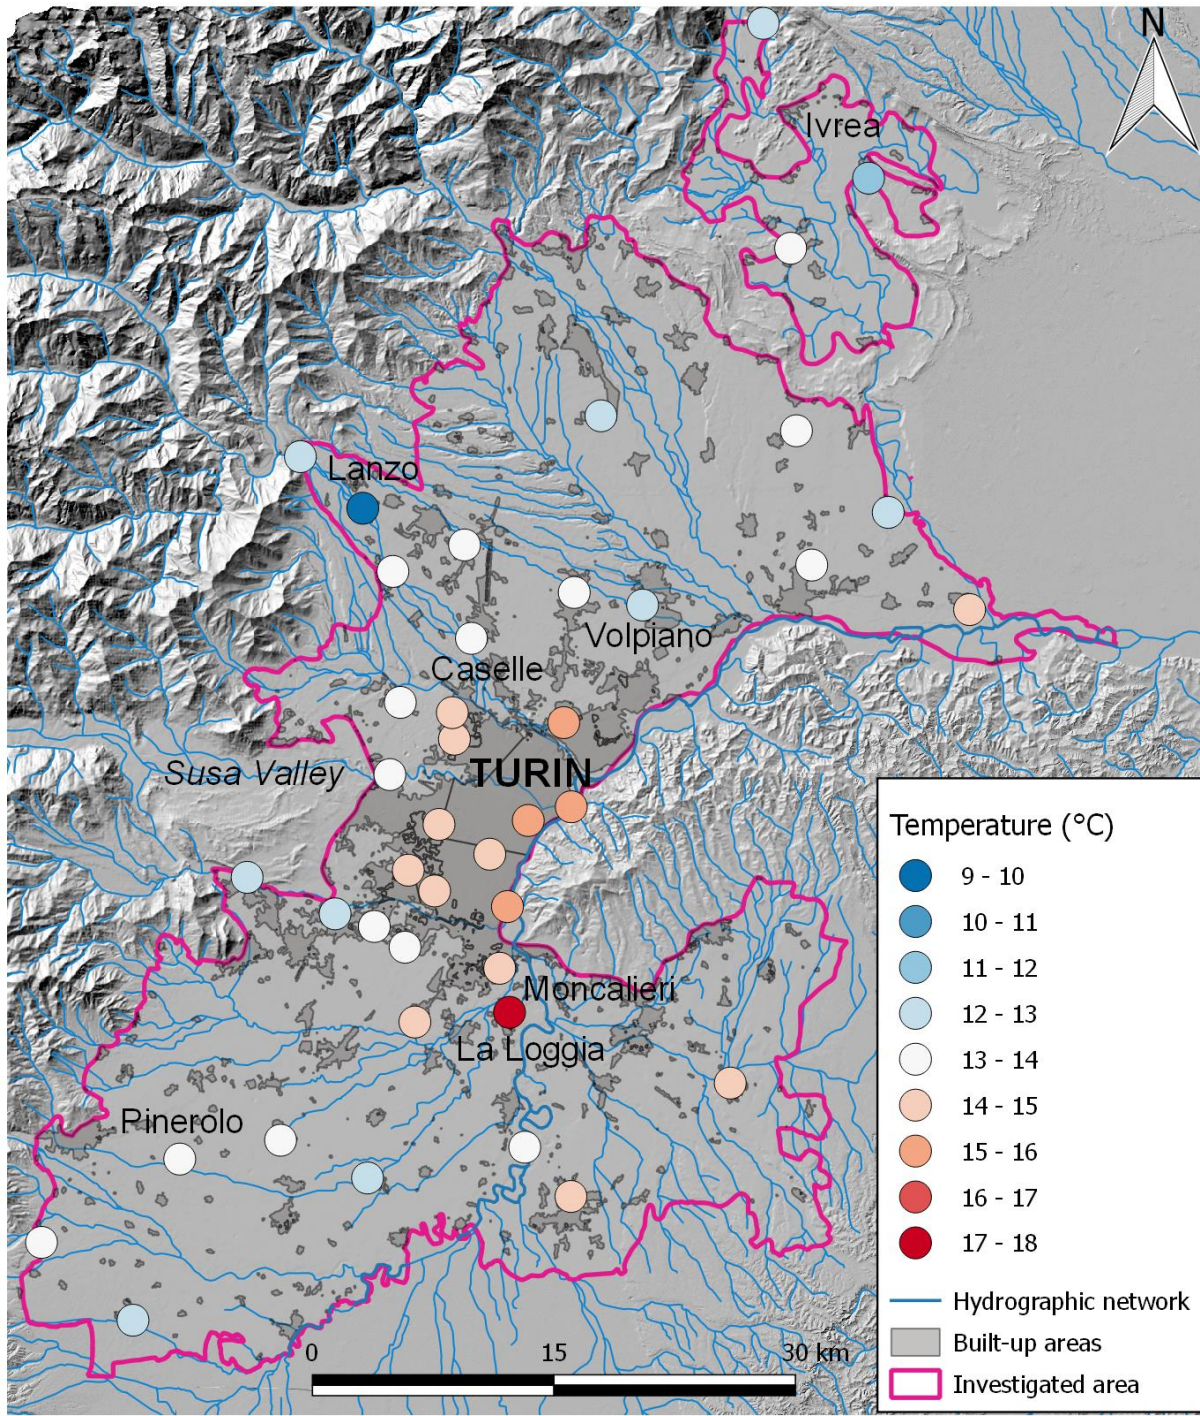


Fig. 7 Temperatures in the shallow aquifer in the spring of 2014. The plotted values refer to the well bottom temperatures.

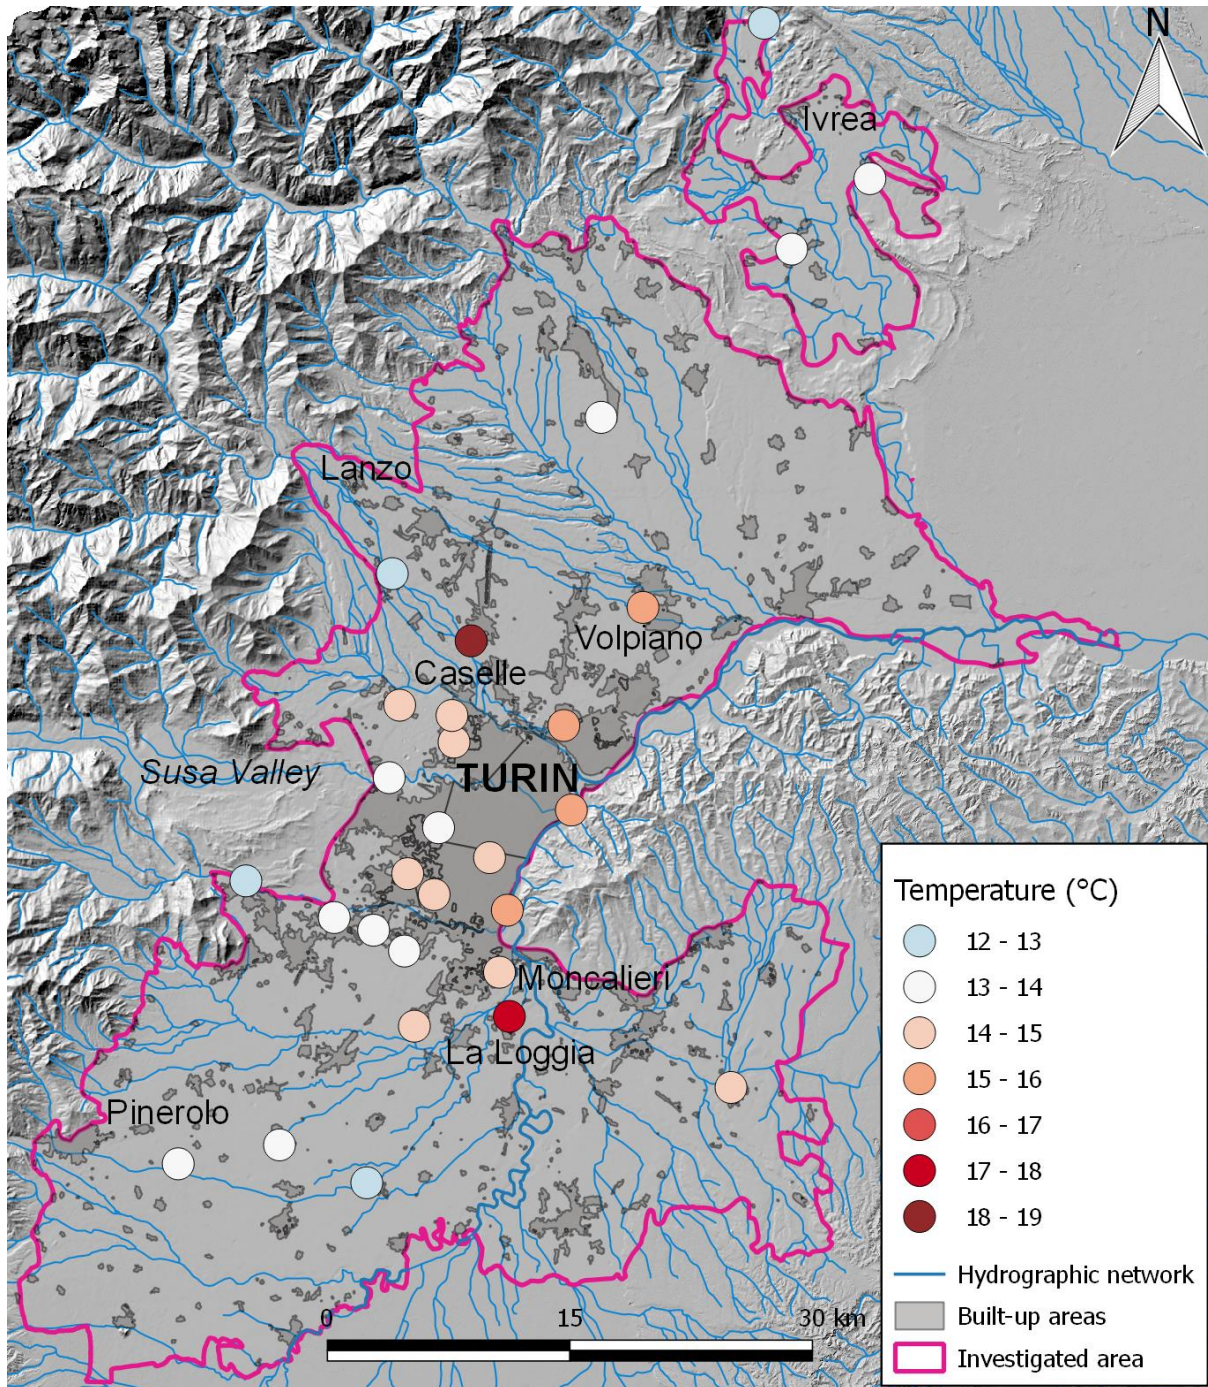


Fig. 8 Temperatures in the shallow aquifer in the autumn of 2014. The plotted values refer to the well bottom temperatures.