

Kinetic-Controlled Hydrodynamics for Traffic Models with Driver-Assist Vehicles

Original

Kinetic-Controlled Hydrodynamics for Traffic Models with Driver-Assist Vehicles / Tosin, Andrea; Zanella, Mattia. - In: MULTISCALE MODELING & SIMULATION. - ISSN 1540-3459. - 17:2(2019), pp. 716-749. [10.1137/18M1203766]

Availability:

This version is available at: 11583/2732852 since: 2020-04-28T15:48:37Z

Publisher:

SIAM

Published

DOI:10.1137/18M1203766

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

KINETIC-CONTROLLED HYDRODYNAMICS FOR TRAFFIC MODELS WITH DRIVER-ASSIST VEHICLES*

ANDREA TOSIN[†] AND MATTIA ZANELLA[†]

Abstract. We develop a hierarchical description of traffic flow control by means of driver-assist vehicles aimed at the mitigation of speed-dependent road risk factors. Microscopic feedback control strategies are designed at the level of vehicle-to-vehicle interactions and then upscaled to the global flow via a kinetic approach based on a Boltzmann-type equation. Then first and second order hydrodynamic traffic models, which naturally embed the microscopic control strategies, are consistently derived from the kinetic-controlled framework via suitable closure methods. Several numerical examples illustrate the effectiveness of such a hierarchical approach at the various scales.

Key words. kinetic modeling, binary control, hydrodynamic equations, road risk mitigation

AMS subject classifications. 35Q20, 35Q70, 35Q84, 35Q93, 49J20, 90B20

DOI. 10.1137/18M1203766

1. Introduction. In the last two decades, the legacy of the classical kinetic theory has emerged as a sound mathematical paradigm for the description of collective phenomena involving a large number of agents, such as socioeconomic [42, 46] and traffic [2, 24, 26, 32, 33, 35, 38, 50, 60] dynamics. In particular, the mathematical modeling of vehicular traffic by methods of the kinetic theory has a quite long history, dating back to the pioneering works [47, 49]. One of the main reasons for such success is the multiscale flexibility of the kinetic equations, which organically bridge the gap between the microscopic, often unobservable, scale of the individual agents, where elementary fundamental dynamics take place, and the macroscopic scale of the observable collective manifestations. This confers on the kinetic approach a great explanatory power about the way in which multiagent systems behave. At the same time, the possibility to derive hydrodynamic descriptions of those systems consistent with microscopic interaction dynamics is of paramount importance for designing fast numerical methods, which possibly help decision-making tasks.

Euler or Navier–Stokes-type equations are classically obtained from collisional kinetic equations by means of suitable closures based on the relaxation of the system towards its equilibria. For instance, in the context of rarefied gas dynamics, they are derived taking advantage of the microscopic conservations of mass, momentum, and energy in the binary collisions between gas molecules, which allow one to identify the asymptotic distribution (Maxwellian); see, e.g., [7, 14]. The derivation of hydrodynamic equations in the nonclassical setting of multiagent systems is instead a currently underexplored topic due to the general lack of information about the asymptotic sta-

*Received by the editors July 30, 2018; accepted for publication (in revised form) March 21, 2019; published electronically May 9, 2019.

<http://www.siam.org/journals/mms/17-2/M120376.html>

Funding: This research was partially supported by the Italian Ministry of Education, University and Research (MIUR) through the “Dipartimenti di Eccellenza” Program (2018-2022), Department of Mathematical Sciences “G. L. Lagrange,” Politecnico di Torino (CUP: E11G18000350001), and through the PRIN 2017 project (2017KKJP4X) “Innovative numerical methods for evolutionary partial differential equations and applications.” This work is also part of the activities of the starting grant “Attracting Excellent Professors” funded by “Compagnia di San Paolo” (Torino) and promoted by Politecnico di Torino.

[†]Department of Mathematical Sciences “G. L. Lagrange,” Politecnico di Torino, Torino 10129, Italy (andrea.tosin@polito.it, mattia.zanella@polito.it).

tistical trends of the system. Some recent works in this direction are [13, 22, 30]. In this work, we focus on the case of vehicular traffic, in which only the total mass of the vehicles is conserved by the microscopic interactions.

In recent times, the challenge of vehicular automation has posed new and exciting questions about traffic management and governance, which in turn has boosted broad developments in the technology for intelligent intersections and driver-assist and self-driving vehicles [52, 55]. One of the main goals of such technologies is the enhancement of driver safety through the mitigation of road risk factors, which, as reported in [61], are largely linked to the heterogeneity of individual driving behavior. Among others, here we recall in particular those related to the variability of the speed in the traffic flow: large differences in the speeds of the vehicles within the traffic stream appear to be responsible for a sensible increase in the crash risk. The idea which is progressively gaining ground in this context is to exploit the possibility to *control* a few automated vehicles in order to induce a regularization of the whole traffic flow [54], which should then mitigate the aforesaid risk factors.

The control of multiagent systems has been recently investigated as a natural follow-up issue in the description and modeling of their self-organization ability. Contributions are available for mean field and kinetic equations [3, 4, 8, 25] as well as for macroscopic conservation laws [6, 15, 16]. In this paper, we address the *instantaneous* control of driver-assist vehicles associated with the minimization of some cost functionals recently proposed in [57] which provide measures of the driving risk in terms of the speed difference between pairs of vehicles. We observe that an instantaneous control is consistent with the instantaneous nature of the binary interactions between pairs of vehicles, which characterize the kinetic approach to vehicular traffic exactly as the collisions between pairs of molecules in the classical Boltzmann equation characterize the dynamics of a gas. In particular, our instantaneous control is active each time a driver-assist vehicle interacts with a leading vehicle. Interestingly, this leads mathematically to a *binary* control problem, which can be solved explicitly. The result is a *feedback* control given in terms of the microscopic states of the interacting vehicles, which can be embedded in a Boltzmann-type kinetic description. Furthermore, our kinetic approach allows us to take into account the so-called *penetration rate* at the aggregate level, which corresponds to the probability that a randomly chosen vehicle is equipped with driver-assist technologies. Therefore, we may globally consider also the realistic scenario in which only a small percentage of vehicles is actually controlled.

The main novelty that we propose in this paper is the organic multiscale derivation of aggregate kinetic and hydrodynamic equations of traffic flow from the closed-loop microscopic description of an instantaneous control representing the action of driver-assist vehicles. Such a derivation is grounded in the sound mathematical-physical principles of statistical mechanics, which has constantly served as a reference paradigm for the multiscale description of numerous physical phenomena. In this respect, it is worth pointing out that most of the current literature on driver-assist/autonomous vehicles is concerned with either purely microscopic models [44, 58] or macroscopic models [18, 19] in which, however, the aspects of vehicle automation are heuristically included at the aggregate level by means of additional terms postulated in the flux equations. Our multiscale derivation stresses instead the actual “bottom-up” role played by the automated vehicles in the control of the traffic stream. Indeed, it makes it clear that what is being controlled are neither the kinetic nor the hydrodynamic equations themselves, which would correspond to a “top-down” control strategy, but rather the microscopic interactions ruling the speed changes of pairs of vehicles.

In more detail, the paper is organized as follows. In section 2, we introduce a space homogeneous kinetic model of human-manned traffic able to explain how fundamental diagrams and statistical speed distributions consistent with the empirical observations are generated by simple microscopic interactions between pairs of vehicles. The analysis of this case provides insights into the normal flow of uncontrolled vehicles, thereby constituting the reference for all the subsequent developments. In section 3, we design and solve the binary control problem for driver-assist vehicles, taking into account their penetration rate into the traffic stream, and we repeat the space homogeneous kinetic analysis so as to assess the effectiveness of the control strategies in reducing the road risk with respect to the previous case of fully human-manned vehicles. In section 4, we consider a space inhomogeneous kinetic description, whence we consistently derive first and second order hydrodynamic traffic equations with embedded microscopic control via the local equilibrium closure and the monokinetic assumption, respectively. In section 5, we extensively investigate the solutions produced by the kinetic and hydrodynamic models by means of numerical simulations specifically focused on the collective impact of the control strategies and on the influence of the penetration rate of the driver-assist technology. Finally, in section 6, we summarize the highlights of the work and draw some conclusions.

2. Homogeneous kinetic modeling of traffic flow. In this section, we study interactive vehicle dynamics which explain how typical speed distributions and traffic diagrams arise in stationary flow conditions. This will be the basis for constructing later control strategies for driver-assist vehicles aimed at making traffic flow more uniform by essentially reducing the speed variance among the vehicles.

The literature nowadays accounts for a number of empirical and theoretical investigations of the so-called *speed* and *fundamental diagrams* of traffic. These are relationships linking the mean speed V and the macroscopic flux ρV of the vehicles to the traffic density ρ in stationary homogeneous conditions along the main longitudinal direction of the flow. From the empirical point of view, the common observation to all measured traffic diagrams is that the mean speed is nearly constant and close to the maximum speed in the free flow regime, i.e., for ρ sufficiently small; conversely, it decreases steeply to zero in the congested flow regime, i.e., for ρ approaching the maximum possible density $\rho_{\max} > 0$. In turn, the macroscopic flux grows almost linearly with the density in the free flow regime, and then it decreases nonlinearly to zero in the congested flow regime. The two traffic regimes are separated by a critical value of ρ , called the density at capacity, where the macroscopic flux is maximum; see, e.g., [39]. A further intermediate regime might exist, called the synchronized traffic regime, in which vehicles tend to travel all at the same speed; cf. [37]. From the theoretical point of view, a few mathematical models have been able to explain the emergence of such large scale characteristics of traffic from a microscopic description of vehicle interactions [23, 29]. In some cases, models have also successfully investigated the origin of the data scattering typically seen in measured traffic diagrams [50, 60]. Finally, very recently, diagrams in the transversal direction of the flow produced by the lateral displacements of lane-changing vehicles have started to be measured and their origin investigated by means of statistical physics tools [34].

Far less studied is the statistical distribution of the microscopic speeds of the vehicles in similar stationary homogeneous conditions. This information is nonetheless fundamental for assessing traffic features correlated with the road safety, such as, e.g., the dispersion of the speeds of the vehicles, which has been reported as one of the major causes of the increase in crash risk [48, 61]. Moreover, speed distribution

at equilibrium may play a role analogous to that of Maxwellian distribution in the kinetic theory of gases for the theoretical derivation of macroscopic hydrodynamic traffic models consistent with microscopic models of vehicle interactions. A typical claim in the literature is that the speed in highway-like traffic can be approximated by a Gaussian distribution [9]. Some studies suggest in particular that this may be valid in free and congested traffic regimes, while in the intermediate regime the approximation by means of a log-normal distribution performs better [1]. Other studies have found that bimodal distributions may be more appropriate to describe the speeds in a mixture of different categories of vehicles [21]. A drawback of the Gaussian distribution is that it is not compactly supported, whereas vehicle speeds normally vary in an interval of the form $[0, v_{\max}]$, where $v_{\max} > 0$ is some maximum speed. Consequently, if, on one hand, the Gaussian curve can be a healthy empirical approximation, on the other hand more accurate distributions need to be sought from the theoretical point of view. In [41, 43] the authors find a good agreement between empirical traffic speed curves and beta distributions. In the following we demonstrate that beta distributions can indeed be obtained as equilibrium distributions of a kinetic traffic model, starting from simple and very reasonable assumptions on the interactions between pairs of vehicles. Interestingly, our approach allows us to recover the relevant parameters of such distributions in terms of the traffic density ρ . This provides organically average statistical quantities parametrized by ρ , such as the mean speed and the macroscopic flux, which turn out to compare qualitatively well with the experimental diagrams of traffic described above.

2.1. Boltzmann-type model and traffic diagrams. Inspired by classical methods of kinetic theory, we introduce the distribution function $f = f(t, v)$ such that $f(t, v) dv$ is the fraction of vehicles which, at time $t > 0$, are traveling at a speed between v and $v + dv$. We understand all variables as dimensionless, and in particular we set $v, \rho \in [0, 1]$, meaning that we have normalized the speed and the density by their maximum values v_{\max}, ρ_{\max} , respectively.

In the Boltzmann-type kinetic approach, one assumes that the time evolution of f is determined by microscopic stochastic processes consisting in binary (i.e., pairwise) interactions responsible for speed changes. If v, v_* are the preinteraction speeds of any two representative vehicles and v', v'_* their postinteraction speeds, a binary interaction takes the form of a rule expressing v', v'_* as functions of v, v_* :

$$(1) \quad \begin{aligned} v' &= v + \gamma I(v, v_*; \rho) + D(v; \rho)\eta, \\ v'_* &= v_*. \end{aligned}$$

Consistently with a microscopic follow-the-leader approach [28], we assume that a vehicle of the pair, in this case the one with speed v_* , plays the role of the leading vehicle. Since, in vehicular traffic, interactions are mainly anisotropic, and particularly frontal, the leading vehicle is unaffected by the rear vehicle, which here is the one with speed v . In contrast, the rear vehicle may change speed according to the interaction function $I(v, v_*; \rho)$, which may depend on the traffic density ρ because traffic congestion may affect acceleration and deceleration. In addition to that, in the equation for v' the constant $\gamma > 0$ is a proportionality parameter and $\eta \in \mathbb{R}$ is a centered random variable, i.e., one with mean $\langle \eta \rangle = 0$, modeling stochastic fluctuations of the postinteraction speed v' . The variance of η is set to $\langle \eta^2 \rangle =: \sigma^2 > 0$, while the intensity of the stochastic fluctuation is tuned by the function $D(v; \rho) \geq 0$ representing the local relevance of the diffusion.

In order to write a Boltzmann-type equation ruling the evolution of f we argue as

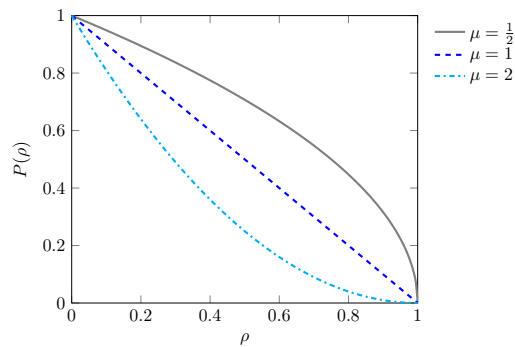


FIG. 1. The probability of accelerating $P(\rho)$ given in (4) plotted for various μ .

in [46]. If $\varphi = \varphi(v)$ is any observable quantity which can be expressed as a function of the speed v , then the time variation of the expectation of $\varphi(v)$ is due, on average, to the variation of φ in a binary interaction. In formulas this writes as

$$(2) \quad \begin{aligned} \frac{d}{dt} \int_0^1 \varphi(v) f(t, v) dv \\ = \frac{1}{2} \left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v) + \varphi(v'_*) - \varphi(v_*)) f(t, v) f(t, v_*) dv dv_* \right\rangle, \end{aligned}$$

where the coefficient $\frac{1}{2}$ at the right-hand side is used to average the variations $\varphi(v') - \varphi(v)$ and $\varphi(v'_*) - \varphi(v_*)$ in a binary interaction (notice from (1) that actually $\varphi(v'_*) - \varphi(v_*) = 0$) and $\langle \cdot \rangle$ denotes the expectation with respect to the probability distribution of η .

We discuss now in more detail the structure of the functions I , D in (1). The interaction function I has often been modeled in the literature by separately considering the cases $v \leq v_*$, which would induce an acceleration of the v -vehicle, and $v > v_*$, which instead would induce a deceleration; see, e.g., [20, 33, 50]. Here we propose a simpler form, which has the merit of making the whole model more tractable analytically while giving rise to many interesting physical consequences. Specifically, we set

$$(3) \quad I(v, v_*; \rho) := P(\rho)(1 - v) + (1 - P(\rho))(P(\rho)v_* - v),$$

where

$$(4) \quad P(\rho) := (1 - \rho)^\mu, \quad \mu > 0,$$

is the probability of accelerating; see Figure 1. This interaction function says that in light traffic, i.e., for ρ small, the v -vehicle basically relaxes its speed towards the maximum possible one; cf. the first term on the right-hand side of (3). When ρ increases, the v -vehicle starts to adapt its speed also to a fraction $P(\rho)$ of the speed v_* of the leading vehicle; cf. the second term on the right-hand side of (3). The fraction is expressed by the function $P(\rho)$ itself in such a way that the more congested the traffic the smaller the target speed $P(\rho)v_*$ towards which the v -vehicle relaxes. In heavy traffic, i.e., for ρ large, this mechanism typically leads to the v -vehicle decelerating.

The choice of the function D , instead, has to be made, taking into account the necessity of guaranteeing that the postinteraction speed v' in (1) complies with the bounds $0 \leq v' \leq 1$. Concerning this, we establish first of all the following result.

PROPOSITION 2.1. *In (1), let $\gamma \in [0, 1]$ and $I(v, v_*; \rho)$ be given by (3). If there exists $c > 0$ such that*

$$\begin{cases} |\eta| \leq c(1 - \gamma), \\ cD(v; \rho) \leq \min\{v, 1 - v\} \quad \forall v, \rho \in [0, 1], \end{cases}$$

then $v' \in [0, 1]$ for every pair of preinteraction speeds $v, v_* \in [0, 1]$ and every $\rho \in [0, 1]$.

Proof. To prove that $v' \geq 0$ we observe that, since $\gamma P(\rho), P(\rho)v_* \geq 0$, it is enough to show that $v - \gamma(P(\rho)v + (1 - P(\rho))v) + D(v; \rho)\eta \geq 0$, i.e., that $(1 - \gamma)v + D(v; \rho)\eta \geq 0$. Since, by assumption, $\eta \geq c(\gamma - 1)$, with $\gamma - 1 \leq 0$, and $D(v; \rho) \leq \frac{v}{c}$, we discover that $(1 - \gamma)v + D(v; \rho)\eta \geq (1 - \gamma)v + \frac{v}{c}c(\gamma - 1) = 0$, and we have the result.

Conversely, to prove that $v' \leq 1$ we observe that, since $P(\rho)v_* \leq 1$, it is sufficient to establish that $v + \gamma(P(\rho)(1 - v) + (1 - P(\rho))(1 - v)) + D(v; \rho)\eta \leq 1$, i.e., that $(\gamma - 1)(1 - v) + D(v; \rho)\eta \leq 0$. But $(\gamma - 1)(1 - v) + D(v; \rho)\eta \leq (\gamma - 1)(1 - v) + \frac{1-v}{c}c(1 - \gamma) = 0$; thus we are done. \square

Conditions posed by Proposition 2.1 imply that η is a compactly supported random variable in the interval $[-c(1 - \gamma), c(1 - \gamma)]$, which is in particular compatible with the fact that $\langle \eta \rangle = 0$, and that $D(0; \rho) = D(1; \rho) = 0$ for all $\rho \in [0, 1]$. We defer to section 2.2 a more specific choice of D .

For the moment we observe that by choosing $\varphi(v) = 1$ in (2) we obtain

$$\frac{d}{dt} \int_0^1 f(t, v) dv = 0.$$

This implies that if the initial speed distribution $f_0(v) := f(0, v)$ fulfills the normalization condition $\int_0^1 f_0(v) dv = 1$, then f is a probability density function for all $t > 0$. Choosing instead $\varphi(v) = v$ in (2) and using the interaction rules (1), (3), we discover that the mean speed

$$V(t) := \int_0^1 v f(t, v) dv$$

satisfies the equation

$$(5) \quad \frac{dV}{dt} = \frac{\gamma}{2} \{P(\rho) [1 + (1 - P(\rho))V] - V\},$$

whose solution writes as

$$(6) \quad V(t) = V_0 e^{-\frac{\gamma}{2}[P(\rho)+(1-P(\rho))^2]t} + \frac{P(\rho)}{P(\rho) + (1 - P(\rho))^2} \left(1 - e^{-\frac{\gamma}{2}[P(\rho)+(1-P(\rho))^2]t}\right)$$

with $V_0 := \int_0^1 v f_0(v) dv$ the mean speed at the initial time. For $t \rightarrow +\infty$, V approaches exponentially the asymptotic value

$$(7) \quad V_\infty(\rho) := \frac{P(\rho)}{P(\rho) + (1 - P(\rho))^2},$$

which defines the speed diagram of traffic. The mapping $\rho \mapsto \rho V_\infty(\rho)$ defines instead the fundamental diagram. Figure 2 shows that these curves agree well with the qualitative empirical characteristics of the traffic diagrams discussed at the beginning of section 2, especially for $\mu > 1$ in the expression (4) of $P(\rho)$.

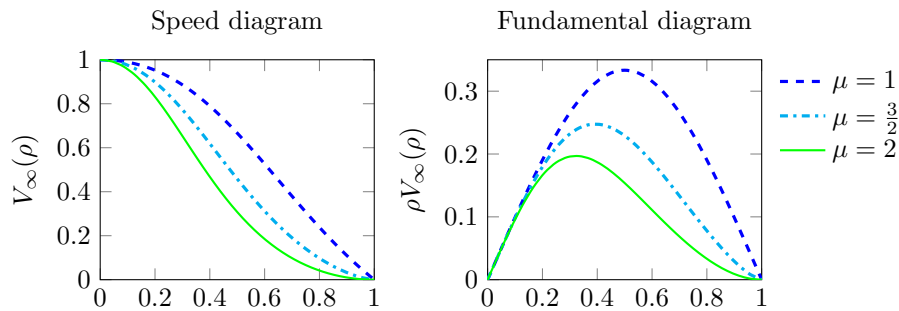


FIG. 2. Traffic diagrams plotted from (7) with different choices of the exponent μ in (4).

2.2. Asymptotic speed distribution. In order to compute the equilibrium speed distribution in homogeneous conditions, one should find the asymptotic solutions of the Boltzmann-type equation (2), namely the probability density functions $f_\infty = f_\infty(v)$ independent of t which make the right-hand side of (2) vanish. They correspond to speed distributions which create an equilibrium of the binary interactions.

Unfortunately, although (2) is suited to investigate the statistical moments of the distribution function f , it is in general not easy to obtain from it a pointwise description of f itself and of its asymptotic trends. The reason is that (2) is a high-resolution equation in time, i.e., one which catches the detail of every single binary interaction. The large-time trends of f , however, may be successfully recovered by means of asymptotic procedures, which transform (2) in simpler kinetic equations whose solutions approximate well the steady profiles of the asymptotic distributions of (2). One such procedure is the *quasi-invariant interaction limit* introduced in [56], which is reminiscent of the *grazing collision limit* of the classical kinetic theory of gases [59] and which leads to *Fokker-Planck-type* asymptotic equations. Here is how the procedure works.

Assume that we consider the binary interactions (1) on a time scale τ much larger than their characteristic time scale t . Then on the τ -scale the contribution of a single interaction (1) is small (i.e., interactions are *quasi-invariant*), but, at the same time, interactions are quite frequent. This can be formalized by defining $\tau := \frac{\gamma}{2}t$ and then assuming that γ and σ^2 (the variance of η) are small in (1). Notice that if the characteristic frequency of a binary interaction is $1/t = O(1)$ in the t -scale, then it becomes $1/\tau = O(1/\gamma) \gg 1$ in the τ -scale.

Let us introduce now the scaled distribution function $\tilde{f}(\tau, v) := f(2\tau/\gamma, v)$. We observe that, for every fixed $\tau > 0$, γ small implies $t = 2\tau/\gamma$ large; hence the limit $\gamma \rightarrow 0^+$ describes the large-time trend of f . On the other hand, since for $\tau \rightarrow +\infty$ it results also that $t \rightarrow +\infty$, the asymptotic trend of \tilde{f} approximates well that of f . The idea is then to find from (2) an equation satisfied by \tilde{f} in the quasi-invariant interaction limit $\gamma, \sigma^2 \rightarrow 0^+$, whence to study the asymptotic trend of \tilde{f} .

Noting that $\partial_\tau \tilde{f} = \frac{2}{\gamma} \partial_t f$, we see that on the τ -scale (2) becomes

$$(8) \quad \frac{d}{d\tau} \int_0^1 \varphi(v) \tilde{f}(\tau, v) dv = \frac{1}{\gamma} \left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) \tilde{f}(\tau, v) \tilde{f}(\tau, v_*) dv dv_* \right\rangle,$$

where we have already taken into account that $\varphi(v'_*) = \varphi(v_*)$ in view of the second rule in (1). Since for γ, σ^2 small the postinteraction speed v' is close to the preinteraction

speed v , if we assume that φ is sufficiently smooth, namely $\varphi \in C^3([0, 1])$, we can perform the following Taylor expansion:

$$\varphi(v') - \varphi(v) = \varphi'(v)(v' - v) + \frac{1}{2}\varphi''(v)(v' - v)^2 + \frac{1}{6}\varphi'''(\bar{v})(v' - v)^3,$$

where $\bar{v} \in (\min\{v, v'\}, \max\{v, v'\})$ is used to express the Lagrange remainder. Writing $v' - v = \gamma I(v, v_*; \rho) + D(v; \rho)\eta$ from the first rule in (1) and plugging it into (8), we deduce that

$$(9) \quad \begin{aligned} \frac{d}{d\tau} \int_0^1 \varphi(v)\tilde{f}(\tau, v) dv &= \int_0^1 \int_0^1 \varphi'(v)I(v, v_*; \rho)\tilde{f}(\tau, v)\tilde{f}(\tau, v_*) dv dv_* \\ &+ \frac{\sigma^2}{2\gamma} \int_0^1 \varphi''(v)D^2(v; \rho)\tilde{f}(\tau, v) dv + R_\varphi(\tilde{f}, \tilde{f}), \end{aligned}$$

where $R_\varphi(\tilde{f}, \tilde{f})$ denotes the following remainder:

$$\begin{aligned} R_\varphi(\tilde{f}, \tilde{f}) &:= \frac{\gamma}{2} \int_0^1 \int_0^1 \varphi''(v)I^2(v, v_*; \rho)\tilde{f}(\tau, v)\tilde{f}(\tau, v_*) dv dv_* \\ &+ \frac{1}{6\gamma} \left\langle \int_0^1 \int_0^1 \varphi'''(\bar{v})(\gamma I(v, v_*; \rho) + D(v; \rho)\eta)^3 \tilde{f}(\tau, v)\tilde{f}(\tau, v_*) dv dv_* \right\rangle. \end{aligned}$$

From (3) we check that $|I(v, v_*; \rho)| \leq 1$ for all $v, v_*, \rho \in [0, 1]$, and, in addition to this, from Proposition 2.1 we infer also that $D(v; \rho)$ has to be bounded. Moreover, φ and its derivatives are in turn bounded in $[0, 1]$ because of the assumed smoothness. Finally, if we assume that η has the third order moment bounded, i.e., $\langle |\eta|^3 \rangle < +\infty$, then we can write $\eta = \sqrt{\sigma^2}\tilde{\eta}$, where $\tilde{\eta}$ is a random variable such that $\langle \tilde{\eta} \rangle = 0$, $\langle \tilde{\eta}^2 \rangle = 1$, and $\langle |\tilde{\eta}|^3 \rangle < +\infty$, so that $\langle |\eta|^3 \rangle \sim (\sigma^2)^{3/2}$. As a result, we estimate¹

$$(10) \quad \left| R_\varphi(\tilde{f}, \tilde{f}) \right| \lesssim \gamma + \gamma^2 + \sigma^2 + \frac{\sigma^2}{\gamma} \sqrt{\sigma^2}.$$

At this point, in taking the quasi-invariant interaction limit $\gamma, \sigma^2 \rightarrow 0^+$, we need to specify the behavior of the ratio σ^2/γ . Assuming that $\sigma^2/\gamma \rightarrow \lambda > 0$, so that the effects of the interactions and of the stochastic fluctuations balance asymptotically, we get $R_\varphi(\tilde{f}, \tilde{f}) \rightarrow 0$ from (10), and consequently from (9)

$$(11) \quad \begin{aligned} \frac{d}{d\tau} \int_0^1 \varphi(v)\tilde{f}(\tau, v) dv &= \int_0^1 \varphi'(v) \left(\int_0^1 I(v, v_*; \rho)\tilde{f}(\tau, v_*) dv_* \right) \tilde{f}(\tau, v) dv \\ &+ \frac{\lambda}{2} \int_0^1 \varphi''(v)D^2(v; \rho)\tilde{f}(\tau, v) dv. \end{aligned}$$

In view of the smoothness of φ , integrating back by parts the terms on the right-hand side, this can be recognized as a weak form of the Fokker–Planck equation

$$(12) \quad \partial_\tau \tilde{f} = \frac{\lambda}{2} \partial_v^2 (D^2(v; \rho)\tilde{f}) - \partial_v \left(\left(\int_0^1 I(v, v_*; \rho)\tilde{f}(\tau, v_*) dv_* \right) \tilde{f} \right)$$

provided the following boundary conditions are satisfied:

$$(13) \quad \begin{aligned} \left(\int_0^1 I(v, v_*; \rho)\tilde{f}(\tau, v_*) dv_* \right) \tilde{f}(\tau, v) + \frac{\lambda}{2} \partial_v \left(D^2(v; \rho)\tilde{f}(\tau, v) \right) &= 0, \\ D^2(v; \rho)\tilde{f}(\tau, v) &= 0 \end{aligned}$$

¹We use the notation $a \lesssim b$ to mean that there exists a constant $C > 0$ such that $a \leq Cb$.

for $v = 0, 1$ and all $\tau > 0$. In particular, substituting into (12) the interaction function I given in (3) yields

$$\partial_\tau \tilde{f} = \frac{\lambda}{2} \partial_v^2 (D^2(v; \rho) \tilde{f}) - \partial_v \left(\left(P(\rho)(1 + (1 - P(\rho))\tilde{V}) - v \right) \tilde{f} \right),$$

where $\tilde{V}(\tau) := V(2\tau/\gamma)$ and V is the mean speed (6). For $\tau \rightarrow +\infty$ the term \tilde{V} converges to $V_\infty(\rho)$ given in (7); hence the asymptotic distribution \tilde{f}_∞ satisfies the equation

$$\frac{\lambda}{2} \partial_v^2 (D^2(v; \rho) \tilde{f}_\infty) - \partial_v \left(\left(P(\rho)(1 + (1 - P(\rho))V_\infty(\rho)) - v \right) \tilde{f}_\infty \right) = 0.$$

Since $P(\rho)(1 + (1 - P(\rho))V_\infty(\rho)) = V_\infty(\rho)$, as can be immediately checked from (5) or by a direct calculation using (7), this further simplifies to

$$\frac{\lambda}{2} \partial_v^2 (D^2(v; \rho) \tilde{f}_\infty) - \partial_v ((V_\infty(\rho) - v) \tilde{f}_\infty) = 0,$$

whose solution reads

$$(14) \quad \tilde{f}_\infty(v) = \frac{C}{D^2(v; \rho)} \exp \left(\frac{2}{\lambda} \int \frac{V_\infty(\rho) - v}{D^2(v; \rho)} dv \right),$$

where $C > 0$ is a constant to ensure the normalization $\int_0^1 \tilde{f}_\infty(v) dv = 1$.

In order to obtain from (14) a more explicit expression of \tilde{f}_∞ , we need to specify the diffusion coefficient $D(v; \rho)$. Choosing in particular

$$(15) \quad D(v; \rho) := a(\rho) \sqrt{v(1-v)}, \quad a(\rho) \geq 0,$$

we get

$$(16) \quad \tilde{f}_\infty(v) = \frac{v^{\frac{2V_\infty(\rho)}{\lambda a^2(\rho)} - 1} (1-v)^{\frac{2(1-V_\infty(\rho))}{\lambda a^2(\rho)} - 1}}{B \left(\frac{2V_\infty(\rho)}{\lambda a^2(\rho)}, \frac{2(1-V_\infty(\rho))}{\lambda a^2(\rho)} \right)},$$

where $B(x, y) := \int_0^1 t^{x-1} (1-t)^{y-1} dt$ is the beta function. It can be checked that this function satisfies the boundary conditions (13) if, e.g.,

$$(17) \quad a^2(\rho) \leq \frac{1}{\lambda} \min\{V_\infty(\rho), 1 - V_\infty(\rho)\};$$

indeed, in such a case both \tilde{f}_∞ and $\partial_v \tilde{f}_\infty$ vanish at $v = 0, 1$.

We notice that (16) is a *beta probability density function* with parameters

$$\alpha := \frac{2V_\infty(\rho)}{\lambda a^2(\rho)}, \quad \beta := \frac{2(1 - V_\infty(\rho))}{\lambda a^2(\rho)},$$

whence the mean and variance of the random variable $X \sim \tilde{f}_\infty$ describing the vehicle speed at equilibrium are respectively

$$(18) \quad \begin{aligned} \mathbb{E}(X) &= \frac{\alpha}{\alpha + \beta} = V_\infty(\rho), \\ \text{Var}(X) &= \frac{\alpha\beta}{(\alpha + \beta)^2(\alpha + \beta + 1)} = \frac{\lambda a^2(\rho)}{2 + \lambda a^2(\rho)} V_\infty(\rho)(1 - V_\infty(\rho)). \end{aligned}$$

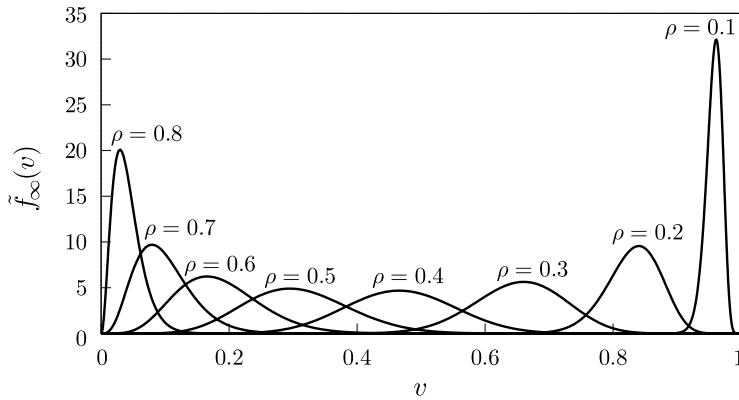


FIG. 3. The asymptotic speed distribution (16) for various traffic densities $\rho \in [0, 1]$ with $V_\infty(\rho)$ given in (7), $P(\rho)$ like in (4) with $\mu = 2$, $\lambda = 1$, and $a(\rho) = \rho(1 - \rho)$, which fulfills the constraint (17).

Owing to the discussion set forth at the beginning of section 2, (16) is a good model for the speed distribution at equilibrium. Nevertheless the choice (15) of the diffusion coefficient leading to it has to be justified more carefully, because that function actually does not satisfy the assumptions of Proposition 2.1. Precisely, there does not exist any $c > 0$ such that $cD(v; \rho) \leq \min\{v, 1 - v\}$ for all $v \in [0, 1]$ due to the vertical tangents at $v = 0$ and $v = 1$ of the function (15). To obviate this difficulty it is sufficient to consider preliminarily in (1) the truncated diffusion coefficient

$$D_\gamma(v; \rho) := a(\rho) \sqrt{\left((1 + \gamma)v(1 - v) - \frac{\gamma}{4} \right)_+},$$

where $(\cdot)_+ := \max\{0, \cdot\}$ denotes the positive part. This coefficient satisfies Proposition 2.1 with $c = \frac{1}{a(\rho)} \sqrt{\frac{\gamma}{1 + \gamma}}$ and for $\gamma \rightarrow 0^+$ converges uniformly to (15). Hence, in the quasi-invariant limit, from (9) with $D_\gamma(v; \rho)$ we obtain (12) with $D(v; \rho)$.

In Figure 3 we show the asymptotic distribution (16) for $\lambda = 1$, $a(\rho) = \rho(1 - \rho)$. Such a choice of $a(\rho)$ produces a vanishing diffusion when both $\rho = 0$ and $\rho = 1$. The asymptotic distributions to which (16) converges in these cases are $\tilde{f}_\infty(v) = \delta(v - 1)$, $\tilde{f}_\infty(v) = \delta(v)$, respectively, i.e., the Dirac deltas centered at $v = 1$ and $v = 0$.

3. Microscopic binary control for road risk mitigation. As mentioned in the introduction, the transportation literature acknowledges the speed variability within the stream of vehicles as one of the major sources of road risk [48, 61]. Hence, a conceivable goal of driver-assist cars would be to *collectively* mitigate the road risk through a reduction of the speed variance (18). In this section, we aim to investigate to what extent this is possible by taking advantage of the ability of such cars to respond *locally* to the actions of their drivers, thanks to the automatic technologies they are equipped with.

It is worth mentioning that another compelling goal, in terms of road safety, is the prevention of the collisions among the trajectories of the vehicles, which are evidently associated with the crash risk. This issue is indeed considered in the literature on autonomous vehicles; see, e.g., [36]. Clearly, any mathematical model aiming at an aggregate description of the traffic, such as, indeed, kinetic and macroscopic models, is hardly able to deal with vehicle trajectories because these are a chiefly microscopic

characteristic of the system. Therefore, we mostly need to recast the problem of road risk mitigation in a context describable by means of more aggregate concepts, such as, indeed, the statistics of the speed distribution. Nevertheless, we observe that our control strategy, which, as we will see in a moment, is based on reducing the speed variability between pairs of vehicles, or, in other words, on aligning the speeds of pairs of vehicles, induces, as a byproduct, a form of *collision avoidance*, at least in our one-dimensional framework. Indeed, two successive vehicles which align their speeds reduce simultaneously the risk of collision, because their relative speed tends to zero. Therefore, we claim that the collision avoidance is conceptually present in our control strategy in connection with the use of driver-assist vehicles.

Let us reconsider the interaction rules (1), and let us modify them as follows:

$$(19) \quad \begin{aligned} v' &= v + \gamma(I(v, v_*; \rho) + \Theta \mathbf{u}) + D(v; \rho)\eta, \\ v'_* &= v_*, \end{aligned}$$

where \mathbf{u} is a *control* representing the instantaneous correction of the “natural” interaction I operated by the driver-assist vehicle and $\Theta \in \{0, 1\}$ is a Bernoulli random variable expressing the fact that a randomly chosen vehicle may be equipped with driver-assist technology with a certain probability $p \in [0, 1]$. Hence $\Theta \sim \text{Bernoulli}(p)$, and p gives the fraction of driver-assist vehicles present in the traffic stream, i.e., the so-called *penetration rate*.

The optimal control \mathbf{u}^* is chosen so as to optimize the value of a certain *binary cost functional* $J = J(v', \mathbf{u})$, whose minimization is supposed to be linked locally to the mitigation of the road risk:

$$\mathbf{u}^* := \arg \min_{\mathbf{u} \in \mathcal{U}} J(v', \mathbf{u}),$$

subject to (19), where \mathcal{U} is a set of admissible controls. Aiming at the reduction of the global speed variance of the flow of vehicles, a possible form of the cost functional in a single binary interaction is

$$(20) \quad J(v', \mathbf{u}) = \frac{1}{2} \langle (v'_* - v')^2 + \nu \mathbf{u}^2 \rangle,$$

where $\frac{1}{2}(v'_* - v')^2$ is the *binary variance* of the speeds of the two vehicles after the interaction, $\frac{\nu}{2}\mathbf{u}^2$ is a penalization of large controls with penalization coefficient $\nu > 0$, and finally $\langle \cdot \rangle$ denotes, as usual, the average with respect to the distribution of the stochastic fluctuation η . Another option is to minimize the gap between the speed of the vehicles and a certain desired speed $v_d \in [0, 1]$, possibly $v_d = v_d(\rho)$, which may be thought of as a speed limit or as a recommended speed communicated to the equipped vehicles by some external monitoring devices. In this case we consider the binary cost functional

$$(21) \quad J(v', \mathbf{u}) = \frac{1}{2} \langle (v_d(\rho) - v')^2 + \nu \mathbf{u}^2 \rangle.$$

Notice that (20), (21) are special cases of the general cost functional

$$(22) \quad J(v', \mathbf{u}) = \frac{1}{2} \langle (V_d(v'_*, \rho) - v')^2 + \nu \mathbf{u}^2 \rangle$$

with either $V_d(v'_*, \rho) = v'_*$ or $V_d(v'_*, \rho) = v_d(\rho)$.

The minimization of (22) constrained to (19) can be done by forming the Lagrangian

$$\mathcal{L}(v', \mathbf{u}, \lambda) := J(v', \mathbf{u}) + \lambda \langle v' - v - \gamma(I(v, v_*; \rho) + \Theta \mathbf{u}) - D(v; \rho) \eta \rangle,$$

where $\lambda \in \mathbb{R}$ is the Lagrange multiplier associated to the constraint (19), and then by computing

$$\begin{cases} \partial_{\mathbf{u}} \mathcal{L} = \nu \mathbf{u} - \gamma \Theta \lambda = 0, \\ \partial_{v'} \mathcal{L} = \langle v' - V_d(v'_*, \rho) \rangle + \lambda = 0. \end{cases}$$

This yields the optimal control

$$\mathbf{u}^* = \frac{\gamma}{\nu} \Theta \langle V_d(v'_*, \rho) - v' \rangle,$$

which, using the binary interactions (19), can be expressed in *feedback form* as a function of the preinteraction speeds v, v_* :

$$(23) \quad \mathbf{u}^* = \frac{\gamma \Theta}{\nu + \gamma^2 \Theta^2} (V_d(v_*; \rho) - v) - \frac{\gamma^2 \Theta}{\nu + \gamma^2 \Theta^2} I(v, v_*; \rho).$$

Plugging (23) into (19), we finally obtain the feedback controlled microscopic rules in the form

$$(24) \quad \begin{aligned} v' &= v + \frac{\nu \gamma}{\nu + \gamma^2 \Theta^2} I(v, v_*; \rho) + \frac{\gamma^2 \Theta^2}{\nu + \gamma^2 \Theta^2} (V_d(v_*; \rho) - v) + D(v; \rho) \eta, \\ v'_* &= v_*. \end{aligned}$$

Notice that these binary interactions are formally identical to (1) up to introducing the new interaction function

$$\mathcal{I}(v, v_*; \rho) := \frac{\nu}{\nu + \gamma^2 \Theta^2} I(v, v_*; \rho) + \frac{\gamma \Theta^2}{\nu + \gamma^2 \Theta^2} (V_d(v_*; \rho) - v).$$

In particular, we can establish the following result.

PROPOSITION 3.1. *In (24), let $\gamma \in [0, 1]$, $\nu > 0$, and $I(v, v_*; \rho)$ be given by (3). If there exists $c > 0$ such that*

$$\begin{cases} |\eta| \leq c \left(1 - \frac{\nu + \gamma}{\nu} \gamma \right), \\ cD(v; \rho) \leq \min\{v, 1 - v\} \quad \forall v, \rho \in [0, 1], \end{cases}$$

then $v' \in [0, 1]$ for every pair of preinteraction speeds $v, v_* \in [0, 1]$ and every $\rho \in [0, 1]$.

Proof. The proof that $v' \geq 0$ is entirely analogous to the corresponding proof of Proposition 2.1 upon observing that $P(\rho), P(\rho)v_*, V_d(v_*; \rho) \geq 0$ imply

$$\begin{aligned} v + \gamma \mathcal{I}(v, v_*; \rho) + D(v; \rho) \eta &\geq \left(1 - \frac{\nu + \gamma \Theta^2}{\nu + \gamma^2 \Theta^2} \gamma \right) v + D(v; \rho) \eta \\ &\geq \left(1 - \frac{\nu + \gamma}{\nu} \gamma \right) v + D(v; \rho) \eta \end{aligned}$$

and then using the new assumptions on η , $D(v; \rho)$. Likewise, the proof that $v' \leq 1$ follows the very same lines as the corresponding proof in Proposition 2.1, considering that now it results that

$$\begin{aligned} v + \gamma \mathcal{I}(v, v_*; \rho) + D(v; \rho)\eta &\leq v + \frac{\nu + \gamma\Theta^2}{\nu + \gamma^2\Theta^2} \gamma(1 - v) + D(v; \rho)\eta \\ &\leq v + \frac{\nu + \gamma}{\nu} \gamma(1 - v) + D(v; \rho)\eta \end{aligned}$$

because $P(\rho)v_*$, $V_d(v_*; \rho) \leq 1$. \square

Remark 3.2. From the assumptions of Proposition 3.1, we see that if $\nu \rightarrow +\infty$, i.e., if the control is so penalized that the only possible one is $\mathbf{u}^* = 0$ (cf. (23)), then we recover the same condition on η as the one of Proposition 2.1.

On the other hand, in order for the assumption of Proposition 3.1 on η to be physically admissible, it is necessary that $\frac{\nu + \gamma}{\nu} \gamma < 1$, which implies $\nu > \frac{\gamma^2}{1 - \gamma}$. Such a lower bound on the penalization coefficient translates the idea that actually the control cannot be arbitrarily cheap.

3.1. Fundamental diagrams. With the new controlled binary interactions (24) the Boltzmann-type equation for the distribution function f writes as

$$(25) \quad \begin{aligned} \frac{d}{dt} \int_0^1 \varphi(v) f^*(t, v) dv \\ = \frac{1}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) f^*(t, v) f^*(t, v_*) dv dv_* \right\rangle \right], \end{aligned}$$

where the superscript $*$ on the distribution function f recalls that we are considering the statistical evolution of the system subject to the optimal binary control \mathbf{u}^* (23), whose contribution is taken into account in v' . Furthermore, \mathbb{E}_Θ denotes the expectation with respect to the random variable Θ appearing in (24). In particular, considering that $\Theta^2 \sim \text{Bernoulli}(p)$, the evolution of the mean speed V^* , obtained from (25) with $\varphi(v) = v$, is now given by the equation

$$(26) \quad \begin{aligned} \frac{dV^*}{dt} = \frac{\gamma}{2} \left\{ \frac{\nu + (1 - p)\gamma^2}{\nu + \gamma^2} \left(P(\rho)[1 + (1 - P(\rho))V^*] - V^* \right) \right. \\ \left. + \frac{\gamma p}{\nu + \gamma^2} \left(\int_0^1 V_d(v_*; \rho) f^*(t, v_*) dv_* - V^* \right) \right\}. \end{aligned}$$

We immediately notice that if $p = 0$, i.e., if no car is actually equipped with driver-assist technologies, this equation reduces to (5) consistently with the fact that the whole model collapses onto the one considered in section 2 (in fact, in such a case we have $\Theta = 0$ almost surely in (19)). The same conclusion holds also if $\nu \rightarrow +\infty$, for then the cost for applying a driver-assist control is so high that the optimal strategy turns out to be not to apply any control. If conversely $\nu \rightarrow 0^+$, i.e., the cost of the driver-assist control is negligible, and $p = 1$, i.e., all cars in the traffic stream are equipped with driver-assist technologies, then the evolution of V is fully dominated by the second term on the right-hand side of (26), which results from the action of the control; whereas if $0 < p < 1$, then the spontaneous (viz. uncontrolled) dynamics (cf. the first term on the right-hand side of (26)) still play a role.

We now discuss in more detail the consequences of (26) in the cases $0 < p < 1$, $0 < \nu < +\infty$ for a generic target speed $V_d(v_*; \rho)$. In order to reduce the analytical complexity due to the number of microscopic parameters in (26) and to preserve simultaneously the qualitative large-time behavior of the system, we refer to

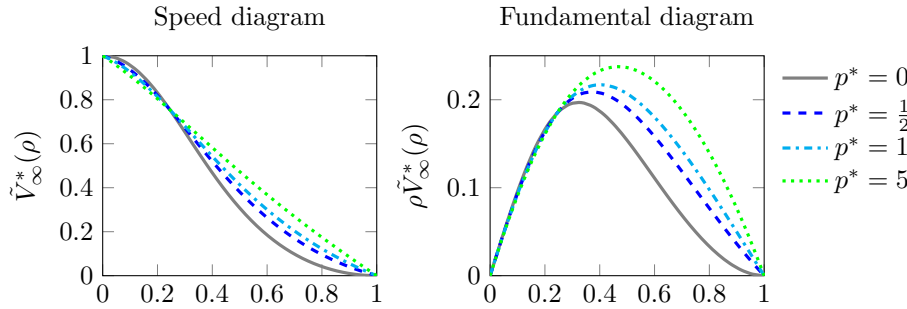


FIG. 4. Speed and fundamental diagrams from (28) with $v_d(\rho) = 1 - \rho$ and $P(\rho)$ like in (4) with $\mu = 2$ for various effective penetration rates p^* . The case $p^* = 0$ corresponds to the uncontrolled scenario.

the quasi-invariant interaction regime. In particular, similarly to what we have done in section 2.2, we consider the limit $\gamma, \nu \rightarrow 0^+$, and we assume that $\nu/\gamma \rightarrow \kappa > 0$, so that we can observe asymptotically a balanced contribution of the interactions and of the control. Under the scaling $\tau := \frac{\gamma}{2}t$, $\tilde{f}^*(\tau, v_*) := f^*(2\tau/\gamma, v_*)$, and $\tilde{V}^*(\tau) := V^*(2\tau/\gamma) = \int_0^1 v \tilde{f}^*(\tau, v) dv$ we obtain from (26)

$$\frac{d\tilde{V}^*}{d\tau} = P(\rho)[1 + (1 - P(\rho))\tilde{V}^*] + p^* \int_0^1 V_d(v_*; \rho) \tilde{f}^*(\tau, v_*) dv_* - (1 + p^*)\tilde{V}^*,$$

where

$$p^* := \frac{p}{\kappa}$$

can be understood as an *effective penetration rate* taking into account not only the actual percentage p of vehicles equipped with driver-assist technologies but also the relative penalization κ of the in-vehicle control. Thus the asymptotic value V_∞^* that the mean speed approaches as $\tau \rightarrow +\infty$ satisfies

$$(27) \quad P(\rho)[1 + (1 - P(\rho))V_\infty^*] + p^* \int_0^1 V_d(v_*; \rho) \tilde{f}_\infty^*(v_*) dv_* = (1 + p^*)V_\infty^*.$$

With $V_d(v_*; \rho) = v_*$, i.e., when the driver-assist control seeks to minimize the binary variance of the speeds of the two interacting vehicles, (27) gives for V_∞^* the same as (6); hence there are apparently no differences with respect to the uncontrolled case. However, we anticipate that a more accurate investigation of the asymptotic statistical properties of the flow of vehicles (cf. section 3.2) will reveal that the driver-assist control actually succeeds in reducing the asymptotic variance of the microscopic speeds, which is at the heart of the risk mitigation issues.

Conversely, with $V_d(v_*; \rho) = v_d(\rho)$, i.e., when the driver-assist control tries to align the car speed to a possibly traffic-dependent desired speed, from (27) we deduce

$$(28) \quad V_\infty^*(\rho) = \frac{P(\rho) + p^*v_d(\rho)}{P(\rho) + (1 - P(\rho))^2 + p^*}.$$

As a general fact, we notice that now for p^* small the speed and fundamental diagrams of traffic are close to those found in the uncontrolled case; cf. (7) and Figure 2. On the contrary, for p^* large they get closer and closer to $v_d(\rho)$, $\rho v_d(\rho)$, respectively;

cf. Figure 4. Nevertheless, also in this case a more accurate characterization of the global effect of the driver-assist control on road risk mitigation can be obtained by studying in more detail the statistical properties of the flow at equilibrium; cf. section 3.2.

3.2. Asymptotic speed variance and risk mitigation. As claimed at the beginning of section 3, an indicator of the road risk and of the effectiveness of in-vehicle driver-assist control strategies for its mitigation is the variance of the speed distribution. It is therefore interesting to investigate such a statistical property of the flow of vehicles at equilibrium in the case of the controlled binary interactions (24), taking advantage of the analytical procedure illustrated in section 2.2.

As already set forth in section 3.1, in order to study the quasi-invariant interaction regime of the Boltzmann-type equation (25), we consider the limit $\gamma, \nu, \sigma^2 \rightarrow 0^+$ and assume $\sigma^2/\gamma \rightarrow \lambda > 0$, $\nu/\gamma \rightarrow \kappa > 0$, implying that both diffusive and control contributions balance asymptotically with interactions. Under the time scaling $\tau := \frac{\gamma}{2}t$ we obtain the Fokker–Planck equation

$$(29) \quad \begin{aligned} \partial_\tau \tilde{f}^* &= \frac{\lambda}{2} \partial_v^2 (D^2(v; \rho) \tilde{f}^*) \\ &\quad - \partial_v \left[\left(\int_0^1 (I(v, v_*; \rho) + p^* V_d(v_*; \rho)) \tilde{f}^*(\tau, v_*) dv_* - p^* v \right) \tilde{f}^* \right], \end{aligned}$$

where \tilde{f}^* is required to satisfy boundary conditions similar to (13). In particular, such conditions are met if $\tilde{f}^*(\tau, v) = \partial_v \tilde{f}^*(\tau, v) = 0$ for $v = 0, 1$ and all $\tau > 0$.

Using the expression (3) of I and taking (27) into account, we have that the asymptotic speed distribution $\tilde{f}_\infty^*(v)$ that the system approaches for $\tau \rightarrow +\infty$ solves

$$(30) \quad \frac{\lambda}{2} \partial_v^2 (D^2(v; \rho) \tilde{f}_\infty^*) - (1 + p^*) \partial_v \left((V_\infty^*(\rho) - v) \tilde{f}_\infty^* \right) = 0,$$

where $V_\infty^*(\rho)$ is either (7) or (28) depending on the chosen target speed V_d . For $D(v; \rho)$ like in (15) the solution to (30) reads

$$(31) \quad \tilde{f}_\infty^*(v) = \frac{v^{\frac{2(1+p^*)}{\lambda a^2(\rho)} V_\infty^*(\rho) - 1} (1-v)^{\frac{2(1+p^*)}{\lambda a^2(\rho)} (1 - V_\infty^*(\rho)) - 1}}{\text{B} \left(\frac{2(1+p^*)}{\lambda a^2(\rho)} V_\infty^*(\rho), \frac{2(1+p^*)}{\lambda a^2(\rho)} (1 - V_\infty^*(\rho)) \right)},$$

and $\tilde{f}_\infty^*, \partial_v \tilde{f}_\infty^*$ vanish at $v = 0, 1$ if

$$(32) \quad a^2(\rho) \leq \frac{1 + p^*}{\lambda} \min \{V_\infty^*(\rho), 1 - V_\infty^*(\rho)\}.$$

On the whole, the random variable $X^* \sim \tilde{f}_\infty^*$ describing the controlled vehicle speed at equilibrium is again distributed according to a beta probability density function, but now its variance is

$$(33) \quad \text{Var}(X^*) = \frac{\lambda a^2(\rho)}{2 + \lambda a^2(\rho) + 2p^*} V_\infty^*(\rho) (1 - V_\infty^*(\rho)).$$

Let us assume $V_d(v_*; \rho) = v_*$, so that $V_\infty^*(\rho)$ is the same as $V_\infty(\rho)$ in (7). Then a direct comparison between (18) and (33) shows that $\text{Var}(X^*)$ is invariably smaller than $\text{Var}(X)$ for all $\rho \in [0, 1]$ provided $p^* > 0$, meaning that an in-vehicle driver-assist system designed to reduce the binary speed variance can effectively mitigate

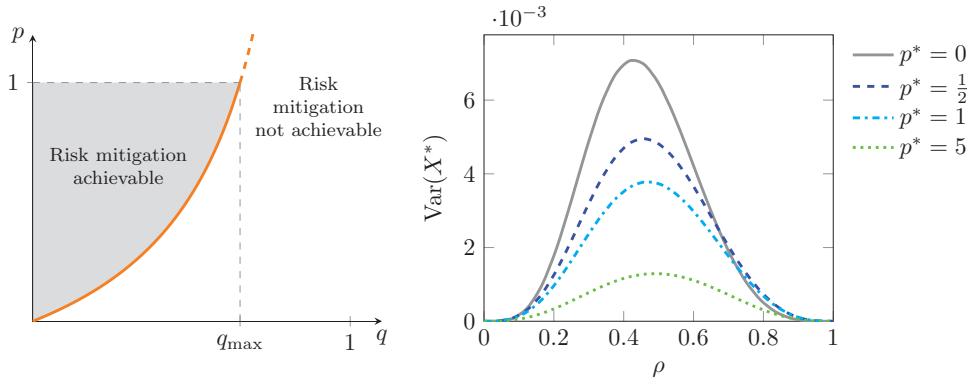


FIG. 5. Left: Relationship between the target risk mitigation q and the penetration rate p with the binary speed variance control strategy; cf. (34), (35). Right: $\text{Var}(X^*)$ as a function of the traffic density ρ (cf. (33)) in the case of the desired speed control strategy. Here $V_\infty(\rho)$ is given by (28) with $v_d(\rho) = 1 - \rho$; moreover, we have set $\lambda = 1$, $a(\rho) = \rho(1 - \rho)$, $P(\rho)$ like in (4) with $\mu = 2$. It can be checked that these choices comply with condition (32) for all $p^* = \frac{p}{\kappa} \geq 0$.

the collective driving risk. We stress that instead a purely macroscopic analysis of the traffic flow based on more standard tools, such as the traffic diagrams, is unable to catch any difference with respect to the uncontrolled case.

The relative reduction of the speed variance at equilibrium representing the risk mitigation factor, say q , with respect to the uncontrolled scenario is

$$q := \frac{\text{Var}(X) - \text{Var}(X^*)}{\text{Var}(X)} = \frac{p^*}{1 + \frac{\lambda}{2}a^2(\rho) + p^*},$$

whence the minimum penetration rate p necessary to achieve a given risk mitigation factor can be computed as

$$(34) \quad p \geq \kappa \left(1 + \frac{\lambda}{2}a^2(\rho) \right) \frac{q}{1 - q}.$$

Considering that the penetration rate can be at most $p = 1$ when all vehicles in the traffic stream are equipped with driver-assist technologies, from (34) we also infer that the maximum achievable risk mitigation, say q_{\max} , is

$$(35) \quad q_{\max} = \frac{1}{1 + \kappa \left(1 + \frac{\lambda}{2}a^2(\rho) \right)};$$

see Figure 5 (left).

Conversely, if we assume $V_d(v_*; \rho) = v_d(\rho)$, then $V_\infty^*(\rho)$ is given by (28), and a comparison of (33) with the uncontrolled case (18) is now less straightforward. From (28) we have that $V_\infty^*(\rho) \rightarrow v_d(\rho)$ when $p^* \rightarrow +\infty$, i.e., $\kappa \rightarrow 0^+$; in the same limit, from (33) we also find $\text{Var}(X^*) \rightarrow 0$. Thus the rationale behind this control strategy is to mitigate the driving risk by inducing the synchronization of the traffic flow around a traffic-dependent recommended speed. However, since $v_d(\rho)$ may be chosen independently of the “spontaneous” mean speed (7), we observe that in general this control strategy does not guarantee that the speed variance $\text{Var}(X^*)$ for $p^* > 0$ is always strictly lower than $\text{Var}(X)$ for $p^* = 0$; see Figure 5 (right).

We conclude this section by generalizing the results discussed so far to sufficiently arbitrary interaction functions I and diffusion coefficients D . For this it is convenient to introduce the concept of *energy* of the system, which is defined as

$$\tilde{E}(\tau) := \int_0^1 v^2 \tilde{f}(\tau, v) dv.$$

Notice that the speed variance at every time $\tau \geq 0$ can then be computed as $\tilde{E}(\tau) - \tilde{V}^2(\tau)$.

THEOREM 3.3 (Binary variance control). *In (24), let $V_d(v_*; \rho) = v_*$, and furthermore let I be a linear-affine function in v , v_* ,*

$$I(v, v_*; \rho) = A(\rho)v + B(\rho)v_* + C(\rho),$$

and let D be given by (15). Assume that initially the mean speed and the energy of the controlled and uncontrolled models are the same, i.e., $\tilde{V}^*(0) = \tilde{V}(0)$ and $\tilde{E}^*(0) = \tilde{E}(0)$. Then

$$\begin{aligned} \tilde{V}^*(\tau) &= \tilde{V}(\tau), \\ \tilde{E}^*(\tau) - (\tilde{V}^*(\tau))^2 &\leq \tilde{E}(\tau) - \tilde{V}^2(\tau) \end{aligned}$$

for all $\tau > 0$.

Proof. Letting $\varphi(v) = v$ in (11) gives, in the uncontrolled case,

$$\frac{d\tilde{V}}{d\tau} = (A(\rho) + B(\rho))\tilde{V} + C(\rho).$$

Likewise, multiplying (29) by v and integrating by parts on $[0, 1]$ with the proper boundary conditions on f^* produces, in the controlled case with $V_d(v_*; \rho) = v_*$,

$$\frac{d\tilde{V}^*}{d\tau} = (A(\rho) + B(\rho))\tilde{V}^* + C(\rho);$$

thus $\frac{d}{d\tau}(\tilde{V}^* - \tilde{V}) = (A(\rho) + B(\rho))(\tilde{V}^* - \tilde{V})$, and finally $\tilde{V}^*(\tau) = \tilde{V}(\tau)$ for all $\tau > 0$ as $\tilde{V}^*(0) = \tilde{V}(0)$.

Letting now $\varphi(v) = v^2$ with $D(v; \rho) = a(\rho)\sqrt{v(1-v)}$ in (11) yields, in the uncontrolled case,

$$\frac{d\tilde{E}}{d\tau} = 2 \left(A(\rho)\tilde{E} + B(\rho)\tilde{V}^2 + C(\rho)\tilde{V} \right) + \lambda a^2(\rho) \left(\tilde{V} - \tilde{E} \right).$$

On the other hand, multiplying (29) by v^2 and integrating on $[0, 1]$, we discover, in the controlled case,

$$\begin{aligned} \frac{d\tilde{E}^*}{d\tau} &= 2 \left(A(\rho)\tilde{E}^* + B(\rho)(\tilde{V}^*)^2 + C(\rho)\tilde{V}^* \right) + \lambda a^2(\rho) \left(\tilde{V}^* - \tilde{E}^* \right) \\ &\quad + 2p^* \left((\tilde{V}^*)^2 - \tilde{E}^* \right). \end{aligned}$$

Since $\tilde{V}^* = \tilde{V}$ while $(\tilde{V}^*)^2 - \tilde{E}^* \leq 0$, because it is the opposite of the variance of \tilde{f}^* , this further implies

$$\frac{d\tilde{E}^*}{d\tau} \leq 2 \left(A(\rho)\tilde{E}^* + B(\rho)\tilde{V}^2 + C(\rho)\tilde{V} \right) + \lambda a^2(\rho) \left(\tilde{V} - \tilde{E}^* \right),$$

whence by difference $\frac{d}{d\tau}(\tilde{E}^* - \tilde{E}) \leq (2A(\rho) - \lambda a^2(\rho))(\tilde{E}^* - \tilde{E})$ and finally $\tilde{E}^*(\tau) - \tilde{E}(\tau) \leq 0$ for all $\tau > 0$ because $\tilde{E}^*(0) = \tilde{E}(0)$. Then

$$\tilde{E}^*(\tau) - (\tilde{V}^*(\tau))^2 = \tilde{E}^*(\tau) - \tilde{V}^2(\tau) \leq \tilde{E}(\tau) - \tilde{V}^2(\tau),$$

and the thesis follows. □

THEOREM 3.4 (Desired speed control). *In (24), let $V_d(v_*; \rho) = v_d(\rho)$, and let I, D be bounded for all $v, v_*, \rho \in [0, 1]$. Then*

$$|V_\infty^*(\rho) - v_d(\rho)| \lesssim \frac{1}{p^*}, \quad |E_\infty^*(\rho) - v_d^2(\rho)| \lesssim \frac{1}{p^*},$$

and, in particular,

$$E_\infty^*(\rho) - (V_\infty^*(\rho))^2 \lesssim \frac{1}{p^*}.$$

Proof. Multiplying the Fokker–Planck equation (29) by v and integrating on $[0, 1]$ gives

$$\frac{d\tilde{V}^*}{d\tau} = \int_0^1 \int_0^1 I(v, v_*; \rho) \tilde{f}^*(\tau, v) \tilde{f}^*(\tau, v_*) dv dv_* + p^*(v_d(\rho) - \tilde{V}^*).$$

Writing $\frac{d\tilde{V}^*}{d\tau} = \frac{d}{d\tau}(\tilde{V}^* - v_d(\rho))$ because $v_d(\rho)$ is constant we obtain

$$\begin{aligned} & \tilde{V}^*(\tau) - v_d(\rho) \\ &= e^{-p^*\tau}(\tilde{V}^*(0) - v_d(\rho)) + \int_0^\tau e^{-p^*(\tau-s)} \int_0^1 \int_0^1 I(v, v_*; \rho) \tilde{f}^*(\tau, v) \tilde{f}^*(\tau, v_*) dv dv_* \end{aligned}$$

whence, since I is bounded, say $|I(v, v_*; \rho)| \leq I_{\max}$ for all $v, v_*, \rho \in [0, 1]$,

$$|\tilde{V}^*(\tau) - v_d(\rho)| \leq e^{-p^*\tau} |\tilde{V}^*(0) - v_d(\rho)| + \frac{I_{\max}}{p^*} (1 - e^{-p^*\tau}),$$

which asymptotically ($\tau \rightarrow +\infty$) yields $|V_\infty^* - v_d(\rho)| \leq \frac{I_{\max}}{p^*}$.

Now multiplying (29) by v^2 and integrating on $[0, 1]$ produces

$$\begin{aligned} \frac{d\tilde{E}^*}{d\tau} &= 2 \int_0^1 \int_0^1 v I(v, v_*; \rho) \tilde{f}^*(\tau, v) \tilde{f}^*(\tau, v_*) dv dv_* \\ &+ 2p^*(v_d(\rho)\tilde{V}^*(\tau) - \tilde{E}^*(\tau)) + \lambda \int_0^1 D^2(v; \rho) \tilde{f}^*(\tau, v) dv. \end{aligned}$$

The asymptotic behavior of the energy ($\tau \rightarrow +\infty$) is found by setting the left-hand side to zero, whence

$$E_\infty^* = v_d(\rho)V_\infty^* + \frac{1}{p^*} \int_0^1 \int_0^1 v I(v, v_*; \rho) \tilde{f}_\infty^*(v) \tilde{f}_\infty^*(v_*) dv dv_* + \frac{\lambda}{2p^*} \int_0^1 D^2(v; \rho) \tilde{f}_\infty^*(v) dv.$$

From here, subtracting $v_d^2(\rho)$ from both sides and using the boundedness of I, D (with, say, $D(v; \rho) \leq D_{\max}$ for all $v, \rho \in [0, 1]$) and the previous result on V_∞^* , we obtain

$$|E_\infty^* - v_d^2(\rho)| \leq v_d(\rho) |V_\infty^* - v_d(\rho)| + \left(I_{\max} + \frac{\lambda D_{\max}^2}{2} \right) \frac{1}{p^*}$$

$$\begin{aligned} &\leq \left(v_d(\rho)I_{\max} + I_{\max} + \frac{\lambda D_{\max}^2}{2} \right) \frac{1}{p^*} \\ &\leq \left(2I_{\max} + \frac{\lambda D_{\max}^2}{2} \right) \frac{1}{p^*}. \end{aligned}$$

Finally, the speed variance at equilibrium is

$$\begin{aligned} E_{\infty}^* - (V_{\infty}^*)^2 &= E_{\infty}^* - v_d^2(\rho) + v_d^2(\rho) - (V_{\infty}^*)^2 \\ &\leq |E_{\infty}^* - v_d^2(\rho)| + |(v_d(\rho) + V_{\infty}^*)(v_d(\rho) - V_{\infty}^*)| \\ &\leq |E_{\infty}^* - v_d^2(\rho)| + 2|v_d(\rho) - V_{\infty}^*| \\ &\leq \left(4I_{\max} + \frac{\lambda D_{\max}^2}{2} \right) \frac{1}{p^*}. \quad \square \end{aligned}$$

4. Hydrodynamic models. The homogeneous kinetic equations studied in the previous sections are the basis from which to derive hydrodynamic traffic models incorporating the microscopic control strategies of driver-assist vehicles.

The kinetic framework to obtain hydrodynamic models is provided by the *inhomogeneous Boltzmann equation*, which with the controlled binary interaction rules (24) reads

$$\begin{aligned} (36) \quad &\partial_t \int_0^1 \varphi(v) f^*(t, x, v) dv + \partial_x \int_0^1 v \varphi(v) f^*(t, x, v) dv \\ &= \frac{1}{2} \mathbb{E}_{\Theta} \left[\left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) f^*(t, x, v) f^*(t, x, v_*) dv dv_* \right\rangle \right]. \end{aligned}$$

Notice that this is the spatially inhomogeneous counterpart of (25), with $x \in \mathbb{R}$ denoting the space position of the vehicles. On the whole, the microscopic state of the vehicles is now defined by the position-speed pair $(x, v) \in \mathbb{R} \times [0, 1]$ and $f^* = f^*(t, x, v)$ is its probability density at time $t \geq 0$. In particular,

$$\int_{\mathbb{R}} \int_0^1 f^*(t, x, v) dv dx = 1 \quad \forall t \geq 0$$

while

$$\rho(t, x) := \int_0^1 f^*(t, x, v) dv$$

is the vehicle density at time t in the point x , which, unlike the homogeneous model, is in general no longer constant in time due to the transport dynamics in space (cf. the second term on the left-hand side in (36)).

4.1. Local equilibrium closure. Transport models at the macroscopic scale can be recovered from (36) by means of a hyperbolic scaling of time and space,

$$\tau := \epsilon t, \quad \xi := \epsilon x \quad (0 < \epsilon \ll 1),$$

which defines the hydrodynamic temporal and spatial scales, respectively. After introducing the scaled distribution function $\tilde{f}^*(\tau, \xi, v) := f^*(\tau/\epsilon, \xi/\epsilon, v)$ and noticing that $\partial_{\tau} \tilde{f}^* = \frac{1}{\epsilon} \partial_t f^*$, $\partial_{\xi} \tilde{f}^* = \frac{1}{\epsilon} \partial_x f^*$, this yields

$$\begin{aligned} (37) \quad &\partial_{\tau} \int_0^1 \varphi(v) \tilde{f}^*(\tau, \xi, v) dv + \partial_{\xi} \int_0^1 v \varphi(v) \tilde{f}^*(\tau, \xi, v) dv \\ &= \frac{1}{2\epsilon} \mathbb{E}_{\Theta} \left[\left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) \tilde{f}^*(\tau, \xi, v) \tilde{f}^*(\tau, \xi, v_*) dv dv_* \right\rangle \right]. \end{aligned}$$

If ϵ is small, then vehicle interactions (right-hand side) dominate over the advection of the distribution function \tilde{f}^* (left-hand side). Inspired by [22], we can then split the dynamics on two well-separated time scales as follows: we consider a “slow” pure transport

$$(38) \quad \partial_\tau \int_0^1 \varphi(v) \tilde{f}^*(\tau, \xi, v) dv + \partial_\xi \int_0^1 v \varphi(v) \tilde{f}^*(\tau, \xi, v) dv = 0$$

and parallelly “quick” interactions

$$(39) \quad \begin{aligned} &\partial_\tau \int_0^1 \varphi(v) \tilde{f}^*(\tau, \xi, v) dv \\ &= \frac{1}{2\epsilon} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) \tilde{f}^*(\tau, \xi, v) \tilde{f}^*(\tau, \xi, v_*) dv dv_* \right\rangle \right] \end{aligned}$$

which produce a local redistribution of the speeds. Notice that (39) is actually an equation parametrized by ξ on the original t -scale; in fact, setting $g(t, \xi, v) := \tilde{f}^*(\epsilon t, \xi, v)$, we have

$$(40) \quad \begin{aligned} &\partial_t \int_0^1 \varphi(v) g(t, \xi, v) dv \\ &= \frac{1}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \int_0^1 (\varphi(v') - \varphi(v)) g(t, \xi, v) g(t, \xi, v_*) dv dv_* \right\rangle \right]. \end{aligned}$$

For fixed $\tau > 0$, if $\epsilon \rightarrow 0^+$, then $t \rightarrow +\infty$, whence we deduce that the solution \tilde{f}^* to (39) at time τ with ϵ small is close to the local stationary solution $g_\infty(\xi, v)$ to (40). On the other hand, (40) is virtually (25) for every fixed $\xi \in \mathbb{R}$ but with $\int_0^1 g(t, \xi, v) dv = \rho(\tau, \xi)$ for all $t > 0$. In fact, setting $\varphi(v) = 1$ in (40), we obtain that the v -integral of g is constant in time; moreover, by definition of g , it has to be equal to that of \tilde{f}^* at time τ . In conclusion, g_∞ can be consistently written as $g_\infty(\xi, v) \approx \rho(\tau, \xi) \tilde{f}_\infty^*(v)$, where \tilde{f}_∞^* is the Fokker–Planck approximation (31) of the equilibrium solution to (25), and finally

$$\tilde{f}^*(\tau, \xi, v) \approx \rho(\tau, \xi) \tilde{f}_\infty^*(v),$$

which provides the local equilibrium closure (in classical terms, the local “Maxwellian” function) to be plugged into (38) to obtain macroscopic conservation laws for the hydrodynamic parameters:

$$\partial_\tau \left(\rho \int_0^1 \varphi(v) \tilde{f}_\infty^*(v) dv \right) + \partial_\xi \left(\rho \int_0^1 v \varphi(v) \tilde{f}_\infty^*(v) dv \right) = 0.$$

Since the microscopic interactions (24) conserve only the zeroth moment of the kinetic distribution function, a closed hydrodynamic equation is consistently obtained in terms of ρ alone by choosing $\varphi(v) = 1$:

$$(41) \quad \partial_\tau \rho + \partial_\xi (\rho V_\infty^*(\rho)) = 0.$$

This is a first order hydrodynamic traffic model with flux $\rho V_\infty^*(\rho)$, which is not necessarily concave for all $\rho \in [0, 1]$ (cf. Figure 4 (right)), as happens more commonly in classical macroscopic models of vehicular traffic. Moreover, the flux depends ultimately on the microscopic control strategy implemented on the driver-assist vehicles.

If one chooses the binary variance control, then $V_\infty^*(\rho)$ is actually given by (7) and no macroscopic impact on the vehicle density is observed with respect to the uncontrolled case:

$$(42) \quad \partial_\tau \rho + \partial_\xi \left(\frac{\rho P(\rho)}{P(\rho) + (1 - P(\rho))^2} \right) = 0,$$

where $P(\rho)$ is given by (4). Conversely, if one chooses the desired speed control, then $V_\infty^*(\rho)$ is given by (28) and in the hydrodynamic limit we have

$$(43) \quad \partial_\tau \rho + \partial_\xi \left(\frac{\rho (P(\rho) + p^* v_d(\rho))}{P(\rho) + (1 - P(\rho))^2 + p^*} \right) = 0.$$

Notice that now the concavity of the flux may depend strongly on the effective penetration rate $p^* = \frac{p}{\kappa}$ of the driver-assist vehicles and on the choice of the recommended speed $v_d(\rho)$.

4.2. Monokinetic closure. A quite different procedure to obtain hydrodynamic models from (36), which does not use the idea of local equilibrium of the interactions, consists in making the following ansatz on the solution f^* to (36):

$$(44) \quad f^*(t, x, v) = \rho(t, x) \delta(v - u(t, x)),$$

where ρ , u are the hydrodynamic parameters denoting the vehicle density and the mean speed, respectively, and δ is the Dirac delta distribution. Such an ansatz is called a *monokinetic* closure because it corresponds to assuming that locally all vehicles travel at the same speed or, in other words, that the kinetic distribution function has locally zero speed variance.

Plugging (44) into (36) with $\varphi(v) = 1$ yields

$$\partial_t \rho + \partial_x(\rho u) = 0,$$

namely the continuity equation stating the conservation of the mass of vehicles. Since in the monokinetic closure the hydrodynamic parameters ρ , u are assumed to be independent, another macroscopic equation is needed in order to get a self-consistent hydrodynamic model. This is obtained from (36) with (44) and $\varphi(v) = v$, which gives the momentum balance equation

$$\partial_t(\rho u) + \partial_x(\rho u^2) = \frac{\gamma}{2} \rho^2 \left(\frac{\nu + (1 - p)\gamma^2}{\nu + \gamma^2} I(u, u; \rho) + \frac{\gamma p}{\nu + \gamma^2} (V_d(u; \rho) - u) \right).$$

From these equations, passing to the hydrodynamic temporal and spatial scales $\tau := \frac{\gamma}{2} t$, $\xi := \frac{\gamma}{2} x$ and taking the quasi-invariant interaction limit $\gamma, \nu \rightarrow 0^+$ with $\nu/\gamma \rightarrow \kappa > 0$, we finally obtain the pressureless second order hydrodynamic traffic model

$$(45) \quad \begin{cases} \partial_\tau \rho + \partial_\xi(\rho u) = 0, \\ \partial_\tau(\rho u) + \partial_\xi(\rho u^2) = \rho^2 [I(u, u; \rho) + p^*(V_d(u; \rho) - u)]. \end{cases}$$

Using the function I in (3), we can derive from (45) two specific models depending on the choice of the control strategy. In the case of the binary variance control, i.e., for $V_d(v_*; \rho) = v_*$, we have

$$(46) \quad \begin{cases} \partial_\tau \rho + \partial_\xi(\rho u) = 0, \\ \partial_\tau(\rho u) + \partial_\xi(\rho u^2) = \rho^2 [P(\rho) - (P(\rho) + (1 - P(\rho))^2) u]. \end{cases}$$

Notice that here the control has actually no effect at all consistently with the monokinetic ansatz, which indeed postulates a locally null speed variance. The right-hand side of the momentum equation turns out to be a relaxation of the mean speed u towards the local equilibrium $V_\infty(\rho(t, x))$, where $V_\infty(\rho)$ is the uncontrolled asymptotic speed (7), which actually coincides with the controlled asymptotic speed; cf. section 3.1 and Theorem 3.3. Conversely, in the case of the desired speed control, i.e., for $V_d(v_*; \rho) = v_d(\rho)$, we have

$$(47) \quad \begin{cases} \partial_\tau \rho + \partial_\xi(\rho u) = 0, \\ \partial_\tau(\rho u) + \partial_\xi(\rho u^2) = \rho^2 [P(\rho) - (P(\rho) + (1 - P(\rho))^2) u + p^*(v_d(\rho) - u)]. \end{cases}$$

Now the right-hand side of the momentum equation expresses a relaxation of u towards the local equilibrium $V_\infty^*(\rho(t, x))$, where $V_\infty^*(\rho)$ is the controlled asymptotic speed (28).

Remark 4.1 (Hyperbolicity of system (45)). It can be easily checked that the two eigenvalues of the Jacobian matrix of the flux of system (45) are both equal to u . In particular, they satisfy the property that no characteristic speed be higher than the flow speed, a fact related to the anisotropy of the interactions between any two vehicles which has become a consistency requirement for all second order hydrodynamic traffic models since the celebrated papers [5, 17].

It is worth pointing out that such a requirement is instead inevitably violated if one attempts to obtain second order models from a local equilibrium closure. In this case typically one defines $(\rho u)(t, x) := \int_0^1 v f(t, x, v) dv$ and lets $\varphi(v) = 1, v$ in (36) to get

$$\begin{cases} \partial_t \rho + \partial_x(\rho u) = 0, \\ \partial_t(\rho u) + \partial_x(\rho u^2 + \mathcal{P}) = \frac{1}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \int_0^1 (v' - v) f^*(t, x, v) f^*(t, x, v_*) dv dv_* \right\rangle \right], \end{cases}$$

where $\mathcal{P} := \int_0^1 (v - u)^2 f^*(t, x, v) dv$ is the *traffic pressure*. Then in order to close the momentum equation one forces the ansatz $f^*(t, x, v) = \rho(t, x) \tilde{f}_\infty^*(v)$ and simultaneously replaces u with $V_\infty^*(\rho)$ in \mathcal{P} . As a result, since the asymptotic distribution function \tilde{f}_∞^* is parametrized only by ρ , the traffic pressure becomes a function of ρ alone, i.e., $\mathcal{P} = \mathcal{P}(\rho)$, and the hydrodynamic model finally reads

$$\begin{cases} \partial_t \rho + \partial_x(\rho u) = 0, \\ \partial_t(\rho u) + \partial_x(\rho u^2 + \mathcal{P}(\rho)) = \frac{\rho^2}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \int_0^1 (v' - v) \tilde{f}_\infty^*(v) \tilde{f}_\infty^*(v_*) dv dv_* \right\rangle \right]. \end{cases}$$

Now the eigenvalues of the Jacobian matrix of the flux are $u \pm \sqrt{\mathcal{P}'(\rho)}$; thus the system is hyperbolic if and only if $\mathcal{P}'(\rho) \geq 0$. Notice that if $\mathcal{P}'(\rho) = 0$, i.e., if \mathcal{P} is independent of ρ , then f^* ought to be the monokinetic distribution function, which however is incompatible with the closure with \tilde{f}_∞^* . Then it has to be that $\mathcal{P}'(\rho) > 0$, which nevertheless implies $u + \sqrt{\mathcal{P}'(\rho)} > u$, thereby violating the consistency requirement previously recalled.

The splitting procedure of section 4.1 suggests why the local equilibrium closure may not be suited to the derivation of second order macroscopic traffic models. In fact, the procedure shows that such a closure is justified if there is a clear separation between the time scale of the microscopic interactions (39) and the space-time scale of

a *conservative* transport of the moments of the local “Maxwellian” distribution (38) which provide the hydrodynamic quantities of interest for the macroscopic model. Consistently, such moments need to be *conserved* by the microscopic interactions (in classical terms, they need to be “*collision invariants*”). In traffic models, however, the mean speed is *not* conserved by the microscopic interactions, so neither is the momentum. The only conserved hydrodynamic quantity is the traffic density, which makes the continuity equation (41) straightforwardly closed in terms of ρ alone. Consequently, it is neither necessary nor possible to join to it a second equation for the momentum.

5. Numerical tests. In this section we present several numerical tests which highlight the main features of the proposed control strategies for a speed-dependent risk mitigation at both the kinetic and the hydrodynamic levels. In particular, we give some insights into the Boltzmann-type controlled kinetic model and the corresponding hydrodynamic approximations for various choices of the penetration rate p of driver-assist vehicles in the traffic stream.

We adopt a Monte Carlo approach for the numerical solution of the Boltzmann-type equation in the quasi-invariant interaction limit; see [45, 46] for an introduction. We use instead finite volume weighted essentially nonoscillatory (WENO) schemes to tackle the macroscopic conservation laws with nonconvex fluxes; see [53] and references therein. In all tests we consider the function $P(\rho)$ given in (4) with $\mu = 2$ and the recommended speed $v_d(\rho) = 1 - \rho$. Other relevant parameters will be specified from case to case.

5.1. Inhomogeneous kinetic model. We begin by rewriting the inhomogeneous Boltzmann-type model (37) in strong form, which is more suited to numerical purposes. This reads

$$(48) \quad \partial_\tau \tilde{f}(\tau, \xi, v) + v \partial_\xi \tilde{f}(\tau, \xi, v) = \frac{1}{\epsilon} Q(\tilde{f}, \tilde{f})(\tau, \xi, v),$$

where Q on the right-hand side is the binary interaction operator (in classical terms, the “*collision operator*”) defined as

$$Q(\tilde{f}, \tilde{f})(\tau, \xi, v) = \frac{1}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \left(\frac{1}{J} \tilde{f}(\tau, \xi, v') \tilde{f}(\tau, \xi, v'_*) - \tilde{f}(\tau, \xi, v) \tilde{f}(\tau, \xi, v_*) \right) dv_* \right\rangle \right],$$

where (v', v'_*) are the preinteraction speeds which generate the postinteraction speeds (v, v_*) according to the interaction rules (24) and J is the Jacobian of the transformation from (v', v'_*) to (v, v_*) .

We now briefly account for the numerical scheme by which we solve (48). After fixing $\epsilon = 10^{-3}$ and introducing a time discretization $\tau^n := n\Delta\tau$, with $\Delta\tau > 0$ and $n \in \mathbb{N}$, we adopt a splitting approach.

Interaction step. Starting from τ^n , we first integrate the interactions in a single time step and in all space positions ξ ,

$$(49) \quad \begin{cases} \partial_\tau F(\tau, \xi, v) = \frac{1}{\epsilon} Q(F, F)(\tau, \xi, v), & \tau \in (\tau^n, \tau^{n+1/2}], \\ F(\tau^n, \xi, v) = \tilde{f}(\tau^n, \xi, v), \end{cases}$$

using the Nanbu algorithm for Maxwellian molecules; see, e.g., [10]. In particular, fixing $\xi = \xi_i$ and setting $F_i(\tau, v) := F(\tau, \xi_i, v)$, $\rho_i(\tau) := \int_0^1 F_i(\tau, v) dv$,

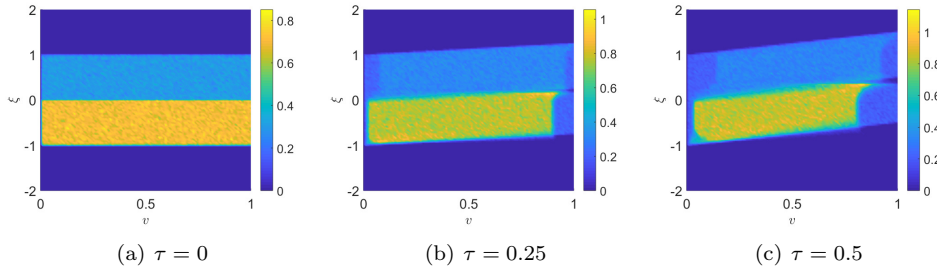


FIG. 6. (a) Initial distribution (52) with $\rho_L = 0.8$, $\rho_R = 0.2$. (b)–(c) Evolution of the kinetic distribution $f(\tau, \xi, v)$ for $0 < \tau \leq 0.5$ in the case of zero penetration rate p (namely, no vehicle of the system is influenced by the action of the control).

we observe that (49) can be rewritten as

$$(50) \quad \partial_\tau F_i(\tau, v) = \frac{1}{\epsilon} Q^+(F_i, F_i)(\tau, v) - \frac{\rho_i(\tau)}{2\epsilon} F_i(\tau, v),$$

where Q^+ denotes the gain part of the binary interaction operator Q , i.e.,

$$Q^+(F_i, F_i)(\tau, v) := \frac{1}{2} \mathbb{E}_\Theta \left[\left\langle \int_0^1 \frac{1}{IJ} F_i(\tau, 'v) F_i(\tau, 'v_*) dv_* \right\rangle \right].$$

Discretizing (50) in time through the forward Euler scheme yields, whenever $\rho_i \neq 0$,

$$(51) \quad F_i^{n+1/2} = \left(1 - \frac{\rho_i \Delta\tau}{2\epsilon} \right) F_i^n + \frac{\rho_i \Delta\tau}{2\epsilon} \cdot \frac{2Q^+(F_i^n, F_i^n)}{\rho_i},$$

whence, from $\int_0^1 F_i^n(v) dv = \frac{2}{\rho_i} \int_0^1 Q^+(F_i^n, F_i^n)(v) dv = \rho_i$, we see that also $F_i^{n+1/2}$ has mass ρ_i , i.e., the numerical scheme preserves the vehicle density in a single interaction step, provided $\frac{\rho_i \Delta\tau}{2\epsilon} \leq 1$. Under such a restriction, (51) has the following interpretation: in a single binary interaction a vehicle with speed v in the position ξ_i either does not change speed with probability $1 - \frac{\rho_i \Delta\tau}{2\epsilon}$ or changes it according to the rules encoded in Q^+ with probability $\frac{\rho_i \Delta\tau}{2\epsilon}$.

Transport step. Subsequently we take the output of the interactions as the input of a pure transport step towards the next time τ^{n+1} :

$$\begin{cases} \partial_\tau \tilde{f}(\tau, \xi, v) + v \partial_\xi \tilde{f}(\tau, \xi, v) = 0, & \tau \in (\tau^{n+1/2}, \tau^{n+1}], \\ \tilde{f}(\tau^{n+1/2}, \xi, v) = F(\tau^{n+1/2}, \xi, v). \end{cases}$$

On the whole, we consider (48) in the bounded domain $(\xi, v) \in [-2, 2] \times [0, 1]$ with periodic boundary conditions on the space variable ξ . As initial condition we prescribe the following distribution:

$$(52) \quad \tilde{f}_0(\xi, v) = \begin{cases} \rho_L & \text{for } (\xi, v) \in [-1, 0) \times [0, 1], \\ \rho_R & \text{for } (\xi, v) \in [0, 1] \times [0, 1], \\ 0 & \text{otherwise,} \end{cases}$$

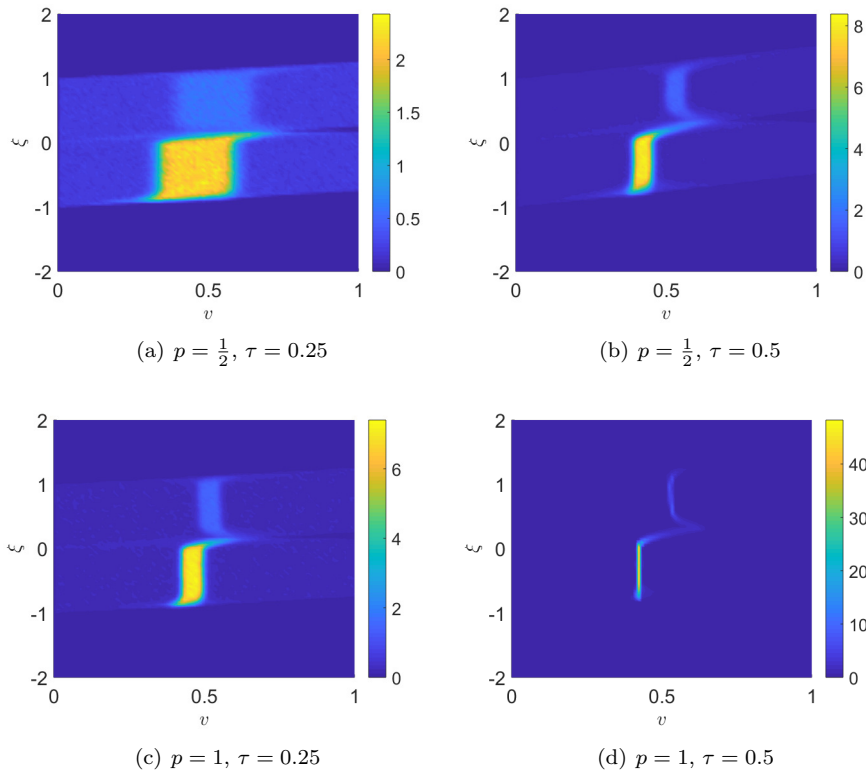


FIG. 7. Binary variance control. Evolution of the kinetic distribution $\tilde{f}(\tau, \xi, v)$ starting from the initial condition depicted in Figure 6(a) and with $\kappa = 5 \cdot 10^{-2}$, $\lambda = 10^{-3}$. First row (a), (b): Penetration rate $p = \frac{1}{2}$. Second row (c), (d): Penetration rate $p = 1$.

which is piecewise constant in ξ and uniform in v for all fixed $\xi \in [-1, 1]$. The constants $\rho_L, \rho_R > 0$ represent the vehicle density to the left and to the right, respectively, of the position $\xi = 0$ and are chosen in such a way that the total mass of vehicles is normalized to 1, i.e.,

$$\rho_L + \rho_R = \int_0^1 \int_{-2}^2 \tilde{f}_0(\xi, v) d\xi dv = 1;$$

see Figure 6(a) for a particular case.

Figures 6(b),(c) show the evolution of the distribution function \tilde{f} at two successive times in the case $p = 0$, i.e., for a null penetration rate meaning that no vehicle in the traffic stream is equipped with driver-assist technologies. We clearly observe that the vehicle speeds are highly dispersed at the final time and hence that the associated driving risk does not tend to decrease spontaneously.

Figures 7 and 8 show instead the evolution of \tilde{f} under the action of a driver-assist control which seeks to minimize either the binary variance of the speeds in each pairwise interaction or the difference with the congestion-dependent recommended speed $v_d(\rho) = 1 - \rho$, respectively. In both cases we consider the scenarios with either 50% or 100% of vehicles equipped with driver-assist technologies in the traffic stream, corresponding to penetration rates $p = \frac{1}{2}$ and $p = 1$, respectively, for a fixed

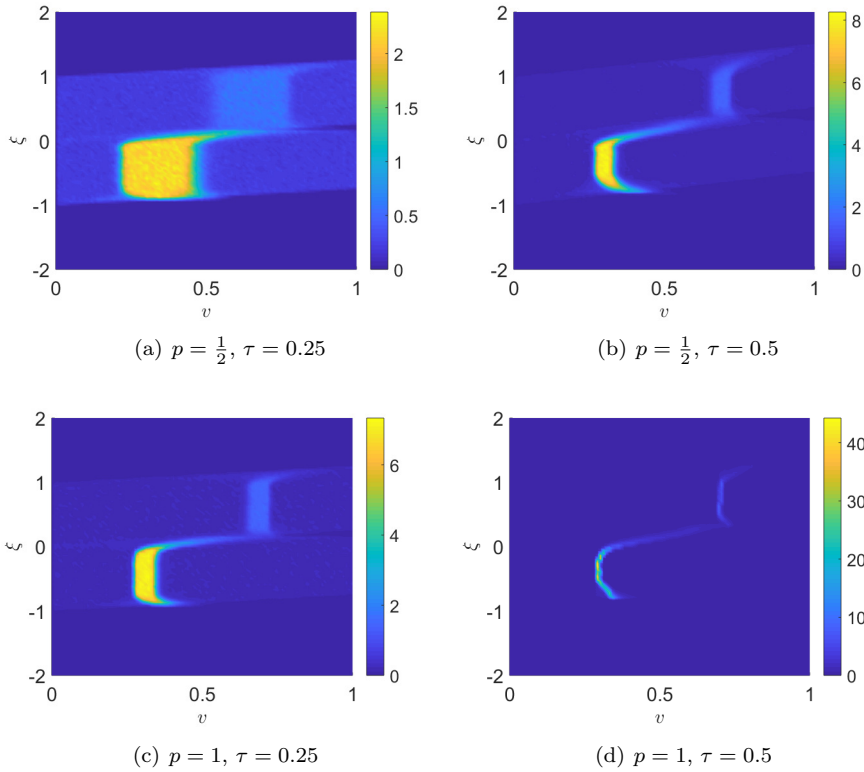


FIG. 8. Desired speed control. Evolution of the kinetic distribution $\tilde{f}(\tau, \xi, v)$ starting from the initial condition depicted in Figure 6(a), with $\kappa = 5 \cdot 10^{-2}$, $\lambda = 10^{-3}$, and $v_d(\rho) = 1 - \rho$. First row (a), (b): Penetration rate $p = \frac{1}{2}$. Second row (c), (d): Penetration rate $p = 1$.

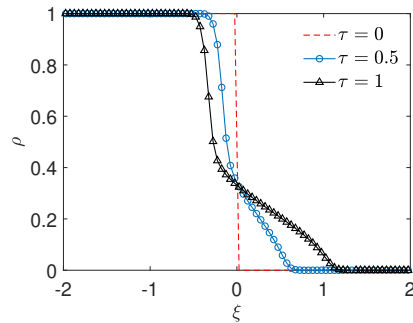


FIG. 9. Solution to (42) at times $\tau = 0$ (initial condition) and $\tau = 0.5, 1$.

control penalization $\kappa = 5 \cdot 10^{-2}$. The numerical results show that both control strategies manage to reduce the global speed variance. Indeed, at the final time the distribution function \tilde{f} clearly approaches Dirac delta-like distributions in the v -variable, particularly for $p = 1$.

5.2. First order hydrodynamic model. We already observed that the flux function $\mathcal{F}(\rho) := \rho V_\infty^*(\rho)$ in the conservation law (41) is in general neither strictly convex nor strictly concave (cf. in particular (42), (43)) because $\mathcal{F}''(\rho)$ may change sign for $\rho \in (0, 1)$. Hence the solution to a Riemann problem is expected to be a combination of shock and rarefaction waves, sometimes called a *compound wave*. The unique entropy solution can be built taking advantage of a convex-hull reconstruction; see, e.g., [40] for an introduction.

At the numerical level, it is quite challenging to prove the convergence of high-order schemes to the entropy solution despite the good numerical performances of such schemes in many regimes. In the nonconvex case counterexamples exist for Godunov and Lax–Friedrichs numerical fluxes under the usual CFL condition. In the following we use a WENO finite volume scheme [53] with Lax–Friedrichs numerical flux. In order to enforce the convergence towards the correct entropy solution, we adopt the first order monotone modification proposed in [51]. The resulting method is high-order accurate in smooth regions, whereas near a nonconvex discontinuity region it uses a discontinuity indicator which is $O(1)$.

To discretize equations (42) and (43) we introduce a uniform mesh in the space domain $[-2, 2]$ made of $N_\xi = 80$ grid points, which implies a mesh parameter $\Delta\xi = 5 \cdot 10^{-2}$. Furthermore, we choose the time step $\Delta\tau > 0$ according to the CFL condition,

$$\max_{\xi \in [-2, 2]} |\mathcal{F}'(\rho)| \cdot \frac{\Delta\tau}{\Delta\xi} = \text{CFL} \leq 1,$$

fixing $\text{CFL} = 0.5$.

In all the tests of this section we prescribe the following initial condition for the vehicle density:

$$\rho_0(\xi) = \begin{cases} 1 & \text{for } \xi \leq 0, \\ 0 & \text{for } \xi > 0, \end{cases}$$

which reproduces the classic example of a queue upstream from a traffic light placed in $\xi = 0$ which turns to green at time $\tau = 0$. Figure 9 shows such an initial condition (dashed red line) and the evolution of the vehicle density ρ at two successive times ruled by (42). Notice that this problem is representative at once of three different scenarios: (i) the case of completely uncontrolled dynamics; (ii) the case of binary variance control with any penetration rate, which, as already observed, has no visible impact on the purely macroscopic stream of vehicles; (iii) the case of desired speed control with zero penetration rate—for then (43) reduces to (42). Since we fixed $\mu = 2$ in (4), the flux of (42) is nonconcave; hence the solution is a combination of a backward propagating shock and a rarefaction wave modeling vehicles which progressively depart at the green light.

Figure 10 shows instead the solution to (43), namely the first order hydrodynamic model with desired speed control, for three different penetration rates ($p = \frac{1}{4}, \frac{1}{2}, 1$) and two choices of the penalization coefficient ($\kappa = 10^{-1}, 1$). As already stated, the recommended speed is set to $v_d(\rho) = 1 - \rho$; therefore, in the limit $\kappa \rightarrow 0^+$ (nonpenalized control) the flux of (43) tends to the classical Greenshield's parabolic flux $\rho(1 - \rho)$, which gives a pure rarefaction wave as solution to the traffic light problem. From the second row of Figure 10 we clearly observe that for $\kappa = 10^{-1}$ (weakly penalized control) the density profile indeed approaches the expected one: the higher the penetration rate p , the more the shock visible in Figure 9 is absorbed by the action of the control, so that the whole evolution is consistent with pure rarefaction dynamics. We stress that the shock is instead still present in case of a more strongly

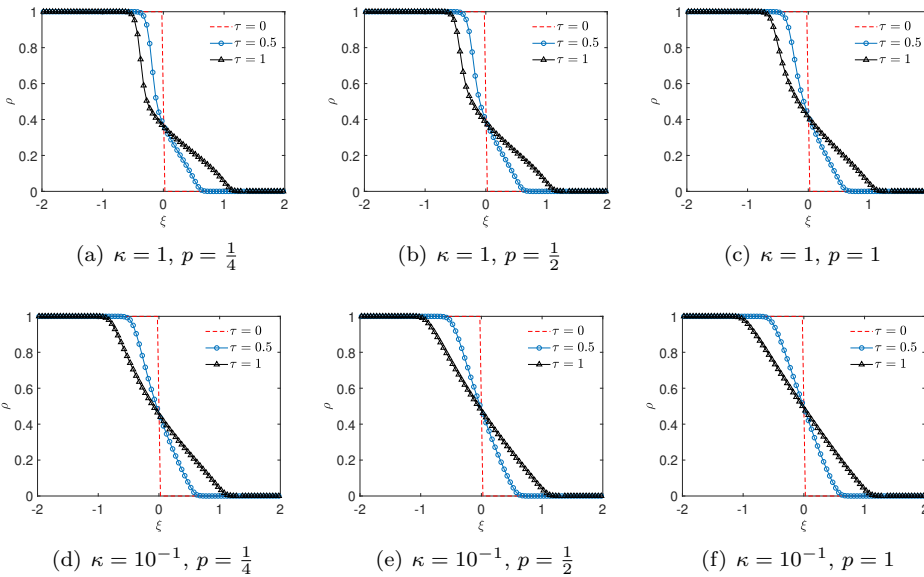


FIG. 10. Desired speed control. *First row: Solution to (43) at times $\tau = 0$ (initial condition) and $\tau = 0.5, 1$ for the three penetration rates $p = \frac{1}{4}, \frac{1}{2}, 1$ in the case $\kappa = 1$ (strongly penalized control). Second row: Same solution in the case $\kappa = 10^{-1}$ (weakly penalized control).*

penalized control; see the first row of Figure 10, where $\kappa = 1$. Nevertheless, it is slightly smoothed with respect to Figure 9 for a sufficiently high penetration rate p . Obviously, the aforementioned choice of $v_d(\rho)$ is just a possible example. It can be replaced by other more elaborate forms of the recommended speed, such as, e.g., those proposed in [27, 31] for a similar problem.

5.3. Second order hydrodynamic model. The second order hydrodynamic models derived in section 4.2 consist in pressureless and isothermal Euler-type equations, with a reaction term describing a relaxation towards the local equilibrium speed predicted by the kinetic model (cf. (46)), plus possibly a further relaxation towards the speed induced by the microscopic control (cf. (47)). Pressureless systems of balance laws have been studied at both the theoretical and the numerical levels by several authors in recent years, including [11, 12] and the references therein. One of the typical difficulties is that pressureless systems are weakly hyperbolic, which, in the absence of source terms, causes the emergence of vacuum states in a finite time. As a consequence, in order to guarantee the stability, the numerical methods would require a time step tending to zero.

In the following, we solve numerically systems (46) and (47) by means of an operator splitting approach in the space domain $[-2, 2]$ discretized by means of $N_\xi = 80$ grid points, which implies a mesh parameter $\Delta\xi = 5 \cdot 10^{-2}$. We impose CFL = 0.5 for the choice of the time step $\Delta\tau$. Moreover, we observe that, for a vanishing penalization coefficient κ , the source term in the second equation of (47) becomes stiff, thereby leading to additional constraints on the choice of the time step.

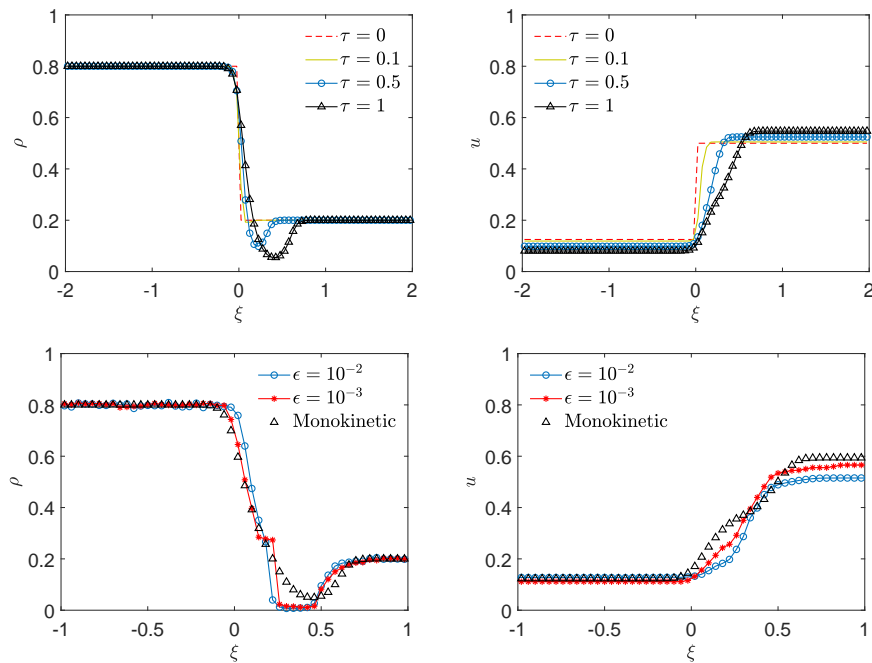


FIG. 11. *Top row: Solution to (46) at times $\tau = 0$ (initial condition) and $\tau = 0.1, 0.5, 1$. Bottom row: Comparison of the solutions obtained at time $\tau = 1$ from either the Boltzmann-type equation (37) with $\epsilon = 10^{-2}$, $\epsilon = 10^{-3}$ or the corresponding macroscopic approximation with the monokinetic closure (46).*

We consider as initial condition the following density-speed pair:

$$(53) \quad \rho_0(\xi) = \begin{cases} 0.8 & \text{for } \xi \leq 0, \\ 0.2 & \text{for } \xi > 0, \end{cases} \quad u_0(\xi) = \begin{cases} 0.125 & \text{for } \xi \leq 0, \\ 0.5 & \text{for } \xi > 0, \end{cases}$$

which mimics the fact that more densely packed vehicles are slower on average than less densely packed ones. The top row of Figure 11 shows the evolution of ρ and u predicted by model (46), which, as already observed in section 4.2, represents simultaneously the hydrodynamic limit in the case of no control of any vehicle in the traffic stream and of binary variance control with arbitrary effective penetration rate $p^* > 0$. We observe that vacuum naturally tends to form (see the vehicle density in the left panel), as expected from pressureless dynamics with fast vehicles preceding slow ones. The bottom row of Figure 11 shows a comparison between the solution of the inhomogeneous Boltzmann-type equation (37) for small ϵ , which mimics a hydrodynamic regime, and the solution to (46). It is evident that the solution provided by the macroscopic system of balance laws is consistent, in the limit $\epsilon \rightarrow 0^+$, with the “original” solution of the kinetic model. For completeness, we mention that we solved the inhomogeneous Boltzmann-type equation (37) via a standard Monte Carlo method, prescribing an initial condition consistent with (53).

The macroscopic action of the control is instead clearly visible in Figure 12. There, we display the evolution of ρ and u predicted by model (47), which implements the microscopic desired speed control towards the recommended speed $v_d(\rho) = 1 - \rho$. We fix in particular $p = 1$, corresponding to 100% penetration of the driver-assist technol-

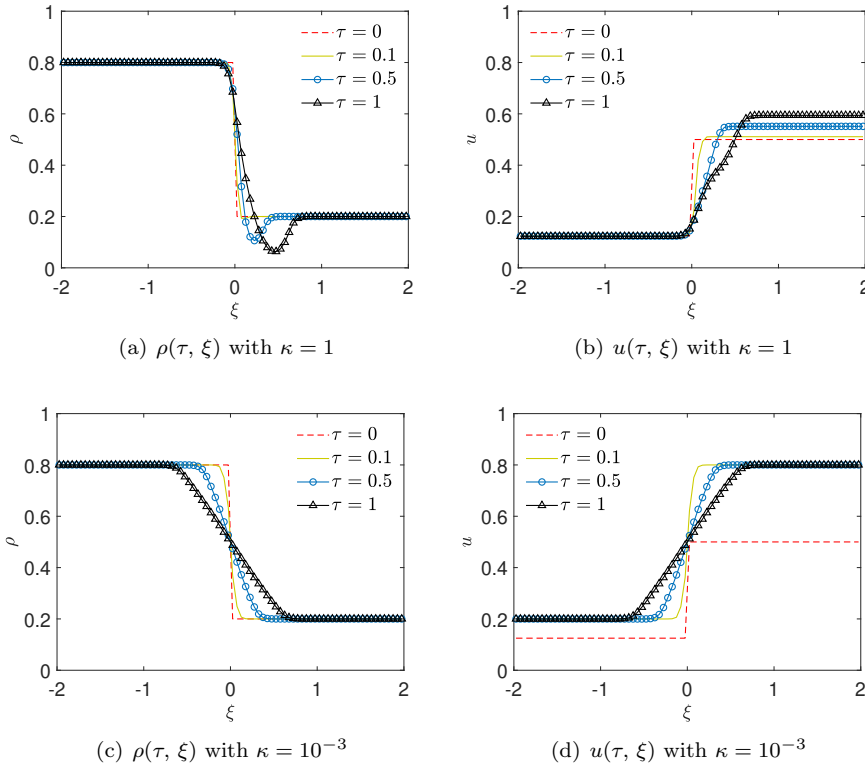


FIG. 12. Desired speed control. Solution to (47) at times $\tau = 0$ (initial condition) and $\tau = 0.1, 0.5, 1$ with penetration rate $p = 1$ and control penalization $\kappa = 1$ (weak control, top row) and $\kappa = 10^{-3}$ (strong control, bottom row).

ogy in the traffic stream, and we vary the control penalization from $\kappa = 1$ (strongly penalized control) to $\kappa = 10^{-3}$ (weakly penalized control). The numerical results show that in the first case a vacuum still tends to form (Figure 12a) as a consequence of the pressureless dynamics, although in the long run ($\tau = 1$) the control slightly perturbs the speed profile (Figure 12b) with respect to the case illustrated in Figure 11. In the second case, instead, the stronger action of the control dominates the speed dynamics, which, according to the second equation in (47), become essentially a quick local relaxation of u towards $v_d(\rho)$ (cf. also Figure 12(d)). The evolution of the corresponding density profile follows very closely a pure rarefaction wave between the left state $\rho_L = 0.8$ and the right state $\rho_R = 0.2$ (Figure 12(c)), which is actually the expected solution to the *first order* hydrodynamic model with flux $\mathcal{F}(\rho) = \rho v_d(\rho)$. On the whole, then, we find that if the control is sufficiently strong, namely if $p^* = \frac{p}{\kappa} \gg 1$, the solution to the second order hydrodynamic model (47) collapses onto that of the first order model (43), which remarkably implies no more vacuum formation (compare Figures 12(a),(c)). Also in this case, we compare the solution to the inhomogeneous Boltzmann-type equation with $\kappa = 10^{-3}$ and $\epsilon = 10^{-3}$ (hydrodynamic regime) with that of the macroscopic model (47); see Figure 13. Again, we observe that the dynamics depicted by the system of balance laws are fully consistent with the “original” kinetic description in the regime $\epsilon \rightarrow 0^+$. Like before, we solved the inhomogeneous Boltzmann-type equation (37) via a standard Monte Carlo method with initial con-

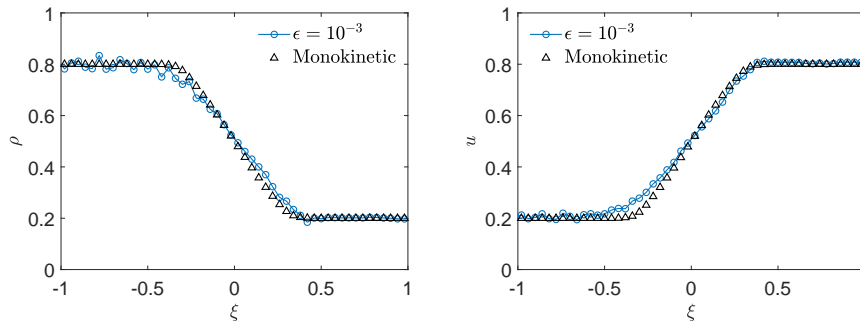


FIG. 13. Desired speed control. Comparison of the density and the mean speed at time $\tau = 0.5$ obtained from either the Boltzmann-type equation (37) with v_d -controlled binary interactions ($\kappa = 10^{-3}$, $\epsilon = 10^{-3}$) or the corresponding macroscopic approximation with the monokinetic closure (47).

ditions consistent with (53).

6. Summary and conclusions. In this paper, we have developed a hierarchical approach to the control of traffic flow based on the current increasingly popular idea that automated vehicles can be profitably used as inner controllers in a bottom-up control perspective. The general goal is to regularize the stream of vehicles from the inside; in particular, in this work we have considered control actions aimed at the mitigation of road risk. First we have proposed a model of stochastic microscopic binary interactions among the vehicles, which include probabilistically the presence of driver-assist vehicles in the traffic flow. Such interactions produce speed variations through accelerations and decelerations, but when they involve a driver-assist vehicle, they are further controlled in such a way that the speed variance of the interacting vehicles is reduced. Indeed, reports of the World Health Organization [48, 61] have stressed that speed differences from vehicle to vehicle are among the major causes of increased levels of crash risk. It is worth noticing that our probabilistic approach easily allows us to consider both large and small percentages of driver-assist vehicles in the traffic stream, the so-called penetration rate. Then we have upscaled these interactions to the level of the global flow by means of a space homogeneous kinetic Boltzmann-type equation. The analysis of such an equation, in particular of its asymptotic solutions, has provided us with detailed insights into the impact of the microscopic control strategies on the observable aggregate behavior of the system. Interestingly, the results have revealed that some control strategies successfully reduce the speed-dependent road risk factors, although they do not modify the macroscopic flow. From a purely macroscopic point of view, they may therefore erroneously seem to be uninformal. At last, we have reformulated the kinetic equation in a space inhomogeneous setting, and we have used it to derive first and second order hydrodynamic traffic models consistent with the original microscopic controlled interactions among the vehicles. To this purpose, we have taken advantage of closure methods, which rely strongly on the ability of our kinetic model to provide explicit information on the speed distribution at equilibrium (the equivalent of the Maxwellian distribution in classical gas dynamics). The resulting equations for the density and the mean speed of the vehicles constitute original macroscopic traffic models, in which the action of the control is directly embedded from the microscopic scale (bottom-up) rather than being imposed through a control problem of the macroscopic equations themselves (top-down).

Acknowledgment. Both authors are members of GNFM (Gruppo Nazionale per la Fisica Matematica) of INdAM (Istituto Nazionale di Alta Matematica), Italy.

REFERENCES

- [1] S. M. ABUELENIN AND A. Y. ABUL-MAGD, *Empirical study of traffic velocity distribution and its effect on VANETs connectivity*, in Proceedings of the 2014 International Conference on Connected Vehicles and Expo (Vienna, Austria), IEEE, Washington, DC, 2014, pp. 391–395.
- [2] J. P. AGNELLI, F. COLASUONNO, AND D. KNOPOFF, *A kinetic theory approach to the dynamics of crowd evacuation from bounded domains*, *Math. Models Methods Appl. Sci.*, 25 (2015), pp. 109–129.
- [3] G. ALBI, Y.-P. CHOI, M. FORNASIER, AND D. KALISE, *Mean field control hierarchy*, *Appl. Math. Optim.*, 76 (2017), pp. 93–135.
- [4] G. ALBI, L. PARESCHI, AND M. ZANELLA, *Boltzmann-type control of opinion consensus through leaders*, *Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci.*, 372 (2014), 20140138.
- [5] A. AW AND M. RASCLE, *Resurrection of “second order” models of traffic flow*, *SIAM J. Appl. Math.*, 60 (2000), pp. 916–938, <https://doi.org/10.1137/S0036139997332099>.
- [6] M. K. BANDA AND M. HERTY, *Numerical discretization of stabilization problems with boundary controls for systems of hyperbolic conservation laws*, *Math. Control Relat. Fields*, 3 (2013), pp. 121–142.
- [7] D. BENEDETTO, E. CAGLIOTI, F. GOLSE, AND M. PULVIRENTI, *Hydrodynamic limits of a Vlasov-Fokker-Planck equation for granular media*, *Commun. Math. Sci.*, 2 (2004), pp. 121–136.
- [8] A. BENSOUSSAN, J. FREHSE, AND P. YAM, *Mean Field Games and Mean Field Type Control Theory*, SpringerBriefs Math., Springer, New York, 2013.
- [9] D. S. BERRY AND D. M. BELMONT, *Distribution of vehicle speeds and travel times*, in Proceedings of the 2nd Berkeley Symposium on Mathematical Statistics and Probability, The Regents of the University of California, 1951, pp. 589–602.
- [10] A. V. BOBYLEV AND K. NANBU, *Theory of collision algorithms for gases and plasmas based on the Boltzmann equation and the Landau-Fokker-Planck equation*, *Phys. Rev. E*, 61 (2000), pp. 4576–4586.
- [11] F. BOUCHUT, *On zero pressure gas dynamics*, in Advances in Kinetic Theory and Computing, Ser. Adv. Math. Appl. Sci. 22, World Scientific, River Edge, NJ, 1994, pp. 171–190.
- [12] F. BOUCHUT, S. JIN, AND X. LI, *Numerical approximations of pressureless and isothermal gas dynamics*, *SIAM J. Numer. Anal.*, 41 (2003), pp. 135–158, <https://doi.org/10.1137/S0036142901398040>.
- [13] J. A. CARRILLO, Y.-P. CHOI, AND S. P. PEREZ, *A review on attractive-repulsive hydrodynamics for consensus in collective behavior*, in Active Particles, Vol. 1, N. Bellomo, P. Degond, and E. Tadmor, eds., Birkhäuser/Springer, Cham, 2017, pp. 259–298.
- [14] C. CERCIGNANI, R. ILLNER, AND M. PULVIRENTI, *The Mathematical Theory of Dilute Gases*, Appl. Math. Sci. 106, Springer, New York, 1994.
- [15] R. M. COLOMBO, M. HERTY, AND M. MERCIER, *Control of the continuity equation with a non local flow*, *ESAIM Control Optim. Calc. Var.*, 17 (2011), pp. 353–379.
- [16] E. CRISTIANI, F. S. PRIULI, AND A. TOSIN, *Modeling rationality to control self-organization of crowds: An environmental approach*, *SIAM J. Appl. Math.*, 75 (2015), pp. 605–629, <https://doi.org/10.1137/140962413>.
- [17] C. F. DAGANZO, *Requiem for second-order fluid approximation of traffic flow*, *Transportation Res.*, 29 (1995), pp. 277–286.
- [18] A. I. DELIS, I. K. NIKOLOS, AND M. PAPAGEORGIOU, *Macroscopic traffic flow modeling with adaptive cruise control: Development and numerical solution*, *Comput. Math. Appl.*, 70 (2015), pp. 1921–1947.
- [19] A. I. DELIS, I. K. NIKOLOS, AND M. PAPAGEORGIOU, *A macroscopic multi-lane traffic flow model for ACC/CACC traffic dynamics*, *Transp. Res. Record*, 2672 (2018), pp. 178–192.
- [20] M. DELITALA AND A. TOSIN, *Mathematical modeling of vehicular traffic: A discrete kinetic theory approach*, *Math. Models Methods Appl. Sci.*, 17 (2007), pp. 901–932.
- [21] P. P. DEY, S. CHANDRA, AND S. GANGOPADHAYA, *Speed distribution curves under mixed traffic conditions*, *J. Transp. Eng.*, 132 (2006), pp. 475–481.
- [22] B. DÜRING AND G. TOSCANI, *Hydrodynamics from kinetic models of conservative economies*, *Phys. A*, 384 (2007), pp. 493–506.
- [23] L. FERMO AND A. TOSIN, *Fundamental diagrams for kinetic equations of traffic flow*, *Discrete Contin. Dyn. Syst. Ser. S*, 7 (2014), pp. 449–462.

- [24] A. FESTA, A. TOSIN, AND M.-T. WOLFRAM, *Kinetic description of collision avoidance in pedestrian crowds by sidestepping*, *Kinet. Relat. Models*, 11 (2018), pp. 491–520.
- [25] M. FORNASIER, B. PICCOLI, AND F. ROSSI, *Mean-field sparse optimal control*, *Philos. Trans. R. Soc. Lond. Ser. A Math. Phys. Eng. Sci.*, 372 (2014), 20130400.
- [26] P. FREGUGLIA AND A. TOSIN, *Proposal of a risk model for vehicular traffic: A Boltzmann-type kinetic approach*, *Commun. Math. Sci.*, 15 (2017), pp. 213–236.
- [27] J. R. FREJO, I. PAPAMICHAIL, M. PAPAGEORGIOU, AND E. F. CAMACHO, *Macroscopic modeling and control of reversible lanes on freeways*, *IEEE Trans. Intell. Transp. Syst.*, 17 (2016), pp. 948–959.
- [28] D. C. GAZIS, R. HERMAN, AND R. W. ROTHERY, *Nonlinear follow-the-leader models of traffic flow*, *Oper. Res.*, 9 (1961), pp. 545–567.
- [29] M. GÜNTHER, A. KLAR, T. MATERNE, AND R. WEGENER, *Multivalued fundamental diagrams and stop and go waves for continuum traffic flow equations*, *SIAM J. Appl. Math.*, 64 (2003), pp. 468–483, <https://doi.org/10.1137/S0036139902404700>.
- [30] S.-Y. HA AND E. TADMOR, *From particle to kinetic and hydrodynamic descriptions of flocking*, *Kinet. Relat. Models*, 3 (2008), pp. 415–435.
- [31] Y. HAN, A. HEGYI, Y. YUAN, S. HOOGENDOORN, M. PAPAGEORGIOU, AND C. RONCOLI, *Resolving freeway jam waves by discrete first-order model-based predictive control of variable speed limits*, *Transportation Res. Part C*, 77 (2017), pp. 405–420.
- [32] M. HERTY, A. KLAR, AND L. PARESCHI, *General kinetic traffic models for vehicular traffic flows and Monte-Carlo methods*, *Comput. Methods Appl. Math.*, 5 (2005), pp. 155–169.
- [33] M. HERTY AND L. PARESCHI, *Fokker-Planck asymptotics for traffic flow models*, *Kinet. Relat. Models*, 3 (2010), pp. 165–179.
- [34] M. HERTY, A. TOSIN, G. VISCONTI, AND M. ZANELLA, *Hybrid stochastic kinetic description of two-dimensional traffic dynamics*, *SIAM J. Appl. Math.*, 78 (2018), pp. 2737–2762, <https://doi.org/10.1137/17M1155909>.
- [35] R. ILLNER, A. KLAR, AND T. MATERNE, *Vlasov-Fokker-Planck models for multilane traffic flow*, *Commun. Math. Sci.*, 1 (2003), pp. 1–12.
- [36] J. JANSSON AND F. GUSTAFSSON, *A framework and automotive application of collision avoidance decision making*, *Automatica J. IFAC*, 44 (2008), pp. 2347–2351.
- [37] B. S. KERNER, *The Physics of Traffic*, *Understanding Complex Systems*, Springer, Berlin, 2004.
- [38] A. KLAR AND R. WEGENER, *Enskog-like kinetic models for vehicular traffic*, *J. Stat. Phys.*, 87 (1997), pp. 91–114.
- [39] W. LEUTZBACH, *Introduction to the Theory of Traffic Flow*, Springer-Verlag, New York, 1988.
- [40] R. J. LEVEQUE, *Finite Volume Methods for Hyperbolic Problems*, Cambridge University Press, Cambridge, UK, 2004.
- [41] A. K. MAURYA, S. DAS, S. DEY, AND S. NAMA, *Study on speed and time-headway distributions on two-lane bidirectional road in heterogeneous traffic condition*, *Transp. Res. Proc.*, 17 (2016), pp. 428–437.
- [42] G. NALDI, L. PARESCHI, AND G. TOSCANI, eds., *Mathematical Modeling of Collective Behavior in Socio-Economic and Life Sciences*, *Modeling and Simulation in Science, Engineering and Technology*, Birkhäuser Boston, Boston, MA, 2010.
- [43] D. NI, H. K. HSIEH, AND T. JIANG, *Modeling phase diagrams as stochastic processes with application in vehicular traffic flow*, *Appl. Math. Model.*, 53 (2018), pp. 106–117.
- [44] I. A. NTOUSAKIS, I. K. NIKOLOK, AND M. PAPAGEORGIOU, *On microscopic modelling of adaptive cruise control systems*, *Transp. Res. Proc.*, 6 (2015), pp. 111–127.
- [45] L. PARESCHI AND G. RUSSO, *An introduction to Monte Carlo methods for the Boltzmann equation*, *ESAIM Proc.*, 10 (2001), pp. 35–75.
- [46] L. PARESCHI AND G. TOSCANI, *Interacting Multiagent Systems: Kinetic Equations and Monte Carlo Methods*, Oxford University Press, Oxford, UK, 2013.
- [47] S. L. PAVERI-FONTANA, *On Boltzmann-like treatments for traffic flow: A critical review of the basic model and an alternative proposal for dilute traffic analysis*, *Transportation Res.*, 9 (1975), pp. 225–235.
- [48] M. PEDEN, R. SCURFIELD, D. SLEET, D. MOHAN, A. A. HYDER, E. JARAWAN, AND C. MATHERS, *World Report on Road Traffic Injury Prevention*, Tech. report, World Health Organization, 2004.
- [49] I. PRIGOGINE AND R. HERMAN, *Kinetic Theory of Vehicular Traffic*, Elsevier, New York, 1971.
- [50] G. PUPPO, M. SEMPLICE, A. TOSIN, AND G. VISCONTI, *Fundamental diagrams in traffic flow: The case of heterogeneous kinetic models*, *Commun. Math. Sci.*, 14 (2016), pp. 643–669.
- [51] J.-M. QIU AND C.-W. SHU, *Convergence of high order finite volume weighted essentially nonoscillatory scheme and discontinuous Galerkin method for nonconvex conservation laws*, *SIAM J. Sci. Comput.*, 31 (2008), pp. 584–607, <https://doi.org/10.1137/070687487>.

- [52] P. SANTI, G. RESTA, M. SZELL, S. SOBOLEVSKY, S. H. STROGATZ, AND C. RATTI, *Quantifying the benefits of vehicle pooling with shareability networks*, Proc. Natl. Acad. Sci. USA, 111 (2014), pp. 13290–13294.
- [53] C.-W. SHU, *High order weighted essentially nonoscillatory schemes for convection dominated problems*, SIAM Rev., 51 (2009), pp. 82–126, <https://doi.org/10.1137/070679065>.
- [54] R. E. STERN, S. CUI, M. L. DELLE MONACHE, R. BHADANI, M. BUNTING, M. CHURCHILL, N. HAMILTON, R. HAULCY, H. POHLMANN, F. WU, B. PICCOLI, B. SEIBOLD, J. SPRINKLE, AND D. B. WORK, *Dissipation of stop-and-go waves via control of autonomous vehicles: Field experiments*, Transportation Res. Part C, 89 (2018), pp. 205–221.
- [55] R. TACHET, P. SANTI, S. SOBOLEVSKY, L. I. REYES-CASTRO, E. FRAZZOLI, D. HELBING, AND C. RATTI, *Revisiting street intersections using slot-based systems*, PLoS ONE, 11 (2016), e0149607.
- [56] G. TOSCANI, *Kinetic models of opinion formation*, Commun. Math. Sci., 4 (2006), pp. 481–496.
- [57] A. TOSIN AND M. ZANELLA, *Control strategies for road risk mitigation in kinetic traffic modelling*, IFAC-PapersOnLine, 51 (2018), pp. 67–72.
- [58] M. TREIBER, A. KESTING, AND D. HELBING, *Delays, inaccuracies and anticipation in microscopic traffic models*, Phys. A, 306 (2006), pp. 71–88.
- [59] C. VILLANI, *On a new class of weak solutions to the spatially homogeneous Boltzmann and Landau equations*, Arch. Ration. Mech. Anal., 143 (1998), pp. 273–307.
- [60] G. VISCONTI, M. HERTY, G. PUPPO, AND A. TOSIN, *Multivalued fundamental diagrams of traffic flow in the kinetic Fokker–Planck limit*, Multiscale Model. Simul., 15 (2017), pp. 1267–1293, <https://doi.org/10.1137/16M1087035>.
- [61] WORLD HEALTH ORGANIZATION, *Global Status Report on Road Safety*, Tech. report, World Health Organization, 2015.