

CFD simulation of multiple dust explosion occurred in a flour mill

*Original*

CFD simulation of multiple dust explosion occurred in a flour mill / Russo, Patrizia; Tabib, Achraf; Mazzaro, M.; Danzi, E.; Marmo, L.. - In: CHEMICAL ENGINEERING TRANSACTIONS. - ISSN 2283-9216. - ELETTRONICO. - 77:(2019), pp. 865-870. [10.3303/CET1977145]

*Availability:*

This version is available at: 11583/2765713 since: 2019-11-07T18:01:34Z

*Publisher:*

Italian Association of Chemical Engineering - AIDIC

*Published*

DOI:10.3303/CET1977145

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

default\_article\_editorial [DA NON USARE]

-

(Article begins on next page)

## CFD Simulation of Multiple Dust Explosion Occurred in a Flour Mill

Paola Russo <sup>a,\*</sup>, Achraf Tabib <sup>a</sup>, Michele Mazzaro <sup>b</sup>, Enrico Danzi <sup>c</sup>, Luca Marmo <sup>c</sup>

<sup>a</sup> Dipartimento Ingegneria Chimica Materiali Ambiente, Sapienza Università di Roma, Roma, Italy

<sup>b</sup> Direzione Centrale per la Prevenzione e la Sicurezza Tecnica, Corpo nazionale dei Vigili del Fuoco, Roma, Italy

<sup>c</sup> Dipartimento di Scienza Applicata e Tecnologia, Politecnico di Torino, Torino, Italy

[paola.russo@uniroma1.it](mailto:paola.russo@uniroma1.it)

Dust explosions pose a serious hazard to both personnel and equipment in industries that handles combustible powders. Although prevention and mitigation technology of dust explosions has progressed greatly, continual accidents in the process industries demonstrate the need for improved knowledge in this area (Mercan, 2016; Russo et al., 2017). On July 16, 2007, a primary explosion followed by secondary explosions happened in the Cordero mill (Italy) and 5 persons died (Marmo et al., 2012). The accident occurred at the end of the loading operation of a tanker, when a surplus of flour was overcharged. This extra amount was then pneumatically conveyed to a silo placed in the flour-warehouses, by connecting the tanker to the pneumatic transport line through one of the tanker hoses. The flour was loaded at a low flow rate, and hence a low concentration of flour in the duct occurred. The source of ignition of the dust cloud was attributed to an electrostatic arc that took place in the pneumatic transport duct (Marmo et al., 2012). The technical enquire found signs of the explosion in the duct: internal pressure provoked evident deformation of the duct. As widely discussed in the literature (Fiorentini and Marmo 2019; Marmo et al., 2013), Computational Fluid Dynamics can be a valid aid to forensic engineering because it allows to discern the incidental sequence that is more adherent to the evidence. The aim of this work is to reproduce the conditions present in the mill at the time of the accident using the CFD-code DESC, which is being developed for simulating dust explosions in complex geometries. The results obtained from the simulations were compared to the damage observed after the accident in order to identify the more credible scenario. Simulations with different levels of flour in the silo, concentration of dust in the air mixture and position of ignition were performed. Analysis of results revealed the effect of different parameters on the severity of dust explosion, not only limited to the case study investigated, in order to adopt the appropriate prevention and protection measures.

### 1. Case study

#### 1.1 Plant description

The flour mill Cordero was located in the town of Fossano. It was constituted by a main rectangular masonry building of four storey plus a basement and a more recent three-storey construction where were located the products warehouse and the offices. Along the length of the building, on one side there was a large courtyard for the movement of vehicles and on the other side a second courtyard was near a road in the village. The production area was located in the main building, where the four main sections were separated by brick thick walls. Entry to the rooms was through an internal staircase and a hoist. The "B" rooms were used to produce wheat flour, and the "A" rooms for the flour storage and for the preparation of the wheat for milling operations. A plan of the basement of the main building is reported in Figure 1.

The other floors were similar. Leaning against the East wall (towards the sacks warehouse) there were two metal flour silos that rose up to the second floor. Nearby there were bucket elevators. Against the middle wall of the building there were, from west to east, a freight elevator and 6 flour silos (the first was made of metal, the other made of wood) that rose up to the top floor and several bucket elevators. In the basement there was





Figure 2. Damage of the main building from the exterior (a) and inside the A area (b,c).

With regards to the transfer pipe from the truck to the silo, some parts were found in their original place, but other parts were found from the debris heap and some were lost. Moreover, the flanges of the pipe showed the typical deformation due to high internal pressure. Because of the overpressure, the material suffered much higher stresses than the elastic limit, and thus a permanent deformation.

## 2. CFD simulations

### 2.1 DESC code

DESC (Dust Explosion Simulation Code) was a CFD code developed to simulate dust explosions in industrial complex geometries (Skjold and Eckhoff, 2016). Skjold et al. (2005, 2006) simulated with DESC large-scale dust explosion experiments in silos. This model was a modified version of a CFD code called FLACS (Flame Acceleration Simulator) which was developed for the simulation of gas explosions. It has estimated potential overpressures in several case studies and accidents (Russo et al., 2017). The code solves the Reynolds-Averaged Navier-Stokes (RANS) equations for mass, enthalpy, momentum, and species. The RANS equations are closed using the  $k-\epsilon$  turbulence model. The combustion model consists of a flame model and a burning velocity model. In DESC, the burning velocity model entails that the laminar burning velocity is roughly estimated from measured pressure-time curves in a 20-litre vessel. The code was based on a finite volume technique with a weighted upwind/central differencing scheme for the convective term. First-order time integration was used. The time step was limited according to the default values of CFLC and CLFV numbers, which for explosion simulations are CFLC = 5.0 and CLFV = 0.5, which means that in each time step the pressure can propagate 5 cells and the flow 0.5 cells.

### 2.2 Simulation parameters

The geometry of the A area of the main building ( $28.2 \times 11.7 \times 17.0 \text{ m}^3$ ) was reconstructed in DESC with CASD code as shown in figure 3. The grid used is uniform and the cell size is 10 cm with a total of 12,217,500 cells to obtain accurate results inside the simulation volume (Figure 3). Some objects of the A area, which include the roof, the windows, the doors, some walls and the floor of the building and the walls of the silos, are represented by pressure relief panels. These devices allow to define objects with a dynamic behaviour when overpressure is detected on the surface of the panel. The characteristics of the panels (267 in total) are reported in Table 1 as obtained from NFPA 921 (2008). The fuel properties were set defining cloud volume, dust concentration, and thermodynamic and chemical data of fuel. The explosion parameters ( $P_{\max}=8.6 \text{ barg}$ ,  $K_{st}=150 \text{ bar m/s}$ ) of dust are those reported in literature for wheat flour (Mittal, 2013), as obtained in 20-L

sphere. This is the standard apparatus for dust explosion tests, through the generation of a uniform dust/air cloud inside the vessel (Di Sarli et al., 2015; Sanchirico et al., 2015).

In the simulation only the first explosion was considered. The dust cloud was assumed to fill the pipe, used to transfer the flour from the trucks to the warehouse, and the silo. Simulation were run by changing the dust concentration in the pipe and in the silo in the range 250- 2000 g/m<sup>3</sup>, and by changing the volume of dust cloud from 1/3 to 2/3 of the volume of the silo. The bottom part of the silo (1/3 of the volume) was assumed to be completely full of flour. The ignition source, with an energy of 10 mJ, was located at different heights inside the silo (i.e. at bottom (3.55m), at half height (7.25m), and at the top (9.25m) of the silo).


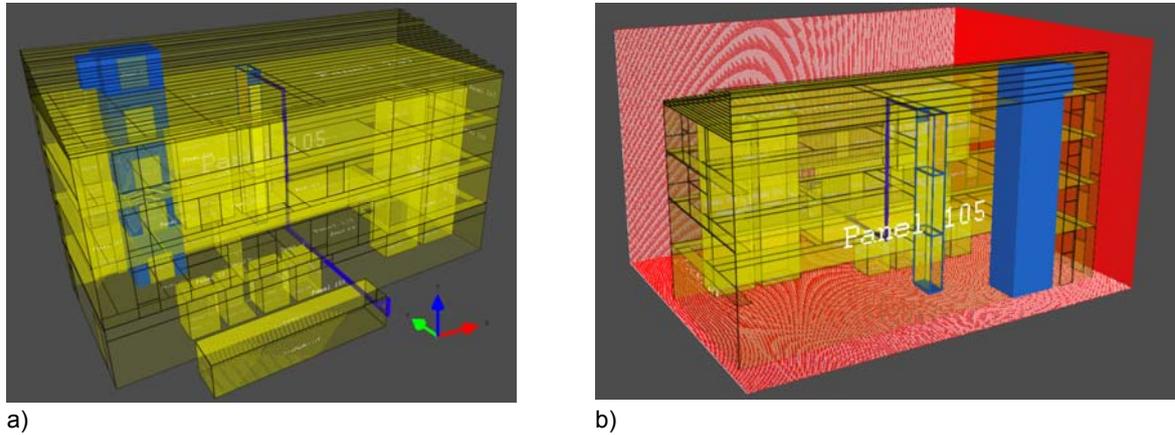


Figure 3. Geometry of the A area of the building (a) and grid (b) used in simulations.

Table 1: Characteristics of pressure relief panels

Object	Failure pressure (barg)	Weight (kg/m <sup>2</sup> )
Glass windows	0.03	10
Fire protection doors	0.07	157
Hoist doors	0.07	395
Brick walls (20 cm thick)	0.48	1800
Concrete floor	0.25	625
Wooden silo walls	0.20	25
Roof panels	0.14	40
Under-roof panels	0.14	50

To follow the value of parameters as temperature, maximum pressure (P<sub>max</sub>), dust concentration, velocity in time and space, some monitors points were set inside the simulation volume. The monitors were located inside the pipe, the silo, the roof, the hoist and the goods receipt area as shown in Figure 4.

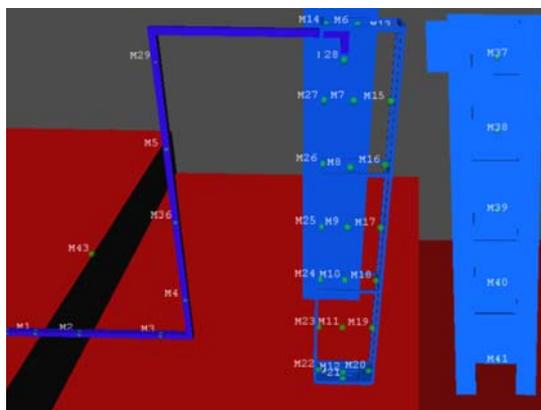

Monitor Point Position	
1 to 5,	Pipe
29 to 36	
6 to 28	Silo
43	Goods receipt area
42	Under-roof area
37 to 41	Hoist

Figure 4. Positions of the monitor points.

### 3. Results

Simulations were performed for various scenarios with different levels of flour in the silo, concentration of dust and position of ignition. The overpressures predicted for each scenario in the different monitor points were compared with the failure pressure of the various objects. From the comparison, it was possible to define the scenario that is compatible with the damage observed after the explosion. It corresponds to the scenario with the silo only partial filled with flour (1/3 of volume), concentration of dust in the dust cloud of  $2000 \text{ g/m}^3$  (higher than the stoichiometric value) and the ignition at the top of the silo. Results of the simulations were reported in figure 5 for this scenario. They showed that it can predict: the collapse of the silo, because of the overpressure increase along the silo length from the top ( $P_{\max} = 0.15 \text{ barg}$ ) to the bottom of the silo up the failure value ( $P_{\max} > 0.20 \text{ barg}$ ). Moreover, it can describe the propagation of the blast wave into the pipe and, as consequence of the silo collapse, then in the goods receipt area, where the under-roof and of roof panels fell. The propagation of the blast wave to the hoist, from the top to the bottom, with the collapse of the hoist door ( $P_{\max} > 0.07 \text{ barg}$ ), and then to the basement where overpressure as high as  $0.27 \text{ barg}$  caused the collapse of the concrete floor (Figure 6) and consequently of the flour bins. The large amount of dust dispersed in the area, because of the poor housekeeping, ignited by the blast wave, was then the cause of multiple explosions occurred in the plant.

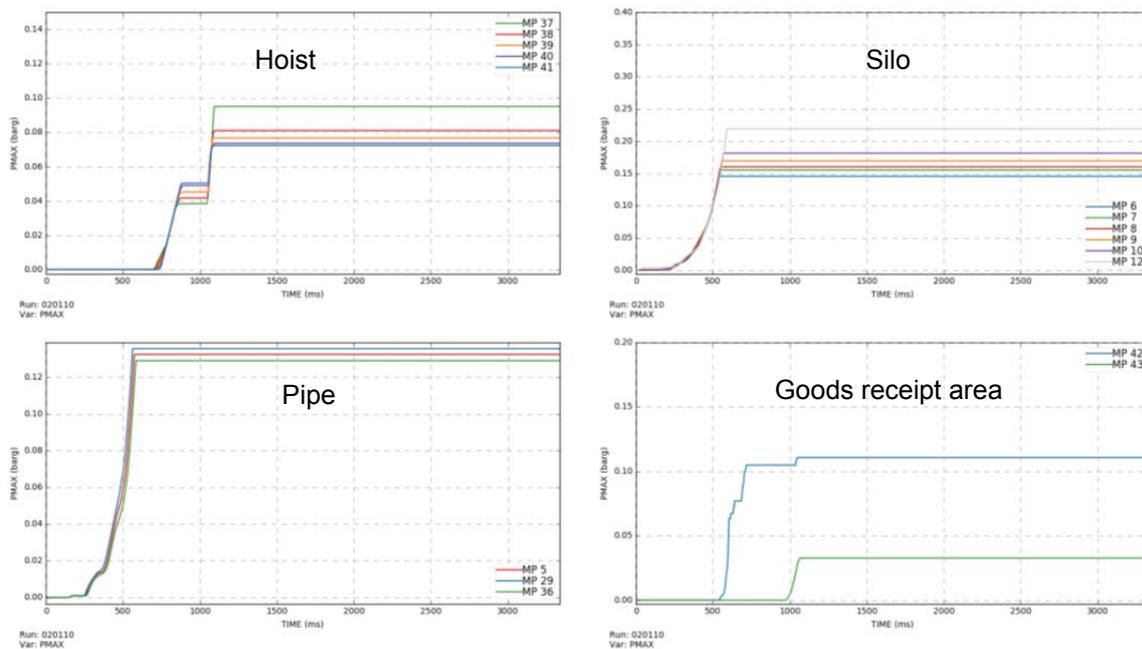


Figure 5.  $P_{\max}$  vs time in the monitor points located in the hoist, silo, pipe and goods receipt area.

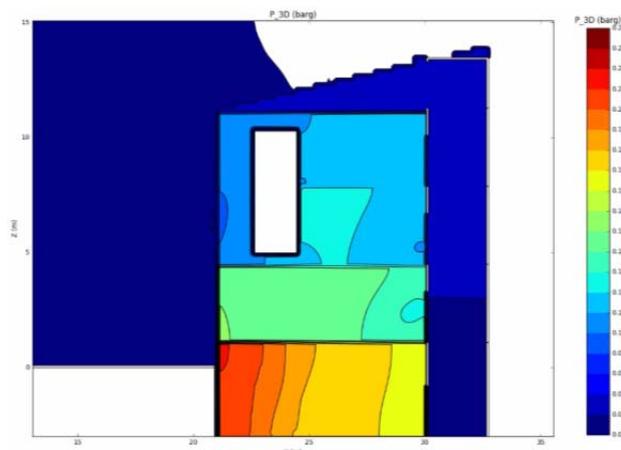


Figure 6. Map of  $P_{\max}$  reached in the hoist and in the basement (at 960 ms).

#### 4. Conclusions

The case study here analysed showed that ordinary and unusual operations, especially those of loading and unloading silos, bins, storage houses are the recurrent cause of uncontrolled explosions. Proper procedures should be defined when such operations have to be carried out in order to reduce the risk of explosions. Deflagration venting can reduce the impact of dust cloud explosions by controlling the release of the explosion energy. Damage to the remaining structure and equipment is then minimized. Good housekeeping in processing areas is important to prevent and mitigate dust explosions. In particular, to prevent secondary dust explosions, dust accumulation has to be minimized. Designing and maintaining equipment to prevent dust leaks, using dust collectors, eliminating flat surfaces and other areas where dust can accumulate, ensuring good housekeeping, and sealing hard-to-clean areas (such as the area above a suspended ceiling) can effectively prevent secondary dust explosions. Moreover, this paper demonstrates that computational fluid dynamics can be a valid aid to forensic engineering because it allows to discern the incidental sequence that is more adherent to the evidence. This despite the investigation must necessarily base the bases on a solid activity of evidence collection.

#### References

- Di Sarli V., Sanchirico R., Russo P., Di Benedetto A., 2015, CFD modeling and simulation of turbulent fluid flow and dust dispersion in the 20-L explosion vessel equipped with the perforated annular nozzle, *Journal of Loss Prevention in the Process Industries*, 38 (1), 2015, 204-213.
- Fiorentini L., Marmo L., 2019, *Principles of Forensic Engineering Applied to Industrial Accidents*, Wiley.
- Marmo L., Demichela M., 2012, Forensic reconstruction of the explosion that occurred at the Cordero flour mill, Cuneo, Italy, *Chemical Engineering Transactions*, 26, 633-638.
- Marmo, L., Fiorentini L., Piccinini N., 2013, Missing safety measures led to the jet fire and seven deaths at a steel plant in Turin. Dynamics and lessons learned, *Journal of Loss Prevention in the Process Industries* 26 (1), pp. 215-224
- Mercan Z., 2016, Dust explosion investigation in turkey, *Chemical Engineering Transactions*, 48, 715-720.
- Mittal M., 2013, Explosion hazard and safety in industries handling grain products, *Journal of Engineering Research and Studies*, 4, 1-11.
- NFPA, 2008, *NFPA 921 Guide for fire and explosion investigations*, NFPA, Quincy, USA.
- Russo P., De Rosa A., Mazzaro M., 2017, Silo explosion from smoldering combustion: A case study, *Canadian Journal of Chemical Engineering*, 95(9), 1721-1729.
- Sanchirico R., Di Sarli V., Russo P., Di Benedetto A., 2015, Effect of the nozzle type on the integrity of dust particles in standard explosion tests, *Powder Technology* 279, 203-208.
- Skjold, T., Arntzen, B.J., Hansen, O.R., Storvik, I.E., Eckhoff, R.K., 2006, Simulation of dust explosions in complex geometries with experimental input from standardized tests, *Journal of Loss Prevention in the Process Industries*, 19, 210-217.
- Skjold, T., Arntzen, B.J., Hansen, O.R., Taraldset, O.J., Storvik, I.E., Eckhoff, R.K., 2005, Simulating dust explosions with the first version of DESC, *Process Safety and Environmental Protection*, 83, 151-160.
- Skjold T., Eckhoff R., 2016, Dust explosions in the process industries: research in the twenty-first century, *Chemical Engineering Transactions*, 48, 337-342.