

Neutronics Scoping Studies for Experimental Fusion Devices

Original

Neutronics Scoping Studies for Experimental Fusion Devices / Zucchetti, M.; Candido, L.; Hartwig, Z.; Po', R.; Segantin, S.; Testoni, R.; Whyte, D.. - In: FUSION SCIENCE AND TECHNOLOGY. - ISSN 1536-1055. - STAMPA. - 75:6(2019), pp. 423-428. [10.1080/15361055.2019.1613141]

Availability:

This version is available at: 11583/2781272 since: 2020-01-16T16:23:54Z

Publisher:

Taylor and Francis Inc.

Published

DOI:10.1080/15361055.2019.1613141

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

NEUTRONICS SCOPING STUDIES FOR EXPERIMENTAL FUSION DEVICES

M. Zucchetti^{1,2}, L. Candido¹, Z. Hartwig², R. Po' ³, S. Segantin¹, R. Testoni¹, D. Whyte²

¹DENERG, Politecnico di Torino, Italy

²Plasma Science and Fusion Center, MIT, Cambridge (MA), USA

³ Decarbonization & Environmental R&D Research & Technological Innovation, Eni SpA,
Novara (Italy)

Abstract

A new Affordable Robust Compact (ARC) Fusion Reactor, which meets its goal in a cheaper, smaller but even more powerful, faster way to achieve Fusion Energy, with new high-field, high-temperature superconducting (HTS) magnets, has been designed in the US. SPARC will be the research tokamak aimed at the development of many ARC technologies. Ignitor is a proposed compact high-field tokamak that share with SPARC and ARC some design concepts, showing the convenience of this tokamak design development line. Neutronics and radiation damage scoping studies have been carried out for both designs. A general-purpose macroscopic model, set up by some of the authors in previous studies, has been used to estimate the radiation damage on selected machine components for the two cases. Solutions to solve the problem of radiation damage of the Toroidal and Poloidal Field Coils materials have been explored.

1
2
3 **1. Introduction**
4
5

6 Progress in technological fields such as High Temperature Superconductors, additive
7 manufacturing and innovative materials has led to new scenarios and to a second generation
8 of Fusion Reactors designs. A new Affordable Robust Compact (ARC) Fusion Reactor, which
9 meets its goal in a cheaper, smaller but even more powerful, faster way to achieve Fusion
10 Energy, with new high-field, high-temperature superconducting (HTS) magnets, has been
11 designed by MIT (Massachusetts Institute of Technology) and PSFC (Plasma Science and
12 Fusion Center).^{1,2} ARC too might face radiation damage problems, besides neutron-induced
13 activation, either for the Vacuum vessel, or for the Poloidal and Toroidal Field Coils (PFC and
14 TFC). For ARC, the selected superconducting material for the magnets is Rare Earth Barium
15 Copper Oxide (REBCO), a high temperature superconductor that can work at temperature up
16 to 80 K, which is higher than the one for Nb3Sn used for ITER. ARC will breed its own tritium
17 by means of a FLiBe self-cooled blanket.¹
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

38 Ignitor is a proposed compact high-magnetic field tokamak³ that includes in its design many
39 features that served, together with the ALCATOR design and experimental results, as a basis
40 for the development of the SPARC-ARC concepts. Ignitor is aimed at studying plasma burning
41 conditions in Deuterium-Tritium plasmas: it has a major radius of 1.3 m, minor radii of 0.47 m
42 and 0.87 m, a peak plasma temperature of 12 keV, a peak plasma density of 10^{21} ions/m³, at
43
44
45
46
47
48
49
50
51
52

53
54 ¹ The MIT PSFC has also begun developing a conceptual design for SPARC, a compact, high-field, net fusion
55 energy experiment. SPARC would be the size of existing mid-sized fusion devices, but with a much stronger
56 magnetic field. Based on established physics, the device is predicted to produce 50-100 MW of fusion power,
57 achieving fusion gain, Q, greater than 3. Such an experiment would be the first demonstration of net energy gain
58 and would validate the promise of high-field devices built with new superconducting technology. Even if SPARC
59 will have lower fusion power than ARC, it will have smaller dimensions, and thus activation and radiation damage
60 aspects must be studied too.
61
62
63
64
65

1 a maximum fusion power of 90 MW. Pulses at different power levels are planned, with either
 2 DD or DT operation, distributed over a global operation time of 10 calendar years. The peak
 3
 4 neutron wall loading at maximum fusion power is about 2 MW/m². The tokamak main
 5
 6 components are: a graphite first wall, an INCONEL625 vacuum vessel, the Cu-based toroidal
 7
 8 magnets, and the AISI316 machine structure (named "C-Clamp").
 9

10
 11
 12 A comparison of the two designs is available in Table I. In this paper, some neutronics scoping
 13
 14 studies will be carried out for both tokamaks (Ignitor and ARC). A general-purpose
 15
 16 macroscopic model, set up by some of the authors in previous Ignitor studies, has been
 17
 18 revised and used to estimate the radiation damage on selected machine components for the
 19
 20 two cases. Solutions to solve the problem of radiation damage of the toroidal and poloidal
 21
 22 field coils (TFC and PFC) materials have been explored.
 23
 24
 25
 26
 27
 28
 29
 30
 31
 32

33 Table I - Ignitor and ARC Tokamaks parameters
 34
 35

PARAMETER	Ignitor	ARC
Major radius	1.32 m	3.3 m
Toroidal Magnetic Field	13 T	9 T
Plasma Volume	10 m ³	141 m ³
Fusion Power (MW)	90	525
Electric Power (MWe)	--	283
Q	Infinite	3
Pulse flat top	10 s	infinite
Magnets Temperature	4 K	80 K

36
 37
 38
 39
 40
 41
 42
 43
 44
 45
 46
 47
 48
 49
 50
 51
 52
 53
 54
 55
 56
 57
 58
 59
 60
 61
 62
 63
 64
 65

2. A model for neutronics and radiation damage scoping studies

Previous Ignitor studies⁴ have been found relevant to set up a model for the ARC radiation damage case too.

In a simple *macroscopic* model the number of displaced atoms depends on the total available energy E_a and the energy required to displace an atom from its lattice position E_d

$$\text{DPA} = \kappa \frac{E_a}{2E_d} \quad (1)$$

If the neutron flux and spectrum is known, then we have:

$$\text{DPA} = \frac{\int dV \int dE \Phi(\vec{r}, E) \sum_{i=1}^N \rho_i \sigma_{R,DPA,i}(E)}{\sum_{i=1}^N \rho_i} \quad (2)$$

summed over all N isotopes in the material mix, where $\sigma_{R,DPA,i}$ is the DPA cross section for the isotope i, and ρ_i is the atomic density.

The most recent version of the inventory code FISPACT,⁵ which has been extensively updated (now called FISPACT-II) is now able to compute radiation damage quantities, such as dpa (Displacement per Atom), Gas Production, KERMA (Kinetic Energy Release to Matter) factors. The code has been found a suitable tool for our neutronics scoping studies. FISPACT-II, in fact, can calculate dpa rates directly using the above formulae, with the latest cross-section nuclear data libraries, such as the TENDL-2017 library.

3. Neutronics and radiation damage scoping studies for Ignitor

1 Radiation damage calculations for Ignitor have been performed by means of the MCNP code.⁶

2 In particular, the total dose on the TFC insulator (DTFC) turned out to deserve some attention.

3
4 In particular, results are as follows:

5
6
$$DTFC = 9.01 \cdot 10^{-23} \text{ MGy}/(\text{neutron generated in the plasma}) \quad (3)$$

7
8
9 If we now evaluate the dose on the TFC insulator based on the total neutron production
10 foreseen for Ignitor⁷, namely $9.22 \cdot 10^{22}$ neutrons in 7 years of DT operation, we have:

11
12
13
$$DTFC = (9.01 \cdot 10^{-23} \cdot 9.22 \cdot 10^{22}) \text{ MGy} = 8.3 \text{ MGy} \quad (4)$$

14
15
16 The TFC insulator is made of G10CR, a bisphenol-A epoxy resin, chlorine-free, low-N, low O,
17 with a boron-free high-strength E glass tissue. The radiation resistance of G10CR material has
18 to be carefully considered, since it appears to be poor, and possible substitute materials must
19 be looked for. Alternatively, some additional shielding must be foreseen.

20
21
22 The G10CR resin was found to have a very low radiation resistance, with a degradation of its
23 mechanical properties as early as an irradiation of around 3 MGy was applied.⁸ On the other
24 hand, the similar material G11CR did not show any relevant degradation. Another early
25 important work in the field of radiation damage of those materials (Ref. 9) stated that the G-
26 10CR matrix is a conventional, heat-activated, amine-catalyzed, bisphenol-A, solid type epoxy
27 resin chosen for proven performance at cryogenic temperatures, while the G-11CR matrix is
28 an aromatic-amine-hardened, bisphenol-A, liquid-type epoxy resin expected to provide
29 improved resistance to radiation damage.

30
31
32 The radiation resistance limit for the epoxy used in ITER is 10 MGy (Ref. 10). That resistance
33 does not seem enough to meet ITER requirements on a safe side, and development of novel
34 insulators has been carried out in the recent years. Cyanate esters (CEs) offer enhanced
35 temperature and radiation resistance as well as high mechanical strength.¹¹ No technological
36 challenges in the coil fabrication are needed, since CE resins can be treated like epoxies and
37 are compatible with the vacuum pressure impregnation (VPI) process, which is foreseen for
38 the fusion coils due to their complexity. These materials are being considered also for
39 replacement of insulators in ITER. Some recent publications¹⁰ show the excellent radiation
40 resistance properties of these materials. Several mixtures of CE and epoxy resins were
41 investigated, and the pure CE composite, named T1, maintained about 75% of its mechanical

1 strength, compared to the unirradiated state, even at a fluence of $5 \cdot 10^{22} \text{ m}^{-2}$, which
2 corresponds to a dose of 250 MGy. In conclusion, Cyanate esters could be the best candidate
3 for Ignitor too. Recent literature shows their excellent characteristics,¹⁰ and the product is
4 available on the high-tech materials market.¹¹
5
6

7
8 A scoping study was carried out in order to determine the best shielding material if no
9 modification is made to the insulator. Three advanced materials were selected, based on their
10 favourable physical properties for radiation shields, i.e., Solid lithium hydride (LiH), powdered
11 zirconium dihydride (ZrH₂), and powdered zirconium borohydride (Zr(BH₄)₄). The more
12 traditional DPE (High-density Polyethylene), Borotron[®] HD050 and B4C have been considered
13 too. To assess their nuclear performance, the total radiation doses to the TF coils and neutron
14 heat deposition were obtained with coupled MCNP-FISPACT-II calculations. The three
15 advanced shielding materials all turned out to be better than the traditional materials. In
16 particular, ZrH₂, with its high mass density, high hydrogen content, and high average atomic
17 number, was the best performing one. Advanced neutron shield materials (Zr- and Li-
18 hydrides) form high performance neutron/gamma shields, within possible Ignitor design
19 modifications. In particular, a 10-cm shield of Powdered zirconium dihydride (ZrH₂) can
20 reduce the dose on the insulator by a factor 100:6 (if the dose is 100 in arbitrary units without
21 shield, it becomes 6 with it). Higher shield thickness is not recommendable from the design
22 viewpoint.
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37

38 As far as radiation damage on vessel materials, a scoping study has been performed for
39 several candidate structural and plasma-facing materials. Results are shown in figure 1. Due
40 to the low foreseen fluence of Ignitor, it turns out that radiation damage for those
41 components is not an issue, while their shielding capability is. Inconel 625 has the best
42 shielding performance, while – as far as first wall tiles are concerned – C, due to its high
43 moderation characteristics, has to be preferred to Mo: even if absorbing less neutrons, it
44 enhances neutron capture in the vessel by slowing down neutrons.
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

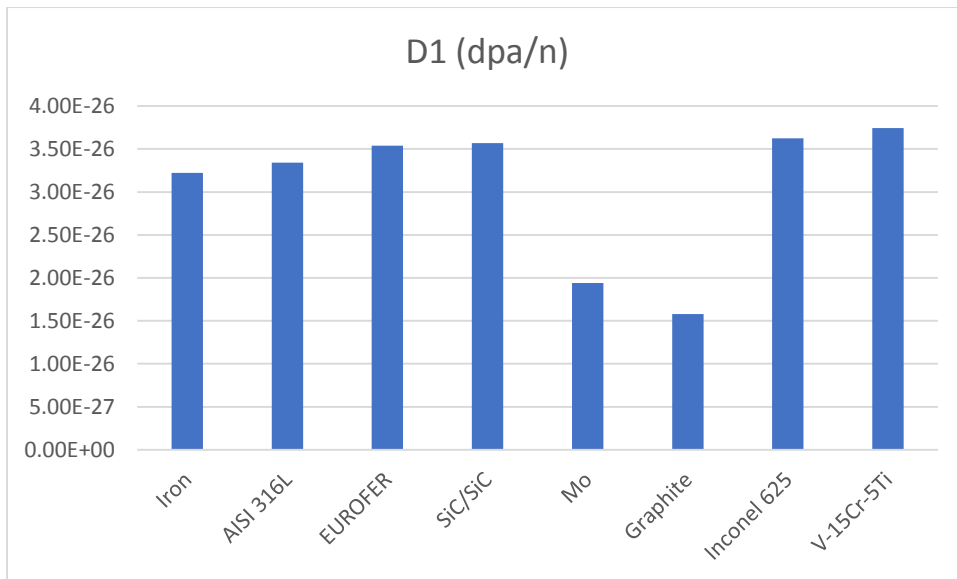


Figure 1 – Radiation damage in vessel and first wall Ignitor materials

4. Detailed studies for the Affordable Robust Compact (ARC) tokamak

ARC is a tokamak designed by MIT scientists. It has been conceived for a FNSF (Fusion Nuclear Science Facility) and pilot plant for producing power,¹ therefore it will be used to collect data about over-energy breakeven reactors and to demonstrate the feasibility of a nuclear fusion power plant connected to an electric grid.

Magnets are the main novelty of ARC reactor: TF coils and PF coils rely on High Temperature Superconductor (HTS) technology, now available on commercial scale. HTS are alloys based on Rare Earths (more specifically Yttrium) Barium and Copper Oxide (REBCO or YBCO) and their critical temperature is as high as 80K. The adoption of the HTS technology for the magnets allows obtaining more compact and cheaper tokamaks than those using traditional technologies based on 4K superconductors. The downside of this technology is that REBCO tapes are very sensitive to neutron damage.^{12,13} Also, since ARC's TF coils are demountable,

1 PF coils can be placed inside them in order to achieve a better plasma control.² This approach
2 was followed by many tokamaks, such as DIII-D¹⁴ and Alcator C-Mod.¹⁵ However this may
3 raise concerns about neutron damage that would be not only on TF coils, like other tokamaks,
4 but also, and even with a higher rate, on PF coils.
5
6
7
8
9

10 ARC is Deuterium-Tritium fueled. A D-T fusion plasma is a huge source of fast neutrons and,
11 more specifically, ARC's plasma, supposed to achieve 525 MW of fusion power, will emit
12 about 2.2×10^{20} n/s (Ref. 1). Therefore, ARC is a relatively small device, with a high density of
13 complex components near its center, and a strong neutron source at the core. This surely
14 requires careful neutronics studies and effective shield design proposals.
15
16
17
18
19
20
21
22
23

24 The ARC shield can be split into two main components. Starting from the plasma core, the
25 first neutron shield is the Nickel-superalloy-based vacuum vessel (VV); its first aim is to
26 provide a vacuum and pure volume for plasma and not being an effective neutron shield,
27 however shielding properties of VV materials will be addressed in this scoping study. The
28 actual neutron shield of this device, however, is the blanket: in fact, the vacuum chamber is
29 immersed in a tank full of a LiF BeF₂ (FLiBe) molten salt. This fluid works as a neutron
30 multiplier, tritium breeder, and coolant, while the bulk tank is a quite effective shield for PF
31 and TF coils.
32
33
34
35
36
37
38
39
40
41
42
43
44


45 MCNP simulations¹ have shown that an additional shield was necessary in order to safeguard
46 TF coils, and a TiH₂ layer has been placed all the way around the FLiBe tank. TiH₂ has been
47 chosen as it confirmed – like in the case of Ignitor – its excellent moderation and absorption
48 characteristics. Further simulations demonstrated that this configuration is actually able to
49 guarantee a lifetime of 9 FPY (Full Power Years) to magnets.¹
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 A second ARC design session lead to some design modifications: long leg, double null
2 divertors, able to effectively exhaust huge heat fluxes, have been added to the machine.³ The
3
4 neutron flux in the divertor area (at the outer surface of the VV at the midplane of the divertor
5
6 foot feature) is a factor of thirty lower than at the outer midplane, while the neutron spectrum
7
8 is significantly softened due to the moderation provided by the FLiBe.² The reduction of fast
9
10 neutron flux drastically reduces neutron damage rates, in terms of both displacements per
11
12 atom (dpa) and helium production from neutron-alpha interactions. A lower damage rate in
13
14 the divertor represents an advantage for those high heat flux components. However, the new
15
16 divertors raise the complexity of the required magnetic configuration, asking for additional
17
18 coils. Furthermore, as previously mentioned, PF coils have been moved inside the TF ones and
19
20 FLiBe tank has been reshaped.² An improved Monte Carlo model for the new configuration
21
22 highlighted the necessity of more effective shielding for the PF coils in their new location. It
23
24 has been chosen therefore to add 25 cm thick ZrH₂ plates directly inside the FLiBe tank, in
25
26 order to shield the magnets.² In this case, the role of the 5 cm-thick vessel gives a small but
27
28 relevant contribution in reducing the neutron flux on the PFC, even if most absorptions take
29
30 place in the 1 m thick FLiBe blanket: the additional shield, with its high hydrogen density,
31
32 softens the neutron spectrum and enhances neutron absorptions in the blanket. Altogether,
33
34 those structures can reduce the neutron load on PFC of roughly two orders of magnitude:
35
36 more specifically, total flux is around to 3×10^{18} n/cm², with a soft energy spectrum, and that
37
38 guarantees to the TFC a lifetime of 10 FPY at least.³

39
40
41 However, the mentioned previsions are supposed to be quite pessimistic. In fact, 3×10^{18}
42
43 n/cm² is the limit set for Nb₃Sn superconductors, used for ITER,¹⁶ while REBCO tapes are
44
45 supposed to have less constraining limits.¹² Furthermore, limits were not set at the failure
46
47 point of the material, but rather at a point at which the critical current begins to degrade.² In
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 addition, recent literature¹³ has shown evidence that it is possible to mitigate critical current
2 degradation, due to fast neutrons, decreasing operating temperature (i.e. for operating
3 temperature of 30 K and roughly 3.2×10^{18} n/cm², YBCO critical current seems to be still very
4 similar to its initial, not irradiated one). Low energy neutrons – on the other hand - have hardly
5 any effect on the superconducting properties of YBCO tapes.¹³ Even if ARC's magnets will be
6 running with a significant margin to their critical current, design modifications could affect
7 these shortcomings, like for instance the substitution of the VV material, or an optimization
8 of the ZrH₂ shield thickness.
9

10 Concerning radiation damage in the vessel material, a study has been performed in order to
11 verify the susceptibility to radiation damage of the proposed low-activation substitute of
12 Inconel718, that is, the V-15Cr-5Ti alloy. By means of FISPACT-II, with the already mentioned
13 new library, results available in Figure 2 have been obtained, where radiation damage in
14 terms of dpa/FPY (Full Power Year) are shown. Dpa rate in V-15Cr-5Ti is just less than 5%
15 higher than the same figure for Inconel718. While it is actually unknown the onset threshold
16 for some radiation damage effects in Inconel718 or V-15Cr-5Ti, they should reach a lifetime
17 irradiation lower than 100 dpa before being replaced for other reasons.
18

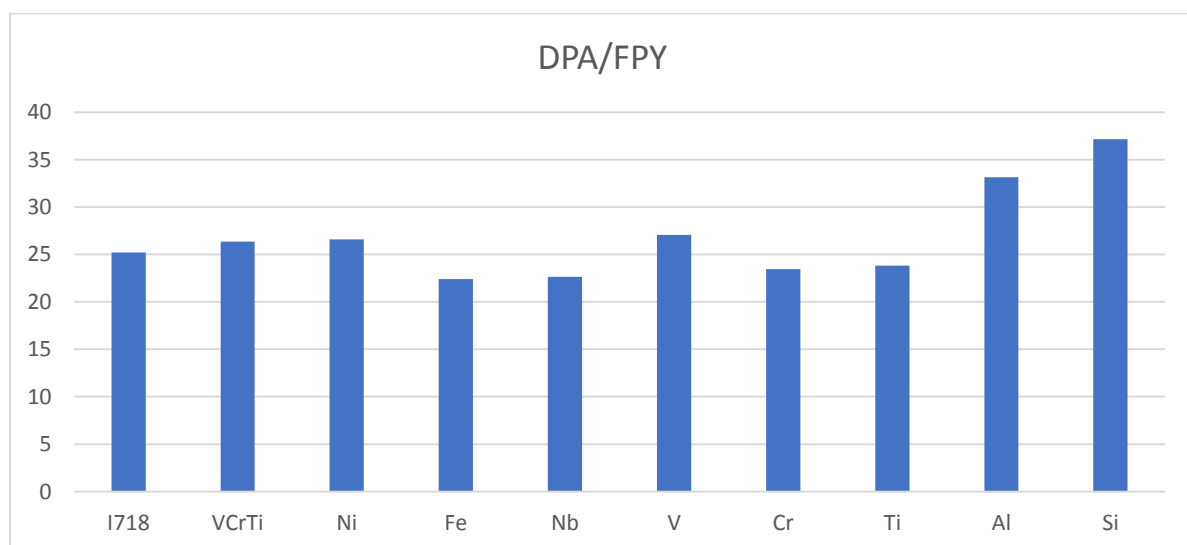

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

Figure 2 – Radiation damage (DpA per Full Power Year) in Inconel 718 (I718) and V-15Cr-5Ti (VCrTi), and in their main alloying elements.

The shielding capability of the vessel material can be a relevant question, given the above-mentioned necessity to shield the magnets. A good parameter to estimate the shielding performance of a material exposed to neutron flux is the KERMA rate (kW/cm^3). Figure 3 shows results for Inconel718, V-15Cr-5Ti and their main alloying elements. It turns out that the KERMA rate for V-15Cr-5Ti is significantly (-35%) lower than for Inconel718, mainly due to the lack of Nickel. This fact will have to be taken into account if the new vessel material is adopted for ARC. Not only the shielding capability of the new material is lower, but also the effect of Inconel718 substitution on the neutron spectrum and then on the neutron absorptions in the FLiBe blanket will have to be evaluated.

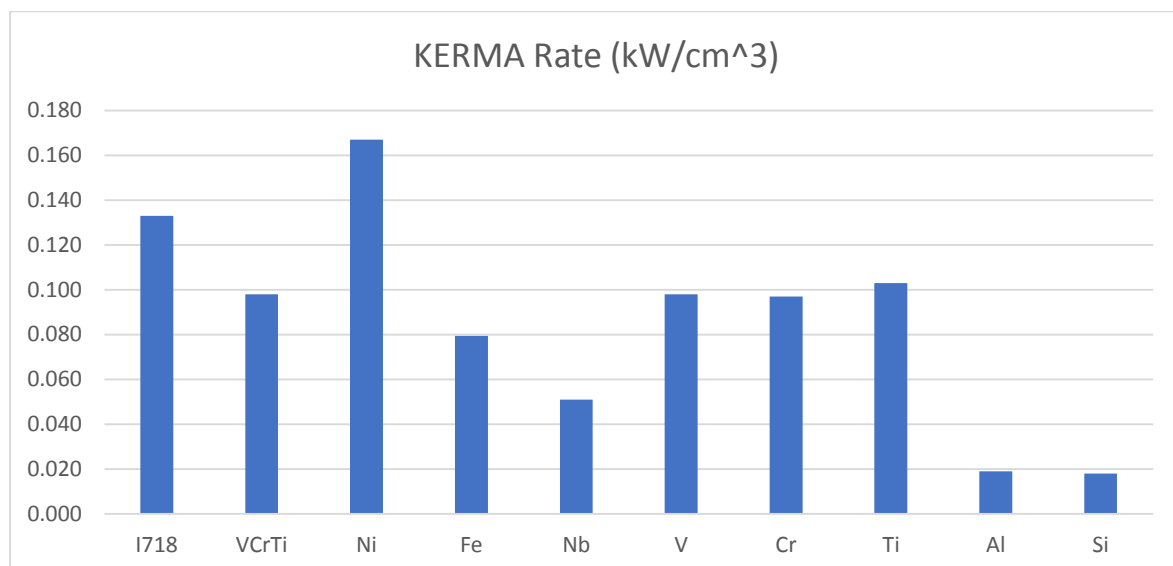


Figure 3 – KERMA Rates in Inconel 718 (I718) and V-15Cr-5Ti (VCrTi), and in their main alloying elements.

1
2
3 **5. Conclusions**
4
5

6 Neutronics scoping studies have been carried out for two different compact high-magnetic
7 field tokamaks: Ignitor and ARC. A general-purpose macroscopic model has been set up, to
8 estimate the radiation damage on selected machine components for the two cases.
9

10 Solutions to solve the problem of radiation damage of the Poloidal and Toroidal Field Coils
11 materials have been explored. In particular, for ARC, it has been found that ARC's magnets
12 will be running with a significant margin to their critical current, however the effects of the
13 substitution of Inconel 718 with V-15Cr-5Ti as vessel material will have to be taken into
14 account.
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34

35 **6. References**
36
37

38 [1] Sorbom B. N., Ball J., Palmer T. R., Mangiarotti F. J., Sierchio J. M., Bonoli P., KastenC.,
39 Sutherland D.A., Barnard H.S., Haakonsen C.B.,Goh J., Sung C., Whyte D.G. (2015). ARC: A
40 compact, high-field, fusion nuclear science facility and demonstration power plant with
41 demountable magnets. *Fusion Engineering and Design*, 100, 378-405.
42
43
44
45
46
47
48

49 [2] Kuang, A. Q., Cao, N. M., Creely, A. J., Dennett, C. A., Hecla, J., LaBombard, B., ... & Ruiz, J.
50 R. (2018). Conceptual design study for heat exhaust management in the ARC fusion pilot plant.
51 *Fusion Engineering and Design*, 137, 221-242.
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 [3] B. Coppi, et al., Perspectives for the high field approach in fusion research and advances
2 within the Ignitor Program, Nucl. Fusion 55 (2015) 053011.
3

4
5 [4] Zucchetti M., Bombarda F., Coppi B., Hartwig Z.S. (2013) Compact Tokamak Neutron
6 Sources As A First Step Towards Hybrid Fission-Fusion Reactors, Fus. Sci. and Technol. 64, 493-
7
8 497.
9

10
11 [5] M. Fleming T. Stainer, and M. Gilbert (ed.) The FISPACT-II User Manual, UKAEA-R(18)001
12
13 February 2018.
14

15
16 [6] Z.S. Hartwig, M. Zucchetti, Neutronic Studies For A Compact High-Field Tokamak Neutron
17 Source, Fusion Sci. And Technol., 60,2 (2011) 725-729.
18

19
20 [7] S.Rollet, M.Zucchetti et al., Radiation damage calculations for Ignitor components, Journ.
21 Nucl. Mater. 212-215 (1994) 1715-1719.
22

23
24 [8] D. S. Tucker, F. W. Clinard, Jr, G. F. Hurley And J. D. Fowler, Properties of Polymers After
25 Cryogenic Neutron Irradiation, Journal of Nuclear Materials, 133&134 (1985) 805-809
26

27
28 [9] M.B. Kasen, G.R. MacDonald, D.H. Beekman and R.E. Schramm, Mechanical electrical and
29 thermal characterization of G-10CR and G-11CR glass-epoxy laminates between room
30 temperature and 4 K, *Adv. Cryogen. Engrg.* **26** (1980), 235–244.
31

32
33 [10] R. Prokopec et al., Characterization of advanced cyanate ester/epoxy insulation systems
34 before and after reactor irradiation, Fusion Eng. and Des. 85 (2010) 227-233.
35

36
37 [11] See Marti Supratec AG contact website: <http://www.supratec.ch/>
38

39
40 [12] Bromberg L., Tekula M., El-Guebaly L., Miller R. (2001) Options for the use of high
41 temperature superconductor in tokamak fusion reactor designs. *Fusion Engineering and*
42
43 *Design*, 54 (2), 167-180.
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

1 [13] Fisher, D. X., Prokopec, R., Emhofer, J., & Eisterer, M. (2018). The effect of fast neutron
2 irradiation on the superconducting properties of REBCO coated conductors with and without
3 artificial pinning centers. *Superconductor Science and Technology*, 31(4), 044006.
4
5

6
7
8 [14] Luxon J.L. A design retrospective of the DIII-D tokamak. *Nuclear Fusion* 42, 614 (2002).
9

10
11 [15] Marmor E.S., and Alcator C-Mod Group. (2007) The Alcator C-Mod Program. *Fusion*
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65

66 [16] Ulbricht, A., Duchateau, J. L., Fietz, W. H., Ciazynski, D., Fillunger, H., Fink, S., ... & Ricci,
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000