

Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications

Original

Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications / Quaranta, Emanuele; Revelli, Roberto. - In: JOURNAL OF HYDRAULIC ENGINEERING. - ISSN 0733-9429. - 146:9(2020), p. 06020011. [10.1061/(ASCE)HY.1943-7900.0001793]

Availability:

This version is available at: 11583/2838018 since: 2020-07-02T11:30:16Z

Publisher:

Asce American Society of Civil Engineers

Published

DOI:10.1061/(ASCE)HY.1943-7900.0001793

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Performance Optimization of Overshot Water Wheels at High Rotational Speeds for Hydropower Applications

Emanuele Quaranta¹ and Roberto Revelli²

Abstract: Overshot water wheels are hydropower converters generally employed for head differences up to 6 m and maximum flow rates of 150–200 L/s per meter width. The hydraulic efficiency (80%–85%) is constant for rotational speeds below the critical speed, whereas the efficiency linearly decreases at higher rotational speeds due to the increase of water losses at the inflow. To improve the efficiency when the rotational speed is above the critical speed, an improved geometric design was investigated by implementing a theoretical model validated using experimental results. The new geometry consists of a circular wall around the periphery of overshot water wheels. The wall redirects into the buckets the water flow that is lost at the inflow, improving the efficiency up to 1.5 times at high rotational speeds. DOI: 10.1061/(ASCE)HY.1943-7900.0001793. © 2020 American Society of Civil Engineers.

Author keywords: Low head; Hydropower; Microhydro; Overshot water wheel; Water mill.

Introduction

In irrigation canals and near old mills there is a great potential of low-head hydropower (ESHA 2004), in which head differences of a few meters and flow rates of few cubic meters per second are available. The installation of low-head hydroturbines could be a viable option to generate clean renewable energy below 100 kW (micro-hydropower) at these sites, with beneficial effects on the local economy and on the electrification of remote areas. In rural and decentralized areas, the installation of microhydro plants is considered one of the most economical options for rural electrification, especially when existing hydraulic structures are used to reduce infrastructure costs (Paish 2002; Bozhinova et al. 2013; ESHA 2004; Quaranta and Revelli 2018).

In this context, water wheels are considered more environmentally friendly and cost-effective than Kaplan and Francis turbines, due to their low rotational speeds, large buckets, and free-surface working behavior. Water wheels can be divided into stream water wheels and gravity water wheels; stream water wheels exploit the kinetic energy of flowing water (Quaranta 2018), whereas gravity wheels mainly use the water weight to generate energy (Quaranta and Revelli 2018). Among gravity water wheels, undershot, breastshot, and overshot water wheels can be identified. In overshot wheels (analyzed in this paper) the water enters the buckets from the top of the wheel; overshot wheels generally are employed for 2.5–6-m head and flow rates below 0.2 m³/s per meter width, with maximum efficiencies of 85% (Williams and Bromley 2000; Dubas 2005; Pellicciardi 2015; Quaranta and Revelli 2015). Some existing overshot water wheels are shown in Fig. 1. Breastshot (Müller and

Wolter 2004; Quaranta and Revelli 2016, 2017) and undershot water wheels (Von Harten et al. 2013; Quaranta and Müller 2018) generally are employed at sites with heads below 4 and 1.5 m, respectively, and have maximum hydraulic efficiency of between 75% and 80%.

The first systematic experiments on water wheels were carried out in the nineteenth century (Fairbairn 1864; Bach 1886; Chaudy 1896; Garuffa 1897; Weidner 1913; Meerwarth 1935), whereas the most recent hydraulic theory of overshot water wheels was presented and validated by Quaranta and Revelli (2015).

The tested water wheel was a 1:2 scale model of an existing overshot water wheel sited in an irrigation canal in North Italy [Fig. 1(b)]. The scale wheel was 1.46 m in diameter and 1 m wide, and had 24 blades that were 0.153 m deep [Fig. 2(a)] (Quaranta and Revelli 2015). A power loss model was developed and validated on experimental results with an average discrepancy between predicted and experimental power output of 8% [Fig. 2(b)]. Beyond a certain rotational speed, called the critical rotational speed, N_{cr} , the experimental power output P_o and the efficiency decreased linearly with the speed N . The efficiency decrease was due to the flow rate that was lost at the inflow (i.e. at the top of the wheel) when the flow impacted on the blades, forming splashes and water droplets [Figs. 1(a) and 3]. The critical speed was estimated as $N_{cr} = 31.3/\sqrt{D}$, where D is the wheel diameter, in agreement with results reported by Williams and Bromley (2000). The results of Williams and Bromley (2000) and Quaranta and Revelli (2015) highlighted the importance of the inflow design of overshot water wheels, as also suggested for hydrodynamic screws (Lubitz et al. 2014; Straalsund et al. 2018) and breastshot and undershot water wheels (Quaranta and Revelli 2016; Quaranta and Müller 2019), both of which are classified as low-head hydraulic machines.

With the aim of reducing volumetric losses, Wahyudi et al. (2013) proposed converting volumetric losses from the buckets and from the channel into a high-velocity water jet by a nozzle, and squirting the jet on the lowest blade using a ram pump system. The efficiency increased from $\eta_o = 61.6\%$ to $\eta_{new} = 73.5\%$, i.e., $\eta_{new}/\eta_o = 1.2$.

The present study improved the performance of overshot water wheels at $N > N_{cr}$ by converting volumetric losses into potential energy, rather than kinetic energy, by means of a wall installed around the periphery of the wheel. The theoretical model developed

¹Researcher, Dept. of Environment, Land and Infrastructure Engineering, Politecnico di Torino, Corso Duca degli Abruzzi, 24, Torino, Italia (corresponding author). ORCID: <https://orcid.org/0000-0001-7781-3526>. Email: emanuele.quaranta@polito.it; quarantaemanuele@yahoo.it

²Professor, Dept. of Environment, Land and Infrastructure Engineering, Politecnico di Torino, Corso Duca degli Abruzzi, 24, Torino, Italia. Email: roberto.revelli@polito.it

Note. This manuscript was submitted on November 12, 2019; approved on April 15, 2020. Discussion period open until 0, 0; separate discussions must be submitted for individual papers. This technical note is part of the *Journal of Hydraulic Engineering*, © ASCE, ISSN 0733-9429.



(a)



(b)




(c)




(d)

Fig. 1. Overshot water wheels, with the conveying channel at the top: (a) overshot wheel of Gratia Hydro, 2.5 m in diameter and 1.5 m wide (image courtesy of Martin Eillebrecht); (b) wheel in Ciconio, 3 m in diameter and 2 m in width (image courtesy of Marco Gatta); (c) wheel in Judenburg, 4 m in diameter and 0.75 m wide (image courtesy of Helmut Mitterfellner); and (d) wheel in Bobbio Pellice, 2.6 m in diameter and 0.9 m wide (image courtesy of Emanuela Genre, Mulino di Bobbio staff).

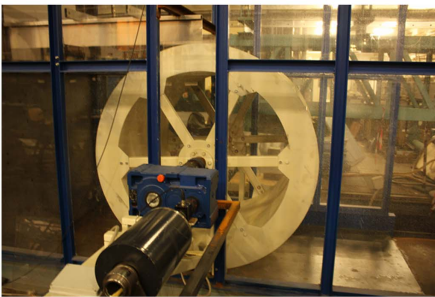

(a)

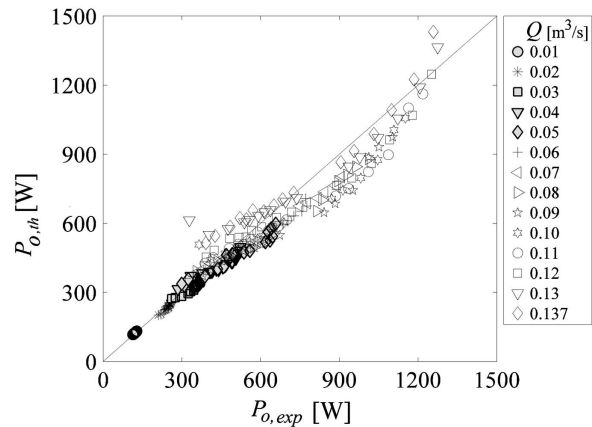

(b)

Fig. 2. (a) Tested water wheel in the laboratory (image by Emanuele Quaranta); and (b) predicted power output $P_{o,th}$ versus experimental power output $P_{o,exp}$ at different flow rates for the original configuration.

and validated by Quaranta and Revelli (2015) was implemented. As previously discussed, the model was proven to be reliable and accurate, and hence it can be used to explore different geometries in similar hydraulic configurations. The new design does not affect the upstream conditions (the upstream hydraulic depths and profiles do not change), which is an essential requirement in irrigation canals. The proposed method is expected to be more cost-effective than the conversion of water losses into kinetic energy.

Method

The theoretical model described by Quaranta and Revelli (2015), based on the estimation of power losses, was implemented. The model was based on the following assumptions:

1. The hydraulic behavior of overshot water wheels is very complex, because splashes, water droplets, and jets arise in the buckets during rotation. Such turbulent phenomena are neglected, so

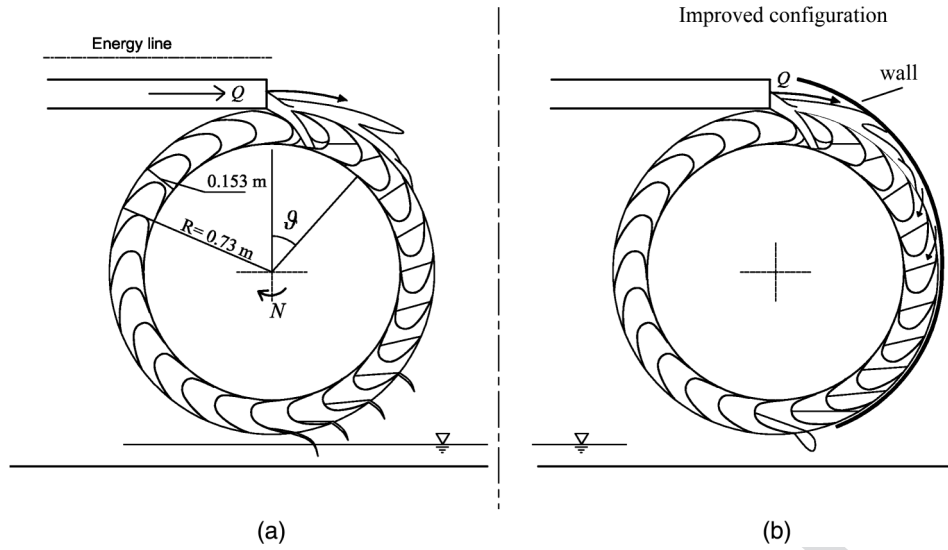


Fig. 3. (a) Original water wheel; and (b) modified configuration on the right, with additional wall to recover and direct the water into the buckets.

that the water jet is considered as a continuum and water in the buckets was considered to be at rest.

- The flow behavior of water wheels is two-dimensional, i.e., velocity components parallel to the rotation axis are negligible and the water depth inside each bucket is uniform along the direction of the rotation axis. This assumption is well satisfied observing well designed water wheels.
- The kinetic energy of the water flow which is redirected into the bucket is lost when the flow enters the bucket, because for most of the time the water flow impacts on the water volume already inside the bucket, dissipating its kinetic energy. Therefore, the additional impulsive force of the water impact is neglected.

With the previous assumptions, the mechanical power output P_o of a generic overshot water wheel can be estimated by the following equation (Quaranta and Revelli 2015):

$$P_o = P - \sum \text{Losses} = P - L_{\text{imp}} - L_t - L_g - L_{Q_u} - L_{Q_r} \quad (1)$$

where L_{imp} = kinetic power loss occurring at inflow; L_t = impact loss of blades on tailrace (if blades are submerged in tailrace); L_g = mechanical friction loss at shaft supports; L_{Q_u} = volumetric loss at inflow; and L_{Q_r} = volumetric loss during rotation, due to the emptying process of the buckets. Inflow volumetric losses were quantified by the following equation:

$$\frac{L_{Q_u}}{P_{\text{in}}} \approx 0 \quad \text{for } N < N_{\text{cr}}$$

$$\frac{L_{Q_u}}{P_{\text{in}}} = 2.2 \cdot \left[\frac{N}{N_{\text{cr}}} - 1 \right] \quad \text{for } N > N_{\text{cr}} \quad (2)$$

where L_{Q_u} = volumetric power loss; and $P_{\text{in}} = \gamma QH$ = power input, where $\gamma = 9810 \text{ N/m}^3$ = specific weight of water, Q = total flow rate (m^3/s); and H = head difference (m).

This model was implemented and applied to the new geometric configuration depicted in Fig. 3. The new design consists of a wall located around the periphery of the wheel, used to redirect into the buckets the water which is lost at the inflow. No additional moving part is added, and thus the modification is cost-effective. A similar geometry was suggested (but not tested, neither experimentally nor theoretically) by Weisbach (1849), but with some conceptual differences. In our design, the water above the wheel and at the inflow is

at atmospheric pressure; otherwise, the gravity wheel would become a pressurized turbine, which would be beyond the purpose of the present study. The diameter of the wheel is almost equal to the head difference, and the wall does not affect the upstream conditions (Fig. 3). In Weisbach (1849), the headrace was dammed at its end by a weir, creating a water basin above the wheel, upstream of the weir. The pressurized water entered into the wheel at high velocity through a nozzle on the bed of the basin. Therefore, a portion of the potential head was converted into kinetic energy. This solution can be useful for head differences above 6 m to avoid very large wheel diameters, and where the increase in the upstream water level (due to backwater propagation) is not a problem; this design was used in the last century in the Black Forest and in the Swiss Alps in Europe (anonymous reviewer, personal communication, 2020). A similar idea also was tested by Ikeda et al. (2010), although it must not be confused with the wall investigated herein, because in Ikeda et al. (2010) the role of the wall was to direct the water of a waterfall into an action turbine, with the aim of controlling the flow direction at variable flow rates.

To avoid backwater propagation, the wheel and the wall at the inflow should not interact with the upstream water flow; hence the distance between the wheel and the wall was set at 0.15 m at the inflow. In the lowest half of the wheel, the clearance between the wall and the wheel must avoid friction between the wall and the wheel, and must minimize the flow through the gap. The gap value of 0.01 m was chosen because this value generally is adopted between undershot/breastshot water wheels and their curb and lateral shrouds for manufacturing considerations (Quaranta and Müller 2018). Therefore, the curvature radius R of the wall in the lowest half of the wheel was $R_{\text{wall}} = R_{\text{wheel}} + 0.01 \text{ m}$. The wall in the upper part of the wheel was shaped to gradually connect the superior part of the wall (where there is clearance of 0.15 m) to its inferior portion. The wall has to be interrupted at $\theta \leq \pi$ (Fig. 3) for a correct emptying process and to avoid counteracting torque due to residual water that may be carried out upstream of the wheel.

Considering the presence of the wall, the following assumptions have to be taken into account in the theoretical model:

- The amount of water that cannot enter into the buckets runs through the gap between the wall and the wheel. When the flow reaches $\theta = \pi/2$, i.e. one-half the wheel diameter D (Fig. 3), it enters the bucket. This means that the water flow which is lost

from the top of the wheel does not lose the full hydraulic head H (as in the original configuration), but it loses a potential head equal to $D/2$. Therefore, the inflow power loss L_{Q_u} [Eq. (2)] must be multiplied by $(D/2)/H$ (generally in overshoot water wheels, $D \approx H$). The position $\theta = \pi/2$ was chosen for two reasons: at lower values of θ , the water jet may impact on the outer surface of the blade (the downstream face), generating power losses; and at $\theta = \pi/2$, the tangent at the wheel circumference is vertical, and thus the wall is easier to build in practical applications.

2. Once the water is redirected into the bucket, it remains inside the bucket, acting by its weight. When the bucket water volume equals the maximum storable volume, the bucket starts to empty; the emptying process is not affected by the wall, as in the original theoretical model. Therefore, the calculation method for the power losses L_{Q_r} does not change (Quaranta and Revelli 2015). However, in this case the bucket is filled with a larger amount of water, because it also contains the water that is lost at the inflow.
3. The critical rotational speed N_{cr} is the same, and it depends only on the wheel diameter [Eq. (2)]. This is because the inflow volumetric losses start at the same rotational speed (i.e., N_{cr}), so the inflow is not affected.

Results and Discussion

The modified theoretical model was applied to 256 operative conditions: the flow rate was in the range $Q = 0.01\text{--}0.137\text{ m}^3/\text{s}$ and the wheel rotation speed was in the range within $N = 0.5\text{--}3.5\text{ rad/s}$. The upstream flow velocity varied between 0.5 and 1.5 m/s, whereas the water depth at the end of the conveying channel (i.e. just upstream of the wheel) varied from 0.02 to 0.09 m. The velocity of the water jet during the impact with the blade ranged between 1.5 and 2.4 m/s (Quaranta and Revelli 2015). The average discrepancy between theory and experiments was 8% [Fig. 2(b)].

Fig. 4 depicts the efficiency in the original configuration η_o and the efficiency in the modified configuration η_w with the wall. The efficiency is defined as the ratio of the power output to the power input, i.e. $\eta_o = P_o/P_{in}$ considering the original configuration, and $\eta_w = P_w/P_{in}$ considering the modified configuration, where P_w is the power output with the wall.

When $N > N_{cr} = 2.7\text{ rad/s}$, η_o and η_w decrease due to the increase of volumetric losses at the inflow with N (Fig. 4). However, η_w is higher than η_o , because the inflow water losses are redirected into the bucket at the middle of the wheel. When $N \leq N_{cr}$, improvements are negligible, because inflow volumetric losses are negligible. The ratio $\eta_w/\eta_o = P_w/P_o$ increases with the rotational speed (Fig. 4) according to the following dimensionless equation:

$$\frac{P_w}{P_o} \approx 1 \quad \text{for } N < N_{cr}$$

$$\frac{P_w}{P_o} = 1 + \left(1.54 \cdot \left[\frac{N}{N_{cr}} - 1 \right] \right) \quad \text{for } N > N_{cr} \quad (3)$$

Once P_w is estimated and normalized to P_o [Eq. (3)], the power output improvement G_w strictly related to the wall can be calculated as $G_w = P_w - P_o$. If G_w is normalized by P_{in} , it can be added to the power loss terms in Eq. (1) to theoretically take into account of the wall benefit (the other power loss terms can always be estimated as in the original configuration); G_w/P_{in} can be expressed as a function of the normalized speed N/N_{cr}

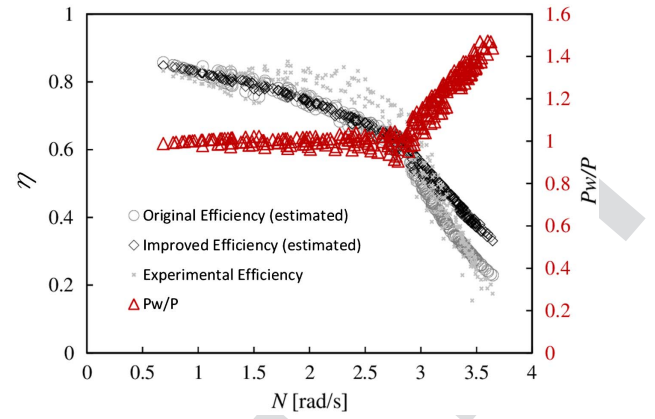


Fig. 4. Original efficiency (theoretically estimated and experimentally measured), η_o , improved efficiency, η_w , and $P_w/P_o = \eta_w/\eta_o$ versus rotational speed.

$$\frac{G_w}{P_{in}} = -0.94 \left(\frac{N}{N_{cr}} \right)^2 + 2.57 \left(\frac{N}{N_{cr}} \right) - 1.65 \quad (4)$$

Based on the investigated conditions, the terms calculated in Eqs. (3) and (4) are valid when $1 < (N/N_{cr}) < 1.35$, and can be applied in practical applications.

In our new configuration, water losses are converted into hydrostatic pressure, instead of velocity, generating a more effective [with η_w/η_o up to 1.5, whereas the ratio was 1.2 in Wahyudi et al. (2013)] and cheaper system. Furthermore, the additional cost of the wall is negligible with respect to the total cost of the installation, although some sediments may be trapped between the wheel and the wall, interfering with the rotation. A trash rack is required in this case, which, in any case, also is recommended for traditional water wheels.

Conclusions

A modified design of overshoot water wheels was theoretically investigated with the intent of improving the performance at rotational speeds higher than the critical one. The modified design consists of a lateral wall around the width of the wheel. The wall recovers the inflow volumetric losses and redirects them into the wheel without affecting the upstream conditions. The modified design is a cost-effective improvement of overshoot water wheels, and equations were proposed for use in practical applications to quantitatively estimate the benefits of the wall. This optimization can lead to the exploitation of higher discharges with higher efficiency. Future developments of this concept could lead to the increase of the operational speed of water wheels (with a consequent reduction of the electromechanics costs), improving the efficiency of the wheel up to 1.5 times with respect to the original efficiency.

Data Availability Statement

All data, models, and code generated or used during the study appear in the published paper.

Acknowledgments

The research leading to these results has received funding from Orme (Energy optimization of traditional water wheels) granted


















257 by Regione Piemonte via the ERDF (#0186000275) 2007–2013
 258 (Gatta srl, BCE srl, Rigamonti Ghisa srl, Promec Elettronica
 259 srl, and Politecnico di Torino). Thanks are extended to Martin
 260 Eillebrecht, Gratia Hydro [Fig. 1(a)], Marco Gatta [Fig. 1(b)],
 261 Helmut Mitterfellner [Fig. 1(c)], and Emanuela Genre and
 262 Jane Atkinson, Mulino di Bobbio staff [Fig. 1(d)], for their pictures.

263 References

264 Bach, C. 1886. *Die Wasserräder: Atlas (The water wheels: Technical*
 265 *drawings)*. [In German.] Stuttgart, Germany: Konrad Wittwer Verlag.
 266 Bozhinova, S., D. Kisiakov, G. Müller, V. Hecht, and S. Schneider. 2013.
 267 “Hydropower converters with head differences below 2.5 m.” *Proc.*
 268 *Inst. Civ. Eng. Energy* 166 (3): 107–119. [https://doi.org/10.1680/ener](https://doi.org/10.1680/ener.11.00037)
 269 [.11.00037](https://doi.org/10.1680/ener.11.00037).
 270 Chaudy, F. 1896. *Machines hydrauliques*. [In French.] Bibliothèque du
 271 conducteur de travaux publics. Paris: Vve. C. Dunod et P. Vicq.
 272 Dubas, M. 2005. “Design and efficiency of overshot water wheels.” *Int. J.*
 273 *Hydropower Dams* 12 (3): 74–78.
 274 ESHA (European Small Hydropower Association). 2004. *Small and micro*
 275 *hydropower restoration handbook*. Athens: National Technical Univ. of
 276 Athens.
 277 Fairbairn, W. 1864. *Treatise on mills and millwork*. London: Longman
 278 Roberts and Green.
 279 Garuffa, E. 1897. *Macchine motrici ed operatrici a fluido*. [In Italian.]
 280 *Campiglia Marittima*, Italy: Meccanica Industriale.
 281 Ikeda, T., S. Iio, and K. Tatsuno. 2010. “Performance of nano-hydraulic
 282 turbine utilizing waterfalls.” *Renewable Energy* 35 (1): 293–300.
 283 <https://doi.org/10.1016/j.renene.2009.07.004>.
 284 Lubitz, W., M. Lyons, and S. Simmons. 2014. “Performance model of
 285 Archimedes screw hydro turbines with variable fill level.” *J. Hydraul.*
 286 *Eng.* 140 (10): 04014050. [https://doi.org/10.1061/\(ASCE\)HY.1943-](https://doi.org/10.1061/(ASCE)HY.1943-7900.0000922)
 287 [7900.0000922](https://doi.org/10.1061/(ASCE)HY.1943-7900.0000922).
 288 Meerwarth, K. D. 1935. *Experimentelle und theoretische untersuchungen*
 289 *am oberschlächtigen wasserrad (Experimental and theoretical investi-*
 290 *gation of an overshot water wheel)*. [In German.] Stuttgart, Germany:
 291 Technical Univ. of Stuttgart.
 292 Müller, G., and C. Wolter. 2004. “The breastshot waterwheel: Design and
 293 model tests.” *Proc. Inst. Civ. Eng. Eng. Sustainability* 157 (4): 203–211.
 294 <https://doi.org/10.1680/ensu.2004.157.4.203>.
 295 Paish, O. 2002. “Small hydro power: Technology and current status.”
 296 *Renewable Sustainable Energy Rev.* 6 (6): 537–556. [https://doi.org/10.1016/S1364-0321\(02\)00006-0](https://doi.org/10.1016/S1364-0321(02)00006-0).
 297

Quaranta, E. 2018. “Stream water wheels as renewable energy supply in
 flowing water: Theoretical considerations, performance assessment
 and design recommendations.” *Energy Sustainable Dev.* 45 (Aug):
 96–109. <https://doi.org/10.1016/j.esd.2018.05.002>.
 Quaranta, E., and G. Müller. 2018. “Zuppinger and Sagebien water wheels
 for very low head hydropower applications.” *J. Hydraul. Res.* 56 (4):
 526–536. <https://doi.org/10.1080/00221686.2017.1397556>.
 Quaranta, E., and G. Müller. 2019. “Optimization of undershot water
 wheels in very low and variable flow rate applications.” *J. Hydraul.*
Res. 1–5. <https://doi.org/10.1080/00221686.2019.1671508>.
 Quaranta, E., and R. Revelli. 2015. “Output power and power losses esti-
 mation for an overshot water wheel.” *Renewable Energy* 83 (Nov):
 979–987. <https://doi.org/10.1016/j.renene.2015.05.018>.
 Quaranta, E., and R. Revelli. 2016. “Optimization of breastshot water
 wheels performance using different inflow configurations.” *Renewable*
Energy 97 (Nov): 243–251. [https://doi.org/10.1016/j.renene.2016.05.](https://doi.org/10.1016/j.renene.2016.05.078)
 .078.
 Quaranta, E., and R. Revelli. 2017. “Hydraulic behavior and performance
 of breastshot water wheels for different blades numbers.” *J. Hydraul.*
Eng. 143 (1): 04016072. [https://doi.org/10.1061/\(ASCE\)HY.1943-](https://doi.org/10.1061/(ASCE)HY.1943-7900.0001229)
 .7900.0001229.
 Quaranta, E., and R. Revelli. 2018. “Gravity water wheels as micro hydro-
 power energy source: A review based on historic data, design methods,
 efficiencies and modern optimizations.” *Renewable Sustainable Energy*
Rev. 97 (Dec): 414–427. <https://doi.org/10.1016/j.rser.2018.08.033>.
 Straalsund, J., S. Harding, D. Nuernbergk, and C. Rorres. 2018. “Exper-
 imental evaluation of advanced Archimedes hydrodynamic screw
 geometries.” *J. Hydraul. Eng.* 144 (8): 04018052. [https://doi.org/10.1061/\(ASCE\)HY.1943-7900.0001479](https://doi.org/10.1061/(ASCE)HY.1943-7900.0001479).
 Von Harten, M., S. Paudel, and N. Saenger. 2013. “Nutzung kleiner fall-
 hohlen: aus forschung und entwicklung [Utilisation of small head
 differences: Research and development].” In *Proc., Tagung Kleinwas-*
serkraft. Stuttgart, Germany: Technical Univ. of Stuttgart.
 Wahyudi, B., A. Faizin, and S. Suparman. 2013. “Increasing efficiency of
 overshot waterwheel with overflow keeper double nozzle (OKDN) by
 using hydraulic ram system.” In Vol. 330 of *Applied mechanics and*
materials, 209–213. Zürich, Switzerland: Trans Tech.
 Weidner, C. 1913. “Theory and test of an overshot water wheel.” *Bull. Univ.*
Wisconsin Eng. Ser. 7 (2): 117–254.
 Weisbach, J. 1849. *Principles of the mechanics of machinery and engineer-*
ing. Philadelphia: Lea and Blanchard.
 Williams, A., and P. Bromley. 2000. “New ideas for old technology-
 experiments with an overshot waterwheel and implications for the drive
 system.” In *Proc., Int. Conf. of Gearing, Transmission and Mechanical*
System, 781–790.

Queries

1. Please provide the ASCE Membership Grades for the authors who are members. 
2. Please provide the postal code for all authors in affiliation footnotes. 
3. The ORCID for “Roberto Revelli” was removed because it was not authenticated. ORCIDs should be authenticated in Editorial Manager for inclusion in the article. The authentication cannot be done after your paper is accepted.
4. Please check the hierarchy of section heading levels. 
5. ASCE Open Access: Authors may choose to publish their papers through ASCE Open Access, making the paper freely available to all readers via the ASCE Library website. ASCE Open Access papers will be published under the Creative Commons-Attribution Only (CC-BY) License. The fee for this service is \$2000, and must be paid prior to publication. If you indicate Yes, you will receive a follow-up message with payment instructions. If you indicate No, your paper will be published in the typical subscribed-access section of the Journal. 
6. The citation ESHA (2014) has been changed to ESHA (2004) to match with the reference list. Please check and confirm. 
7. The citation Bozhinova et al. (2005) has been changed to Bozhinova et al. (2013) to match with the reference list. Please check and confirm. 
8. The citation Pellicciardi (2015) mentioned in this sentence is not present in the References list. Please provide the full details and we will insert it in the References list and link it to this citation. 
9. Please check all figures, figure citations, and figure captions to ensure they match and are in the correct order. 
10. ASCE style for math is to set all mathematical variables in italic font. Please check all math variables throughout the paper, both in equations and throughout the text, to ensure that all conform to ASCE style. 
11. ASCE style for fences in math is in the order $\{[()]\}$. Please check to ensure that all math conforms to this ASCE style. 
12. Please confirm the change of citation from “Pers. Comm. of Reviewer” to “anonymous reviewer, personal communication, 2020”. 
13. Please confirm the change from “ranged within ” to “was in the range ”. 
14. Please confirm the change from “within ” to “was in the range ”. 
15. This query was generated by an automatic reference checking system. This reference Dubas (2005) could not be located in the databases used by the system. While the reference may be correct, we ask that you check it so we can provide as many links to the referenced articles as possible. 
16. Please check whether the edits made for Garuffa (1897) is set correctly. 
17. Please provide volume and issue number for Quaranta and Müller (2019). 
18. This query was generated by an automatic reference checking system. This reference Weidner (1913) could not be located in the databases used by the system. While the reference may be correct, we ask that you check it so we can provide as many links to the referenced articles as possible. 
19. Please provide the publisher or sponsor name and location (not the conference location) for Williams and Bromley (2000). 