

Current Trends towards PON systems at 50+ Gbps

Original

Current Trends towards PON systems at 50+ Gbps / Wang, Haoyi; Torres Ferrera, Pablo; Ferrero, Valter; Pagano, Annachiara; Mercinelli, Roberto; Gaudino, Roberto. - ELETTRONICO. - (2020), pp. 1-4. ((Intervento presentato al convegno 2020 Italian Conference on Optics and Photonics (ICOP) tenutosi a Parma, Italy nel 9-11 Sept. 2020 [10.1109/ICOP49690.2020.9300328].

Availability:

This version is available at: 11583/2859704 since: 2021-04-24T14:56:30Z

Publisher:

IEEE

Published

DOI:10.1109/ICOP49690.2020.9300328

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2020 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Current Trends towards PON Systems at 50+ Gbps

R. Gaudino^{1*}, P. Torres-Ferrera¹, H. Wang¹, M. Valvo², A. Pagano², R. Mercinelli², V. Ferrero¹

¹ Politecnico di Torino, C.so Duca degli Abruzzi 24, 10129 Torino (TO), Italy, roberto.gaudino@polito.it

² Telecom Italia (TIM), Via Reiss Romoli 274, 10148 Torino (TO), Italy

Next generation PON physical layer will target 50 Gbit/s/lambda while using significant lower bandwidth transceivers. In this paper, we review our results on best modulation formats and equalization strategies.

Keywords: Optical Access Network, Passive Optical Network (PON)

1. Introduction

Passive Optical Network (PON) standardization is evolving towards 25 Gb/s (per wavelength) (25G-EPON under IEEE) [1-2], while the next step, focused on 50 Gb/s (HSP-PON, Higher Speed PON) is under discussion in ITU-T [3]. It is envisioned that 50 Gb/s/λ will still be based on intensity modulation and direct detection (IM-DD), but the limited bandwidth available in PON optoelectronic transceivers may require adopting more complex modulation formats, such as electrical duobinary (EDB) or PAM-4, and/or some simple form of digital signal processing (DSP) at the receiver (RX). Our group at Politecnico di Torino, in close collaboration with Telecom Italia (TIM), has been active in this area for the last two years [4-5]. In this paper, we experimentally discuss the required optoelectronic bandwidth (at both TX and RX) to support either 25 Gb/s/λ or 50 Gb/s/λ for different modulation formats.

2. Performance vs. available bandwidth

We focused on required optoelectronic bandwidth. We performed a set of experiments at 25 Gb/s/λ and 50 Gb/s/λ measuring BER vs. Optical Distribution Network (ODN) loss for three different modulation formats: traditional OOK NRZ (indicated as PAM-2 in the following), quaternary PAM (PAM-4), and electrical duobinary (EDB). Then we developed a very detailed numerical simulation framework taking into account experimentally measured transfer functions and noise levels. Results are given in Fig. 1, showing a good matching between experiments and simulations at both 25 and 50 Gb/s/λ. We consider adaptive equalization using either FFE or FFE+DFE approaches. After obtaining a validated simulation model, we use it to study the performance in terms of achievable ODN loss versus available electrical bandwidth at the transmitter and receiver for a 50Gbps system, showing results in Fig. 2. Simulation curves with or without FFE adaptive equalization are reported. This graph allows deriving important system considerations:

- Traditional NRZ (i.e. PAM-2) allows obtaining the highest ODN but only when the available bandwidth is sufficiently high, in particular for $f_{3dB} > 20$ GHz. Adaptive equalization is very effective for PAM-2, but still requires at least 25G class optoelectronics (i.e., optoelectronics having at least $f_{3dB} \approx 20$ GHz).
- EDB has significantly better performance than PAM-2 for $f_{3dB} < 20$ GHz, and it allows reaching a target 29 dB ODN loss down to $f_{3dB} \approx 15$ GHz. For EDB, adaptive equalization

improves the performance, but in a less pronounced way compared to the other formats

- For even lower bandwidth, PAM-4 has the best performances among the three considered modulation formats, and again adaptive equalization is quite useful. If ODN loss target is lowered to 24 dB, it allows using $f_{3dB} \approx 10$ GHz optoelectronics.

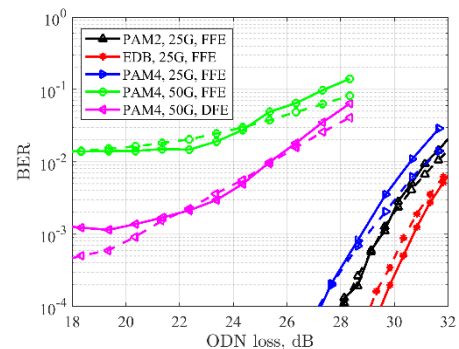


Fig. 1 Comparison between experiments (solid) and simulation model (dashed).

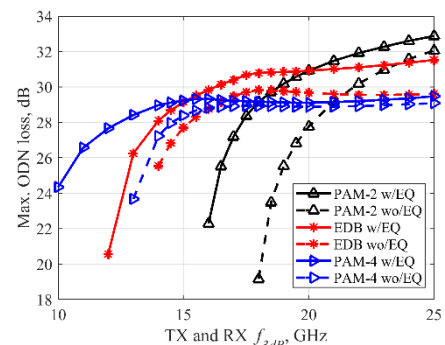


Fig. 2 ODN loss vs. available bandwidth (same at TX and RX) for different modulation formats, with and without equalization, for 50Gbps system.

Acknowledgements: the authors thank the support of the PhotoNext initiative at Politecnico di Torino. This work has been carried out in the framework of a research contract with Telecom Italia.

References

- [1] Harstead, E., *et al.*, "Technology Roadmap for Time-Division Multiplexed Passive Optical ...", *J. Light. Technol.*, 37, (2), 657-664 (2019).
- [2] 'IEEE P802.3ca 50G-EPON Task Force', <http://www.ieee802.org/3/ca/>
- [3] ITU-T G.9804.1 "Higher Speed PON Requirements"
- [4] Torres-Ferrera, P., *et al.*, "Impact of the Overall Electrical Filter Shaping in ...", *J. Opt. Comm. Netw.* 10, (5), pp. 493-505 (2018).
- [5] Torres-Ferrera, P., *et al.*, "Optimization of band-limited DSP-aided 25 and 50...", *J. Light. Technol.*, doi: 10.1109/JLT.2019.2946959 (2019)