

Dynamics of Optical Frequency Combs in Ring and Fabry-Perot Quantum Cascade Lasers

Original

Dynamics of Optical Frequency Combs in Ring and Fabry-Perot Quantum Cascade Lasers / Silvestri, Carlo; Columbo, Lorenzo Luigi; Brambilla, Massimo; Gioannini, Mariangela. - ELETTRONICO. - (2021). ((Intervento presentato al convegno 2021 Conference on Lasers and Electro-Optics Europe & European Quantum Electronics Conference (CLEO/Europe-EQEC) tenutosi a Munich, Germany nel 21-25 June 2021 [10.1109/CLEO/Europe-EQEC52157.2021.9541633]).

Availability:

This version is available at: 11583/2933032 since: 2021-10-19T13:55:20Z

Publisher:

IEEE

Published

DOI:10.1109/CLEO/Europe-EQEC52157.2021.9541633

Terms of use:

openAccess

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

IEEE postprint/Author's Accepted Manuscript

©2021 IEEE. Personal use of this material is permitted. Permission from IEEE must be obtained for all other uses, in any current or future media, including reprinting/republishing this material for advertising or promotional purposes, creating new collecting works, for resale or lists, or reuse of any copyrighted component of this work in other works.

(Article begins on next page)

Dynamics of Optical Frequency Combs in Ring and Fabry-Perot Quantum Cascade Lasers

Carlo Silvestri¹, Lorenzo Luigi Columbo¹, Massimo Brambilla², Mariangela Gioannini¹

1. Dipartimento di Elettronica e Telecomunicazioni, Politecnico di Torino, Corso Duca degli Abruzzi 24, Torino, 10129, Italy

2. Dipartimento Interateneo di Fisica, Politecnico ed Università degli Studi di Bari, Via Amendola 173, Bari, 70126, Italy

Since the demonstration that multimode Quantum Cascade Lasers (QCLs) can operate as sources of Optical Frequency Combs (OFC) [1], an extended class of theoretical models, based on standard two or three level Maxwell-Bloch equations, has been proposed to interpret such phenomenology.

We present an efficient framework for simulating QCL spatio-temporal field dynamics in either Fabry-Perot (FP) or ring cavity with and without external field injection. In both cases we demonstrate the formation of stable OFCs in good agreement with several experimental findings [2]. The model encompasses coherent polarization effects, spatial carrier grating and a non-zero linewidth enhancement factor (LEF).

For the FP configuration the coexistence of a FM and AM regime reported in [3] could be reproduced (Fig. 1a: power pulses in blue line and linear frequency chirp in red line). We have also demonstrated that the current range for OFC emission is strongly determined by the LEF, the carrier lifetime and the gain bandwidth [4]. For $LEF \approx 0.7-1$ and carrier lifetime of about 1ps, the OFCs are found only for certain current ranges above threshold. For current values much above threshold the OFC is lost and the multimode regime is irregular.

Our model can also describe the ring configuration where an OFC appears, induced by phase turbulence as reported experimentally by M. Piccardo et al. [5] [6]; see for example Fig. 1b where power pulses are periodic and optical modes are separated by twice the roundtrip frequency. Finally, by injecting a coherent external field, detuned with respect to the solitary ring lasing frequency, we demonstrate the formation of cavity solitons (see Fig. 1c) in agreement with the recent predictions we obtained in a general model approach, valid in the limit of small field injection and small frequency detuning [7].

The present approach is therefore a comprehensive simulation framework not limited by simplified assumptions, that can be used to test simplified but fastest approaches, interpret complex experimental results or design optimized cavity structures.

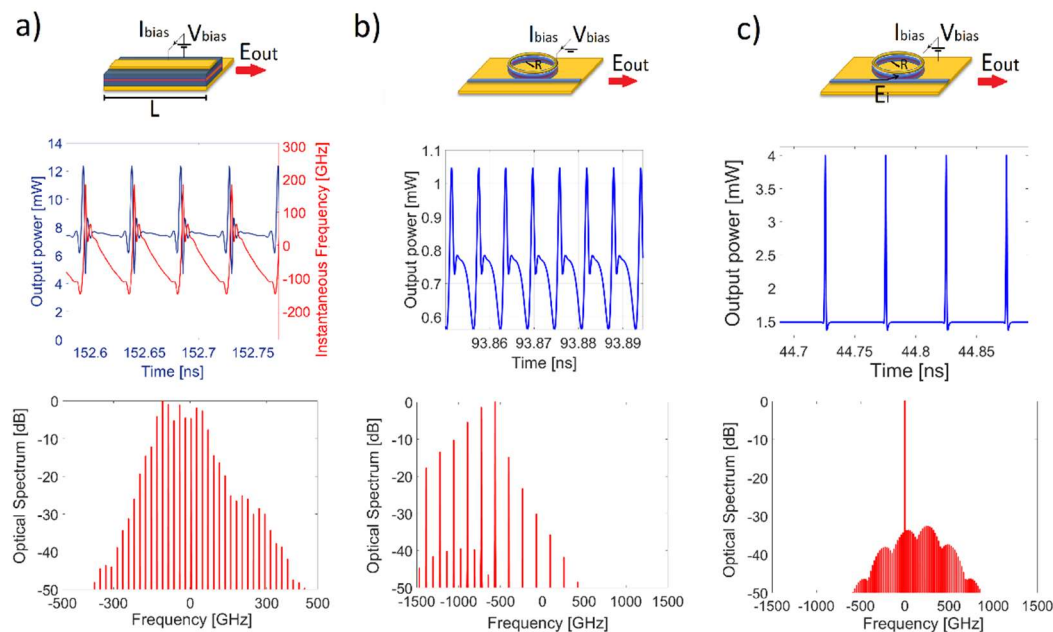


Fig. 1 Output power (top) and optical spectra (bottom) of OFCs in three different QCL in configurations (a) FP with length $L=2\text{mm}$, current 600mA and Beat Note (BN) frequency 22.6GHz , (b) ring with $R=0.16\text{mm}$, current 60mA and BN frequency 82.2GHz , (c) ring of $R=0.72\text{mm}$ with external injection of $E_i=83.93\text{V}/\mu\text{m}$ and detuning of 1.76GHz , current 21mA and BN frequency 20.2GHz .

References

- [1] A. Hugi, et al., *Nature* **492**, 229-233 (2012).
 [2] M. Singleton, et al., *Optica* **5**(8), 948-953 (2018).
 [3] Burghoff, D., *Optica* **7**, 1781-1787 (2020).
 [4] C. Silvestri, et al., *Optics Express* **28**, 23846-23861 (2020).
 [5] L.L. Columbo, et al., *Optics Express* **26**, 2829-2847 (2018).
 [6] M. Piccardo, et al., " *Nature* **582**, 360-364 (2020).
 [7] F. Prati, et al., *Nanophotonics* **10**, 195-207 (2020).