

Novel functionalized graphene oxide for capacitive deionization

Original

Novel functionalized graphene oxide for capacitive deionization / Pedico, Alessandro; Bocchini, Sergio; Tresso, Elena Maria; Lamberti, Andrea. - ELETTRONICO. - (2022), pp. 135-135. (Intervento presentato al convegno Desalination for the Environment: Clean Water and Energy tenutosi a Las Palmas de Gran Canaria nel 20-23 June 2022).

Availability:

This version is available at: 11583/2970507 since: 2022-08-06T15:46:29Z

Publisher:

European Desalination Society

Published

DOI:

Terms of use:

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

Publisher copyright

(Article begins on next page)

Novel functionalized graphene oxide for capacitive deionization

Alessandro Pedico^{a*}, Sergio Bocchini^b, Elena Tresso^a, Andrea Lamberti^{a,b}



^aPolitecnico di Torino, Dipartimento di Scienza Applicata (DISAT),
Corso Duca degli Abruzzi 24, 10129 Turin, Italy.

^bIstituto Italiano di Tecnologia, Center for Sustainable Future Technologies,
Via Livorno 60, 10144 Turin, Italy.

*e-mail: alessandro.pedico@polito.it

Graphene oxide functionalized with a novel positively charged monomer is proposed for application in water desalination. The functionalized graphene oxide has been obtained by a simple and scalable method, based on a modification of the one recently proposed by Roppolo et al [1]. The material obtained in this way has been mixed in organic solvent with activated carbon and hydrophobic polymeric binder to obtain a stable dispersion. The as prepared slurry has been coated on a metallic current collector with the doctor blade method and then dried at 50°C in order to obtain an electrode useful for capacitive deionization. The counterpart is obtained by replacing the functionalized graphene oxide with pristine graphene oxide in the preparation previously described. The final device, exploiting high surface asymmetric electrodes with opposite charges, is obtained juxtaposing a pair of these electrodes inside a homemade cell specifically designed for capacitive deionization application. Inlet and outlet are connected to a peristaltic pump. All the capacitive deionization tests have been performed in batch configuration, using NaCl 10 mM. A conductimeter is used for real-time measurement of the solution's conductivity. Material characterization techniques such as electron microscopy and infrared spectroscopy are employed to study the physical and chemical structure of the proposed materials. Thermogravimetric analysis is used to investigate the effectiveness of the functionalization procedure. Electrochemical methods are chosen to investigate the performance of the proposed materials. The final device demonstrates a remarkable desalination performance, reaching a value of 17 mg g⁻¹ of salt removal, with a charge efficiency of 98%.

Keywords: Graphene oxide; Capacitive deionization; Functionalization; Salt removal

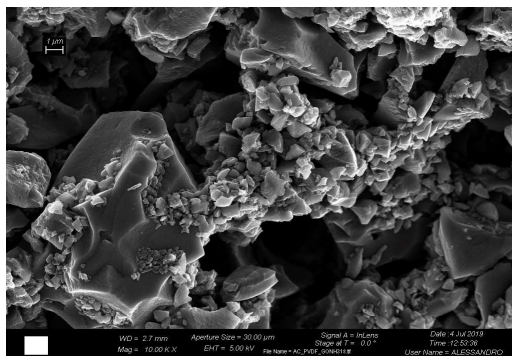

References

[1] Roppolo, I. et al., *Carbon* **2014**, 77, 226-235.