

Sustainable production networks: A design methodology based on the cooperation among stakeholders

*Original*

Sustainable production networks: A design methodology based on the cooperation among stakeholders / Castiglione, C; Fiore, E. - In: JOURNAL OF CLEANER PRODUCTION. - ISSN 0959-6526. - 362:(2022), p. 132308. [10.1016/j.jclepro.2022.132308]

*Availability:*

This version is available at: 11583/2971291 since: 2023-02-15T13:45:15Z

*Publisher:*

ELSEVIER SCI LTD

*Published*

DOI:10.1016/j.jclepro.2022.132308

*Terms of use:*

This article is made available under terms and conditions as specified in the corresponding bibliographic description in the repository

*Publisher copyright*

Elsevier postprint/Author's Accepted Manuscript

© 2022. This manuscript version is made available under the CC-BY-NC-ND 4.0 license  
<http://creativecommons.org/licenses/by-nc-nd/4.0/>. The final authenticated version is available online at:  
<http://dx.doi.org/10.1016/j.jclepro.2022.132308>

(Article begins on next page)

**Word count: 8831**

## **Sustainable production networks: a design methodology based on the cooperation among stakeholders**

### **Abstract**

This paper proposes an approach based on a systemic design methodology and the Multi-layer Enterprise Input-Output formalisation method to engage different stakeholders in a new production network to create value from waste and by-products. The proposed methodology supports the stakeholders' cooperation in the design and development phases to establish, in a bottom-up fashion, production networks based on mutual stakeholders' trust and relevant innovation content, such as industrial symbioses. The systemic design approach focuses on the characteristics of the local communities and their know-how identifying current waste and potential alternatives to exploit them as raw materials. A novel hierarchical version of the Multi-layer Enterprise Input-Output formalisation method quantitatively supports the system design and the performance assessment. It increases data consistency, supports practitioners in system formalisation, and feeds a properly developed dashboard of KPIs to provide the stakeholders with systemic design information and system techno-economic-environmental performance. The methodology implementation is shown in a case study based on the regional project InnovaEcoFood, which analyses the technical feasibility of producing healthy products from wine press residue and rice bran. The methodology data structure appears suitable for dynamic analyses to support decision-making, performance assessment, negotiation, and development activities. The methodology engages stakeholders in the design and development process, providing consistent techno-economic-environmental data based on a shared platform. In particular, it is suitable for self-organising networks and models where stakeholders themselves engage partners to build and extend the network.

**keywords: Sustainable production systems; Industrial symbiosis; Systemic design; Eco-efficiency; Sustainability indicators; Holistic diagnosis.**

### **1. Introduction**

Sustainable development merges the environmental and social dimensions with the economic growth of human activities. It was defined in 1987 (United Nations General Assembly, 1987) as the development that 'meets the needs of the present without compromising the ability of future generations to meet their own needs.' Nowadays, the sustainable development definition has been extended by introducing the 17 Sustainable Development Goals for 2030, set by United Nations (United Nations, 2015), which tightly intertwine industrial and infrastructure innovation and the positive impacts on the local communities and the environment.

Circular economy, industrial ecology, and systemic design are among the most popular paradigms for designing sustainable production networks. The circular economy paradigm fosters the adoption of cleaner production patterns at the company level and designing bottom-up environmental and waste management policies (Ghisellini et al., 2016). Although waste management represents only one aspect of circular economy and sustainability, recycling, reuse, and resource reduction play a pivotal role (Kirchherr et al., 2017), fostering sustainable development by addressing regenerative systems, waste reduction and resource efficiency improvement (Geissdoerfer et al., 2017). Industrial ecology investigates the mutual interaction between environmental and human ecosystems by focusing on materials and energy exchange (Saavedra et al., 2018). The systemic design aims to create new production networks through the cooperative connections of stakeholders capable of exploiting one the waste of another by ensuring that the new systems can self-adapt and self-organise. This approach shifts the focus from the product to the territory and the potential connections that can be established among stakeholders to gain diversity, efficiency, adaptability, and cohesion (Fiore et al., 2020).

The systemic design (SD) derives from von Bertalanffy's General System Theory (1969), which successively applied to the intersection of several research fields such as ecology, technology, and eco-management. Like industrial ecology, SD deals with artificial systems that evolve, and a specific methodology has been developed for dealing with production systems and value chains (Barbero, 2015). This methodology is based on the following five principles (Bistagnino, 2011):

1. The output (side-streams or by-products) of a system becomes the input (raw material) for another to create positive impacts such as increased turnover and new jobs.
2. Each relationship contributes to the system, which can be within or outside of the system.
3. Self-producing systems evolve by defining their paths of action and their interactions with other systems. Therefore, industries connected in a systemic approach are in dynamic balance and will change their role within the system to adapt themselves to the continuous changes of the environmental conditions (e.g., market, supply chains);
4. Stakeholders act locally: consolidating local networks gives value to the local resources (e.g. human, culture and material), highlighting local needs and opportunities by including them in the analysis.
5. Local communities act at the centre of the project and shall be connected to their own environmental, social and cultural context.

Therefore, the SD approach carefully considers the social dimension of sustainable development by including many social factors such as the local direct and indirect job creation, the local culture and products such as food and the know-how. Moreover, the approach based on stakeholders' engagement may effectively design and develop networks where trust among stakeholders must be developed. Innovation is pivotal at the technological, business model, and operational levels, such as in the industrial symbioses.

However, the SD approach lacks quantitative assessment methods to investigate and quantify system performance. New proposed alternatives should be comparable to support the practitioners in designing a well-performing system. In addition, during the design of a new system integrating several existing systems, involved stakeholders may require quantitative evidence regarding economic and environmental strengths and weaknesses to compare the current condition with the proposed alternatives.

This study investigates the exploitation of the Multi-layer Enterprise Input-Output (MEIO) formalisation method, which is used in production planning and control systems to simultaneously assess system performance under technical, economic, and environmental dimensions (Castiglione et al., 2022), as a quantitative tool to support SD in the design of sustainable production systems. Specifically, the MEIO method is used to support practitioners in identifying resource flows and estimating the performance of the current production system and the improving alternatives by developing a set of Key Performance Indicators (KPIs). Differently from other sets of KPIs proposed in the literature, such as regulatory indicators (e.g., Tian et al., 2014) and those developed through the use of Environmental Network Analysis (ENA), for example, to optimise networks (Layton, Bras, & Weissburg, 2016) and investigate the changes in resource flows (Malone, Weissburg, & Bras, 2018), the proposed KPIs focus on the development phase. Although the proposed method does not exclude the possibility of conducting further analyses with other sets of KPIs, it aims to support all the engaged stakeholders' during the design and development phase. Hence, the KPIs mainly focus on providing information about the performance of the potential networks under analysis and their relationships with the local context rather than a global *a posteriori* perspective like in Mattila, Pakarinen, & Sokka 2010. The use of the MEIO method within the SD approach and the proposed KPIs are shown through the case study of the project InnovaEcoFood.

In the remainder of this study, Section 2 presents the literature review and the research gap, while Section 3 shows the integration of the MEIO formalisation method and the SD methodology. Section 4 presents the empirical context and the case study. Section 5 discusses the results and section 6 concludes this paper.

## 2. Literature review

1 The transition toward sustainable development affects the design of production networks. However,  
2 achieving 'zero waste' could be considered economically unsustainable for stand-alone companies (Pauli,  
3 1997); hence, the interaction strategies among different companies play a pivotal role in the literature. The  
4 main strategies, which involve more than one company, regard the development of new products, the supply  
5 chains improvement to optimise resource exploitation and the development of networks able to use  
6 produced waste as raw material. Life cycle engineering approaches help to reduce environmental impact and  
7 foster circular economy strategies focusing on the product and analysing each phase of the product life cycle  
8 (Bradley et al., 2018) to limit the sources of waste during the entire product lifecycle (Brundage et al., 2018)  
9 and facilitating the companies that will exploit the product after the customer's use to avoid its disposal off  
10 (Sonego et al., 2018). The exploitation of waste and by-products to improve the efficient use of the resources  
11 and reduce the consumption of virgin materials require the design of new systems and supply chains capable  
12 of implementing the 6Rs strategies of circular economy, namely, reduction, reuse, recycling, recovery,  
13 redesign, re-manufacture (Govindan and Hasanagic 2018). Furthermore, companies can cooperate to make  
14 networks of industrial symbiotic relationships (i.e., industrial symbiosis studied by industrial ecology) where  
15 waste produced by a company becomes raw materials for another (Chertow and Ehrenfeld, 2012).

16  
17 The main difference between supply chains that implement the previously introduced 6Rs strategies and  
18 industrial symbiosis networks (ISN) is that all the supply chain stakeholders are oriented to the satisfaction  
19 of the same customers. In contrast, in an ISN, each company focuses on its customers' satisfaction (Stefan  
20 Seuring, 2004). Therefore, the environmental performance of ISN is intertwined and limited to the economic  
21 gain achieved by the single stakeholders (Scott Victor Valentine, 2016). However, considering supply chains  
22 and ISNs holistically can increase the economic and environmental performance of the involved stakeholders  
23 (Herczeg et al., 2018), especially when they are jointly designed and developed (Castiglione and Alfieri, 2019).  
24 The relationships among stakeholders play a fundamental role in this context because companies set part of  
25 their innovation strategies and investment allocation according to the development of the network  
26 (Castiglione et al., 2021), and they can be injured by the propagation of disruptive events that can affect the  
27 network by moving costs from a stakeholder to another (Yazan and Fraccascia, 2020).

28  
29 Local authorities and governments foster cooperation among stakeholders and companies, whether in  
30 the product development process or supply chains and ISNs, to improve the exploitation of local resources,  
31 enhance value creation, and reduce waste disposal (Allais et al., 2015). However, interactions among  
32 stakeholders are mainly studied by analysing the resource flows to improve the network resilience, matching  
33 the waste production and its use as raw material, and preventing the onset of opportunistic behaviours.  
34 Social network analysis has been used to investigate the centrality of some companies within the networks  
35 and identify their characteristics (Song et al., 2018). ENA methods investigate the benefits and weaknesses  
36 of the network characteristics, such as nestedness (Chatterjee, Brehm, & Layton, 2021). Also, ENA methods  
37 help to analyse and design the networks by focusing on their resilience (Chatterjee & Layton, 2020) and  
38 robustness (Dave & Layton, 2020) capabilities. For example, Food Web Analysis (one of the ENA methods) is  
39 used to study the network resilience regarding the capability of absorbing waste even though the occurrence  
40 of disruptive events (Genc et al., 2019) and identify detrital actors capable of fostering resource circularity  
41 (Watson et al., 2020).

42  
43 Enterprise Input-Output models have been used to identify and analyse a set of companies capable of  
44 creating synergies by exploiting their waste (Fraccascia, 2019), combined with Multi-Agent models to  
45 introduce the companies' behaviours (Albino et al., 2016). Game theory approaches are used to define  
46 equilibrium conditions to prevent opportunistic behaviours, while commitment-keeping mechanisms  
47 incentivise the companies to cooperate (Castiglione and Alfieri, 2020).

48  
49 However, these approaches neglect the local traditions and know-how, the strengths and weaknesses of  
50 a particular region, and the local communities. Conversely, SD approaches consider these aspects by fostering  
51 the active involvement of the local stakeholders in the design and development phases.

SD approaches are increasingly reaching the interest of scholars and practitioners that deal with *open* systems, that is, self-adaptable and self-organising systems over time (Hadžikadić, 2017) whose goal goes beyond closing the resource loops. The Systemic Design Research Network (SDRN)<sup>1</sup> has investigated these approaches since 2012<sup>2</sup>, and it has been recently formalised into the Systemic Design Association (SDA), which was created in 2018 by featuring the Oslo School of Architecture and Design (AHO), Ontario College of Art and Design University in Toronto (OCAD) and Politecnico di Torino in Italy (Battistoni et al., 2019). SD approaches developed by different research groups focus on framing complex problems and solutions<sup>3</sup>, which led to the creation of several degree programmes held in international universities, such as (i) a Strategic Foresight and Innovation master program at OCAD University of Toronto<sup>4</sup>, led by Peter Jones, addressing the complexity by investigating the causal links (Jones, 2014), (ii) Systems Oriented Design at AHO, Norway<sup>5</sup>, held by Birger Sevaldson, facing with socio-cultural-economic-environmental systems, (iii) a Master Degree in Systemic Design at the Politecnico di Torino, in Italy<sup>6</sup>, held by Silvia Barbero, that aims at defining production systems in which the output of a system becomes input, by viewing discarded output as a valuable resource for the local communities (Bistagnino, 2011), (iv) master degrees at the National Institute of Design (NID)<sup>7</sup>, India, lead by Praween Nahar<sup>8</sup>. Moreover, Alex Ryan<sup>9</sup> leads a group of systemic designers at the Government of Alberta (Alberta CoLab)<sup>10</sup>.

The tools developed in the several SD approaches for framing the existing systems usually rely on the designer's ability to visualise the problem and graphically shape the complexity (Pereno and Barbero, 2020). The most famous tools are the synthesis maps (Jones & Bowes, 2016) or giga mapping (Sevaldson, 2018), and the holistic diagnosis, which allows the "analysis and visualisation of all the components that define the current scenario, considering both the surrounding context and the flow of energy and matter" to provide a holistic picture of the state-of-the-art and the advantages for change (Battistoni, Giraldo Nohra, & Barbero, 2019).

This paper contributes to the literature by investigating the use of an SD methodology enriched with an improved version of the MEIO formalisation method and a new dashboard of KPIs to design open systems capable of exploiting the waste and by-products as new raw materials by also including some factors poorly considered in the literature, such as the local culture, know-how, and traditions. These factors are crucial for establishing industrial symbiosis because they address two relevant and hard to investigate issues: reducing the "mental distance" and improving trust among stakeholders (Yeo et al., 2019).

The SD methodology used in this paper consists of a six-phase framework whose application and final result partially depend on the designer's skills. The integration with the MEIO formalisation method overcomes the lack of quantitative tools of SD approaches quantitatively supporting the designers in the data collection, assisting the formalisation phases, and providing policy-makers and stakeholders with quantitative evidence on the alternatives for improving the system. Furthermore, the quantitative evidence can also encourage companies and entrepreneurs to keep their commitment in the open system development.

---

<sup>1</sup> <https://systemic-design.org> [Accessed 20 July, 2021]

<sup>2</sup> <https://systemic-design.org/systemic-design-association/> lo [Accessed 20 July 2021]

<sup>3</sup> <https://systemic-design.org/systemic-design-association/> lo [Accessed 20 July 2021]

<sup>4</sup> <https://www.ocadu.ca/academics/graduate-studies/strategic-foresight-and-innovation> [Accessed 2 September 2021]

<sup>5</sup> <https://aho.no/no/courses/70-504/2017-host>. [Accessed 17 August 2021]

<sup>6</sup> [https://didattica.polito.it/laurea\\_magistrale/design\\_sistemico/en/presentation](https://didattica.polito.it/laurea_magistrale/design_sistemico/en/presentation) [Accessed 17 August 2021]

<sup>7</sup> <https://www.nid.edu/home> [Accessed 22 August 2021]

<sup>8</sup> <https://www.nid.edu/people/detail/praveen-nahar> [Accessed 22 August 2021]

<sup>9</sup> <https://www.marsdd.com/bio/alex-ryan/> [Accessed 22 August 2021]

<sup>10</sup> <https://open.alberta.ca/publications/systemic-design-alberta-colab-info-sheet> [Accessed 22 August 2021]

This paper introduces an improved version of the MEIO method to hierarchically support the different phases of the SD approach and adapt to different stakeholders' use. It aims to assist both the data collection activities and the evaluation of the identified alternatives by adapting to the level of detail required by each specific stakeholder.

Also, this paper presents a dashboard of KPIs developed to be easily calculated and updated during the exploitation of the MEIO method. The dashboard provides technical, economic, environmental and systemic design information relevant to support the phases of establishing the production network by focusing on each stakeholder's involvement.

### 3. Materials and methods

This section briefly summarises the six-step SD framework and the MEIO method to support the introduction of the novel methodology based on the SD framework itself, the novel hierarchical version of the MEIO method, and the dashboard of KPIs to improve systemic-techno-economic-environmental analyses.

#### 3.1. The systemic design approach

SD focuses on the production networks by combining desk and field research and visualisation tools to provide a quali-quantitative vision of the existing system and foster the identification of improving alternatives (Pereno and Barbero, 2020). The proposed methodology is based on the framework developed by Battistoni and colleagues (2019), which consists of the following six steps:

1. *Holistic diagnosis*. Based on desk and field research, this analysis identifies all the components that define the current scenario, that is, the *linear model* that considers the involved input and output resource flows (i.e., raw materials, finished products, consumables, waste, and by-products), and the surrounding context (e.g., local traditions and know-how).
2. *Definition of problems and leverages for change*. The *linear model* and the surrounding context are used to identify unexploited resources and their potentialities.
3. *System design*. This phase focuses on identifying the alternatives, that is, sets of connections involving different stakeholders and processes, to create value from the resources discarded in the *linear model* by exploiting the opportunities offered by the territory. The alternatives transform the *linear model* into a *systemic model*, that is, an *open* system capable of creating value from part of the currently unexploited waste.
4. *Preliminary outcomes analysis*. Performance assessment of the alternatives under economic, environmental, and social dimensions highlights possible benefits and weaknesses.
5. *Implementation*. Once an alternative is selected because of its viability and feasibility, the stakeholders implement it.
6. *Results analysis and feedback*. Data collected during the *Implementation* phase helps to identify new opportunities, making the system autopoietic (i.e., capable of self-improving).

#### 3.2. The Multi-layer Enterprise Input-Output formalisation method

MEIO is a data formalisation method performing data collection, processing, and conditioning activities. It has been developed in the production planning and control system field to support the assessment of manufacturing system performance. It simultaneously considers value creation and technical, economic, and environmental dimensions (Castiglione et al., 2022) by avoiding adopting several methods together that may lead to redundancies and inconsistencies in data collection, processing, and analysis activities.

The MEIO method architecture consists of three tables: the Resource-Activity (RA) MEIO table, the Activity-Parameter (AP) MEIO table, and the Resource-Function (RF) MEIO table. They collect information on activities involved in the system (production, transport, and inventory activities) and their relationships with all

resources produced and consumed by the system. The three tables are used to create the RA MEIO graph representing the system under investigation.

**RA MEIO table.** RA MEIO table has a column for each activity and a row for each resource involved in the system to report, through the format “Input/output”, the maximum quantity absorbed in *input* or produced in *output* by the activity itself, replaced by the middle dash when the resource is absent. Table 1 shows an example of the RA MEIO table for a system with three activities (production, transport, and inventory activity, P1, T1, and I1, respectively) and five resources. For example, resource R2 is both input and output of activities T1 and I1, while, in P1, it is just an output. The RA MEIO table exploits the two principles of Material Flow Analysis: the input and the output of an activity must correspond according to the energy and the material balances; the unit of analysis of each resource must be consistent within the entire system. Hence, this method has no privileged resource (e.g., finished products) as it considers all resources simultaneously.

Table 1. The RA MEIO table for a three-activity and five-resource system.

RA MEIO table	P1	T1	I1
R1	$input_{R1,P1}/-$	$-/-$	$input_{R1,I1}/-$
R2	$-/output_{R2,P1}$	$input_{R2,T1}/output_{R2,T1}$	$input_{R2,I1}/output_{R2,I1}$
R3	$-/-$	$input_{R3,T1}/-$	$-/-$
R4	$input_{R4,P1}/output_{R4,P1}$	$-/-$	$-/-$
R5	$-/output_{R5,P1}$	$-/-$	$-/-$

**AP MEIO table.** This table has the activities in the column and activity parameters in rows. Generally, the first table rows introduce the activity ID, the machine involved, the number of parallel machines, the operating costs, operating hours per shift and shifts in a day, the distance matrix between activities reporting whether two activities are physically connected and the distance between two not connected activities. Table 2 shows the AP MEIO table of the previous example of the three-activity system. The table is highly customisable to adapt to the various uses of the method.

Table 2. The AP MEIO table for a three-activity system.

AP MEIO table	P1	T1	I1
ID	A001	A002	A003
Activity description	Marc grinding	Truck transport	Marc flour bag
Number of machines	2	1	5
Operating costs (€/h)	10	5	1
Distance from P1 (km)	-	0	5
Distance from T1 (km)	0	-	0
Distance from I1 (km)	5	0	-

**RF MEIO table.** It follows the same structure as the RA MEIO table, with the activities in the columns and the resources involved in the system in rows. This table allows analysing of different production rates and scales of the manufacturing system by varying production and consumption through mathematical functions that model relationships between consumed and produced resources. In each activity  $i$ , one of the produced or consumed resources is selected as the independent variable  $X_i$ , and its produced or consumed quantity is decided by the decision-maker or in other ways out of the method. The dependent variables  $Y_{r,i}$  and  $Y'_{r,i}$  represent, respectively, the consumed and the produced quantities of the resource  $r$  of activity  $i$ . Differently from the RA MEIO table, the “input;output” format specifies both the proportional quantity produced or consumed according to the independent variable  $X_i$  and potential fixed consumption or production. Therefore, in each activity  $i$ , for each resource  $r$ , four parameters  $a_{(s,i)}$ ,  $b_{(s,i)}$ ,  $a'_{(i,e)}$ , and  $b'_{(i,e)}$  are introduced to model the consumption or the production of  $r$  proportional to  $X_i$ , respectively,  $a_{(s,i)}$  and  $a'_{(i,e)}$ , and the potential fixed consumption or production of  $r$ ,  $b_{(s,i)}$  and  $b'_{(i,e)}$ , respectively. The subscripts of the four

parameters identify the starting activities  $s$  that produce the resource  $r$  followed by the ending activities  $e$  that consume it, and the role of the current activity  $i$ . Table 3 shows the RF MEIO table of the previous example, and for the activity I1, the input quantity of the resource R1 has been chosen as the independent variable  $X_{I1}$  and the input ( $Y_{R2,I1}$ ) and output ( $Y'_{R2,I1}$ ) quantities of R2 dependent proportionally from  $X_{I1}$  plus a fixed consumption and production. The accuracy of mathematical functions can range from a rough linear estimation for big picture analyses to a high-fidelity representation of the process by exploiting industrial data or using the producer's nominal information for production machines.

Table 3. The RF MEIO table for a system with three activities and five resources.

RF MEIO table	P1	T1	I1
R1	$Y_{R1,P1}=a_{(s,P1)} X_{P1}+b_{(s,P1)}$ ;-	-;-	$X_{I1}$ ;-
R2	-;X <sub>P1</sub>	$Y_{R2,T1}=a_{(s,T1)}X_{T1}+b_{(s,T1)}$ ; $Y'_{R2,T1}=a'_{(T1,e)}X_{T1}+b'_{(T1,e)}$	$Y_{R2,I1}=a_{(s,I1)}X_{I1}+b_{(s,I1)}$ ; $Y'_{R2,I1}=a'_{(I1,e)}X_{I1}+b'_{(I1,e)}$
R3	-;-	$X_{T1}$ ;-	-;-
R4	$Y_{R4,P1}=a_{(s,P1)}X_{P1}+b_{(s,P1)}$ ; $Y'_{R4,P1}=a'_{(P1,e)}X_{P1}+b'_{(P1,e)}$	-;-	-;-
R5	-;Y' <sub>R5,P1</sub> = $a_{(P1,e)}X_{P1}+b_{(P1,e)}$	-;-	-;-

**RA MEIO graph.** The MEIO tables can be used to create the RA MEIO graph in which the activities and the resources are the nodes and the arcs, respectively. The RA MEIO graph is both a visual tool and a formal representation to which the mathematical graph rules can be applied to perform analyses and optimisations. Arcs connect the node where the resource is produced with the nodes that consume or can consume it. The RA MEIO graph consists of two subgraphs: one of the current connections among activities (solid arcs) and one of the potential connections among the activities (dashed arcs) to identify potential alternatives for reusing waste and by-products. The RA MEIO graph exploits the RA MEIO table to identify dashed arcs, that is, all the potential connections among the activities producing each resource and the activities that may exploit them. Conversely, the connections identified in the distance matrix of the AP MEIO table represent the physical system structure, and they are represented through solid arcs in the RA MEIO graph by defining the actual connections. Figure 1 shows the RA MEIO graph of the previous example.

All the activity input (incoming arcs) and output (outgoing arcs) must have a source and a sink activity. When the system does not provide a sink or source activity, for example, in Figure 1, when a process dissipates heat in the environment (resource R5) or absorbs power (resource R1) from the market, a dashed node is introduced (T6 for R5 and T3 for R1) by putting together all the arcs representing the procurement of the same resource. The nodes contain the information of the AP MEIO table, such as operating costs, technical data, and efficiency. AP MEIO table also provides the weight of the dashed arcs, that is, the distance between two activities or a middle dash when they are not connected. The weights of the solid arcs are given from the mathematical functions of the RF MEIO table. For example, in Figure 1, the activity P1 exploits some resources from the market (R1 and R4 coming from T2 and T3, dashed arcs since the current system does not consider them), emitting in the environment R4 and R5 after the transformation process (T6 and T7). P1 finished product is currently transported (activity T1) to a warehouse (I1) where it is sold (dashed activity T4), and solid arcs identify this path. However, other system alternatives might consider selling the product directly from P1 or storing the product near P1. These system alternatives, represented in dashed arcs, come from the RA MEIO table by matching the output and the input of different activities.



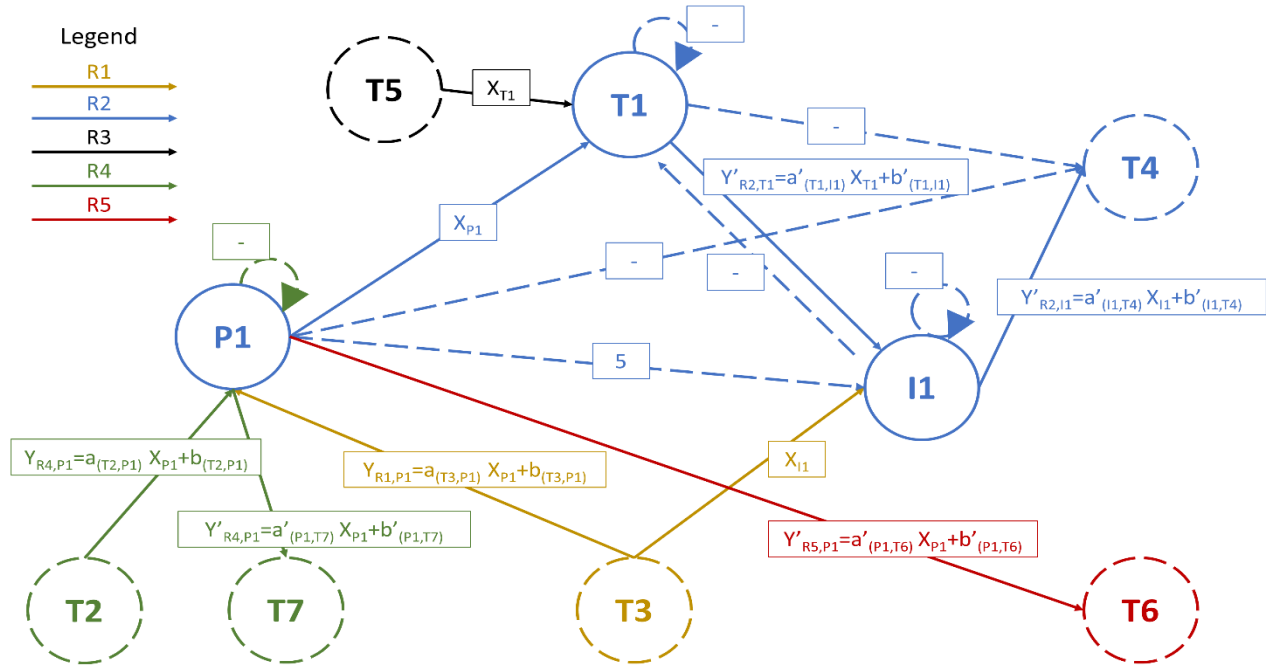


Figure 1. The RA MEIO graph for the three-activity system (P1, T1, and I1) and the five resources (T1, R2, R3, R4, and R5).

### 3.3. The exploitation of the MEIO method in the systemic design approach

The MEIO method exploitation within the SD approach helps to deal with complex systems characterised by multidisciplinary context, the involvement of many stakeholders in the design process, and the large number of alternative solutions identified to improve the current systems. Figure 2 shows the six-step SD approach, highlighting the phases in which the designers and the stakeholders can exploit the method.

The proposed approach introduces the MEIO formalisation method to enhance the robustness of the SD approach in phases 1 and 3: the *Holistic diagnosis* and the *System design*. Specifically, the method improves the data collection, conditioning and the processing activities by helping to consider all the involved resources (i.e., waste, by-products, and consumables beyond raw materials and finished products) to satisfy the material and energy balances in every activity through the three-table data structure and the compilation method. Therefore, the *linear model* (i.e., the initial systems) and the further production, transport, and inventory activities, which are introduced to create value from waste by constituting the several alternatives of the *systemic model*, are represented through the three MEIO tables.

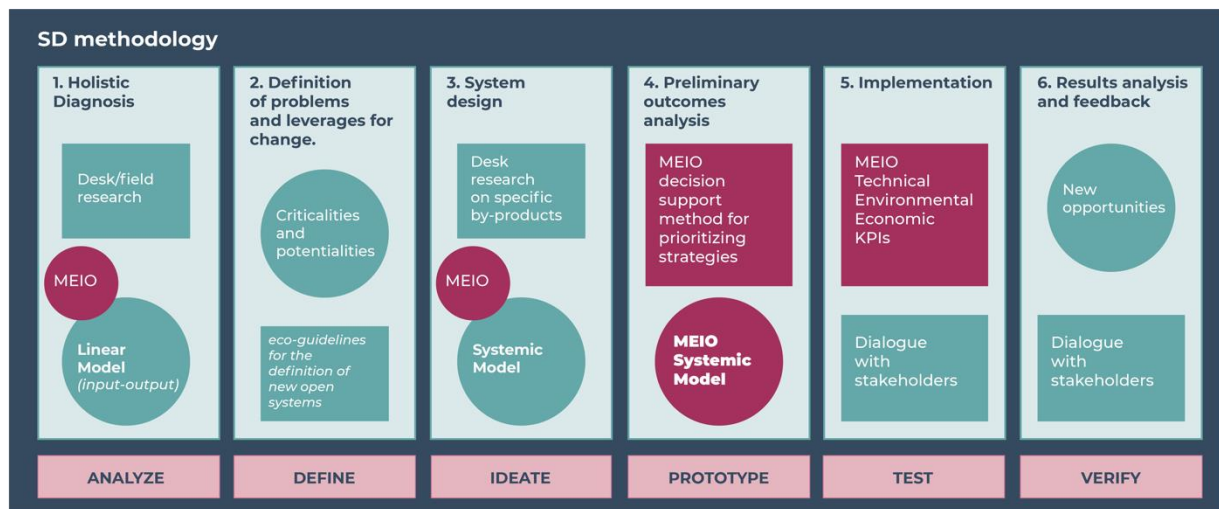


Figure 2. The six-step framework of the SD approach (proposed by Barbero, 2017; Battistoni et al., 2019; Gaiardo, 2016) with the integration of the MEIO method.

Both phases 4 and 5 of the SD approach, namely, the *Preliminary outcomes analysis* and the *Implementation*, involve extensive use of quantitative information represented by data arbitrarily chosen by the designer that could focus on some dimensions rather than others, for example, by privileging technical and economic KPIs and neglecting environmental ones. Moreover, the use of data in phase 4 has a different role than in phase 5. In phase 4, quantitative information aims to support the designers in identifying the best set of alternatives according to the several dimensions. Conversely, in phase 5, the quantitative information aims to provide stakeholders with quantitative evidence of the potential benefits and weaknesses of each of the proposed alternatives of *systemic models*.

The proposed approach improves the effectiveness of phases 4 and 5 by exploiting the data collected and formalised by the MEIO method by developing a dashboard of performance indicators. The dashboard aims to reach the twofold goal of (i) defining general guidelines to objectively evaluate system performance and (ii) providing quantitative information to support designers and stakeholders in their respective roles. The KPIs can assess the technical, economic, and environmental performance of all the activities involved in both the *linear* and the *systemic models*. Furthermore, the *linear* and *systemic models*, modelled through the three MEIO tables or synthesised in the RA MEIO graph, can be hierarchically aggregated and disaggregated to provide the best detail level to each stakeholder. Hence, the KPIs can be applied to the single production, transport, and inventory activities or their aggregations to provide high-level quantitative information to stakeholders.

### 3.3.1. Hierarchical data aggregation and disaggregation

The hierarchical approach allows to aggregate data formalised through the MEIO starting from the atomic entities, that is, the activities. The activity aggregation allows the designers to perform several kinds of analysis and highlight performance by considering the single activities or aggregating activities according to several criteria (e.g., involved resources, stakeholders who perform them).

The activity aggregation modifies the MEIO tables by condensing the data of several activities in the aggregated one. The AP MEIO table is not affected by aggregation/disaggregation operations to maintain the entire information about the underlying processes. In the RA and RF MEIO tables, the underlying activities are substituted by the aggregated activities. The resource production and consumption in the RA and RF MEIO tables are adjusted differently if the quantities are produced and consumed only within the aggregated activity or purchased and sent out of the aggregated activity.

In the first case, the RA and RF MEIO tables do not report the resources produced by underlying activities entirely consumed within the aggregated activity because they do not have effects outside of the aggregated activity. Conversely, the resources acquired from outside the aggregated activity by all the underlying activities are added together to define the input of the RA MEIO table. Similarly, all the resources produced by the underlying activities are added together and reduced by the quantities consumed internally to define the output quantity of the RA MEIO table. The new RF MEIO table sets new functions between the input and output of all involved resources because it must consider the resources produced and consumed within the new activity that do not produce effects in the rest of the system. Therefore, the activity aggregation/disaggregation is an alternative representation of the same system to highlight specific information for different stakeholders.

Table 4 and Figure 3 show the RA MEIO graph and the new RA and RF MEIO tables on the left and the right, respectively, for the previous example of three activities and five resources, in which the activities P1, T1, and I1, performed by the same stakeholder, are aggregated in process activity A-P1.

Table 4. The aggregated RA and RF MEIO tables for the system of the previous example with five resources and three activities.

	RA MEIO Table	RF MEIO table
Resources	A-P1	A-P1

<b>R1</b>	$input_{R1,A-P1}/-$	$Y_{R1,A-P1}=a_{(T3,A-P1)}X_{R3,A-P1}+b_{(T3,A-P1)};-$
<b>R2</b>	$-/output_{R2,A-P1}$	$-;Y'_{R2,A-P1}=a'_{(A-P1,T4)}X_{R3,A-P1}+b'_{(A-P1,T4)}$
<b>R3</b>	$input_{R3,A-P1}/-$	$X_{R3,A-P1};-$
<b>R4</b>	$input_{R4,A-P1}/output_{R4,A-P1}$	$Y_{R4,A-P1}=a_{(T2,A-P1)}X_{R3,A-P1}+b_{(T2,A-P1)};$ $Y'_{R4,A-P1}=a'_{(A-P1,T7)}X_{R3,A-P1}+b'_{(A-P1,T7)}$
<b>R5</b>	$-/output_{R5,A-P1}$	$-;Y'_{R5,A-P1}=a'_{(A-P1,T6)}X_{R3,A-P1}+b'_{(A-P1,T6)}$

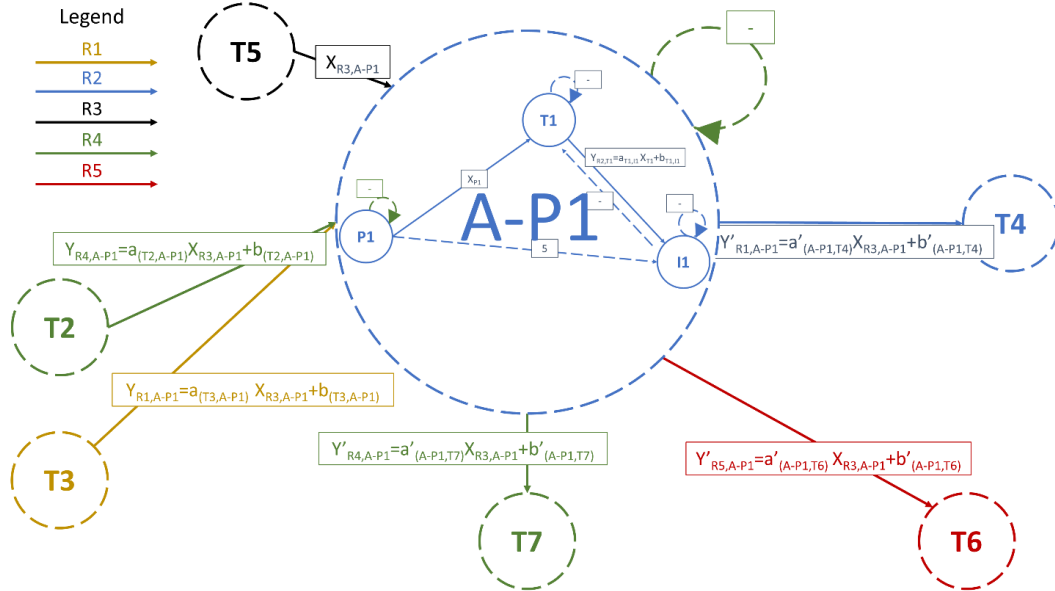


Figure 3. The RA MEIO graph for the system with activities aggregated by stakeholders.

### 3.3.2. KPI dashboard for the systemic design approach

The dashboard provides a set of indicators that assess single activities and sets of activities in terms of technical, economic, and environmental performance and provide insights useful for the systemic approach. Table 5 shows the set of resources used to define the KPIs.

Table 5. The sets of resources and activities used to define technical, economic, and environmental performance

Set	Description	Abbreviation
$\mathcal{J}$	$\mathcal{J}$ is the set of all resources $j$ involved in the system.	Total resources.
$\mathcal{S}$	$\mathcal{S}$ is the set of all activities $s$ involved in the system.	Total activities.
$\mathcal{E} \subset \mathcal{J}$	$\mathcal{E}$ is the subset of all resources $j$ that are energy vectors.	Energy vectors.
$\mathcal{R} \subset \mathcal{J}$	$\mathcal{R}$ is the subset of all resources $j$ that are materials.	Materials.
$\mathcal{I}_s \subset \mathcal{J}$	$\mathcal{I}_s$ is the subset of all resources $j$ input of activity $s$ .	Input resources of $s$ .
$\mathcal{O}_s \subset \mathcal{J}$	$\mathcal{O}_s$ is the subset of all resources $j$ output of activity $s$ .	Output resources of $s$ .
$\mathcal{S}_{ptw} \subset \mathcal{S}$	$\mathcal{S}_{ptw}$ is the subset of the system $\mathcal{S}$ involving activities $p$ , $t$ , and $w$ .	Aggregated activity.
$\mathcal{W}_s \subset \mathcal{O}_s$	$\mathcal{W}_s$ is the subset of all output resources $j$ of $s$ that are waste.	Waste.
$\mathcal{P}_s \subset \mathcal{S}$	$\mathcal{P}_s$ is the subset of the system $\mathcal{S}$ involving the production activities $P$ .	Total production activities.
$\mathcal{T}_s \subset \mathcal{S}$	$\mathcal{T}_s$ is the subset of the system $\mathcal{S}$ involving the transport activities $T$ .	Total transport activities.
$\mathcal{D}_s \subset \mathcal{S}$	$\mathcal{D}_s$ is the subset of the system $\mathcal{S}$ involving the inventory activities $I$ .	Total inventory activities.

$\mathcal{J}_s^v$ $\subset \mathcal{J}_s$	$\mathcal{J}_s^v$ is the subset of virgin input resources $j$ of activity $s$ .	Virgin resources.
$\mathcal{J}_s^r$ $\subset \mathcal{J}_s$	$\mathcal{J}_s^r$ is the subset of input resources $j$ of activity $s$ recovered from other systems.	Recovered resources.

### 3.3.2.1. Technical performance

The following indicators measure the energy, raw material, and labour required by the activities that add value to defective products, waste, and scrap. Equation (1) represents the indicator for the raw materials embodied in waste for activity  $s$  ( $REW_s$ ), in which the percentage of waste, that is, resources belonging to  $\mathcal{W}_s$  and the set  $\mathcal{R}$  of the raw materials, out of the total output material resources  $\mathcal{O}_s \cap \mathcal{R}$  is multiplied by each raw material  $j$  in input decreased by the scrap,  $\mathcal{J}_s \cap \mathcal{R}$ :

$$REW_s = \frac{\sum_{j \in \mathcal{W}_s \cap \mathcal{R}} (Y_j)}{\sum_{j \in \mathcal{O}_s \cap \mathcal{R}} (Y_j)} \left( \sum_{j \in \mathcal{J}_s \cap \mathcal{R}} (Y_j) - \sum_{j \in \mathcal{J}_s \cap \mathcal{R} \cap \mathcal{W}_s} (Y_j) \right) \quad (1)$$

Equation (2) is the indicator to monitor the energy embodied in waste for activity  $s$  ( $EEW_s$ ), that exploits the same ratio of Equation (1) multiplied by the energy vectors  $j$  in input decreased by the dissipated energy, that is, the energy vectors  $j \in \mathcal{E} \cap \mathcal{W}_s$ .

$$EEW_s = \frac{\sum_{j \in \mathcal{W}_s \cap \mathcal{R}} (Y_j)}{\sum_{j \in \mathcal{O}_s \cap \mathcal{R}} (Y_j)} \left( \sum_{j \in \mathcal{J}_s \cap \mathcal{E}} (Y_j) - \sum_{j \in \mathcal{J}_s \cap \mathcal{E} \cap \mathcal{W}_s} (Y_j) \right) \quad (2)$$

The last indicator (Equation (3)) measures the cost of resources, both energy vectors and raw materials, embodied in waste for activity  $s$  ( $CEW_s$ ) through the market price  $p_j$ .

$$CEW_s = \frac{\sum_{j \in \mathcal{W}_s \cap \mathcal{R}} (Y_j)}{\sum_{j \in \mathcal{O}_s \cap \mathcal{R}} (Y_j)} \left( \sum_{j \in \mathcal{J}_s} (Y_j) p_j - \sum_{j \in \mathcal{J}_s \cap \mathcal{W}_s} (Y_j) p_j \right) \quad (3)$$

### 3.3.2.2. Economic performance

The activity economic profitability ( $AEP_s$ ) indicator measures the net profit generated through activity  $s$ . In Equation (4), the  $AEP_s$  considers the economic savings generated by using resource  $j$  as a raw material rather than waste, specifically, the savings of avoided disposal costs ( $s_j^d$ ) and the minor cost compared to raw material ( $s_j^v$ ), the revenues evaluated through the market prices ( $p_j$ ) of the activity outputs, the resource purchasing costs, and the operating costs such as the labour cost  $l_s$  and the disposal costs ( $d_j$ ) of the inputs resources.

$$AEP_s = \sum_{j \in \mathcal{J}_s} ((s_j^d + s_j^v - p_j) Y_j) - l_s X_s + \sum_{j \in \mathcal{O}_s} ((p_j - d_j) Y_j) \quad (4)$$

Equation (5) shows the economic profitability ( $SEM_s$ ) indicator for subsystem  $S$ ; it measures the economic profitability of the nodes belonging to  $S$  by summing their individual  $AEP_i$ .

$$SEM_S = \sum_{s \in S} (AEP_s) \quad (5)$$

Equation (6) indicates the percentage of costs of the added value activities ( $PAVA_s$ ) of system  $S$ , that is, the set of production processes  $\mathcal{P}_s$ , compared to the costs of all the activities.

$$PAVA_S = \frac{\sum_{s \in \mathcal{P}_s} (\sum_{j \in \mathcal{J}_s} ((p_j) Y_j) + l_s X_s + \sum_{j \in \mathcal{O}_s} ((d_j) Y_j))}{\sum_{s \in S} (\sum_{j \in \mathcal{J}_s} ((p_j) Y_j) + l_s X_s + \sum_{j \in \mathcal{O}_s} ((d_j) Y_j))} \quad (6)$$

### 3.3.2.3. Environmental performance

Equation (6) measures the exploited quantity of waste and by-products of other systems compared to the total quantity used to input raw materials. Hence, for each activity  $s$ , the percentage of recovered resources

( $PRR_s$ ) out of all the resources used as input. The indicator reported in Equation (7) measures the quantity of energy recovered from other systems ( $PER_s$ ) out of the total used energy. The indicator reported in Equation (8) assesses the percentage of resources recovered from other systems ( $ARR_s$ ) by evaluating the average of indicators in Equations (6) and (7).

$$PRR_s = \frac{\sum_{j \in \mathcal{J}_s^r \cap \mathcal{R}} (Y_j)}{\sum_{j \in \mathcal{J}_s \cap \mathcal{R}} (Y_j)} \quad (6)$$

$$PER_s = \frac{\sum_{j \in \mathcal{J}_s^r \cap \mathcal{E}} (Y_j)}{\sum_{j \in \mathcal{J}_s \cap \mathcal{E}} (Y_j)} \quad (7)$$

$$ARR_s = \frac{PRR_s + PER_s}{2} \quad (8)$$

The indicator in Equation (9) measures the quantity of energy required for one unit of valuable output of activity  $s$  ( $EVO_s$ ). Equation (10) indicates the ratio between the waste of other systems used as raw material ( $RW_s$ ) and the production of new waste from the process.

$$EVO_s = \frac{\sum_{j \in \mathcal{J}_s \cap \mathcal{E}} (Y_j)}{\sum_{j \in \mathcal{O}_s / \mathcal{W} \cap \mathcal{E}_s} (Y_j)} \quad (9)$$

$$RW_s = \frac{\sum_{j \in \mathcal{J}_s^r \cap \mathcal{R}} (Y_j)}{\sum_{j \in \mathcal{W}_s \cap \mathcal{R}} (Y_j)} \quad (10)$$

#### 3.3.2.4. Systemic information

This set of information is not derived from the MEIO data structure, and it provides the systemic designer information regarding the geographical context and the specific industrial fields. Table 6 collects all the systemic information. The reference market ( $TM_j$ ) is the market to which the resource  $j$  belongs, and it is crucial to determine whether the proposed *systemic model*, that is, the set of activities  $\mathcal{S}$ , enriches or impoverishes the initial sector of the produced ( $OUT_j$ ) and absorbed ( $IN_j$ ) quantities. It is crucial for each activity  $s$  the number of other activities ( $NFA_s$ ) fed through its finished products, reusable waste, and by-products, and the number of local fed activities ( $NLFA_s$ ), that is, those activities that can be performed in the local community creating jobs and increasing the quantities of resources produced and absorbed by the region.

Table 6. Systemic parameters that characterise the activities of the system.

Characteristic	Definition
$TM_j$	The market to which the resource $j$ belongs.
$OUT_j$	The total quantity of the resource $j$ produced by the set of activities $\mathcal{S}$ .
$IN_j$	The total quantity of the resource $j$ absorbed by the set of activities $\mathcal{S}$ .
$NFA_s$	The number of activities fed through the resources produced by activity $s$ .
$NLFA_s$	The number of local activities fed through the resources produced by activity $s$ .
$NLPA_s$	The number of local activities that feed the activity $s$ .

## 4. Case study: the InnovaEcoFood project

The proposed approach does not focus on a specific industrial field. However, it is particularly suitable for the design and development of production networks in which mutual trust among stakeholders must be developed, and innovation is crucial at the technological, business model, and operational levels, such as in industrial symbiosis. The food and drink industry has some characteristics capable of highlighting the strengths of the SD framework extended with the MEIO formalisation method, such as its strong relationship with the local tradition and know-how, the coordination of many stakeholders, and the impact on the local communities.

InnovaEcoFood project investigates the exploitation of marc and rice hulls that are by-products of wine and rice production chains. Fiore et al. (2020) applied the original SD framework to the marc and rice hull systems to identify a *systemic model* able to exploit these by-products by avoiding the downcycling in animal food and barn products. Several possible *systemic models*, that is, alternatives creating *open systems* exploiting the by-products mentioned above, have been identified involving several industrial fields and different stakeholders. The final *systemic model* proposed by the InnovaEcoFood project studied the production of marc flour, rice hull flour, and rice hull butter and their use in baked food products.

The approach in this paper is implemented in the final *systemic model* of the InnovaEcoFood project to reach the threefold goal of:

- showing how to implement the MEIO formalisation method to collect and formalise data to represent the systems;
- introducing the managerial insights stemming from the dashboard of techno-economic-environmental KPIs and systemic information;
- showing the performance assessment, which can be extended at different aggregation levels of the system activities to support designers' and stakeholders' analyses.

The MEIO tables and the RA MEIO graph should also include the activities of the *linear model*, such as grape and rice harvesting, their preliminary treatments, and the other alternatives of *systemic models* identified in Fiore et al. 2020. The proposed case study focuses only on the *systemic model*, even though the methodology includes the *linear model*, to reduce redundancy and complexity while increasing understandability. Figure A1 in Appendix A shows the entire InnovaEcoFood project.

Figure 4 shows the stakeholders of InnovaEcoFood; in particular, Agrindustria is involved in the mechanical transformation, Exenia Group in chemical transformation, and Quasani – Fattoria della Mandorla produces the baked products. Table 7 highlights the involved resources and their market price, while Table 8 presents the eleven production activities and the produced and absorbed resources. *Supercritical CO<sub>2</sub> extraction* (P8 in Table 8) employs 60 kg of CO<sub>2</sub> in each extraction; 8.33% becomes a waste, while the remaining 91.66% is recovered for the subsequent extraction.

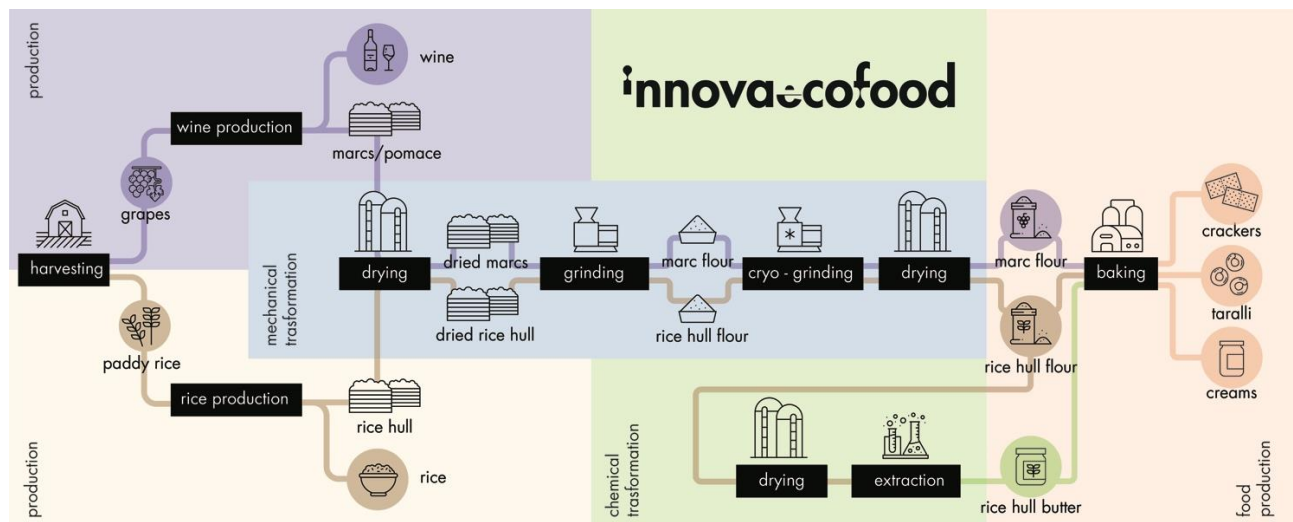


Figure 4. The stakeholders involved in the InnovaEcoFood project: rice and wine producers, marc and rice hull flour producer, rice hull butter producer, and the producer of baked products.

Table 7. Prices of finished products and resources in 2018

Resource ID	Resource	Price	Resource ID	Resource	Price
R1	Taralli (€/kg)	10.00	R9	Dried marc (€/kg)	0.06
R2	Cracker (€/kg)	14.50	R10	Marc flour 10.00 mm (€/kg)	0.10
R3	Cream (€/kg)	48.00	R11	Marc flour 0.50 mm (€/kg)	0.15



<b>R4</b>	<b>Almond (€/kg)</b>	12.00	<b>R12</b>	<b>Marc flour 0.50 mm FOOD (€/kg)</b>	2.00
<b>R5</b>	<b>Power (€/kWh)</b>	0.05	<b>R13</b>	<b>Rice hull (€/kg)</b>	0.70
<b>R6</b>	<b>Water (€/kg)</b>	0.01	<b>R14</b>	<b>Rice hull flour 10.00 mm (€/kg)</b>	1.30
<b>R7</b>	<b>Heat (€/kWh)</b>	0.01	<b>R15</b>	<b>Rice hull flour 0.50 mm FOOD (€/kg)</b>	1.70
<b>R8</b>	<b>Marc (€/kg)</b>	0.01	<b>R16</b>	<b>Rice hull butter (€/kg)</b>	250.00

Table 8. The eleven production activities involve 16 resources to produce marc and rice hull flours, rice hull butter and baked products.

Stakeholder		Agrindustria						Exenia Group		Quasani – Fattoria della Mandorla		
Main finished product		Marc flour				Rice hull flour		Rice hull butter		Crackers	Taralli	Cream
Resource ID	Unit	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11
		Drying	Crushing	Cryo-grinding	Bacterial load reduction and final drying	Cryo-grinding	Bacterial load reduction and final drying	Drying	Super-critical CO <sub>2</sub> extraction	Production of Crackers	Production of Taralli	Production of Cream
R1	Kg	-	-	-	-	-	-	-	-	-	+1	-
R2	Kg	-	-	-	-	-	-	-	-	+1	-	-
R3	Kg	-	-	-	-	-	-	-	-	-	-	+1
R4	Kg	-	-	-	-	-	-	-	-	-	-	-0.3
R5	kWh	-5	-1	-10	-10	-10	-10	-30	-6.5	-0.12	-0.9	-0.27
R6	Kg	-	-	-	-7	-	-7	-	-	-3	-2	-3
R7	kWh	-100	-	-	-100	-	-100	-	-1.84	-	-	-
R8	Kg	-100	-	-	-	-	-	-	-	-	-	-
R9	Kg	+47	-100	-	-	-	-	-	-	-	-	-
R10	Kg	-	+99.5	-100	-	-	-	-	-	-	-	-
R11	Kg	-	-	+99	-100	-	-	-	-	-	-	-
R12	Kg	-	-	-	+100	-	-	-	-	-0.277	-0.277	-0.277
R13	Kg	-	-	-	-	-100	-	-1	-	-	-	-
R14	Kg	-	-	-	-	+99	-100	+0.987	-1	-	-	-
R15	Kg	-	-	-	-	-	+100	-	-	-0.277	-0.277	-0.277
R16	Kg	-	-	-	-	-	-	-	+0.002	-0.277	-0.277	-0.277
Operating cost	€	-	-	-	-	-	-	9	-	-	-	-

#### 4.1. Method application

The performance and resource efficiency analysis of the whole production chain neglects financial and labour costs because they depend on the production chain design for market competition, which goes beyond the technical exploration set by the project.

##### *The Resource-Activity MEIO table*

The construction of the RA MEIO tables (Tables A1 and A2 in Appendix A) ensures the identification of all the resources involved in each activity of the current production systems by identifying the crucial points. Before the MEIO application, the stakeholders provided the power and heat required for activities from P1 to P11, but they did not know their actual use because the machines do not detect dissipated heat and power used for support and monitoring tasks. Also, the humidity content of raw materials was initially neglected, although it affects the volume and the weight of resources transported and stored. The RA MEIO table required making assumptions for the missing information bringing out the initially neglected resources.

The RA MEIO tables (Tables A1 and A2 in Appendix A) highlight the unexploited resources such as water in the raw marc and rice hull (Table A1 shows 53% of unused water for marc in process P1, while Table A2 shows 1.3% for rice hull in P7). Moreover, Table A1 highlights the valuable material losses such as marc flour in P2 and P3 (0.5% and 1%, respectively) and the rice hull flour in P5 (1%), while Table A2 reports the loss of CO<sub>2</sub> in P8 (5 kgs out of the initial 60 kgs) that also is a climate-altering gas.

##### *The Activity-Parameter MEIO table*

The AP MEIO table collects information about involved processes to summarise the data provided by the stakeholders and track their changes. Tables A3 and A4 in Appendix A show data provided by the stakeholders for the 11 production activities. The row *ID resource involved* shows that the same machines used in P3 and P4 are used in P5 and P6, respectively. The distance matrix in the bottom part of the AP MEIO tables shows that all the activities are considered in the same area; thus, no transport and inventory activities have been included in the analysis.

#### *The Resource-Function MEIO table.*

Tables A5 and A6 in Appendix A are the RF MEIO tables showing that, in the InnovaEcoFood project, the activity production and absorption of the resource flows are not affected by the production rate; that is, no scale factors are included in the analysis except for CO<sub>2</sub>. The supercritical CO<sub>2</sub> extraction process (P8 in Table A6) uses a quantity of CO<sub>2</sub> (60 kg) independent of the raw materials introduced. A large part of CO<sub>2</sub> employed is recovered (55 kg) while the remaining part of CO<sub>2</sub> is emitted into the atmosphere (5 kg).

#### *The RA MEIO graph.*

To define the arc weights (dependent and independent variables of all activities) is necessary to fix the independent variables  $X_i$  of all the activities by ensuring the material and energy balance in each activity. Therefore, starting to fix the independent variables of the activities that produce the finished products (P9, P10, and P11), the method goes on backwardly by fixing the independent variables of the previous nodes to produce enough raw materials.

The independent variable  $X_{P9}$ ,  $X_{P10}$ , and  $X_{P11}$  (i.e., the produced amount of *crackers*, *taralli*, and *almond cream*, respectively) are set to 1 kg; thus, the case study and the following performance analysis is developed on the production of 1 kg of each baked product. The activity P8 that produces rice hull butter must produce  $0.01 + 0.01 + 0.1$  kg ( $a'_{(P8,P9)}$ ,  $a'_{(P8,P10)}$ , and  $a'_{(P8,P11)}$ , respectively); therefore, in P8, the *rice hull butter* dependent variable  $Y$  is set to 0.12, forcing the independent variable  $X_{P8}$  to be 6 (because  $Y = 0.02 * X_{P8} = 0.12$ ), and it is used to derive the other production input and output.




Figure 5 shows the RA MEIO graph for the proposed system characterised by 11 production activities (solid circles in Figure 5). Figure 5a highlights the arc weights (in grey) for the finished products of the activities and the scrap flows. For example, from P9, P10, and P11, the outgoing arcs indicate the production of 1 kg of crackers, 1 kg of taralli, and 1 kg of almond cream, respectively, and the production of 2.564 kg, 1.564 kg, and 2.954 kg of wastewater, with a high content of ingredients, used to clean the machines, respectively. Conversely, the incoming arcs in P9 indicate the required 0.277 kg of marc flour, 0.277 kg of rice hull flour, and 0.01 kg of rice hull butter. The arcs (P8,T10) and (T10,P8) show the need for CO<sub>2</sub> and the partial recovery for the next production. Figure 5b shows the absorption and production of water (in blue arcs), and the sum of all the incoming grey and blue arcs is equal to the sum of all the grey and blue arcs outgoing in each node, representing the material balance. Figures 5c and 5d show the absorption of heat and power, respectively, which neglects the dissipated energy. Figure 4e shows the entire RA MEIO graph.

Through the backward fix of the independent variables, it is possible to observe that the productions of 1 kg of each of the three finished products require approximately 1.8 kg of fresh marc, 7 kg of rice hull (the arcs outgoing from T0 in Figure 5a), 8.116 kg of water (the arcs outgoing from T11 in Figure 5b), 14.502 kWh of heat (arcs outgoing from T8 in Figure 5c), and 223.122 kWh of power (arcs outgoing from T9 in Figure 5d). However, each activity contributes differently to resource flow consumption and waste production. Thus, a set of KPIs has been developed by exploiting the RA MEIO graph to support the decision-maker in assessing the performance of the single activities and the entire system.

## **4.2. Performance analysis**



- 1 Table 9 shows the scores obtained by the eleven production activities in the eleven KPIs evaluated by
- 2 exploiting the RA MEIO graph and the three systemic parameters referred to the activities. Table 10 presents
- 3 the three systemic parameters that refer to the resources involved in the project rather than its activities.





Activity economic profitability	$AEP_s$	€	0,01	0,03	0,04	1,52	0,49	0,32	-9,18	23,74	10,94	6,41	18,33
Subsystem economic profitability	$SEM_s$	€		1.6			0.81		14.56		10.94	6.41	18.33
Percentage of costs of added value activities in a subsystem	$PAVA_s$	%		100%			100%		100%		100%	100%	100%
<b>Environmental KPIs</b>													
Percentage of raw materials recovered from waste out of all raw materials involved	$PRR_s$	%	100%	100%	100%	93%	100%	93%	100%	55%	16%	22%	15%
Percentage of energy recovered from waste out of all energy used	$PER_s$	%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%	0%
Average resources recovered by waste	$ARR_s$	n.a.	50%	50%	50%	47%	50%	47%	50%	27%	8%	11%	7%
Energy embedded in finished products	$EVO_s$	kWh/kg	2,24	0,01	0,10	1,10	0,10	1,10	30,40	417,0	0,12	0,90	0,27
Waste absorbed out of waste produced	$RW_s$	n.a.	1,89	211,0	93,33	14,33	93,33	14,33	76,96	0,55	0,22	0,36	0,22
<b>Systemic information</b>													
The number of activities of the system fed through the activity s	$NFA_s$	n.a.	1	1	1	3	1	3	1	4	1	1	1
The number of activities out of the system fed through the activity s	$NLFA_s$	n.a.	1	1	1	1	1	1	1	2	1	1	1
The number of activities out of the system feeding the current one	$NLPA_s$	n.a.	2	1	1	3	1	3	1	3	2	2	2

Systemic parameters in Table 10 show that all the involved resources maintain the food-grade label and show the production and consumption of resources in this case study, which is set on 1 kg of each baked product.

Table 10. Three out of six systemic information referred to the resources.

Systemic information	The market to which the resources belong	Total produced quantity of resource j	Total absorbed quantity of resource j	Systemic information	The market to which the resources belong	Total produced quantity of resource j	Total absorbed quantity of resource j
Acr	TM <sub>j</sub>	OUT <sub>j</sub>	IN <sub>j</sub>	Acr	TM <sub>j</sub>	OUT <sub>j</sub>	IN <sub>j</sub>
Unit	n.a.	Kg or kWh	Kg or kWh	Unit	n.a.	Kg or kWh	Kg or kWh
R1	Food industry	1	-	R9	Food industry	0.844	0.844
R2	Food industry	1	-	R10	Food industry	0.844	0.84
R3	Food industry	1	-	R11	Food industry	0.84	0.831
R4	Food industry	-	-	R12	Food industry	0.831	0.831
R5	Multi-utility	-	223.122	R13	Food industry	-	6.92
R6	Multi-utility	1.149	8.116	R14	Food industry	0.84	0.831
R7	Multi-utility	-	14.502	R15	Food industry	0.831	0.831
R8	Food industry	-	1.8	R16	Food industry	0.12	0.12

## 5. Discussion

This study proposes the combined use of the SD approach and MEIO formalisation method to support all the involved stakeholders during the six phases required to establish new production networks (e.g., industrial symbiotic relationships and eco-industrial parks): (1) preliminary assessment, (2) engage business, (3) find synergy opportunities, (4) determine feasibility, (5) implement transactions, and (6) documentation (Yeo et al., 2019). The proposed approach represents a framework to promote the stakeholders' engagement and the cooperation between decision-makers, designers, technicians, engineers, and entrepreneurs of all the involved public and private entities.

The proposed approach evaluates techno-economic-environmental data related to the activities analysed in different production network design and establishment phases. This approach ensures coherence and consistency in all the KPIs provided to each stakeholder, thus avoiding partial and discordant information. The flexibility and adaptability of the proposed approach and its focus on bottom-up development of production networks contribute to overcoming the lack of quantitative approaches for supporting self-organised networks, which are considered preferable because of their significant potential diffusion (Lybæk, Christensen, & Thomsen, 2021). The same KPIs can be assessed for single activities and clusters of network activities to provide each stakeholder with the most pertinent information. For example, designers would be interested in single activities in order to analyse input and output resources and their match; entrepreneurs would focus on the KPIs of their companies by aggregating sets of activities. Production engineers would consider the activity production rates to optimise the overall production. In contrast, public decision-makers would consider the network global KPIs and their influences on the local economy, environment, and community.

The MEIO method introduces the techno-economic-environmental parameters of the production processes, both internal and external to the network, in all the design phases because available technology, product demands, raw material prices, and other external factors (e.g., landfill tax) can have hindering and fostering effects on the network establishment (Yap & Devlin, 2017). Moreover, the RF MEIO table allows dynamic analyses to investigate the changes in KPIs in each phase in which some crucial factors regarding the production systems change (e.g., production rates, waste procurement, and finished product demands).

Dynamic analyses help the decision-maker, during the system design phase, to choose the best alternative solution also according to the values of the aforementioned crucial factors. Dynamic analyses enable scenario and what-if analyses to evaluate robustness and resilience and investigate the relationships with the local economy through the systemic design KPIs. Increasing the connections with other local networks and relevance to the local economy can be drivers to foster the production network development (Neves et al., 2019).

The development of new products and businesses is relevant for the economic sustainability of production networks jointly based on industrial symbiosis and supply chains (Castiglione & Alfieri, 2019; Sellitto et al., 2021). Therefore, the SD framework aims to support many stakeholders in developing businesses based on new production systems by intertwining the resource flows of the original ones. The quantitative formalisation of the current and the new systems helps to make consistent the data provided by the stakeholders by making the design process more structured and avoiding frequent changes in the system representation. Furthermore, using the MEIO formalisation method enlarges the number of tools the decision-maker can use to assess system performance and provide quantitative evidence to the stakeholders (e.g., facilitating LCA use). Furthermore, the quantitative evidence supports companies to discover easy-to-achieve competitive advantages and policy-makers to focus only on those connections that require a public incentive to be established to realise an economic and environmental gain (Scott Victor Valentine, 2016).

The new systems generate new waste and by-products, which may be easier or more difficult to exploit than the original ones. Whether a waste is an opportunity or a risk depends on the capabilities and the know-how of the local communities to exploit it. The proposed dashboard of KPIs allows the identification and

quantification of waste produced by each proposed solution; thus, it supports the SD approach in designing sustainable systems for the local communities in which they are located.

The proposed approach is mainly suitable for designing and establishing production networks involving industrial symbiosis and based on cooperative approaches among stakeholders in a bottom-up fashion. For example, it is useful for self-organising networks and “build and recruit” models (Chertow & Ehrenfeld, 2012) in which the proposed approach fosters cooperation. It reduces the “mental distance” and increases the trust among all the partners, which are two of the main issues for whose the recent literature about barriers and drivers to the establishment of industrial symbiosis relationships identified a lack of tools, methods and discussions (Yeo et al., 2019). Differently from top-down approaches (e.g., network optimisation algorithms and models where input and output resources are already planned), the proposed approach fosters the stakeholders’ engagement in all the design and development phases.

## 6. Conclusion

This paper proposes an approach based on a Systemic Design (SD) framework and a novel hierarchical version of the Multi-layer Enterprise Input-Output formalisation method (MEIO) to support the design and the establishment of production networks based on industrial symbiosis and stakeholders’ cooperation and involvement since the design phase. The approach supports designers in the data collection and formalisation activities by improving system formalisation, data consistency, and coherence. The combination with the MEIO method allows the quantitative comparison of techno-economic-environmental performance to select the most promising activities to design the network. Furthermore, the MEIO method has been improved to allow the aggregation and disaggregation of activities to provide each stakeholder with information at the proper level of detail. All the proposed KPIs, useful for the phases leading to the production network establishment, are evaluated on the specific set of information suitable for each stakeholder but based on the same shared platform to increase data consistency and coherence. Furthermore, the proposed approach supports designers in their mediation role (Celaschi, Formia & Lupo, 2013) to overcome the physical and “mental distance” between stakeholders by setting up a dialogue.

The approach does not explicitly consider the social dimension since it focuses on techno-economic-environmental and systemic design dimensions. However, the MEIO architecture facilitates the adoption of other methods such as Social Life Cycle Analysis through consistently aggregated information about activities. Furthermore, the dashboard of KPIs mainly focuses on supporting stakeholders during the design and development phases, and its future improvements might include further financial, economic, environmental, and social KPIs such as job creation.

Future research can investigate the introduction of other quantitative tools such as algorithms and heuristics for network optimisation to support the proposed approach by enriching the comparison of the found alternatives for network creation. Furthermore, the proposed approach could extend the analyses to the stakeholders’ behaviours to avoid opportunistic effects through game theory approaches and multi-agent systems. Finally, introducing one or more commitment keeping mechanisms (Castiglione & Alfieri, 2020), which are devoted to ensuring and supporting the stakeholders’ engagement also after the production network establishment, can help the network design phases.

**Author Contributions:** each author contributed equally to the writing of the paper; however, C.C. mainly focused on the mathematical modelling, the integration of the MEIO formalisation method, the performance assessment, and the managerial and industrial aspects of the production systems based on industrial symbiosis. E.F. mainly dealt with the theoretical framework of the SD in the literature review, methodology, the InnovaEcoFood project, and the discussion and conclusion sections.

**Acknowledgements:** authors acknowledge all the partners of the InnovaEcoFood project, namely, the companies involved that contributed with their data to this study, the collaborators in the field of SD (Paolo

Tamborrini, Silvia Barbero, and Amina Pereno), and Debora Fino, Tonia Tommasi, Silvia Fraterrigo from the Department of Applied Science and Technology (DISAT).

## 7. References

Abbott, R., Hadžikadić, M., 2017. Complex adaptive systems, systems thinking, and agent-based modeling. In Hadžikadić, M., Avdaković, S. (Eds.), *Advanced technologies, systems, and applications* (pp. 1-8). Cham, Switzerland: Springer.

Albino, V., Fraccascia, L. & Giannoccaro, I., 2016. Exploring the role of contracts to support the emergence of self-organised industrial symbiosis networks: an agent-based simulation study. *Journal of Cleaner Production*, 112, pp.4353-4366.

Allais, R., Reyes, T. & Roucoules, L., 2015. Inclusion of territorial resources in the product development process. *Journal of cleaner production*, 94, pp.187-197.

Barbero, S., 2015. Systemic Design for Food Sustainability Interpretation of real cases and reflection on theories. *Proceedings of Relating Systems Thinking and Design (RSD4) Symposium*, 1-3 September, 2015, Banff, Canada.

Barbero, S., 2017. *Systemic Design Method Guide for Policymaking: A Circular Europe on the Way*; Allemandi: Torino, Italy; Volume 1, ISBN 978-88-422-2444-0.

Battistoni, C.; Nohra, C.G., 2017. The Retrace Holistic Diagnosis. In *Systemic Design Method Guide for Policymaking: A Circular Europe on the Way*; Barbero, S., Ed.; Allemandi: Torino, Italy; Volume 1, ISBN 978-88-422-2444-0.

Battistoni, C., Giraldo Nohra, C., & Barbero, S., 2019. A Systemic Design Method to Approach Future Complex Scenarios and Research Towards Sustainability: A Holistic Diagnosis Tool. *Sustainability*, 11(16), 4458. doi:10.3390/su11164458

Bistagnino, L., 2011. *Systemic Design, Designing the Productive and Environmental Sustainability*, 2nd ed.; Slow Food: Bra, Italy.

Bradley, R., Jawahir, I. S., Badurdeen, F., & Rouch, K. 2018. A total life cycle cost model (TLCCM) for the circular economy and its application to post-recovery resource allocation. *Resources, Conservation and Recycling*, 135, 141-149.

Brundage, M. P., Bernstein, W. Z., Hoffenson, S., Chang, Q., Nishi, H., Kliks, T., & Morris, K. C. 2018. Analysing environmental sustainability methods for use earlier in the product lifecycle. *Journal of cleaner production*, 187, 877-892.

Castiglione, C., & Alfieri, A. 2019. Supply chain and eco-industrial park concurrent design. *IFAC-PapersOnLine*, 52(13), 1313-1318. Doi: <https://doi.org/10.1016/j.ifacol.2019.11.380>

Castiglione, C. & Alfieri, A., 2020. Economic sustainability under supply chain and eco-industrial park concurrent design. *Procedia CIRP*, 90, pp.19-24. Doi: <https://doi.org/10.1016/j.procir.2020.01.086>

Castiglione, C., Yazan, D. M., Alfieri, A., & Mes, M. R. K. 2021. A holistic technological eco-innovation methodology for industrial symbiosis development. *Sustainable Production and Consumption*, 28, 1538-1551. Doi: <https://doi.org/10.1016/j.spc.2021.09.002>

Castiglione, C., Pastore, E., & Alfieri, A. 2022. Technical, economic, and environmental performance assessment of manufacturing systems: the multi-layer enterprise input-output formalisation method. *Production Planning & Control*, 1-18. Doi: <https://doi.org/10.1080/09537287.2022.2054743>

1 Chatterjee, A., & Layton, A. 2020. Mimicking nature for resilient resource and infrastructure network  
2 design. *Reliability Engineering & System Safety*, 204, 107142.

3 Chatterjee, A., Brehm, C., & Layton, A. 2021. Evaluating benefits of ecologically-inspired nested  
4 architectures for industrial symbiosis. *Resources, Conservation and Recycling*, 167, 105423.

5 Chertow, M. & Ehrenfeld, J., 2012. Organising self-organising systems: Toward a theory of industrial  
6 symbiosis. *Journal of industrial ecology*, 16(1), pp.13-27.

7 Dave, T., & Layton, A. 2020. Designing ecologically-inspired robustness into a water distribution network.  
8 *Journal of Cleaner Production*, 254, 120057.

9 Fiore, E., Stabellini, B. & Tamborrini, P., 2020. A Systemic Design Approach Applied to Rice and Wine  
10 Value Chains. The Case of the InnovaEcoFood Project in Piedmont (Italy). *Sustainability*, 12(21), p.9272.

11 Fraccascia, L., 2019. The impact of technical and economic disruptions in industrial symbiosis  
12 relationships: An enterprise input-output approach. *International journal of production economics*, 213,  
13 pp.161-174.

14 Gaiardo, A., 2016. Innovation, Entrepreneurship and Sustainable Design. A Methodology Proposal for  
15 Sustainable Innovation Initiatives. Ph.D. Thesis, Politecnico di Torino, Turin, Italy.

16 Geissdoerfer, M., Savaget, P., Bocken, N.M. & Hultink, E.J., 2017. The Circular Economy—A new  
17 sustainability paradigm?. *Journal of cleaner production*, 143, pp.757-768.

18 Genc, O., van Capelleveen, G., Erdis, E., Yildiz, O. & Yazan, D.M., 2019. A socio-ecological approach to  
19 improve industrial zones towards eco-industrial parks. *Journal of environmental management*, 250,  
20 p.109507.

21 Ghisellini, P.; Cialani, C.; Ulgiati, S., 2016. A review on circular economy: The expected transition to a  
22 balanced interplay of environmental and economic systems. *J. Clean. Prod.* 114, 11–32.

23 Govindan, K. & Hasanagic, M., 2018. A systematic review on drivers, barriers, and practices towards  
24 circular economy: a supply chain perspective. *International Journal of Production Research*, 56(1-2), pp.278-  
25 311.

26 Herczeg, G., Akkerman, R., & Hauschild, M. Z. 2018. Supply chain collaboration in industrial symbiosis  
27 networks. *Journal of Cleaner Production*, 171, 1058-1067.

28 Kirchherr, J., Reike, D. & Hekkert, M., 2017. Conceptualising the circular economy: An analysis of 114  
29 definitions. *Resources, conservation and recycling*, 127, pp.221-232.

30 Layton, A., Bras, B., & Weissburg, M. 2016. Designing industrial networks using ecological food web  
31 metrics. *Environmental science & technology*, 50(20), 11243-11252.

32 Lybæk, R., Christensen, T. B., & Thomsen, T. P. 2021. Enhancing policies for deployment of Industrial  
33 symbiosis—What are the obstacles, drivers and future way forward?. *Journal of Cleaner Production*, 280,  
34 124351.

35 Malone, S. M., Weissburg, M. J., & Bras, B. 2018. Industrial ecosystems and food webs: An ecological-  
36 based mass flow analysis to model the progress of steel manufacturing in China. *Engineering*, 4(2), 209-217.

37 Mattila, T. J., Pakarinen, S., & Sokka, L. 2010. Quantifying the total environmental impacts of an industrial  
38 symbiosis—a comparison of process-, hybrid and input–output life cycle assessment. *Environmental science &  
39 technology*, 44(11), 4309-4314.



1 Nations, U., 2015. Transforming our world: The 2030 agenda for sustainable development. New York:  
2 United Nations, Department of Economic and Social Affairs.

3 Neves, A., Godina, R., G Azevedo, S., Pimentel, C., & CO Matias, J. 2019. The potential of industrial  
4 symbiosis: Case analysis and main drivers and barriers to its implementation. *Sustainability*, 11(24), 7095.

5 Pereno, A., & Barbero, S., 2020. Systemic design for territorial enhancement: an overview on design tools  
6 supporting socio-technical system innovation. *Strategic Design Research Journal*, volume 13, number 02, May  
7 – August 2020. 113-136. Doi: 10.4013/sdrj.2020.132.02

8 Saavedra, Y.M., Iritani, D.R., Pavan, A.L. & Ometto, A.R., 2018. Theoretical contribution of industrial  
9 ecology to circular economy. *Journal of cleaner production*, 170, pp.1514-1522.

10 Sellitto, M. A., Murakami, F. K., Butturi, M. A., Marinelli, S., Kadel Jr, N., & Rimini, B. 2021. Barriers, drivers,  
11 and relationships in industrial symbiosis of a network of Brazilian manufacturing companies. *Sustainable*  
12 *Production and Consumption*, 26, 443-454.

13 Seuring, S. 2004. Industrial ecology, life cycles, supply chains: differences and interrelations. *Business*  
14 *strategy and the Environment*, 13(5), 306-319.

15 Sonogo, M., Echeveste, M. E. S., & Debarba, H. G. (2018). The role of modularity in sustainable design: A  
16 systematic review. *Journal of Cleaner Production*, 176, 196-209.

17 Song, X., Geng, Y., Dong, H. & Chen, W., 2018. Social network analysis on industrial symbiosis: A case of  
18 Gujiao eco-industrial park. *Journal of Cleaner Production*, 193, pp.414-423.

19 Tian, J., Liu, W., Lai, B., Li, X., & Chen, L. 2014. Study of the performance of eco-industrial park  
20 development in China. *Journal of Cleaner Production*, 64, 486-494.

21 United Nations General Assembly. 1987. Report of the world commission on environment and  
22 development: Our common future. Oslo, Norway: United Nations General Assembly, Development and  
23 International Co-operation: Environment.

24 United Nations. 2015. Transforming our world: The 2030 agenda for sustainable development.  
25 Resolution adopted by the General Assembly,(A/RES/70/1). In: (2015).

26 Valentine, S. V. 2016. Kalundborg Symbiosis: Fostering progressive innovation in environmental  
27 networks. *Journal of Cleaner Production*, 118, 65-77.

28 Von Bertalanffy, L., 1969. *General System Theory: Foundations, Development, Applications*; George  
29 Braziller: New York, NY, USA.

30 Watson, B. C., Malone, S., Weissburg, M., & Bras, B. 2020. Adding a Detrital Actor to Increase System of  
31 System Resilience: A Case Study Test of a Biologically Inspired Design Heuristic to Guide Sociotechnical  
32 Network Evolution. *Journal of Mechanical Design*, 142(12), 121705.

33 Yap, N. T., & Devlin, J. F. 2017. Explaining industrial symbiosis emergence, development, and disruption:  
34 a multilevel analytical framework. *Journal of industrial Ecology*, 21(1), 6-15.

35 Yazan, D. M., & Fraccascia, L. 2020. Sustainable operations of industrial symbiosis: an enterprise input-  
36 output model integrated by agent-based simulation. *International Journal of Production Research*, 58(2),  
37 392-414.

38 Yeo, Z., Masi, D., Low, J. S. C., Ng, Y. T., Tan, P. S., & Barnes, S. 2019. Tools for promoting industrial  
39 symbiosis: A systematic review. *Journal of Industrial Ecology*, 23(5), 1087-1108.

# 1 APPENDIX A

2 Table A1. The RA MEIO table for the production activities from P1 to P6.

<b>Resource-Activity MEIO table</b>	<b>P1</b>	<b>P2</b>	<b>P3</b>	<b>P4</b>	<b>P5</b>	<b>P6</b>
<i>Fresh marc (kg)</i>	1/-	-/-	-/-	-/-	-/-	-/-
<i>Dry marc (kg)</i>	-/0.47	1/-	-/-	-/-	-/-	-/-
<i>Marc flour 10 mm (kg)</i>	-/-	-/0.995	1/-	-/-	-/-	-/-
<i>Marc flour 0.5 mm (kg)</i>	-/-	-/-	-/0.99	1/-	-/-	-/-
<i>Marc flour FOOD (kg)</i>	-/-	-/-	-/-	-/1	-/-	-/-
<i>Fresh rice husk (kg)</i>	-/-	-/-	-/-	-/-	1/-	-/-
<i>Dry rice husk (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Rice husk flour 0.5 mm (kg)</i>	-/-	-/-	-/-	-/-	-/0.99	1/-
<i>Rice husk flour FOOD (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/1
<i>Rice husk butter (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Taralli (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Crackers (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Cream (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Almonds (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Power (kWh)</i>	0.05/-	0.01/-	0.1/-	0.1/-	0.1/-	0.1/-
<i>Heat (kWh)</i>	1/-	-/-	-/-	1/-	-/-	1/-
<i>Used power (kWh)</i>	-/0.05	-/0.01	-/0.1	-/0.1	-/0.1	-/0.1
<i>Used heat (kWh)</i>	-/1	-/-	-/-	-/1	-/-	-/1
<i>Dissipated heat (kWh)</i>	-/-	-/-	-/-	-/-	-/-	-/-
<i>Freshwater (kg)</i>	-/-	-/-	-/-	0.07/-	-/-	0.07/-
<i>Waste marc flour 10 mm (kg)</i>	-/-	-/0.005	-/-	-/-	-/-	-/-
<i>Waste marc flour 0.5 mm (kg)</i>	-/-	-/-	-/0.01	-/-	-/-	-/-
<i>Waste rice husk flour 0.5 mm (kg)</i>	-/-	-/-	-/-	-/-	-/0.01	-/-
<i>Waste rice husk extracted (kg)</i>	-/-	-/-	-/-	-/-	-/-	-/-

Wastewater (kg)	-/0.53	-/-	-/-	-/0.07	-/-	-/0.07
CO <sub>2</sub> (kg)	-/-	-/-	-/-	-/-	-/-	-/-
Waste CO <sub>2</sub> (kg)	-/-	-/-	-/-	-/-	-/-	-/-
Waste humid mixture (kg)	-/-	-/-	-/-	-/-	-/-	-/-

Table A2. The RA MEIO table for the production activities from P7 to P11

<b>Resource-Activity MEIO table</b>	<b>P7</b>	<b>P8</b>	<b>P9</b>	<b>P10</b>	<b>P11</b>
Fresh marc (kg)	-/-	-/-	-/-	-/-	-/-
Dry marc (kg)	-/-	-/-	-/-	-/-	-/-
Marc flour 10 mm (kg)	-/-	-/-	-/-	-/-	-/-
Marc flour 0.5 mm (kg)	-/-	-/-	-/-	-/-	-/-
Marc flour FOOD (kg)	-/-	-/-	0.277/-	0.277/-	0.277/-
Fresh rice husk (kg)	1/-	-/-	-/-	-/-	-/-
Dry rice husk (kg)	-/0.987	1/-	-/-	-/-	-/-
Rice husk flour 0.5 mm (kg)	-/-	-/-	-/-	-/-	-/-
Rice husk flour FOOD (kg)	-/-	-/-	0.277/-	0.277/-	0.277/-
Rice husk butter (kg)	-/-	-/0.02	0.01/-	0.01/-	0.1/-
Taralli (kg)	-/-	-/-	-/-	-/1	-/-
Crackers (kg)	-/-	-/-	-/1	-/-	-/-
Cream (kg)	-/-	-/-	-/-	-/-	-/1
Almonds (kg)	-/-	-/-	-/-	-/-	0.3/-
Power (kWh)	30/-	6.5/-	0.12/-	0.9/-	0.27/-
Heat (kWh)	-/-	1.84/-	-/-	-/-	-/-
Used power (kWh)	-/30	-/6.5	-/0.12	-/0.9	-/0.27
Used heat (kWh)	-/-	-/1.84	-/-	-/-	-/-
Dissipated heat (kWh)	-/-	-/-	-/-	-/-	-/-
Freshwater (kg)	-/-	-/-	3/-	2/-	3/-
Waste marc flour 10 mm (kg)	-/-	-/-	-/-	-/-	-/-

Waste marc flour 0.5 mm (kg)	-/-	-/-	-/-	-/-	-/-
Waste rice husk flour 0.5 mm (kg)	-/-	-/-	-/-	-/-	-/-
Waste rice husk extracted (kg)	-/-	-/0.98	-/-	-/-	-/-
Wastewater (kg)	-/0.013	-/-	-/-	-/-	-/-
CO <sub>2</sub> (kg)	-/-	60/55	-/-	-/-	-/-
Waste CO <sub>2</sub> (kg)	-/-	-/5	-/-	-/-	-/-
Waste humid mixture (kg)	-/-	-/-	-/2.555	-/1.555	-/2.555

Table A3. The AP MEIO table for the production activities from P1 to P6.

<b>Activity- Parameters MEIO table</b>	<b>P1</b>	<b>P2</b>	<b>P3</b>	<b>P4</b>	<b>P5</b>	<b>P6</b>
<i>Description</i>	marc drying	marc crushing	marc cryo- grinding	marc final drying	rice husk cryo- grinding	rice husk final drying
<i>Activity type</i>	production	production	production	production	production	production
<i>ID Activity</i>	1	2	3	4	5	6
<i>ID resource involved</i>	1	2	3	4	3	4
<i>Max Capacity(kg/hr)</i>	-	-	-	-	-	-
<i>Scrap (%)</i>	0%	0.5%	1%	-	1/-	-
<i>Operating cost (€/kg)</i>	-	-	-	-	-	-
<i>P1 distance from (km)</i>	-	0	0	0	0	0
<i>P2 distance from (km)</i>	0	-	0	0	0	0
<i>P3 distance from (km)</i>	0	0	-	0	0	0
<i>P4 distance from (km)</i>	0	0	0	-	0	0
<i>P5 distance from (km)</i>	0	0	0	0	-	0
<i>P6 distance from (km)</i>	0	0	0	0	0	-
<i>P7 distance from (km)</i>	0	0	0	0	0	0
<i>P8 distance from (km)</i>	0	0	0	0	0	0
<i>P9 distance from (km)</i>	0	0	0	0	0	0

<i>P10 distance from (km)</i>	0	0	0	0	0	0
<i>P11 distance from (km)</i>	0	0	0	0	0	0

Table A4. The AP MEIO table for the production activities from P7 to P11.

<b>Activity-Parameters MEIO table</b>	<b>P7</b>	<b>P8</b>	<b>P9</b>	<b>P10</b>	<b>P11</b>
<i>Description</i>	rice husk drying	rice husk butter extraction	cracker production	taralli production	almond cream production
<i>Activity type</i>	production	production	production	production	production
<i>ID Activity</i>	7	8	9	10	11
<i>ID resource involved</i>	5	6	7	7	7
<i>Max Capacity(kg/hr)</i>	-	8	3	3	3
<i>Scrap (%)</i>	0%	0.5%	1%	-	1/-
<i>Operating cost (€/kg)</i>	9	-	-	-	-
<i>P1 distance from (km)</i>	-	0	0	0	0
<i>P2 distance from (km)</i>	0	-	0	0	0
<i>P3 distance from (km)</i>	0	0	-	0	0
<i>P4 distance from (km)</i>	0	0	0	-	0
<i>P5 distance from (km)</i>	0	0	0	0	-
<i>P6 distance from (km)</i>	0	0	0	0	0
<i>P7 distance from (km)</i>	0	0	0	0	0
<i>P8 distance from (km)</i>	0	0	0	0	0
<i>P9 distance from (km)</i>	0	0	0	0	0
<i>P10 distance from (km)</i>	0	0	0	0	0
<i>P11 distance from (km)</i>	0	0	0	0	0

Table A5. The RF MEIO table for the production activities from P1 to P6.

<b>Resource-Function MEIO table</b>	<b>P1</b>	<b>P2</b>	<b>P3</b>	<b>P4</b>	<b>P5</b>	<b>P6</b>
<i>Fresh marc (kg)</i>	*X;-	-;-	-;-	-;-	-;-	-;-

<i>Dry marc (kg)</i>	-;Y=0.47X	*X;-	-;-	-;-	-;-	-;-
<i>Marc flour 10 mm (kg)</i>	-;-	-;Y=0.995X	*X;-	-;-	-;-	-;-
<i>Marc flour 0.5 mm (kg)</i>	-;-	-;-	-;Y=0.99X	*X;-	-;-	-;-
<i>Marc flour FOOD (kg)</i>	-;-	-;-	-;-	-;Y=X	-;-	-;-
<i>Fresh rice husk (kg)</i>	-;-	-;-	-;-	-;-	*X;-	-;-
<i>Dry rice husk (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Rice husk flour 0.5 mm (kg)</i>	-;-	-;-	-;-	-;-	-;Y=0.99X	*X;-
<i>Rice husk flour FOOD (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;Y=X
<i>Rice husk butter (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Taralli (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Crackers (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Cream (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Almonds (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Power (kWh)</i>	Y=0.05X;-	Y=0.1X;-	Y=0.1X;-	Y=0.1X;-	Y=0.1X;-	Y=0.1X;-
<i>Heat (kWh)</i>	Y=X;-	-;-	-;-	Y=X;-	-;-	Y=X;-
<i>Used power (kWh)</i>	-;Y=0.05X	-;Y=0.1X	-;Y=0.1X	-;Y=0.1X	-;Y=0.1X	-;Y=0.1X
<i>Used heat (kWh)</i>	-;Y=X	-;-	-;-	-;Y=X	-;-	-;Y=X
<i>Dissipated heat (kWh)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Freshwater (kg)</i>	-;-	-;-	-;-	Y=0.07X;-	-;-	Y=0.07X;-
<i>Waste marc flour 10 mm (kg)</i>	-;-	-;Y=0.005X	-;-	-;-	-;-	-;-
<i>Waste marc flour 0.5 mm (kg)</i>	-;-	-;-	-;Y=0.01X	-;-	-;-	-;-
<i>Waste rice husk flour 0.5 mm (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Waste rice husk extracted (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Wastewater (kg)</i>	-;Y=0.53X	-;-	-;-	-;Y=0.07X	-;-	-;Y=0.07X
<i>CO<sub>2</sub> (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Waste CO<sub>2</sub> (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-
<i>Waste humid mixture (kg)</i>	-;-	-;-	-;-	-;-	-;-	-;-

1 Table A6. The RF MEIO table for the activities from P7 to P11.

<b>Resource-Function MEIO table</b>	<b>P7</b>	<b>P8</b>	<b>P9</b>	<b>P10</b>	<b>P11</b>
<i>Fresh marc (kg)</i>	-;	-;	-;	-;	-;
<i>Dry marc (kg)</i>	-;	-;	-;	-;	-;
<i>Marc flour 10 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Marc flour 0.5 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Marc flour FOOD (kg)</i>	-;	-;	Y=0.277X;-	Y=0.277X;-	Y=0.277X;-
<i>Fresh rice husk (kg)</i>	*X;-	-;	-;	-;	-;
<i>Dry rice husk (kg)</i>	-;Y=0.987X	*X;-	-;	-;	-;
<i>Rice husk flour 0.5 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Rice husk flour FOOD (kg)</i>	-;	-;	Y=0.277X;-	Y=0.277X;-	Y=0.277X;-
<i>Rice husk butter (kg)</i>	-;	-;Y=0.02X	Y=0.01X;-	Y=0.01X;-	Y=0.1X;-
<i>Taralli (kg)</i>	-;	-;	-;	-;X*	-;
<i>Crackers (kg)</i>	-;	-;	-;X*	-;	-;
<i>Cream (kg)</i>	-;	-;	-;	-;	-;X*
<i>Almonds (kg)</i>	-;	-;	-;	-;	Y=0.3X;-
<i>Power (kWh)</i>	Y=30X;-	Y=6.5X;-	Y=0.12X;-	Y=0.9X;-	Y=0.27X;-
<i>Heat (kWh)</i>	-;	Y=1.84X;-	-;	-;	-;
<i>Used power (kWh)</i>	-; Y=30X	-;Y=6.5X	-;Y=0.12X	-;Y=0.9X	-; Y=0.27X
<i>Used heat (kWh)</i>	-;	-;Y=1.84X	-;	-;	-;
<i>Dissipated heat (kWh)</i>	-;	-;	-;	-;	-;
<i>Freshwater (kg)</i>	-;	-;	Y=3X;-	Y=2X;-	Y=3X;-
<i>Waste marc flour 10 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Waste marc flour 0.5 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Waste rice husk flour 0.5 mm (kg)</i>	-;	-;	-;	-;	-;
<i>Waste rice husk extracted (kg)</i>	-;	-;Y=0.98X	-;	-;	-;
<i>Wastewater (kg)</i>	-;Y=0.013X	-;	-;	-;	-;

<i>CO<sub>2</sub> (kg)</i>	-;-	Y=60;Y=55	-;-	-;-	-;-
<i>Waste CO<sub>2</sub> (kg)</i>	-;-	-; Y=5	-;-	-;-	-;-
<i>Waste humid mixture (kg)</i>	-;-	-;-	-;Y=2.564X	-;Y=1.564X	-;Y=2.954X

1

2

3



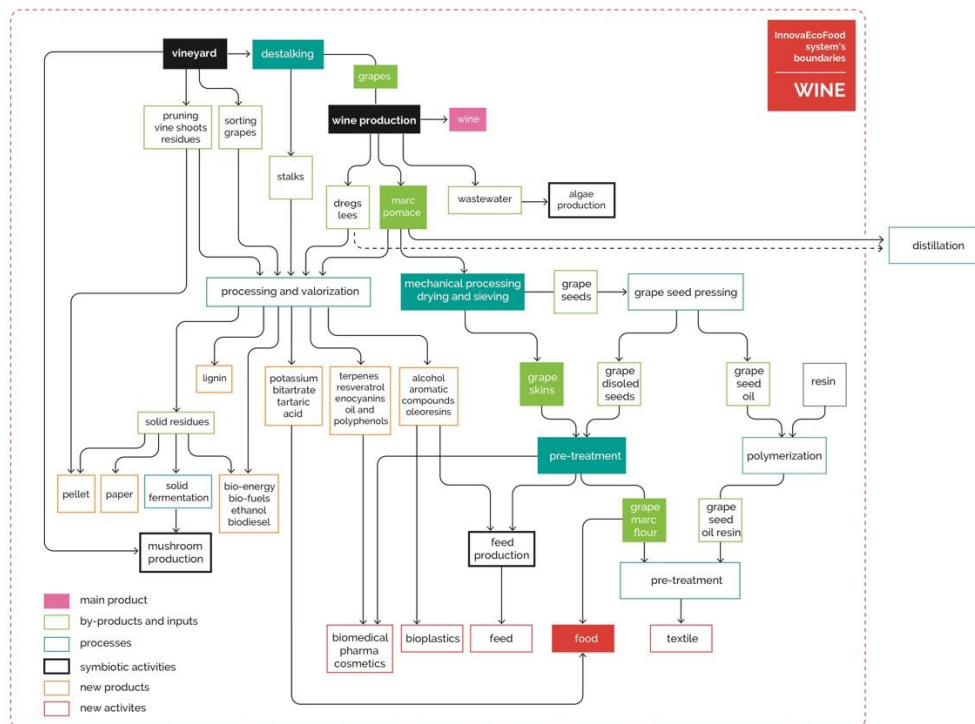
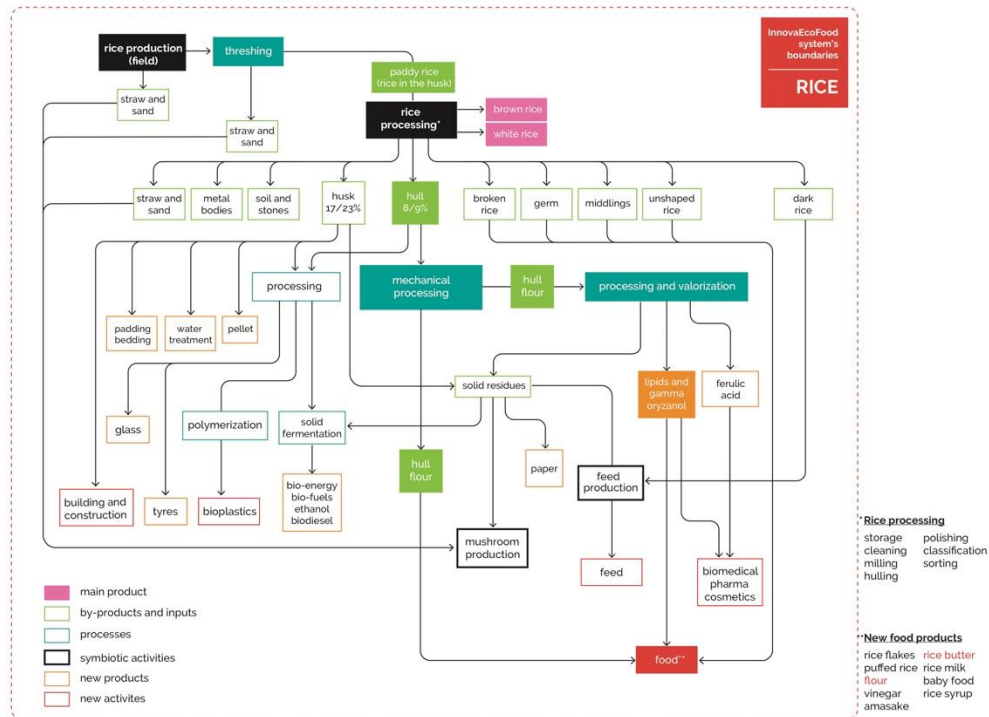


Figure A1. Systemic value chains proposed for rice and wine in the InnovaEcoFood project